



(22) Date de dépôt/Filing Date: 2009/10/08

(41) Mise à la disp. pub./Open to Public Insp.: 2010/04/14

(45) Date de délivrance/Issue Date: 2017/02/14

(30) Priorité/Priority: 2008/10/14 (US12/251,034)

(51) Cl.Int./Int.Cl. *B29C 59/04* (2006.01),
B29C 47/20 (2006.01)


(72) Inventeurs/Inventors:
SUTTON, GERALD S., US;
KELLEY, DAVID J., US

(73) Propriétaire/Owner:
ADVANCED DRAINAGE SYSTEMS, INC., US

(74) Agent: SMART & BIGGAR

(54) Titre : APPAREIL ET PROCEDE DE PRESSAGE DE LA PAROI EXTERIEURE D'UN TUYAU

(54) Title: APPARATUS AND METHOD FOR PRESSING AN OUTER WALL OF PIPE

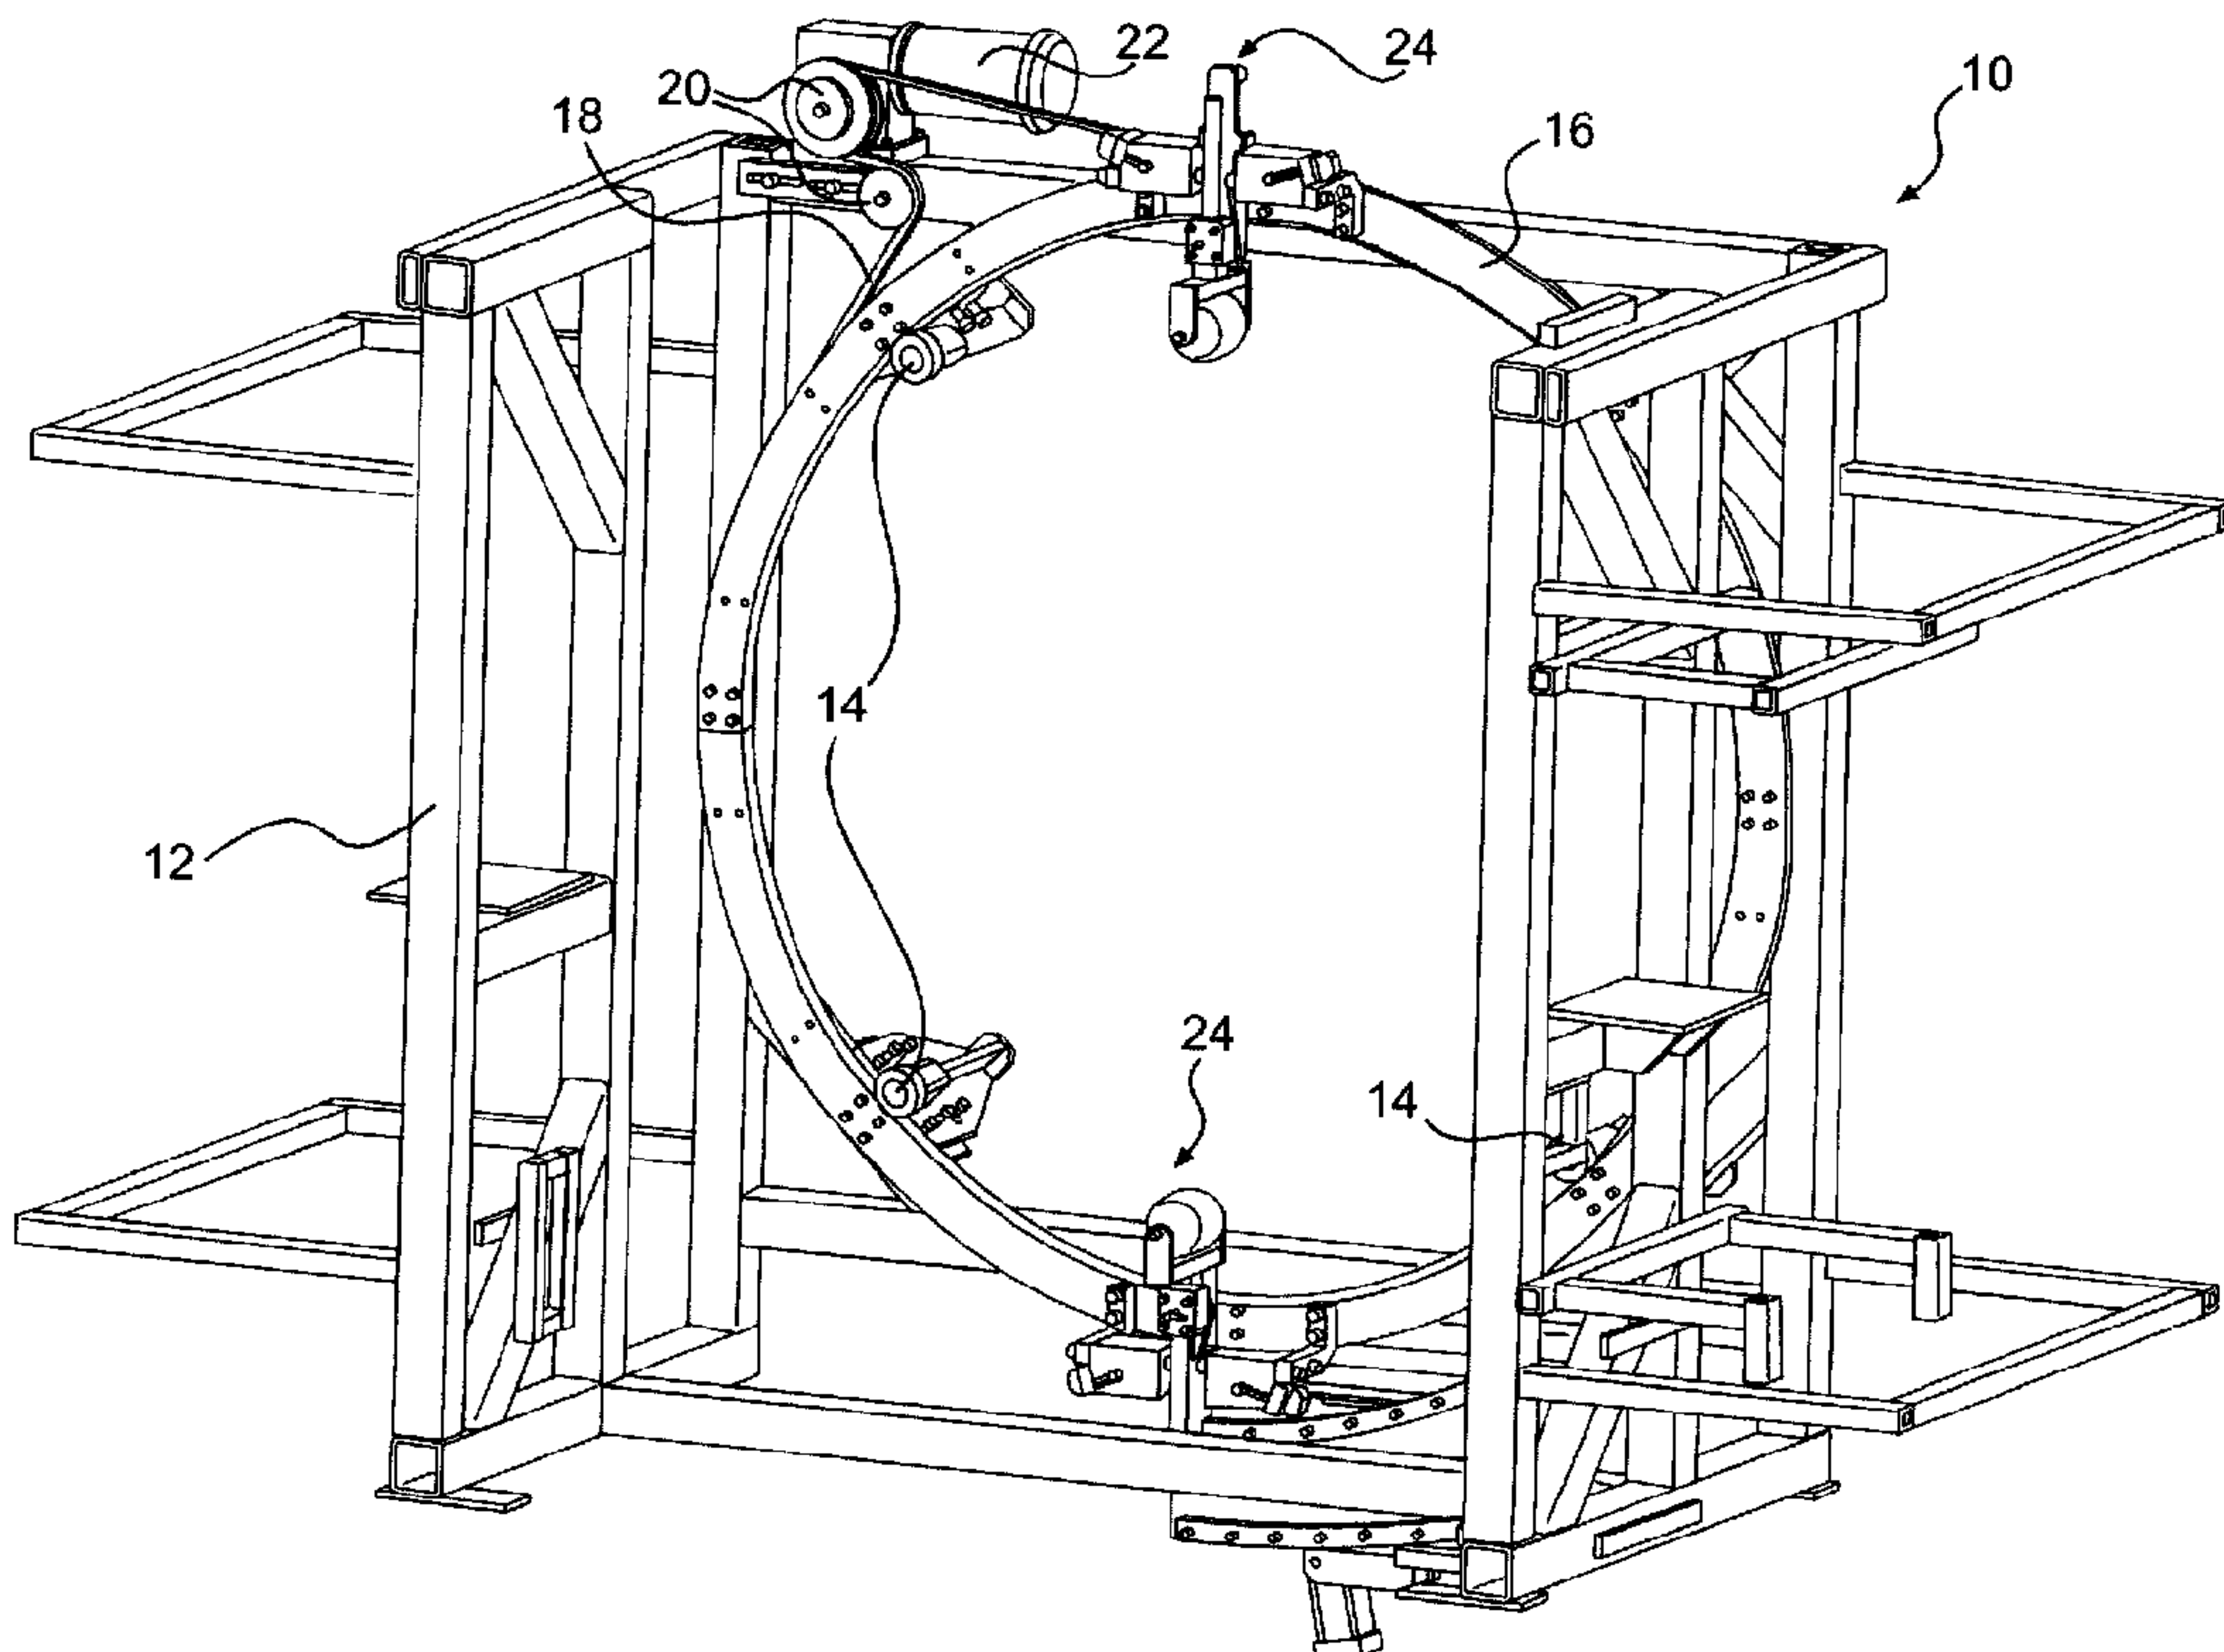

(57) Abrégé/Abstract:

A method of pressing an outer wall of polymer pipe is provided. The method includes extruding a layer of polymer onto a pipe to form an outer wall of pipe; conveying the pipe including the outer wall of pipe through a pressing apparatus having a pressing element configured to rotate about the pipe; and urging the pressing element against an exterior surface of the outer wall as the pressing element rotates about a pipe conveyed through the pressing apparatus. An apparatus for pressing an outer wall of polymer pipe is also provided.

Abstract of the Invention

A method of pressing an outer wall of polymer pipe is provided. The method includes extruding a layer of polymer onto a pipe to form an outer wall of pipe; conveying the pipe including the outer wall of pipe through a pressing apparatus having a pressing element configured to rotate about the pipe; and urging the pressing element against an exterior surface of the outer wall as the pressing element rotates about a pipe conveyed through the pressing apparatus. An apparatus for pressing an outer wall of polymer pipe is also provided.

APPARATUS AND METHOD FOR PRESSING AN OUTER WALL OF PIPE

DESCRIPTION

Technical Field

[001] The present invention relates to manufacturing three-wall corrugated pipe walls, and more particularly, to an apparatus and method for pressing an outer wall of pipe after the outer wall is extruded onto a dual-wall corrugated pipe.

Background

[002] Drainage pipe has long been used for transporting water in various agricultural, residential, civil engineering, and other construction applications. For example, drainage pipe has been used to create storm sewer systems configured to collect and dispose of water "run-off." Traditionally, drainage pipe was made from clay or concrete, which caused the pipe to be heavy, expensive, and brittle. In order to improve the ease-of-installation, cost-effectiveness, and durability of drainage pipes, pipes are now often manufactured from alternative materials, including various polymers and polymer blends.

[003] One method of manufacturing polymer pipe involves forming a polymer pipe and then extruding an outer layer of polymer onto the outside of the polymer pipe. As a result, the outer layer of polymer constitutes an outer pipe wall that is fused to the exterior surface of the polymer pipe. This outer layer of polymer is generally extruded at a temperature sufficiently high to allow it to bond with the exterior surface of the polymer pipe. Specifically, the extruded outer layer of polymer is extruded at a temperature hot enough to at least partially melt the exterior surface of the polymer pipe, such that polymer chains of the exterior surface and the extruded outer wall intersperse and then cool together. This results in the exterior surface and the extruded outer wall being integrally fused or bonded together wherever they contact each other.

[004] Even when the outer layer of polymer is extruded at a high temperature, the outer layer can sometimes insufficiently bond or fuse to the exterior surface of the pipe. Specifically, even though a very thin layer of the exterior surface may weld to the newly extruded outer layer, the level of bonding may be too shallow to provide a sufficient weld between the outer layer and the exterior pipe surface. Thus, a high extrusion temperature can sometimes be insufficient for thoroughly bonding an outer layer beyond the immediately exterior surface of a polymer pipe.

[005] Accordingly, there is a need for an apparatus and method for pressing an outer wall of pipe to achieve sufficient bonding between an outer layer of polymer and the polymer pipe.

Summary

[006] It is an object of the present invention to provide such an apparatus and method for pressing an outer wall of pipe.

[007] An exemplary embodiment provides a method of pressing an outer wall of polymer pipe, the method comprising: extruding a layer of polymer onto a pipe to form an outer wall of pipe; conveying the pipe including the outer wall of pipe through a pressing apparatus having: a frame having an annular carriage configured to rotate about an axis; a translating member configured to translate radially inward and radially outward relative to the annular carriage, and having opposing angled faces; at least two opposing spring-biased cam followers configured to engage the opposing angled faces and bias the translating member in a direction that is radially inward; and a press roller attached to the translating member and configured to orbit around said axis on a path defined by the annular carriage; and urging the press roller against an exterior surface of the outer wall as the press roller orbits about the pipe conveyed through the pressing apparatus.

[008] Another exemplary embodiment provides an apparatus for pressing an outer wall of polymer pipe, the apparatus comprising: a frame having an annular carriage configured to rotate about an axis; a translating member configured to translate radially inward and radially outward relative to the annular carriage, said translating member having opposing angled faces; at least two opposing spring-biased cam followers configured to engage the opposing angled faces and bias the translating member in a direction that is radially inward; and a press roller attached to the translating member and configured to orbit around said axis on a path defined by the

annular carriage; wherein the press roller is configured to press an outer wall of polymer pipe when the pipe is conveyed through the annular carriage.

[009] An exemplary embodiment provides an apparatus for pressing an outer wall of polymer pipe, the apparatus comprising: a frame having a bearing; an annular carriage configured to rotate about an axis as guided by the bearing; a translating member configured to translate radially inward and radially outward relative to the annular carriage, said translating member having opposing angled faces; at least two opposing spring-biased cam followers configured to engage the opposing angled faces and bias the translating member in a direction that is radially inward; and a press roller translatably mounted to the translating member and configured to orbit around said axis on a path defined by the annular carriage; wherein the press roller is configured to press an outer wall of polymer pipe when the pipe is conveyed through the annular carriage.

[010] In this respect, before explaining at least one embodiment of the disclosure in detail, it is to be understood that the invention is not limited in its application to the details of construction and to the arrangements of the components set forth in the following description or illustrated in the drawings. The invention is capable of embodiments in addition to those described and of being practiced and carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein, as well as the abstract, are for the purpose of description and should not be regarded as limiting.

[011] The accompanying drawings illustrate certain exemplary embodiments of the disclosure, and together with the description, serve to explain the principles of the invention.

set forth in the following description or illustrated in the drawings. The invention is capable of embodiments in addition to those described and of being practiced and carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein, as well as the abstract, are for the purpose of description and should not be regarded as limiting.

[011] The accompanying drawings illustrate certain exemplary embodiments of the disclosure, and together with the description, serve to explain the principles of the invention.

[012] As such, those skilled in the art will appreciate that the conception upon which this disclosure is based may readily be utilized as a basis for designing other structures, methods, and systems for carrying out the several purposes of the present invention. The scope of the present invention as claimed thus is intended to include all such equivalents.

Brief Description of the Drawings

[013] Fig. 1 is a perspective view of an exemplary embodiment of a press rolling apparatus for pressing an outer wall of pipe;

[014] Fig. 2 is a side view of the exemplary press rolling apparatus depicted in Fig. 1;

[015] Fig. 3 is a cross-sectional view of a portion of the exemplary press rolling apparatus depicted in Figs. 1 and 2; and

[016] Fig. 4 is a cross-sectional view of an exemplary three-wall polymer pipe and a portion of the exemplary press rolling apparatus depicted in Figs. 1-3.

Description of the Exemplary Embodiments

[017] Reference will now be made in detail to the exemplary embodiments described above and illustrated in the accompanying drawings.

[018] During the manufacture of multi-wall polymer pipe, concentric tubes of polymer may be continuously extruded from one or more extrusion dies. A corrugator may be used to form corrugations into one or more of the layers of polymer as they continuously translate away from the extrusion dies. In one embodiment, a corrugator may be used to form dual-wall pipe having a smooth inner wall and a corrugated wall. The corrugated wall may have a plurality of alternating corrugation crests and corrugation valleys, with the corrugation valleys being fused to the smooth inner wall. In order to improve the performance of such a pipe, it may be desirable to extrude an additional layer of polymer onto the pipe. For example, a cross-head die may be used to extrude an outer layer of polymer onto the exterior surface of the corrugated wall, thereby forming three-wall, corrugated polymer pipe.

[019] The outer layer of polymer may be extruded at a temperature high enough to at least partially bond or fuse the outer layer of polymer to corrugation crests of the corrugated wall. For example, the hot outer layer of polymer may at least partially melt the corrugation crests of the corrugated wall. Alternatively, the corrugation crests of the corrugated wall may be heated by use of a separate heating element, in order to increase

their level of bonding with the extruded outer layer. However, a high extrusion temperature can sometimes be insufficient for thoroughly bonding an outer layer beyond the immediately exterior surface of a polymer pipe. For this reason, pressure may be applied to the outer layer to increase the depth of bonding beyond the immediately exterior surface of the polymer pipe. Thus, in some cases, it may be desirable to press an outer layer of polymer pipe against the exterior surface of a dual-wall corrugated polymer pipe after the outer layer of polymer is extruded onto the dual-wall corrugated polymer pipe.

[020] Fig. 1 illustrates an exemplary embodiment of a press rolling apparatus 10. Press rolling apparatus 10 may include a frame 12 having a plurality of bearings 14 disposed thereon. In one embodiment, frame 12 may have four bearings 14, each of the four bearings 14 being rotatably disposed on a quadrant of frame 12. Press rolling apparatus 10 may further include an annular carriage 16. Annular carriage 16 may be rotatably disposed on and engaged with bearings 14. Thus, annular carriage 16 may be configured to rotate about a central axis, relative to frame 12, as guided by bearings 14.

[021] Press rolling apparatus 10 may further include a drive belt 18, a pulley system 20, and a motor 22. Drive belt 18 may be configured to be wrapped around an outer groove disposed in annular carriage 16 and around wheels of pulley system 20. At least one wheel of pulley system 20 may be driven by motor 22. Thus, motor 22 may be configured to selectively control a rotation of annular carriage 16 by manipulating drive belt 18 via pulley system 20. Annular carriage 16 may be selectively rotated by any other suitable mechanism, such as a rack and pinion drive, a spiral gear, a gas spring, a crank system, a hydraulic system, a pneumatic system, and/or an electromagnetic drive.

[022] Press rolling apparatus 10 may further include a plurality of press rolling mechanisms 24 disposed on annular carriage 16. As illustrated in the embodiment of Fig. 1, press rolling apparatus 10 may include two press rolling mechanisms 24, each being disposed 180° apart from each other on annular carriage 16. Alternatively, press rolling apparatus 10 may include any number of press rolling mechanisms 24, as desired. As will be described in greater detail below, each press rolling mechanism 24 may be provided with a pressing element configured to press against an outer wall of pipe as the pipe is conveyed through press rolling apparatus 10. Even though press rolling apparatus 10 will be described with respect to an embodiment in which press rolling mechanisms 24 are attached to a rotating annular carriage 16, any equivalent or similar mechanism may be used. For example, annular carriage 16 may be fixed to frame 12, and a pressing element

may be configured to advance around a circumferential path of annular carriage 16 in any way that suitably rotates the pressing element about a pipe conveyed through press rolling apparatus 10.

[023] Fig. 2 illustrates a side view of an exemplary embodiment of press rolling apparatus 10. As described above, press rolling apparatus 10 may include frame 12 having bearings 14. Annular carriage 16 may be rotatably disposed on bearings 14. Motor 22 and pulley system 20 may be configured to rotate annular carriage 16 on bearings 14. Annular carriage 16 may rotate about a central axis "D", along which a pipe may be continuously conveyed through press rolling apparatus 10. In the exemplary embodiment of Fig. 2, two press rolling mechanisms 24 are illustrated as being disposed 180° apart from each other on annular carriage 16.

[024] In one embodiment, each press rolling mechanism 24 may include a linkage 26, a bracket 28, and a pressing element 30. Linkage 26 may translatably mount bracket 28 to annular carriage 16. Bracket 28 may rotatably mount pressing element 30 to linkage 26. It will be appreciated that any equivalent or similar system of brackets and linkages may be used to allow pressing element 30 to translate and/or rotate relative to annular carriage 16 and/or frame 12 of press rolling apparatus 10, as desired.

[025] Fig. 3 illustrates a cross-section of one exemplary embodiment of a press rolling mechanism 24. Press rolling mechanism 24 may include a translating member 32, a bracket 28, and a pressing element 30. Translating member 32, bracket 28, and pressing element 30 may be fixed to each other in series, as shown in Fig. 3, and configured to translate together along an axis "A" through a block 36 mounted to annular carriage 16. Translating member 32 may include an angled plate 34 disposed integrally therein. Press rolling mechanism 24 may also include a plurality of opposing cam followers 40 configured to engage opposing faces of angled plate 34. Each cam follower 40 may be rotatably disposed at an end of a cylinder 44 connected to a threaded rod 46. Cam follower 40, cylinder 44, and threaded rod 46 may be configured to translate together in a bore 37 formed in block 36. A compression spring 42 may be disposed around threaded rod 46 between cylinder 44 and a threaded bolt 48 disposed in an end cap 38. Compression spring 42 may be configured to urge cylinder 44, and therefore cam follower 40 in a direction toward axis "A". As shown in the exemplary embodiment of Fig. 3, a pair of opposing cam followers 40 may be configured to contact and press against opposing faces of angled plate 34. Given a particular geometry of angled plate 34, compression springs 42 and cam followers 40 may urge translating member 32, bracket 28, and

pressing element 30 along axis "A" toward a center point of annular carriage 16. Thus, pressing element 30 may be urged in a direction towards an axis along which a pipe may be conveyed through annular carriage 16 of press rolling apparatus 10. An amount of urging provided by compression springs 42 may be adjusted by turning threaded bolts 48 so as to compress or relax compression springs 42. Any other suitable device may be used to selectively urge pressing element 30 toward a center point of annular carriage 16. For example, a rack and pinion drive, a spiral gear, a gas spring, a crank system, a hydraulic system, a pneumatic system, and/or an electromagnetic drive may be used to selectively urge pressing member 30 toward a center point of annular carriage 16.

[026] Fig. 4 illustrates an exemplary embodiment of a bracket 28 and a pressing element 30 engaging a three-wall pipe 50. As illustrated in Fig. 4, pressing element 30 may be a relatively cylindrical press roller configured to rotate about a portion of bracket 28. In one embodiment, pressing element 30 may be a press roller made from a solid slug of Teflon[®]. Pressing element 30 may have a generally rounded profile configured to rotate about bracket 28 and roll across a surface of multi-wall pipe. As illustrated in Fig. 4, pressing element 30 may be a press roller having a substantially hexagonal cross-section. In another embodiment, pressing element 30 may be a press roller having a substantially octagonal cross-section. In yet another embodiment, pressing element 30 may be a press roller having a substantially circular cross-section. In yet another embodiment, pressing element 30 may be a press roller having a substantially rectangular cross-section. In yet another embodiment, pressing element 30 may be a press roller having a substantially square cross-section.

[027] Fig. 4 illustrates the exemplary pressing element 30 contacting an outer wall of three-wall pipe 50. Specifically, pressing element 30 may press against an outer wall of three-wall pipe 50, thereby urging an outer wall of three-wall pipe 50 against an inner wall of three-wall pipe 50. It will be appreciated that the inward urging provided by press rolling mechanism 24 to pressing element 30 may be used to compress any two or more layers or walls of a pipe having any number of layers or walls, and any type of geometry. Specifically, as illustrated in Fig. 4, pressing element 30 may have any cross-sectional geometry that allows it to accommodate changing diameters along a length of multi-wall pipe. Moreover, pressing element 30 may be especially configured to accommodate changing diameters of pipe due to translation of pressing element 30 as allowed by translating member 32. Thus, pressing element 30 may be configured to press against a pipe having any desired diameter. However, regardless of any translation of pressing

element 30, a sufficient amount of pressing force may be applied to an outer wall of multi-wall pipe by adjusting compression springs 42, via threaded bolts 48.

[028] Thus, the presently disclosed press rolling apparatus 10, press rolling mechanisms 24, and pressing element 30 may be particularly advantageous for use in a method of pressing against an outer wall of pipe. The method may include extruding a layer of polymer from a cross-head die onto a pipe to form an outer wall of pipe. The method may further include conveying the pipe including the outer wall of pipe through a press rolling apparatus 10 having a pressing element 30 configured to rotate about the pipe. The method may further include mounting pressing element 30 to an annular carriage 16 and rotating annular carriage 16 about the pipe. The method may further include rotatably mounting pressing element 30 on a bracket 28 and urging bracket 28 and pressing element 30 against an exterior surface of the outer wall, via a spring bias, as pressing element 30 rotates about a pipe conveyed through press rolling apparatus 10. The method may further include rotating annular carriage 16 at a pre-determined velocity based on an outer diameter of the pipe and an axial velocity of the pipe through press rolling apparatus 10.

[029] The presently disclosed apparatus and method may be advantageous in forming a proper bonding, fusion, or welding between adjacent layers of polymer in a multi-wall polymer pipe. Specifically, even when an outer wall of pipe is extruded at a high temperature, the presently disclosed apparatus and method may be used to increase the depth of bonding between the outer wall of pipe and an adjacent wall of a polymer pipe. As a result, a multi-wall pipe made by using the above-described exemplary apparatus and method may benefit from increased strength due to the ability of an outer wall of pipe to support forces on the outside of the pipe and from within the pipe. For example, when an outer wall is extruded onto a dual-wall pipe comprising a smooth inner wall and a corrugated wall, the pressing apparatus and method may allow the outer wall to better support tensile forces transmitted between adjacent corrugations of the corrugated wall.

[030] The many features and advantages of the invention are apparent from the detailed specification, and thus, it is intended by the appended claims to cover all such features and advantages of the invention which fall within the true spirit and scope of the invention. Further, since numerous modifications and variations will readily occur to those skilled in the art, it is not desired to limit the invention to the exact construction and operation illustrated and described, and accordingly, all suitable modifications and equivalents may be resorted to, falling within the scope of the invention.

What is claimed is:

1. A method of pressing an outer wall of polymer pipe, the method comprising:

extruding a layer of polymer onto a pipe to form an outer wall of pipe;
conveying the pipe including the outer wall of pipe through a pressing apparatus having: a frame having an annular carriage configured to rotate about an axis; a translating member configured to translate radially inward and radially outward relative to the annular carriage, and having opposing angled faces; at least two opposing spring-biased cam followers configured to engage the opposing angled faces and bias the translating member in a direction that is radially inward; and a press roller attached to the translating member and configured to orbit around said axis on a path defined by the annular carriage; and

urging the press roller against an exterior surface of the outer wall as the press roller orbits about the pipe conveyed through the pressing apparatus.

2. The method of claim 1, wherein the pipe is a dual-wall pipe comprising a smooth inner wall and a corrugated wall, and said extruding a layer of polymer includes extruding a layer of polymer from a cross-head die onto the corrugated wall.

3. The method of claim 2, wherein the method further includes rotating the annular carriage about the pipe such that the press roller orbits about the pipe conveyed through the pressing apparatus.

4. The method of claim 3, wherein the press roller is rotatably mounted to a bracket disposed on the annular carriage, said method further includes rotating the press roller about a portion of the bracket while urging the press roller against the exterior surface of the outer wall of polymer pipe.

5. The method of claim 4, wherein the step of rotating the annular carriage comprises providing a drive belt around the annular carriage and rotating the drive belt so as to rotate the annular carriage.

6. The method of claim 5, wherein said rotating the drive belt comprises providing a motor in connection with the drive belt and operating the motor so as to selectively rotate the annular carriage.

7. The method of claim 1, further comprising: rotating the annular carriage at a pre-determined angular velocity.

8. The method of claim 7, wherein the pre-determined angular velocity is calculated based on an outer diameter of the pipe and an axial velocity of the pipe being conveyed through the pressing apparatus.

9. An apparatus for pressing an outer wall of polymer pipe, the apparatus comprising:

- a frame having an annular carriage configured to rotate about an axis;
- a translating member configured to translate radially inward and radially outward relative to the annular carriage, said translating member having opposing angled faces;

- at least two opposing spring-biased cam followers configured to engage the opposing angled faces and bias the translating member in a direction that is radially inward; and

- a press roller attached to the translating member and configured to orbit around said axis on a path defined by the annular carriage;

- wherein the press roller is configured to press an outer wall of polymer pipe when the pipe is conveyed through the annular carriage.

10. The apparatus of claim 9, wherein the frame comprises a bearing, and the annular carriage is configured to rotate about a center point of the annular carriage, as guided by the bearing.

11. The apparatus of claim 9, wherein the frame comprises four bearings, each of the four bearings being disposed on a quadrant of the frame, and the annular carriage is configured to rotate about a center point of the annular carriage, as guided by the four bearings.

12. An apparatus for pressing an outer wall of polymer pipe, the apparatus comprising:

a frame having a bearing;
 an annular carriage configured to rotate about an axis as guided by the bearing;
 a translating member configured to translate radially inward and radially outward relative to the annular carriage, said translating member having opposing angled faces;
 at least two opposing spring-biased cam followers configured to engage the opposing angled faces and bias the translating member in a direction that is radially inward; and
 a press roller translatably mounted to the translating member and configured to orbit around said axis on a path defined by the annular carriage;
 wherein the press roller is configured to press an outer wall of polymer pipe when the pipe is conveyed through the annular carriage.

13. The apparatus of claim 12, further comprising a bracket configured to mount the press roller to the translating member, wherein the press roller is configured to rotate about a portion of the bracket.

14. The apparatus of claim 12, wherein the frame comprises four bearings, each of the four bearings being disposed on a quadrant of the frame, and the annular carriage is configured to rotate about a center point of the annular carriage, as guided by the four bearings.

15. The apparatus of claim 12, wherein the press roller is generally cylindrical in shape and, at either end of the cylindrical shape, is angled toward an axis about which the press roller rotates.

16. The apparatus of claim 12, wherein each of the spring-biased cam followers is engaged with a threaded bolt configured to adjust an axial length of a compression spring disposed in the spring-biased cam follower, for modifying an amount of bias provided by the spring biased cam follower.

17. The apparatus of claim 9, further comprising a bracket configured to mount the press roller to the translating member, wherein the press roller is configured to rotate about a portion of the bracket.

18. The apparatus of claim 9, wherein the press roller is generally cylindrical in shape and, at either end of the cylindrical shape, is angled toward an axis about which the press roller rotates.

19. The apparatus of claim 9, wherein the frame comprises four bearings, each of the four bearings being disposed on a quadrant of the frame, and the annular carriage is configured to rotate about a center point of the annular carriage, as guided by the four bearings.

20. The apparatus of claim 9, wherein the each of the spring-biased cam followers is engaged with a threaded bolt configured to adjust an axial length of a compression spring disposed in the spring-biased cam follower, for modifying an amount of bias provided by the spring biased cam follower.

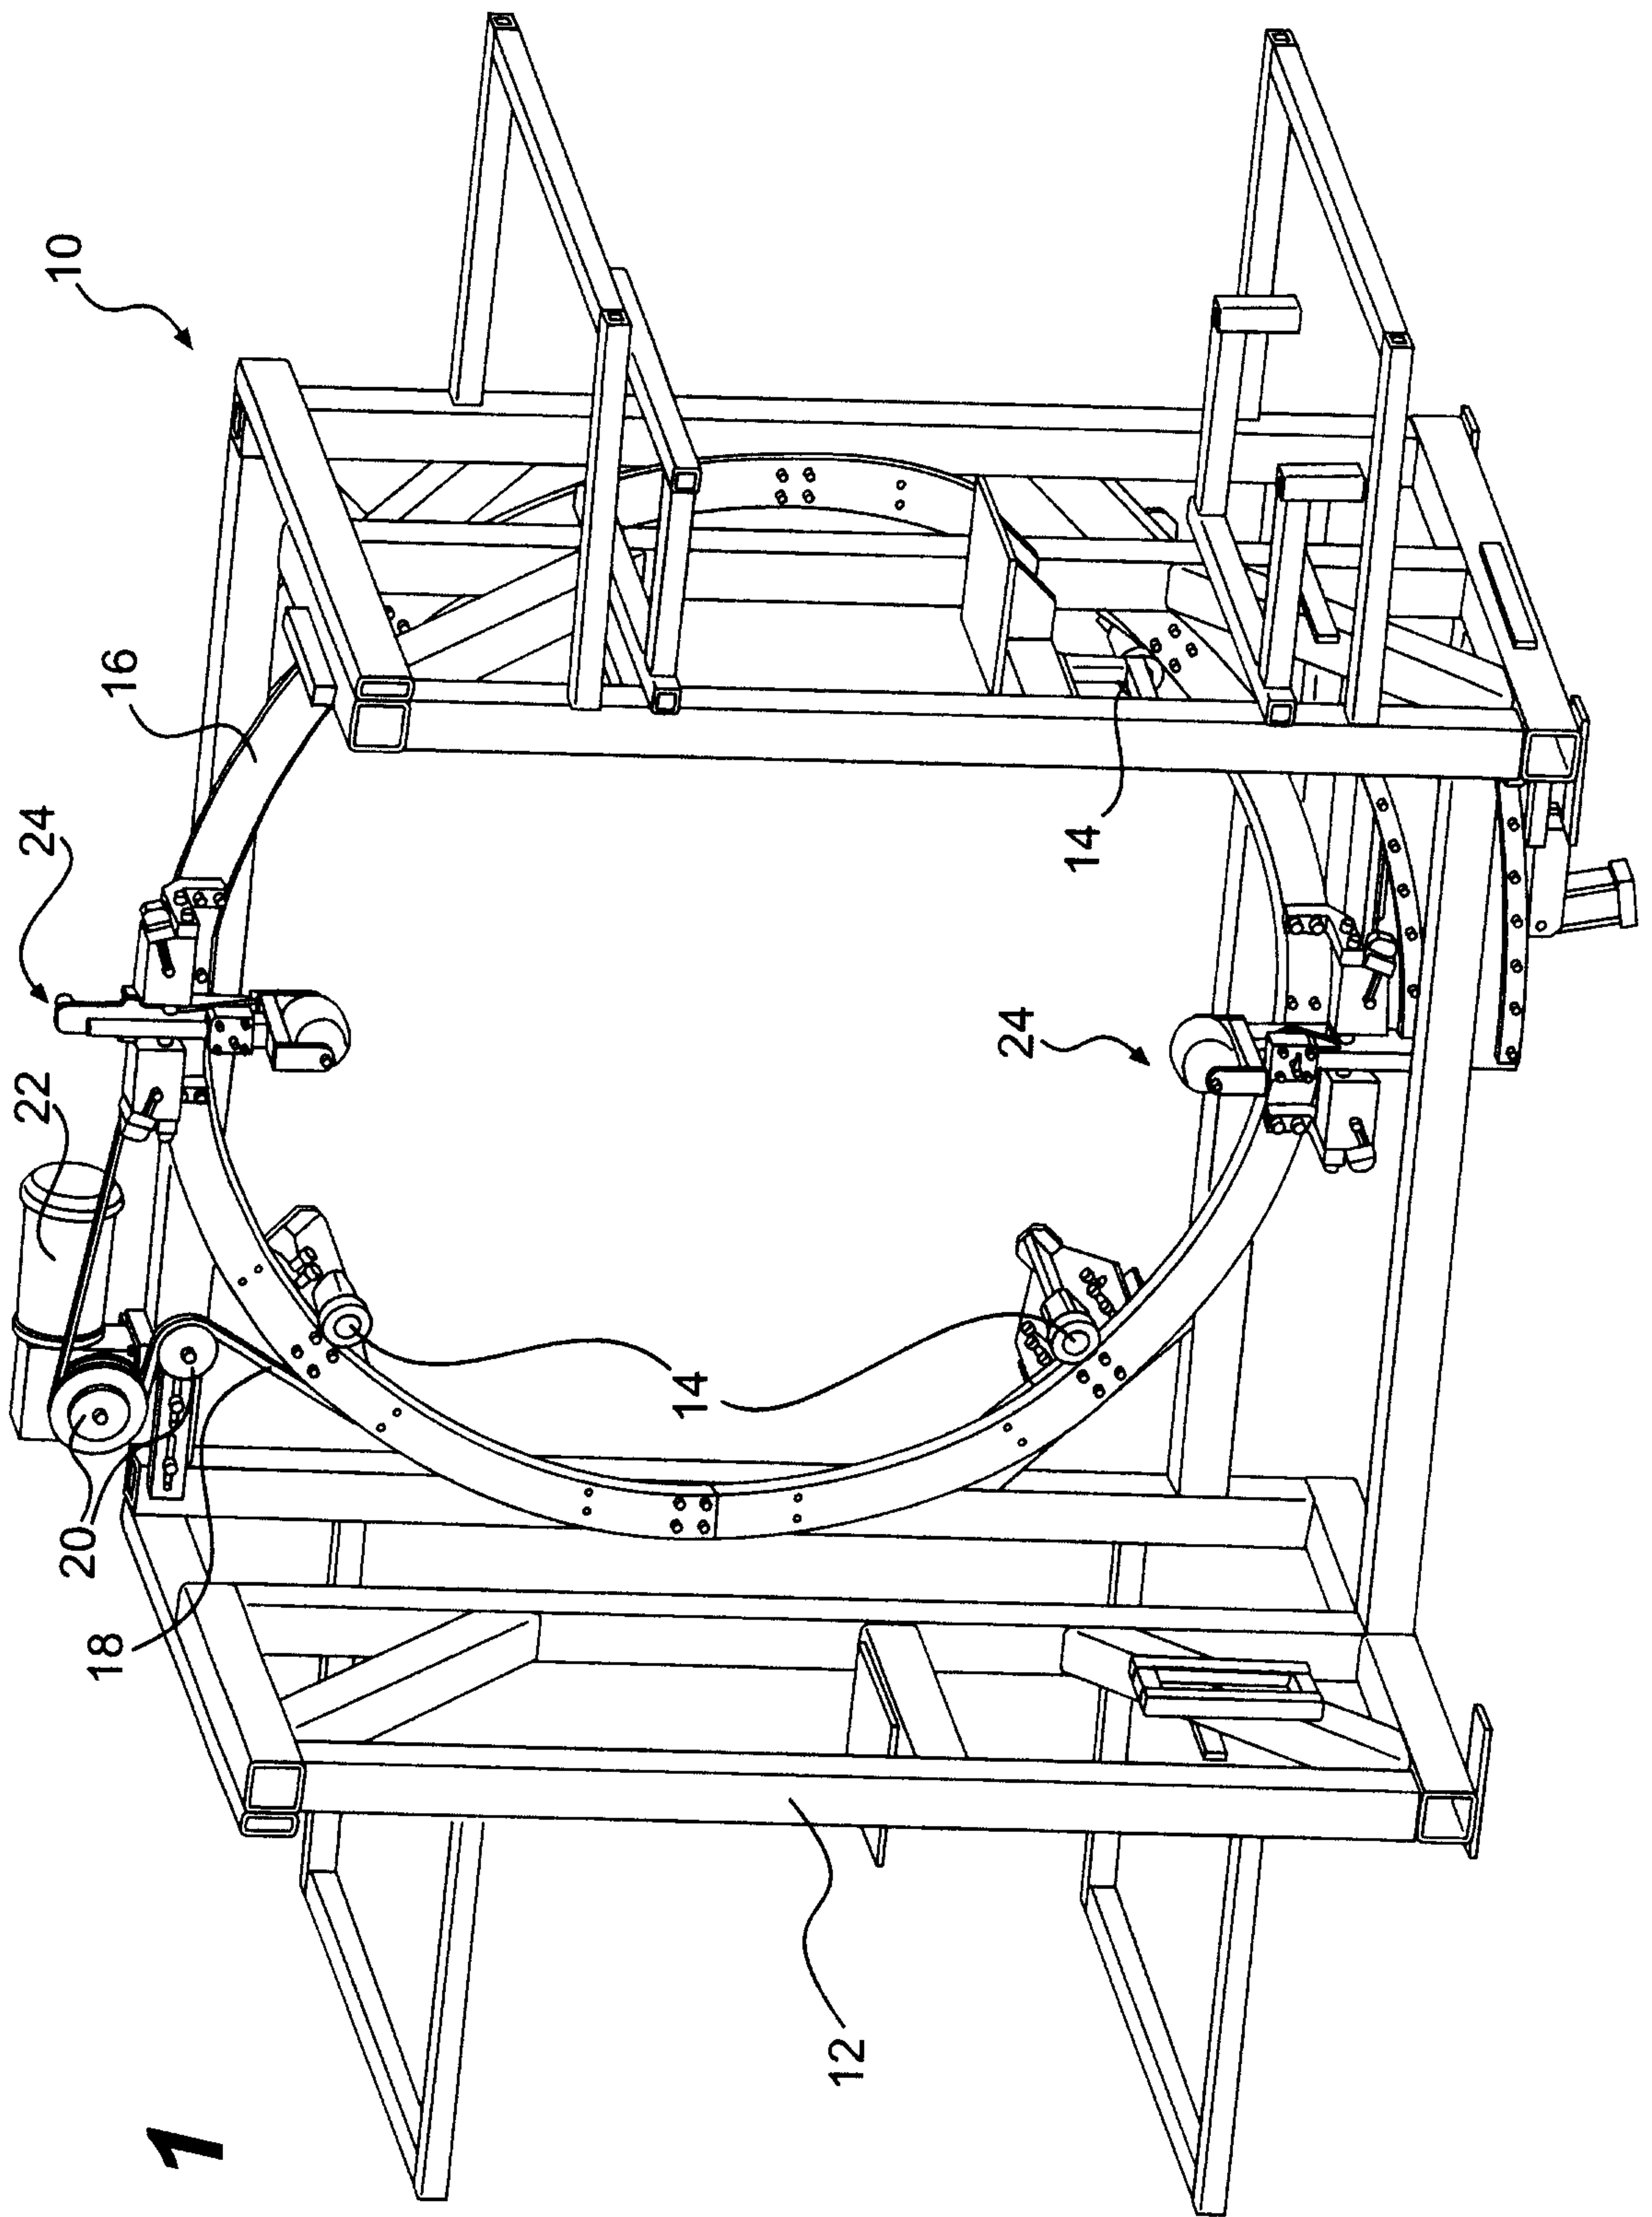


FIG. 1

*Patent Agents
Smart & Biggar*

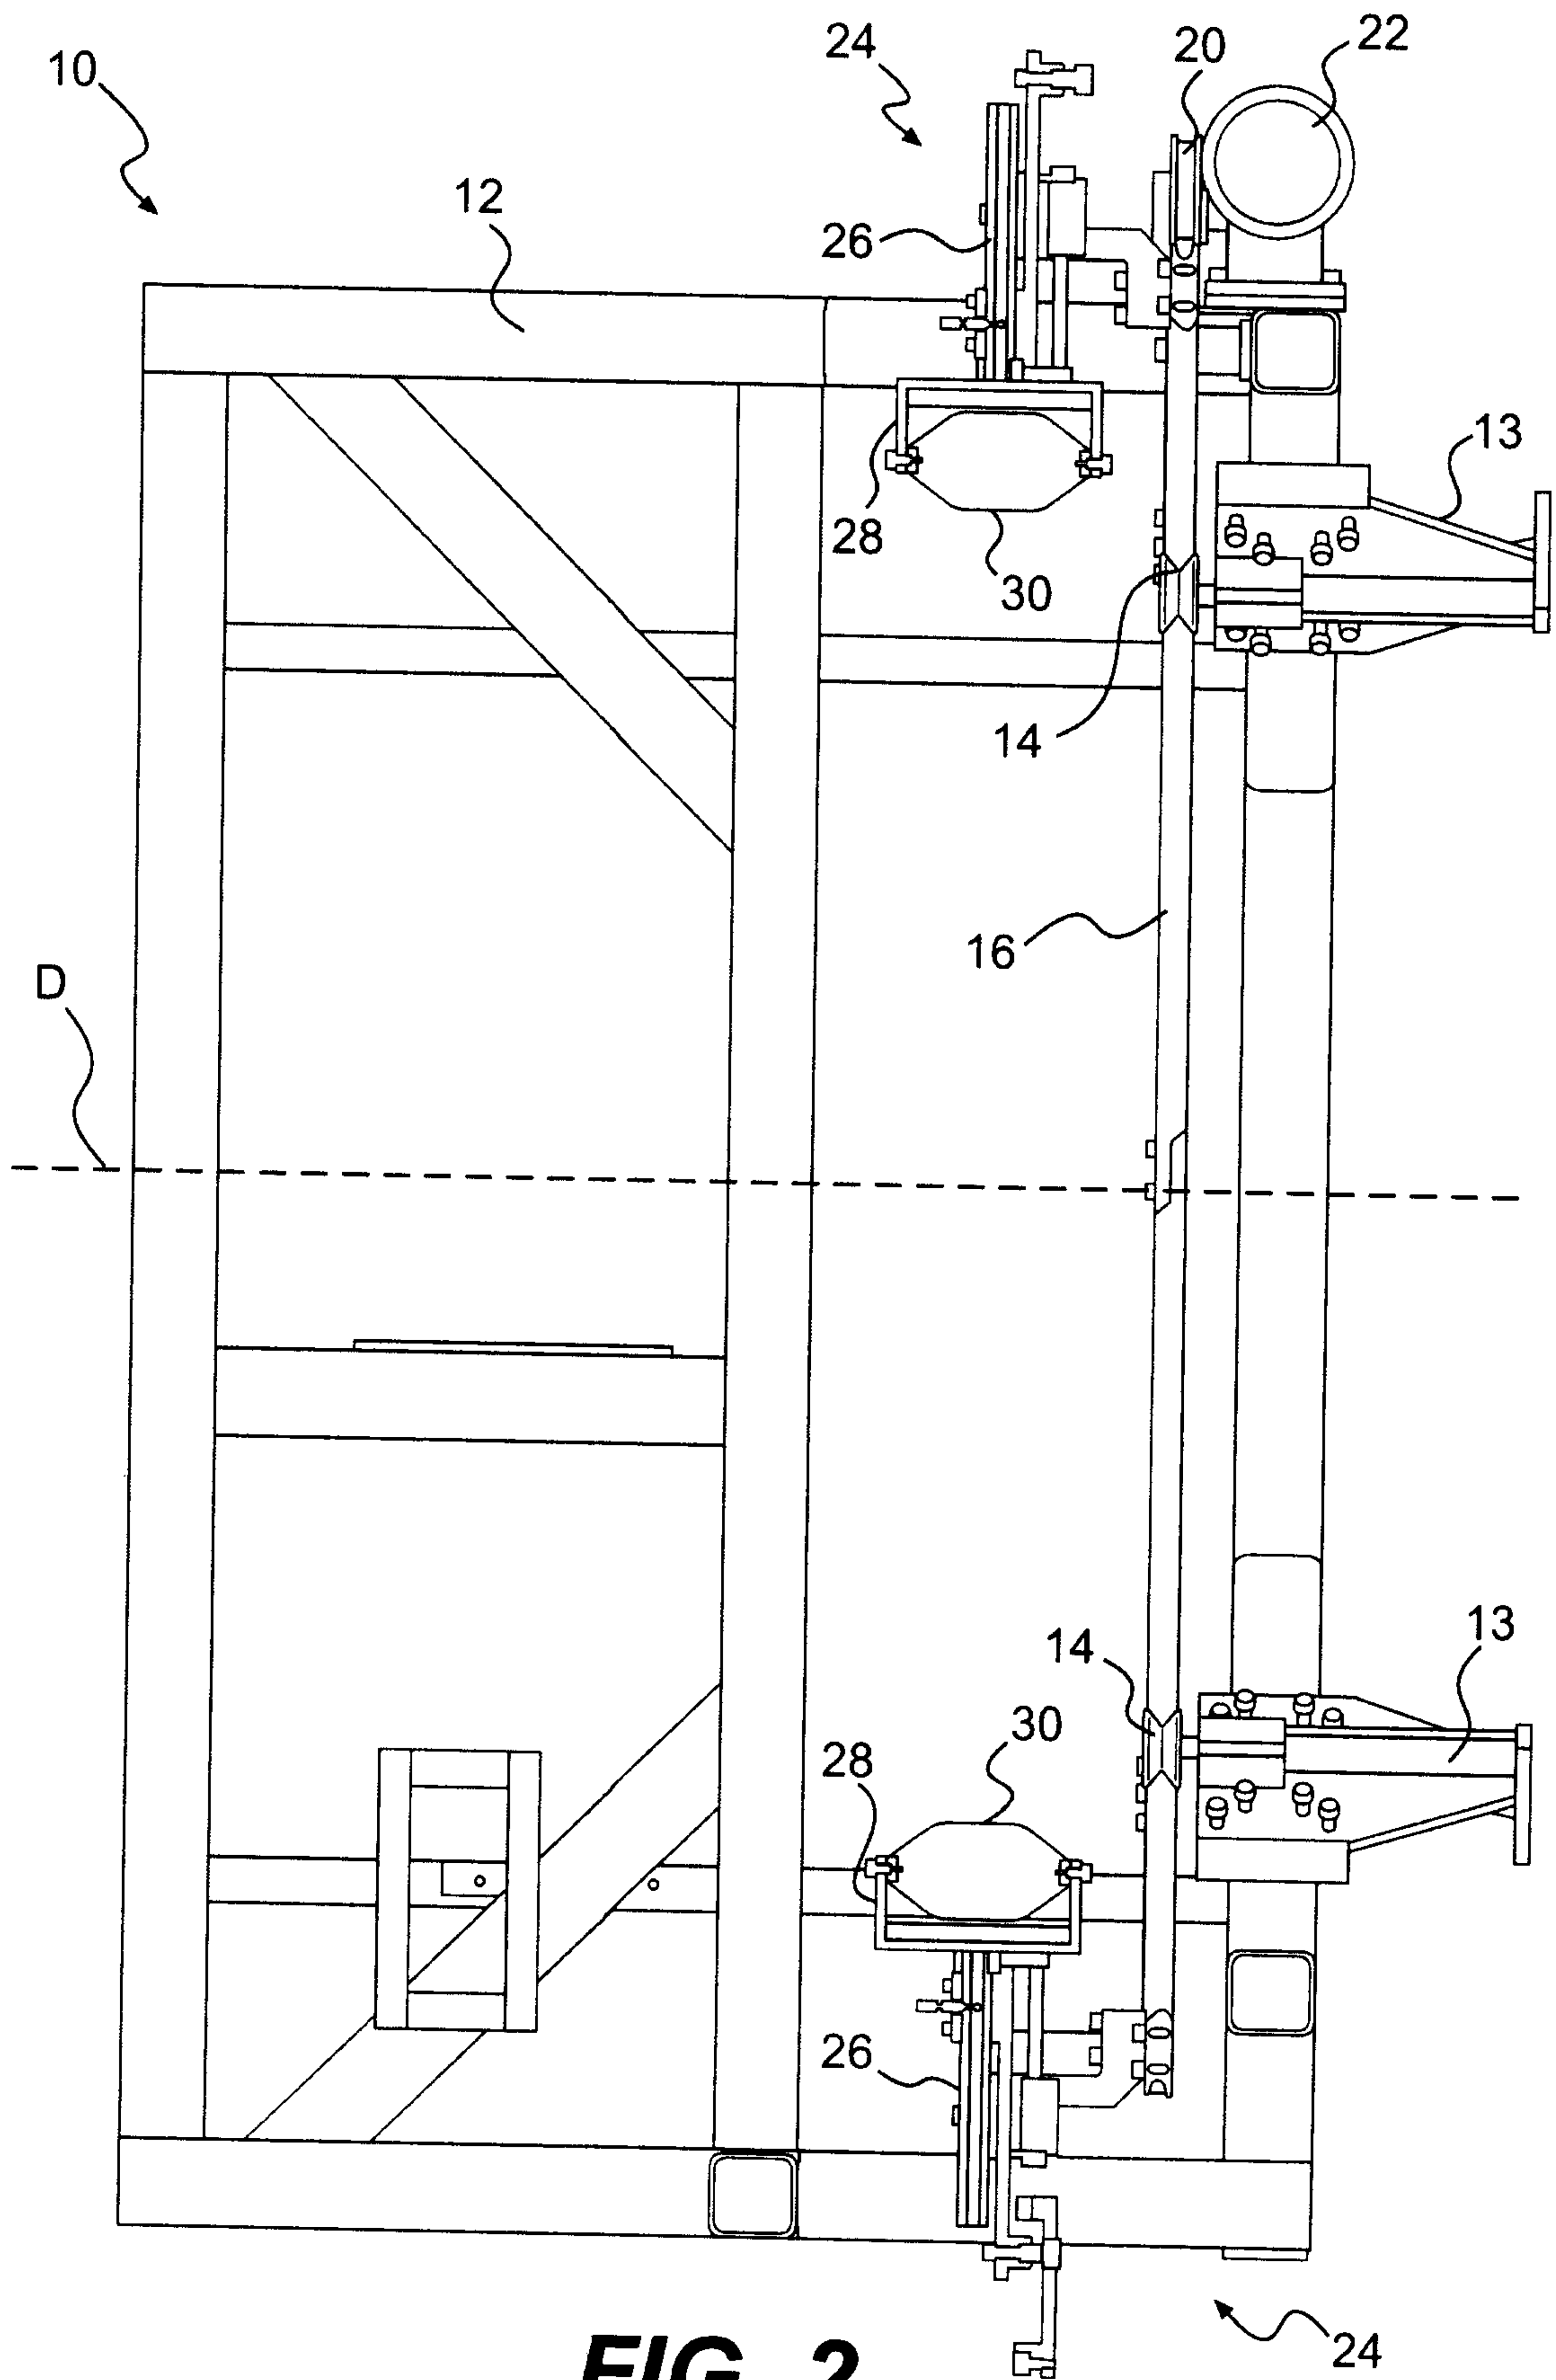


FIG. 2

*Patent Agents
Smart & Biggar*

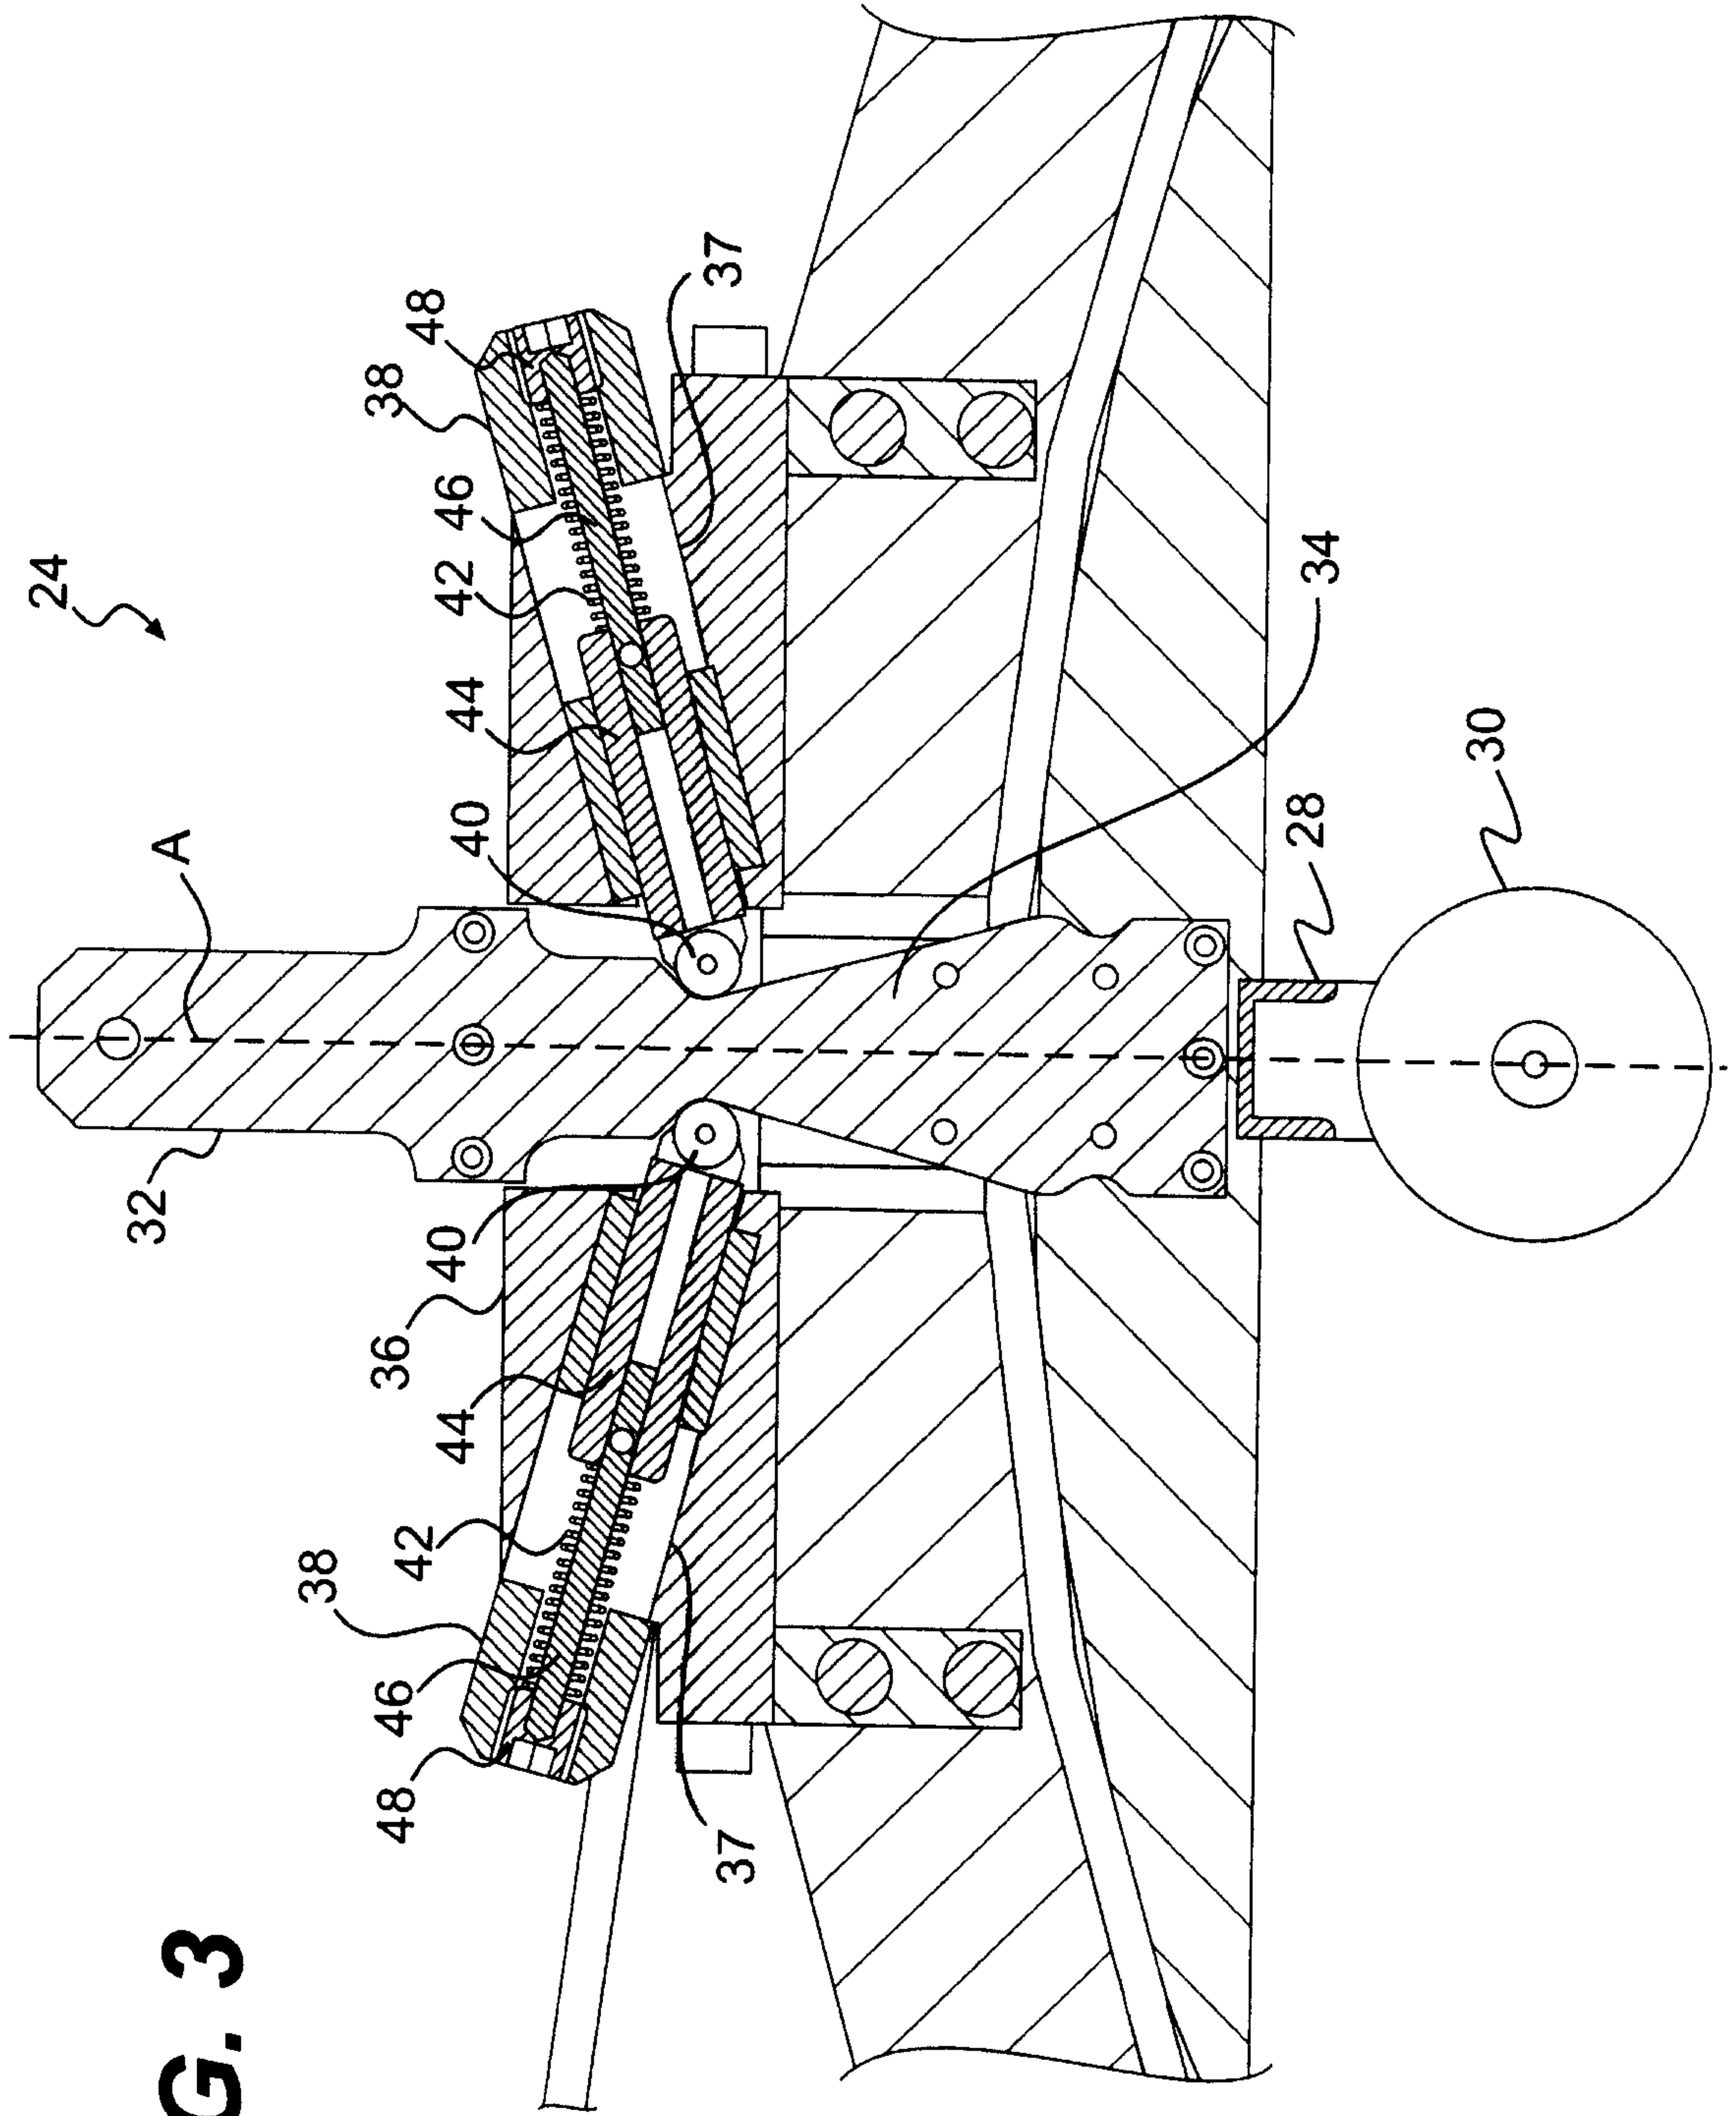


FIG. 3

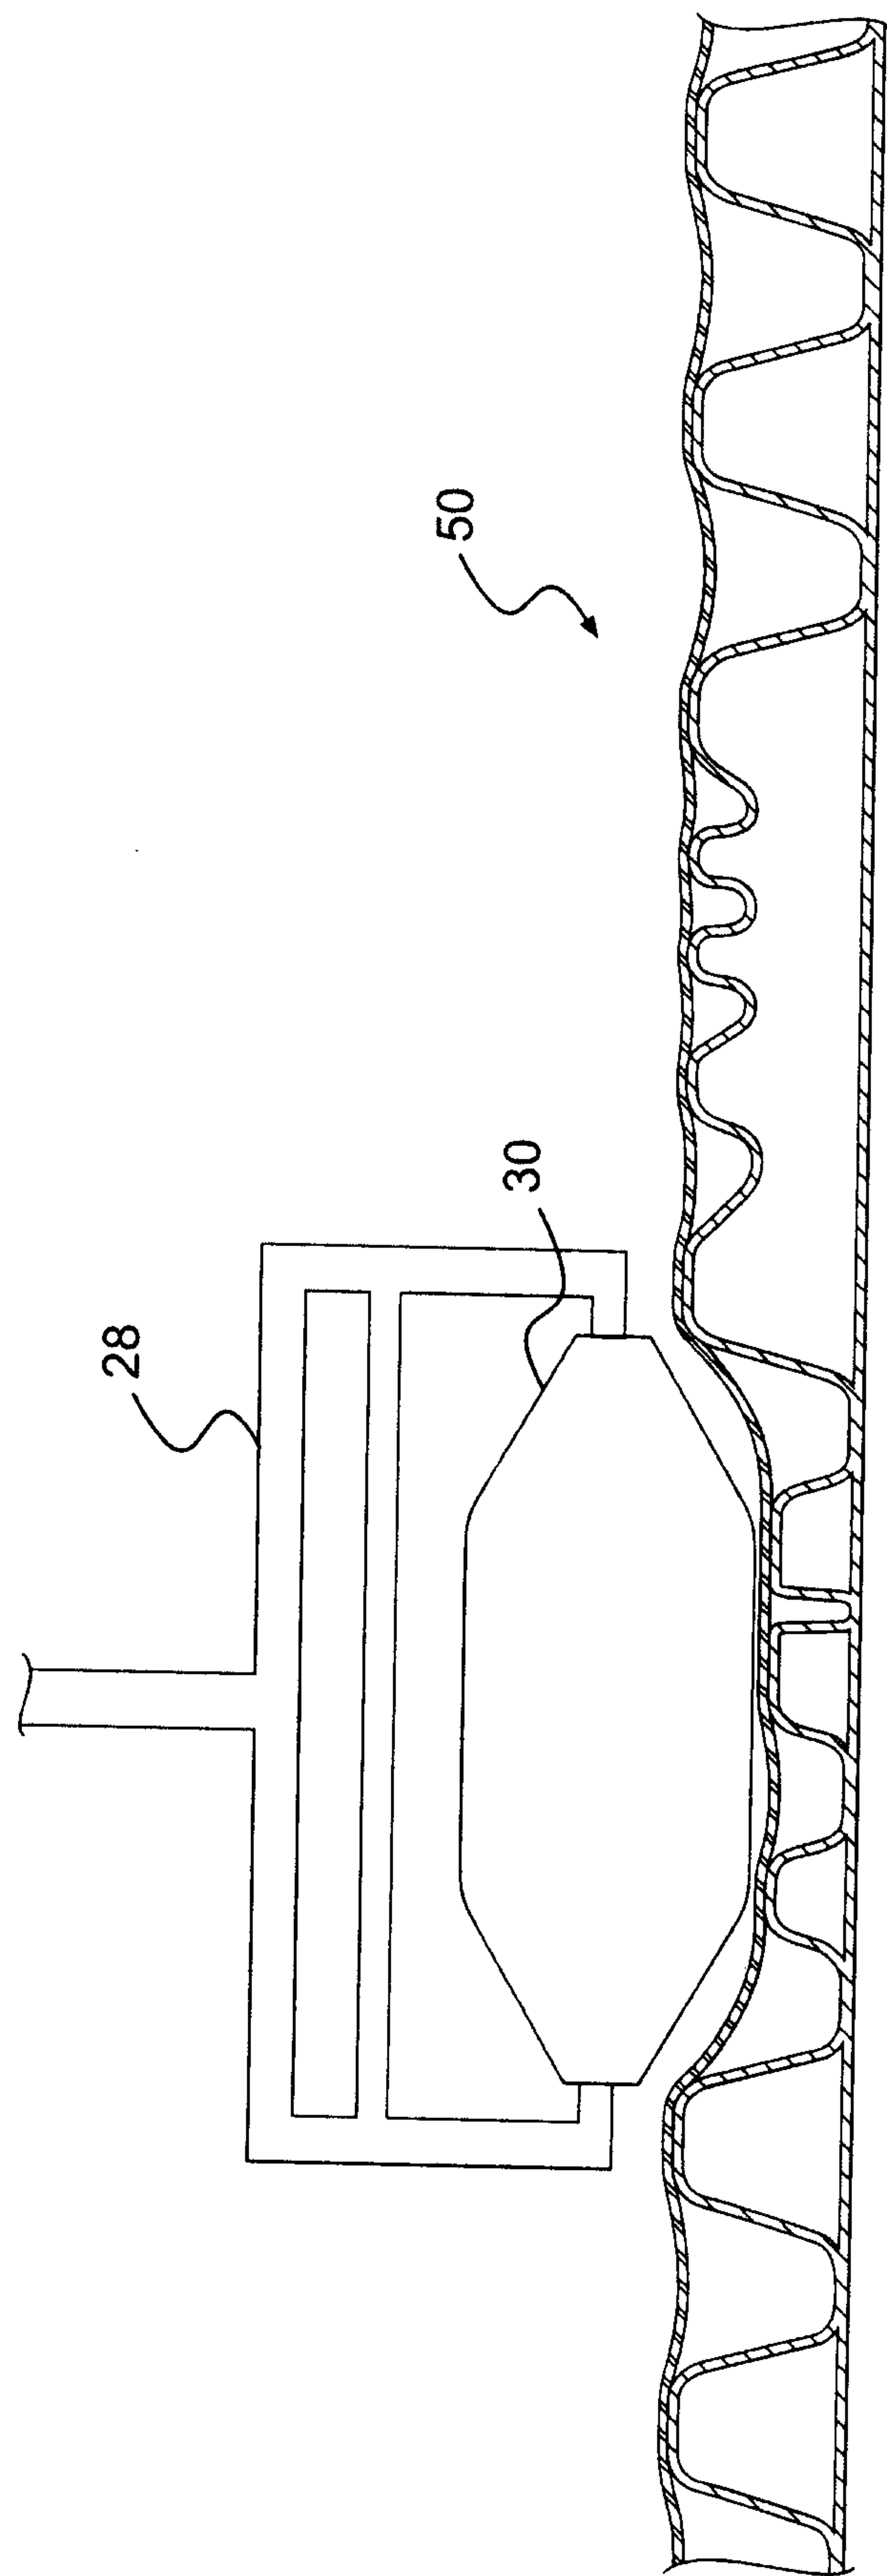


FIG. 4