

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 December 2003 (04.12.2003)

PCT

(10) International Publication Number
WO 03/100368 A1

- (51) International Patent Classification⁷: G01J 01/04, G02B 05/08
- (21) International Application Number: PCT/US03/15998
- (22) International Filing Date: 21 May 2003 (21.05.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/151,172 21 May 2002 (21.05.2002) US
- (71) Applicant (for all designated States except US): OPTIX TECH INC. [US/US]; 1050 17th Street, NW, Suite 1150, Washington, DC 20036 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


- (72) Inventor; and
- (75) Inventor/Applicant (for US only): KUKLINSKI, Jan [PL/PL]; ul. Czarnieckiego 76 m.1, PL-01541 Warszawa (PL).
- (74) Agents: FOURNIER, Paul, A. et al.; Morgan, Lewis & Bockuis LLP, 1111 Pennsylvania Avenue, NW, Washington, DC 20004 (US).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: OPTICAL ARRAY CONVERTING UV RADIATION

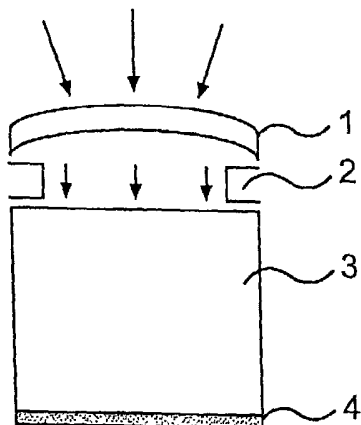

(57) Abstract: An optical array containing a system of absorptive filters (3), a system of interference filters (4) and a scatterer (1). For the sun light the spectral characteristics of transmission of the optical array is close to the world-wide accepted Diffey Standard. That standard models human skin sensitivity to UV burning. The invention allows making inexpensive, miniature UV sensors that can be applied in miniature devices measuring burning power of UV contained in the sun light.

WO 03/100368 A1

Optical Array Converting UV Radiation

This invention is an optical array converting UV radiation, especially contained in sunlight. The spectral characteristic of the transmission of the filter is similar to the sensitivity of human skin to sun burning. That sensitivity is described by the widely recognized Diffey Standard, also called also the Erythema Action Spectrum.

The Roberston Berger UV meter has been widely used over the past two decades to measure UV in good approximation of the Diffey/Erythema Spectral Response. This stationary device is based on a phosphore convertor screen as the principle means to reach a spectral response close to the Erythema/Diffey Curve.

By now there are a few UV hand-held measuring devices known on the market that are targeting monitoring of UV radiation for avoiding sunburning. CASIO Computer Ltd. manufactures a device called "CASIO UC-120 UV", which has an optical array containing absorptive filter made of material similar to Schott UG-11 and a photodiode. The spectral characteristic of the device doesn't match the Diffey Standard. The device illuminated by sunlight is too sensitive to UV-A, that has low burning power.

US patent 5,196,705 describes a device measuring the intensity and dose of UV. The device has an optical array containing: an absorptive filter made of material similar to Schott UG- 11, a photo- luminescentive material and a photodiode. The spectral characteristic of the device doesn't match the Diffey Standard. The device is too sensitive to UV-A comparing to its sensitivity to UV-B. Several others solutions for biologically oriented monitors of UV radiation were also proposed, among them: US patent 5,036,311 describes a UV-monitoring system in which a light sensing element is placed under a curved optical element with interference filters imposed on its surface.

US patent 5,401,970 describes a UV-monitoring device which incorporates a UV-B sensor and a VIS sensor. The UV-B detector involved is described to be based on a phosphor convertor screen.

Description of the invention

The invention solves the problem of constructing a device equipped with an optical array converting UV, visible and IR radiation that has the spectral characteristic of the transmission similar to the Diffey Standard.

Definition of the relative internal transmission of a set of filters:

$$T_{\text{int}}^{\text{rel}}(\lambda) = T_{\text{int}}(\lambda) / T_{\text{int}}(310) \quad (1)$$

where:

λ wavelength in nano-meters

$T_{\text{int}}^{\text{rel}}(\lambda)$ relative internal transmission for λ wavelength

$T_{\text{int}}(\lambda)$ internal transmission for λ wavelength

$T_{\text{int}}(310)$ internal transmission for 310nm wavelength

Note that the total internal transmission of the set of absorptive filters is equal to the product of internal transmissions of each consecutive filter.

Definition of the relative transmission of a set of filters:

$$T^{\text{rel}}(\lambda) = T(\lambda) / T(310) \quad (2)$$

where:

λ wavelength in nano-meters

$T^{\text{rel}}(\lambda)$ relative transmission for λ wavelength

$T(\lambda)$ transmission for λ wavelength

$T(310)$ transmission for 310nm wavelength

The Diffey spectral characteristics will be denoted as $D(\lambda)$ (3)

where: λ wavelength in nano-meters

In the first solution the array contains a system of absorptive filters to block visible and IR radiation, a system of interference filters modifying transmission of UV and/or blocking visible and IR radiation, scattering elements, elements forming the light beam. Interference filter/filters

is/are made of layers of materials having high and low UV refractive indexes. According to the invention one of the system of interference filters has layers made of Hafnium oxide and/or Zirconium oxide. A collimator placed in the optical path forms the light beam. The collimator can have surfaces highly absorbing light. At the beginning of the optical path a scatterer is placed to achieve non-directional characteristic of the array. The scatterer can be made of PTFE.

In the second solution the array contains the first system of absorptive filters to partly block UV-A, the second system of absorptive filters to block visible and IR radiation and may contain scattering elements and/or system/systems of interference filter/filters.

The first system of absorptive filters has internal relative transmission $T_{int}^{rel}(\lambda)$: between 0 and 0.2 for $\lambda=290\text{nm}$, between 0.34 and 0.7 for $\lambda=300\text{nm}$, between 0.5 and 0.8 for $\lambda=320\text{nm}$, between 0.04 and 0.36 for $\lambda=330\text{nm}$, between $10\text{E-}3$ and 0.1 for $\lambda=340\text{nm}$, between $7*10\text{E-}6$ and 0.02 for $\lambda=350\text{nm}$, between $2*10\text{E-}7$ and $7*10\text{E-}3$ for $\lambda=360\text{nm}$, between $2*10\text{E-}7$ and $7*10\text{E-}3$ for $\lambda=370\text{nm}$, between $2*10\text{E-}5$ and 0.03 for $\lambda=380\text{nm}$, between $2*10\text{E-}3$ and 0.14 for $\lambda=390\text{nm}$. The total optical thickness of the first system of absorptive filters is between 0.5 and 2mm.

The second system of absorptive filters has internal relative transmission $T_{int}^{rel}(\lambda)$: between 0 and 0.3 for $\lambda=290\text{nm}$, between 0.7 and 0.8 for $\lambda=300\text{nm}$, between 1 and 1.3 for $\lambda=320\text{nm}$, between 1 and 1.4 for $\lambda=330\text{nm}$, between 1 and 1.3 for $\lambda=340\text{nm}$, between 1 and 1.12 for $\lambda=350\text{nm}$, between 0.6 and 0.8 for $\lambda=360\text{nm}$, between 0.14 and 0.3 for $\lambda=370\text{nm}$, between $10\text{E-}3$ and 0.015 for $\lambda=380\text{nm}$, between $10\text{E-}10$ and $10\text{E-}6$ for $\lambda=390\text{nm}$. The total optical thickness of the first system of absorptive filters is between 0.5 and 10mm.

At the beginning of the optical path a scatterer is placed to achieve non-directional characteristic of the array. The scatterer can be made of PTFE. In the optical path additional system/systems of interference filters can be placed to block visible and IR radiation and/or to modify transmission in UV range.

In another embodiment the internal transmissions are arranged slightly differently. In the third solution, the array contains the first system of absorptive filters to partly block UV-A, the second system of absorptive filters to block visible and IR radiation and

may contain scattering elements and/or system/systems of interference filter/filters. The first system of absorptive filters has internal relative transmission $T_{int}^{rel}(\lambda)$: between 0 and 0.6 for $\lambda=290\text{nm}$, between 0.1 and 1.5 for $\lambda=300\text{nm}$, between 0.2 and 2.0 for $\lambda=320\text{nm}$, between $10\text{E-}4$ and $10\text{E-}1$ for $\lambda=330\text{nm}$, between $10\text{E-}2$ and 1.0 for $\lambda=340\text{nm}$, between $10\text{E-}8$ and 0.1 for $\lambda=350\text{nm}$, between $10\text{E-}9$ and $10\text{E-}2$ for $\lambda=360\text{nm}$, between $10\text{E-}9$ and $10\text{E-}2$ for $\lambda=370\text{nm}$, between $10\text{E-}6$ and 0.1 for $\lambda=380\text{nm}$, between $10\text{E-}4$ and 0.1 for $\lambda=390\text{nm}$.

The second system of absorptive filters has internal relative transmission $T_{int}^{rel}(\lambda)$: between 0 and 0.7 for $\lambda=290\text{nm}$, between 0.3 and 1.5 for $\lambda=300\text{nm}$, between 0.5 and 2 for $\lambda=320\text{nm}$, between 0.5 and 3 for $\lambda=330\text{nm}$, between 0.5 and 2 for $\lambda=340\text{nm}$, between 0.5 and 1.7 for $\lambda=350\text{nm}$, between 0.1 and 1.5 for $\lambda=360\text{nm}$, between 0.01 and 1 for $\lambda=370\text{nm}$, between $10\text{E-}5$ and $10\text{E-}1$ for $\lambda=380\text{nm}$, between $10\text{E-}12$ and $10\text{E-}2$ for $\lambda=390\text{nm}$.

At the beginning of the optical path a scatterer is placed to achieve non-directional characteristic of the array. The scatterer can be made of PTFE. In the optical path additional system/systems of interference filters can be placed to block visible and IR radiation and/or to modify transmission in UV range.

This invention allows producing a cheap and simple optical array with a spectral characteristics in the UV-A and UV-B range following the human skin sensitivity described by Diffey Standard. The scatterer ensures non-directional characteristics of the array. Other standards of skin sensitivity to UV-A and UV-B burning can also be easily followed.

Brief Description of the Drawings

The invention is presented on the block diagrams where Fig. 1 presents the construction of the version 1 of the optical array, Fig. 2 presents the construction of another variant of the invention presented on Fig. 1, Fig. 3 presents the construction of the version 2 of the optical array, Fig. 4 presents the construction of the of the version 3 of the optical array. Fig. 5 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ for optical array from Fig. 2 in comparison with the Diffey Standard $D(\lambda)$, Fig. 6 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ for optical array from Fig. 3 in comparison with the Diffey Standard $D(\lambda)$, Fig. 7 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ for optical array from Fig. 4 in comparison with the Diffey Standard $D(\lambda)$.

Description of the version 1

The array contains: the layer 1 that scatters light, a collimator 2 an absorptive filter 3 that makes a system of absorptive filters, a set of interference filters 4 that makes a system of interference filters. The absorptive filter 3 is made of material transparent to UV and blocking visible and IR radiation. That property has M1 material, with a characteristics presented in the table below.

In that example a scatterer 1 is made of PTFE, and the absorptive filter 3 is a plano-parallel plate, 8mm thick, made of M1 material Schott UG-11 like. The set of interference filters 4 that is placed on the absorptive filter's 3 surface consists of 38 layers of Hafnium oxide and/or Zirconium oxide and Silica oxide.

The scatterer 1 ensures non-directional characteristics of the array. The collimator 2 forms the light beam. To achieve desired spectral characteristics the light beam passes through the absorptive filter 3 and the interference filter 4.

In the other variant of the version 1, that is shown on the Fig. 2, the array contains: the layer 5 that scatters light, a collimator 6, absorptive filter 7 that makes a system of absorptive filters and a first set of interference filters 8 and a second set of interference filters 9 that both make a system of interference filters. The absorptive filter 7 is made of material transparent to UV and blocking visible and IR radiation. That property has M1 material, with a characteristics presented in the table below.

In that example a scatterer 5 is made of PTFE, and absorptive filter 7 is a plano-parallel plate, 8mm thick, made of M1 material, Schott UG-11 like. The first set of interference filters 8 and the second set of interference filters 9 are placed on the absorptive filter's 7 surfaces and together consists of 62 layers of Hafnium oxide and/or Zirconium oxide and Silica oxide.

The scatterer 5 ensures non-directional characteristics of the array. The collimator 6 forms the light beam. To achieve desired spectral characteristics the light beam passes through the first interference filter 8, the absorptive filter 7 and the second interference filter 9.

On the Fig. 5 chart the $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ characteristics of the array is plotted as a broken line, the Diffey Standard is plotted as a solid line. On the chart these two curves are close to each other in the 310-325nm range.

Description of the version 2.

The array contains: the layer 10 that scatters light, a first absorptive filter 11 that makes a first system of absorptive filters, a second absorptive filter 12 that makes a second system of absorptive filters. The first absorptive filter 11 is made of material transparent to UV with decreasing transmission when the wavelength is changed from 320 to 350nm, the second absorptive filter 12 is made of material transparent to UV and blocking visible and IR radiation. That property have materials M2 and M1 respectively, with characteristics presented in the table below.

In that example a scatterer 10 is made of PTFE, the first absorptive filter 11 is a plano-parallel plate, 1.5mm thick, made of M2 material, Schott GG-19 like, the second absorptive filter 12 is a plano-parallel plate, 8 mm thick, made of M1 material, Schott UG-11 like.

The scatterer 10 ensures non-directional characteristics of the array. To achieve desired spectral characteristics the light beam passes through the first absorptive filter 11 and the second absorptive filter 12.

On the Fig. 6 chart $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ characteristics of the array is plotted as a broken line, the Diffey Standard is plotted as a solid line.

Description of the version 3.

The array contains: a first absorptive filter 13 that makes a first system of absorptive filters, a second absorptive filter 14 that makes a second system of absorptive filters and a first set of interference filters 15 and a second set of interference filters 16 that both make a system of interference filters. The first absorptive filter 13 is made of material transparent to UV with decreasing transmission when wavelength is changed from 320 to 350nm, the second absorptive filter 14 is made of material transparent to UV and blocking visible and IR radiation. That property have materials M2 and M1 respectively, with characteristics presented in the table below. Interference filters are constructed to block visible and IR radiation and/or to

modify transmission characteristics in UV.

In that example the first absorptive filter 13 is a plano-parallel plate, 1.5mm thick, made of M2 material, Schott GG-19 like. The second absorptive filter 14 with interference filters 15, 16 placed on the filter 14 surfaces are made together by Schott as Schott DUG-11 filter.

To achieve desired spectral characteristics the light beam passes through the first absorptive filter 13, the first interference filter 15, the second absorptive filter 14 and the second interference filter 16.

On the Fig. 7 chart $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ characteristics of the array is plotted as a broken line, the Diffey Standard is plotted as a solid line.

TABLE of relative internal transmission $T^{rel}_{int}(\lambda)$

λ [nm]		290	300	310	320	330	340	350
M1 glass, 8 mm thick	Minimal value	0	0.7	1	1.0	1.0	1.0	1.0
	Maximal value	0.3	0.8	1	1.3	1.4	1.3	1.12
M2 glass, 1.5 mm thick	Minimal value	0	0.34	1	0.5	0.04	10E-3	7*10E-6
	Maximal value	0.2	0.7	1	0.8	0.36	0.1	0.02

λ [nm]		360	370	380	390
M1 glass, 8 mm thick	Minimal value	0.6	0.14	10E-3	10E-10
	Maximal value	0.8	0.3	0.015	10E-6
M2 glass, 1.5 mm thick	Minimal value	2*10E-7	2*10E-7	2*10E-5	2*10E-3
	Maximal value	7*10E-3	7*10E-3	0.03	0.14

Data in tables above are $T_{int}^{rel}(\lambda)$ characteristics of plano-parallel plates made of M1, M2 with given thickness.

The exact values of $T_{int}^{rel}(\lambda)$ are described in the example constructions. These data are example values and it is obvious that the invention is not restricted to them.

The optical array in the example constructions has the spectral characteristics similar to human skin sensitivity to UV contained in sunlight. Fig. 5 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ chart for optical array from Fig. 2 in comparison with the Diffey Standard $D(\lambda)$, Fig. 6 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ chart for optical array from Fig. 3 in comparison with the Diffey Standard $D(\lambda)$, Fig. 7 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ chart for optical array from Fig 4 in comparison with the Diffey Standard $D(\lambda)$. The biggest discrepancies between the characteristics and the Diffey Standard are for UV-C that is absent in sunlight and UV-A that has a minimal burning power comparing with total burning power of sun UV.

What is claimed is:

1. An optical array converting UV, visible and IR radiation, especially contained in sunlight, with a spectral characteristics following the Diffey Standard, comprising:

a system of absorptive filters, made of M1 material, to modify transmission characteristics in the UV range and/or to block visible and IR radiation, this M1 material is characterized by internal transmission for a given wavelength divided by its internal transmission for 310nm light within the following range: between 0 and 0.7 for $\lambda=290\text{nm}$, between 0.3 and 1.5 for $\lambda=300\text{nm}$, between 0.5 and 2.0 for $\lambda=320\text{nm}$, between 0.5 and 3.0 for $\lambda=330\text{nm}$, between 0.5 and 2.0 for $\lambda=340\text{nm}$, between 0.5 and 1.7 for $\lambda=350\text{nm}$, between 0.1 and 1.5 for $\lambda=360\text{nm}$, between 0.01 and 1.0 for $\lambda=370\text{nm}$, between $10\text{E}-5$ and $10\text{E}-1$ for $\lambda=380\text{nm}$, between $10\text{E}-12$ and $10\text{E}-2$ for $\lambda=390\text{nm}$;

a system of interference filters to modify transmission characteristics in the UV range and/or to block visible and IR radiation; and

a scatterer at the beginning of the optical path to achieve non-directional spectral transmission characteristics of the array and to improve the spectral transmission characteristics of the array.

2. The array in claim 1, further comprising a collimator placed in the optical path to form the light beam passing through the array and to improve the spectral transmission characteristics of the array where a collimator surface should be highly absorptive to the light.

3. An optical array converting UV, visible and IR radiation, especially contained in sunlight, with a spectral characteristics following the Diffey Standard, comprising:

a first system of absorptive filters, made of M2 material, to modify transmission characteristics in the UV range and/or to block visible and/or IR radiation, this M2 material is characterized by internal transmission for a given wavelength divided by its internal transmission for 310nm light within the following range: between 0 and 0.6 for $\lambda=290\text{nm}$, between 0.1 and 1.5 for $\lambda=300\text{nm}$, between 0.2 and 2.0 for $\lambda=320\text{nm}$, between $10\text{E}-4$ and $10\text{E}-1$ for $\lambda=330\text{nm}$, between $10\text{E}-2$ and 1.0 for $\lambda=340\text{nm}$, between $10\text{E}-8$ and 0.1 for $\lambda=350\text{nm}$, between $10\text{E}-9$ and $10\text{E}-2$ for $\lambda=360\text{nm}$, between $10\text{E}-9$ and $10\text{E}-2$ for $\lambda=370\text{nm}$, between $10\text{E}-6$ and 0.1 for $\lambda=380\text{nm}$, between $10\text{E}-4$ and 0.1 for $\lambda=390\text{nm}$; and

a second system of absorptive filters, made of M1 material, to modify transmission characteristics in the UV range and/or to block visible and/or IR radiation, this M1 material is characterized by internal transmission for a given wavelength divided by its internal transmission for 310 nm light within the following range: between 0 and 0.7 for $\lambda=290\text{nm}$, between 0.3 and 1.5 for $\lambda=300\text{nm}$, between 0.5 and 2.0 for $\lambda=320\text{nm}$, between 0.5 and 3.0 for $\lambda=330\text{nm}$, between 0.5 and 2.0 for $\lambda=340\text{nm}$, between 0.5 and 1.7 for $\lambda=350\text{nm}$, between 0.1 and 1.5 for $\lambda=360\text{nm}$, between 0.01 and 1.0 for $\lambda=370\text{nm}$, between $10\text{E}-5$ and $10\text{E}-1$ for $\lambda=380\text{nm}$, between $10\text{E}-12$ and $10\text{E}-2$ for $\lambda=390\text{nm}$.

4. The array in claim 3, further comprising a scatterer at the beginning of the optical path to achieve non-directional spectral transmission characteristics of the array and to improve the spectral transmission characteristics of the array.

5. The array in claim 3, further comprising additional interference filters to improve the spectral transmission characteristics of the array.

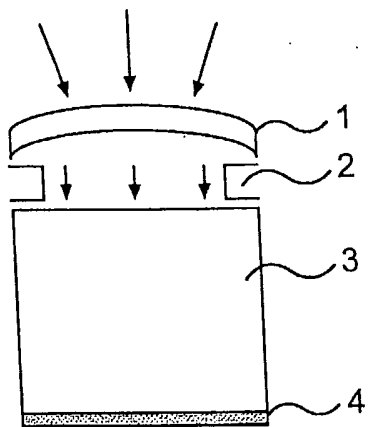


FIG. 1

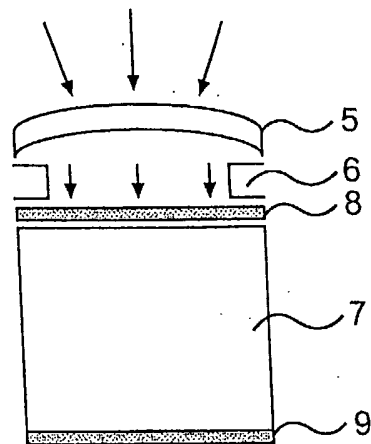


FIG. 2

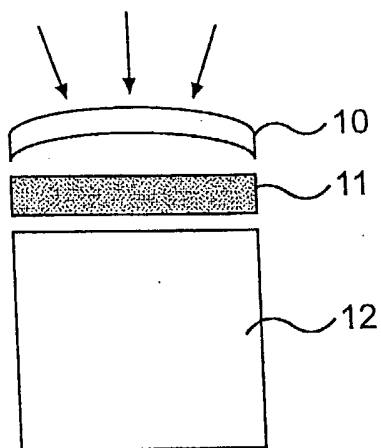


FIG. 3

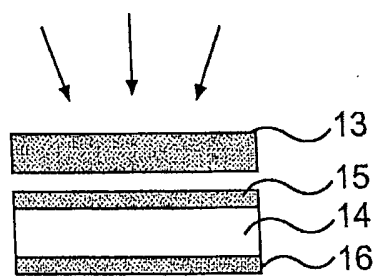


FIG. 4

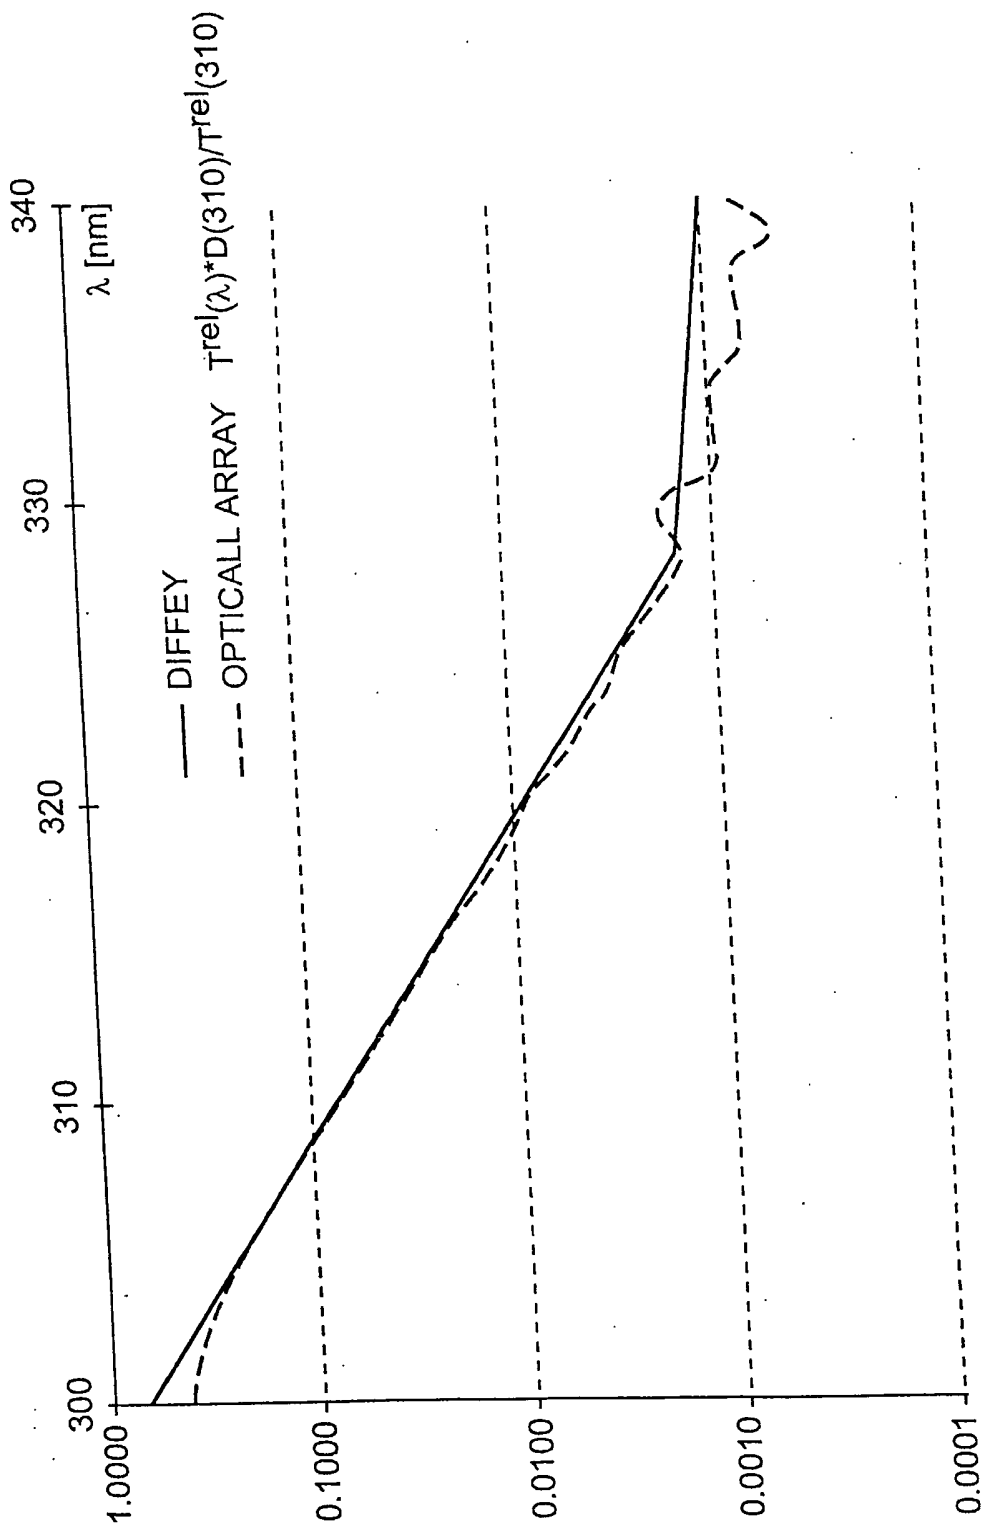


FIG. 5

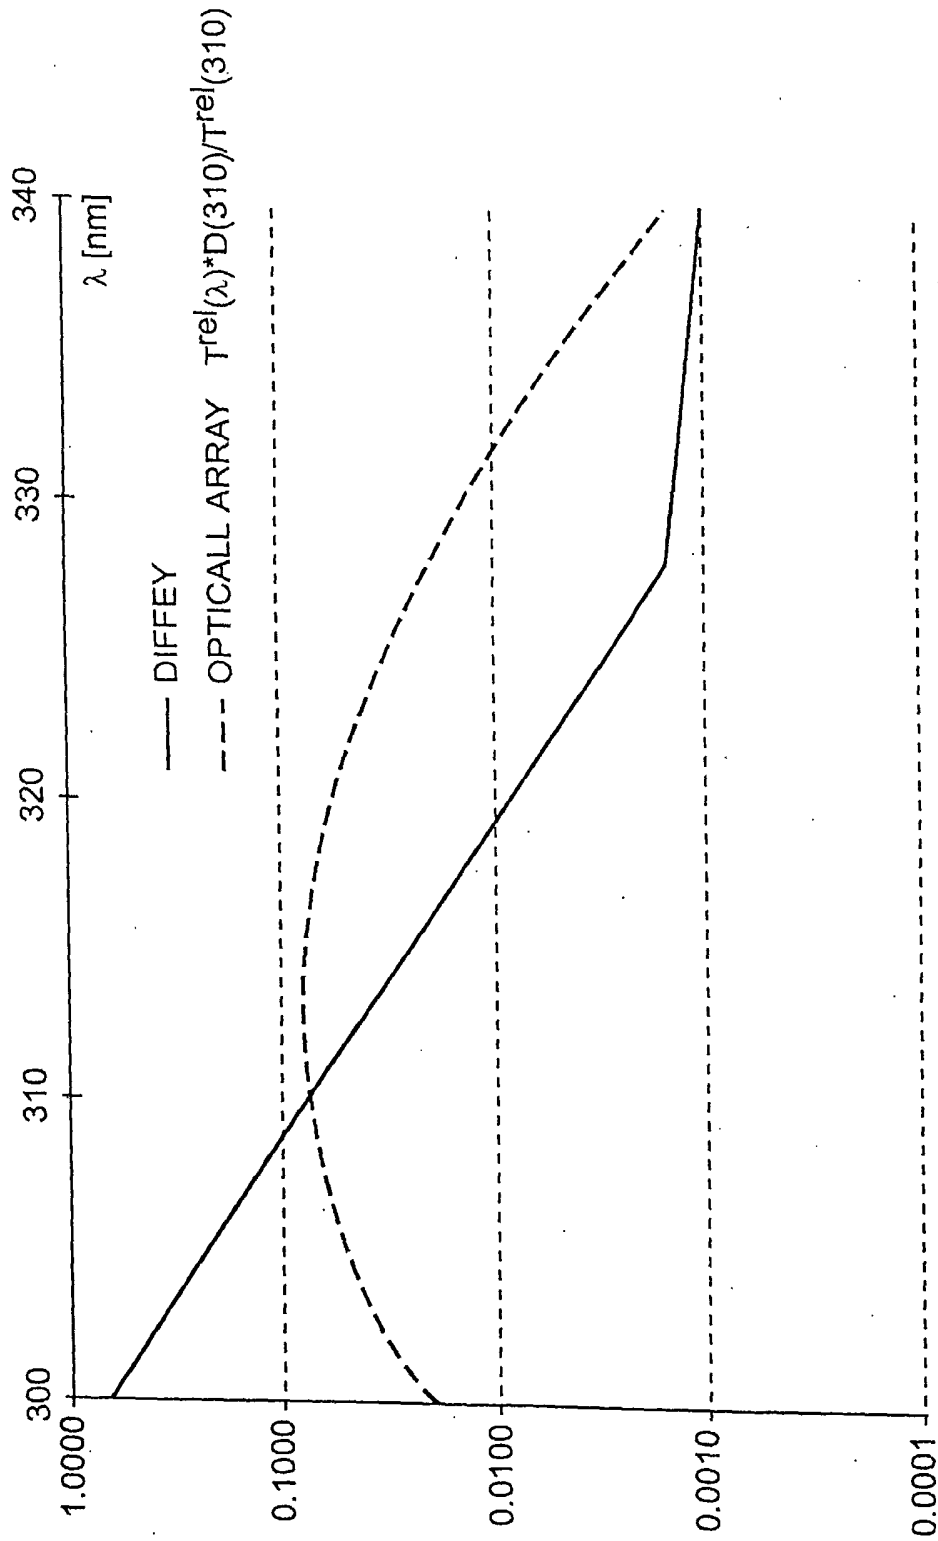


FIG. 6

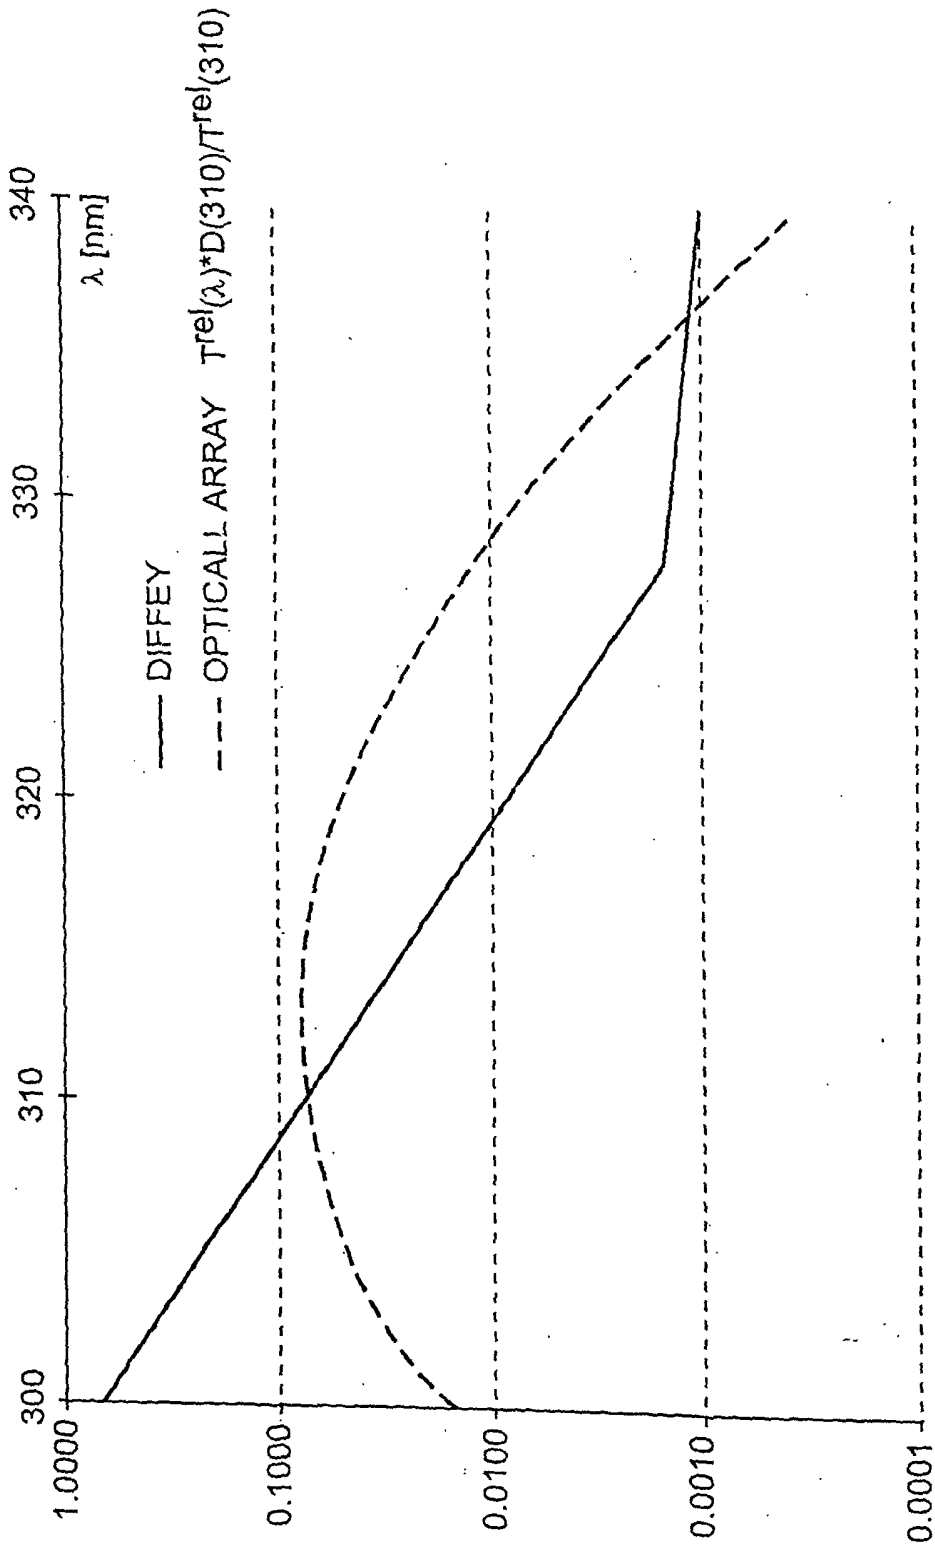


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/15998

A. CLASSIFICATION OF SUBJECT MATTER
 IPC(7) : G01J 01/04; G02B 05/08
 US CL : 359/359; 250/372
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 U.S. : 359/359,350,361; 250/372,252.1,474.1,226

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
 NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,036,311 A (Moran et al) 30 July 1991 (30.07.1991), figs. 1 and 2, column 2, lines 8-13, column 4, lines 37-57.	1-5
A	US 5,196,705 A (Ryan) 23 March 1993 (23.03.1993), fig. 1, column 3, lines 24-34.	1-5
A	US. 4,882,598 A (Wulf) 21 November 1989 (21.11.1989), Figs. 7a,7b,7c, column 14, line 15-column 16, line 21.	1-5
A,P	US 6,426,503 B1 (Wuest) 30 July 2002 (30.07.2002), figs. 2 and 3, column 2, lines 61-65, column 3, lines 52-53.	1-5

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search 10 July 2003 (10.07.2003)	Date of mailing of the international search report 06 OCT 2003
--	--

Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US Commissioner for Patents P.O. Box 1450 Alexandria, Virginia 22313-1450 Facsimile No. (703)305-3230	Authorized officer Drew Dunn <i>Shawn S. Dwyer</i> Telephone No. (703) 305-4900
--	---