

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(12)

Oversættelse af europæisk patentskrift

(10) **DK/EP 2595413 T3**

(51) Int.Cl.: **H 04 R 25/00 (2006.01)**

(45) Oversættelsen bekendtgjort den: **2015-10-12**

(80) Dato for Den Europæiske Patentmyndigheds
bekendtgørelse om meddelelse af patentet: **2015-07-01**

(86) Europæisk ansøgning nr.: **11189534.8**

(86) Europæisk indleveringsdag: **2011-11-17**

(87) Den europæiske ansøgnings publiceringsdag: **2013-05-22**

(84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV
MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(73) Patenthaver: **Oticon A/S, Kongebakken 9, 2765 Smørum, Danmark**

(72) Opfinder: **Rasmussen, Karsten Bo, Oticon A/S, c/o Kongebakken 9, 2765 Smørum, Danmark**

(54) Benævnelse: **Høreapparatfikstur**

(56) Fremdragne publikationer:

WO-A2-99/07182

DE-A1- 19 504 478

DE-A1- 19 943 809

DE-A1-102006 014 023

DE-A1-102010 019 710

US-A- 6 094 494

US-A1- 2001 043 708

DESCRIPTION

BACKGROUND OF THE INVENTION

[0001] The invention is related to the field of hearing aids, more specifically to hearing aids sealing the bony part of an external ear canal and the comfort of inserting and wearing them.

[0002] Comfortable insertion and safe fixation of an acoustically active part (end portion of a hearing aid tube through which the sound exits) of a bony seal hearing aid is crucial for customer acceptance. Prior art bony seal hearing aids comprise dome portions made of materials such as memory foam, silicon or alike to keep an acoustically active part in place while sealing the external ear canal. It has been observed that such materials, especially if worn on a long term basis, may cause skin irritations in the external ear canal of a user.

[0003] An arrangement keeping an acoustically active part of a hearing aid in place is disclosed in DE 102 36 134 C1, namely a hearing aid comprising an implanted acoustic duct extending from behind the ear into the external ear canal of a user, wherein the hearing aid is connected to the acoustic canal via an adapter located behind the ear. With an acoustic duct implanted and requiring an adapter to be placed behind the ear, said arrangement lacks comfort in wear.

[0004] A hearing aid enclosed in an ear mold and including an acoustic tube located at its inner end is disclosed in DE 199 43 809 A1. The acoustic tube being connected to an extending component occupying a volume towards the eardrum adapted to shape the acoustic proportions of the hearing aid, the arrangement is not suitable for safely fixing the acoustically active part to the external ear canal.

[0005] In ear components of hearing aids are also known from WO 99/07182 A2; US 2001/043708; and DE 10 2006 014023A1 in which tips are separable from the audio producing device.

[0006] DE 10 2010 019710 A1 discloses a hearing device intended to be more easily fitted into the auditory canal by the user and removed again. For this purpose, a hearing device to be worn in a predefined auditory canal is proposed, with a housing. The hearing device also has an adapter which is prepared individually for the auditory canal and which is designed to remain permanently in the auditory canal. In the auditory canal, the housing can be fitted several times into the adapter and removed again therefrom.

[0007] It is therefore an object of the present invention to provide a means which allows comfortable insertion and safe fixation of an acoustically active bony seal hearing aid.

SUMMARY OF THE INVENTION

[0008] According to a first aspect of the present invention, the technical objective is achieved by a hearing aid fixture which is adapted to remain firmly and completely within an external ear canal of a user allowing for an acoustically active part of a hearing aid to be releasably fastened thereto.

[0009] The inventive hearing aid fixture allows for an acoustically active part of a hearing aid to be inserted into an external ear canal comfortably by avoiding dome portions made of skin irritating materials. Since the hearing aid fixture remains firmly within the external ear canal, so does the acoustically active part attached thereto. When fastened to the hearing aid fixture the acoustically active part resides within the external ear canal without any direct contact to the external ear canal.

[0010] Adapted to remain firmly connotes that the hearing aid fixture is fitted into an external ear canal of a user such that it remains in position when an acoustically active part of a hearing aid which is releasably fastened thereto, is unfastened, i.e. pulled out of the external ear canal of the user.

[0011] In a preferred embodiment the hearing aid fixture comprises an ear canal abutting surface defining a first mechanical interface providing for a retaining force between the hearing aid fixture and an ear canal when the hearing aid fixture is inserted in the ear canal. The hearing aid fixture further comprises a second mechanical interface adapted to connect to an acoustically active part of a hearing aid and providing a connection force between an acoustically active part of a hearing aid and the hearing aid fixture. The retaining force is higher than the connection force.

[0012] In a preferred embodiment, to prevent ambient noise from reaching the eardrum, the hearing aid fixture but for a comprised auditory duct seals the external ear canal entirely. The hearing aid fixture can be adapted to seal the external ear canal entirely if an acoustically active part of a hearing aid is fastened thereto. The hearing aid fixture can be shaped in a manner of a hollow cylinder with the auditory duct being the inner cylinder.

[0013] Preferably, the auditory duct is designed to allow sound from an acoustically active part to reach the ear drum. To further improve sound transfer through the hearing aid fixture, the auditory duct can be adapted to accommodate a protruding portion of an acoustically active part of a hearing aid. The auditory duct can extend centrally through the hearing aid fixture along an axis of insertion to prevent misplacement of an acoustically active part to be attached.

[0014] In a preferred embodiment the hearing aid fixture is adapted to allow for an acoustically active part of a hearing aid to be magnetically fastened thereto. This prevents abrasion from both the hearing aid fixture and the acoustically active part. The respective magnetic components can be placed at the fixture and/or the acoustically active part such that the magnetic fastening is self-centering, that means that when inserted the acoustically active part is guided toward an optimal position.

[0015] In a further preferred embodiment the hearing aid fixture comprises a slit. The slit is formed as part of the auditory duct. The slit extends from a front face portion to an end face portion and/or along an ear canal abutting surface of the hearing aid fixture. The slit is provided in the hearing aid fixture such that the hearing aid fixture can resiliently extend in diameter to provide entry for an acoustically active part of a hearing aid. When in position the hearing aid fixture returning to its original diameter can provide for a mechanical locking. To provide a simple and robust mechanism, the mechanical locking is preferably of force fitting nature.

[0016] The slit can be provided in the hearing aid fixture such so as to allow for the hearing aid fixture to be resiliently squeezed from a firmly fitting diameter to a lesser diameter to simplify insertion of the hearing aid fixture. Such simplified insertion causes lesser skin pressure in the external ear canal.

[0017] To prevent debris entering the hearing aid fixture through said slit, the hearing aid fixture can comprises a plate covering the slit in the directing of insertion. The plate can be attachable to or formed as part of an acoustically active part of a hearing aid. In a preferred embodiment the plate is adapted to span a cross section of an external ear canal lying perpendicular to the direction of insertion. Thereby additional sealing of the auditory duct is achieved.

[0018] To be even more subtle to allow being placed close to the ear drum the length of the hearing aid fixture in the direction of insertion can be less than its diameter perpendicular to the direction of insertion.

[0019] In a preferred embodiment the hearing aid fixture is made of a shape-retaining material. This allows for the ear canal of a user to adapt more easily to the hearing aid fixture to be worn on a long term basis. At least ear canal abutting surface of the hearing aid fixture in physical contact with the external ear canal of a user can be made of or coated with a biocompatible material (material with high skin tolerance), such as titanium or alike. This allows for the hearing aid to remain in the ear canal for weeks or month or even permanently. This is true for the hearing aid fixture with or without the acoustically active part fastened thereto.

[0020] In a further preferred embodiment, to reduce a customizing effort, the hearing aid fixture is chosen from a range of pre-manufactured sizes as to fit firmly and completely within an external ear canal of a user.

[0021] According to a second aspect of the present invention, the technical object is achieved by a hearing aid assembly comprising a hearing aid fixture and an acoustically active part of a hearing aid releasably fastened thereto. It is to be understood that the embodiments and advantages described with respect to the first aspect of the present invention are comprised by the second aspect of the invention as well.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022]

Fig. 1 schematically depicts a cross section of an ear canal perpendicular to the direction of insertion with a hearing aid fixture according to a first embodiment of the invention;

Fig. 2 schematically depicts a side view of the hearing aid fixture of fig. 1;

Fig. 3 schematically depicts the hearing aid fixture of fig. 1 with an acoustically active part of a hearing aid releasably fastened thereto forming a hearing aid assembly;

Fig. 4 schematically depicts a cross section of an ear canal perpendicular to the direction of insertion with a hearing aid fixture according to a second embodiment of the invention;

Fig. 5 schematically depicts a side view of the hearing aid fixture of fig. 4;

Fig. 6 schematically depicts the hearing aid fixture of fig. 5 with an acoustically active part of a hearing aid releasably fastened thereto forming a hearing aid assembly.

DETAILED DESCRIPTION

[0023] A hearing aid fixture 1 in fig. 1 and fig. 2 is fitted firmly within an external ear canal 10 of a user. The hearing aid fixture 1 comprises an auditory duct 3 extending centrally through the hearing aid fixture 1 along an axis of insertion. The hearing aid fixture 1 is shaped in a manner of a hollow cylinder with the auditory duct 3 being the inner cylinder. The hearing aid fixture 1 seals the external ear canal 10 entirely but for auditory duct 3. An ear canal abutting surface 5 of the hearing aid fixture 1 in physical contact with the external ear canal 10 of a user is made of titanium. The ear canal abutting surface 5 defines a first mechanical interface providing for a retaining force between the hearing aid fixture 1 and the ear canal 10 when the hearing aid fixture 1 is inserted in the ear canal. As can be seen from fig. 2 the hearing aid fixture 1 is fitted completely within the external ear canal 10.

[0024] Fig. 3 depicts a hearing aid assembly, comprising a hearing aid fixture 1 as of fig. 1 and fig. 2 and an acoustically active part 2 of a hearing aid releasably fastened thereto. The auditory duct 3 is adapted to accommodate a protruding portion 4 of the acoustically active part 2. The hearing aid fixture 1 seals the external ear canal 10 entirely since the acoustically active part 2 is fastened thereto. The acoustically active part 2 is magnetically fastened to the hearing aid fixture 1 (magnetic members not shown). The magnetic members define a second mechanical interface with a connection force between the acoustically active part 2 of a hearing aid and the hearing aid fixture 2. The retaining force provided by the first mechanical interface is higher than the connection force provided by the second mechanical interface. The length of the hearing aid fixture 1 in the direction of insertion is less than its diameter perpendicular to the direction of insertion. The hearing aid fixture 1 is placed close to eardrum 11.

[0025] A hearing aid fixture 1 in fig. 4 and fig. 5 is fitted firmly within an external ear canal 10 of a user. The hearing aid fixture 1 comprises an auditory duct 3 extending centrally through the hearing aid fixture 1 along an axis of insertion. The hearing aid fixture 1 is shaped in a manner of a hollow cylinder with the auditory duct 3 being the inner cylinder. The hearing aid fixture 1 comprises a slit 7 as part of the auditory duct 3. The slit 7 allows for the hearing aid fixture 1 to be squeezed in a spring-like manner from a firmly fitting diameter (as shown in fig. 4 and fig. 5) to a lesser diameter (not shown) to simplify insertion. The hearing aid fixture 1 seals the external ear canal 10 entirely but for auditory duct 3 (and slit 7 as part of the auditory duct 3). An ear canal abutting surface 5 of the hearing aid fixture 1 in physical contact with the external ear canal 10 of a user is made of titanium. As can be seen from fig. 2 the hearing aid fixture 1 is fitted completely within the external ear canal 10.

[0026] Fig. 6 depicts a hearing aid assembly, comprising a hearing aid fixture 1 as of fig. 3 and fig. 4 and an acoustically active part 2 of a hearing aid about to be releasably fastened thereto. The auditory duct 3 of hearing aid fixture 1 is adapted to accommodate a protruding portion 4 of the acoustically active part 2. The auditory duct 3 coincidentally defines a second mechanical interface adapted to connect to the protruding portion 4 of the acoustically active part 2 of a hearing aid. The retaining force provided by the first mechanical interface is higher than the connection force provided by the second mechanical interface. Slit 7 comprised by hearing aid fixture 1 extend from a front face portion to an end face portion and along ear canal abutting surface 5. The ear canal abutting surface 5 defines a first mechanical interface providing for a retaining force between the hearing aid fixture 1 and ear canal 10 when the hearing aid fixture 1 is inserted in the ear canal. Slit 7 allows for the hearing aid fixture to resiliently expand in diameter to provide entry for an acoustically active part 2 and its force fitting locking thereafter. The hearing aid assembly comprises a plate 6 adapted to cover the slit 7 once as the acoustically active part 2 arrives in its attached position. The plate 6 is formed as part of the acoustically active part 2. Furthermore, plate 6 is adapted to span a cross section of an external ear canal lying perpendicular to the direction of insertion to provide for additional sealing of the auditory duct 3. The length of the hearing aid fixture 1 in the direction of insertion is less than its diameter perpendicular to the direction of insertion.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [DE10236134C1 \[0003\]](#)
- [DE19943809A1 \[0004\]](#)
- [WO9907182A2 \[0005\]](#)
- [US2001043708A \[0005\]](#)
- [DE102006014023A1 \[0005\]](#)
- [DE102010019710A1 \[0006\]](#)

Patentkrav

1. Høreapparatfikstur (1), der er indrettet til at forblive fast og helt inden i en ydre øregang (10) hos en bruger, hvilket giver mulighed for en akustisk aktiv del (2) af et høreapparat at blive udløseligt fastgjort dertil, hvor
5 høreapparatfiksturen (1) lukker den ydre øregang (10) fuldstændigt bortset fra en ørekanal (3) indeholdt deri, hvor høreapparatfiksturen (1) omfatter en slids (7) som en del af ørekanalen (3), der er indrettet til at muliggøre høreapparatfiksturen (1) at blive elastisk presset sammen fra en fast fittingdiameter til en mindre diameter for at forenkle indsætning og/eller for at
10 høreapparatfiksturen (1) bliver elastisk udvidet i diameter for at give adgang for den akustisk aktive del (2) og derefter dets mekaniske låsning.
2. Høreapparatfikstur ifølge krav 1, kendetegnet ved, at ørekanalen (3) er indrettet til at rumme en udragende del (4) af en akustisk aktiv del (2) af et
15 høreapparat og således definerer en mekanisk grænseflade mellem høreapparatfiksturen (1) og en akustisk aktiv del (2) af et høreapparat.
3. Høreapparatfikstur ifølge krav 1 eller 2, kendetegnet ved, at ørekanalen (3) strækker sig centralt gennem høreapparatfiksturen (1) langs en
20 indsætningsakse.
4. Høreapparatfikstur ifølge hvilke som helst af kravene 1 til 3, kendetegnet ved, at høreapparatfiksturen (1) er indrettet til at lukke den ydre øregang (10) fuldstændigt, hvis en akustisk aktiv del (2) af et høreapparat er fastgjort dertil.
25
5. Høreapparatfikstur ifølge hvilke som helst af kravene 1 til 4, kendetegnet ved, at høreapparatfiksturen (1) er indrettet til at muliggøre en akustisk aktiv del (2) af et høreapparat at blive magnetisk fastgjort dertil.
6. Høreapparatfikstur ifølge krav 1, kendetegnet ved, at høreapparatfiksturen (1) omfatter en plade (6), der dækker slidsen (7) i indsætningsretningen, hvor pladen (6) kan fastgøres til eller dannes som en del af en akustisk aktiv del (2) af et høreapparat.
30
7. Høreapparatfikstur ifølge krav 6, kendetegnet ved, at pladen (6) er indrettet til at strække sig over et tværsnit af en ydre øregang, der ligger vinkelret på indsætningsretningen for at tilvejebringe yderligere lukning af ørekanalen (3).
35

8. Høreapparatfikstur ifølge hvilke som helst af kravene 1 til 7, kendetegnet ved, at høreapparatfiksturen (1) er fremstillet af et formbevarende materiale.
- 5 9. Høreapparatfikstur ifølge hvilke som helst af kravene 1 til 8, kendetegnet ved, at i det mindste en øregangs anlægsflade (5) af høreapparatfiksturen (1), der er i fysisk kontakt med den ydre øregang (10) hos en bruger, er fremstillet af eller belagt med et biokompatibelt materiale.
- 10 10. Høreapparatfikstur ifølge hvilke som helst af kravene 1 til 9, kendetegnet ved, at længden af høreapparatfiksturen (1) i indsætningsretningen er mindre end dens diameter vinkelret på indsætningsretningen.
- 15 11. Høreapparatfikstur ifølge hvilke som helst af kravene 1 til 10, kendetegnet ved, at høreapparatfiksturen (1) er udvalgt fra en række af præfremstillede størrelser for at passe fast og helt inden i en ydre øregang hos en bruger.
- 20 12. Høreapparatkonstruktion, der omfatter et høreapparatfikstur ifølge hvilke som helst af kravene 1 til 11 og en akustisk aktiv del (2) af et høreapparat, der er udløseligt fastgjort.
- 25

DRAWINGS




Fig. 1




Fig. 2

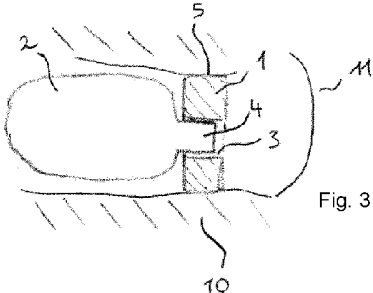


Fig. 3




Fig. 4




Fig. 5

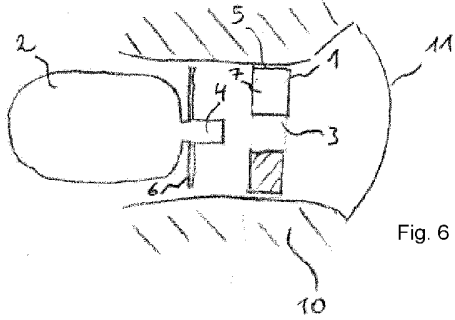


Fig. 6