




(86) Date de dépôt PCT/PCT Filing Date: 2007/09/19
(87) Date publication PCT/PCT Publication Date: 2008/03/27
(85) Entrée phase nationale/National Entry: 2009/03/17
(86) N° demande PCT/PCT Application No.: US 2007/020373
(87) N° publication PCT/PCT Publication No.: 2008/036359
(30) Priorités/Priorities: 2006/09/19 (US60/845,993);
2007/09/18 (US11/901,602)

(51) Cl.Int./Int.Cl. *A61M 1/00* (2006.01)
(71) Demandeur/Applicant:
KCI LICENSING INC., US
(72) Inventeurs/Inventors:
LOCKE, CHRISTOPHER BRIAN, GB;
ROBINSON, TIMOTHY MARK, GB;
BEARD, MARK STEPHEN JAMES, GB;
TOUT, AIDAN MARCUS, GB
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : MODULE POUR SYSTEME DE TRAITEMENT A DEPRESSION
(54) Title: COMPONENT MODULE FOR A REDUCED PRESSURE TREATMENT SYSTEM

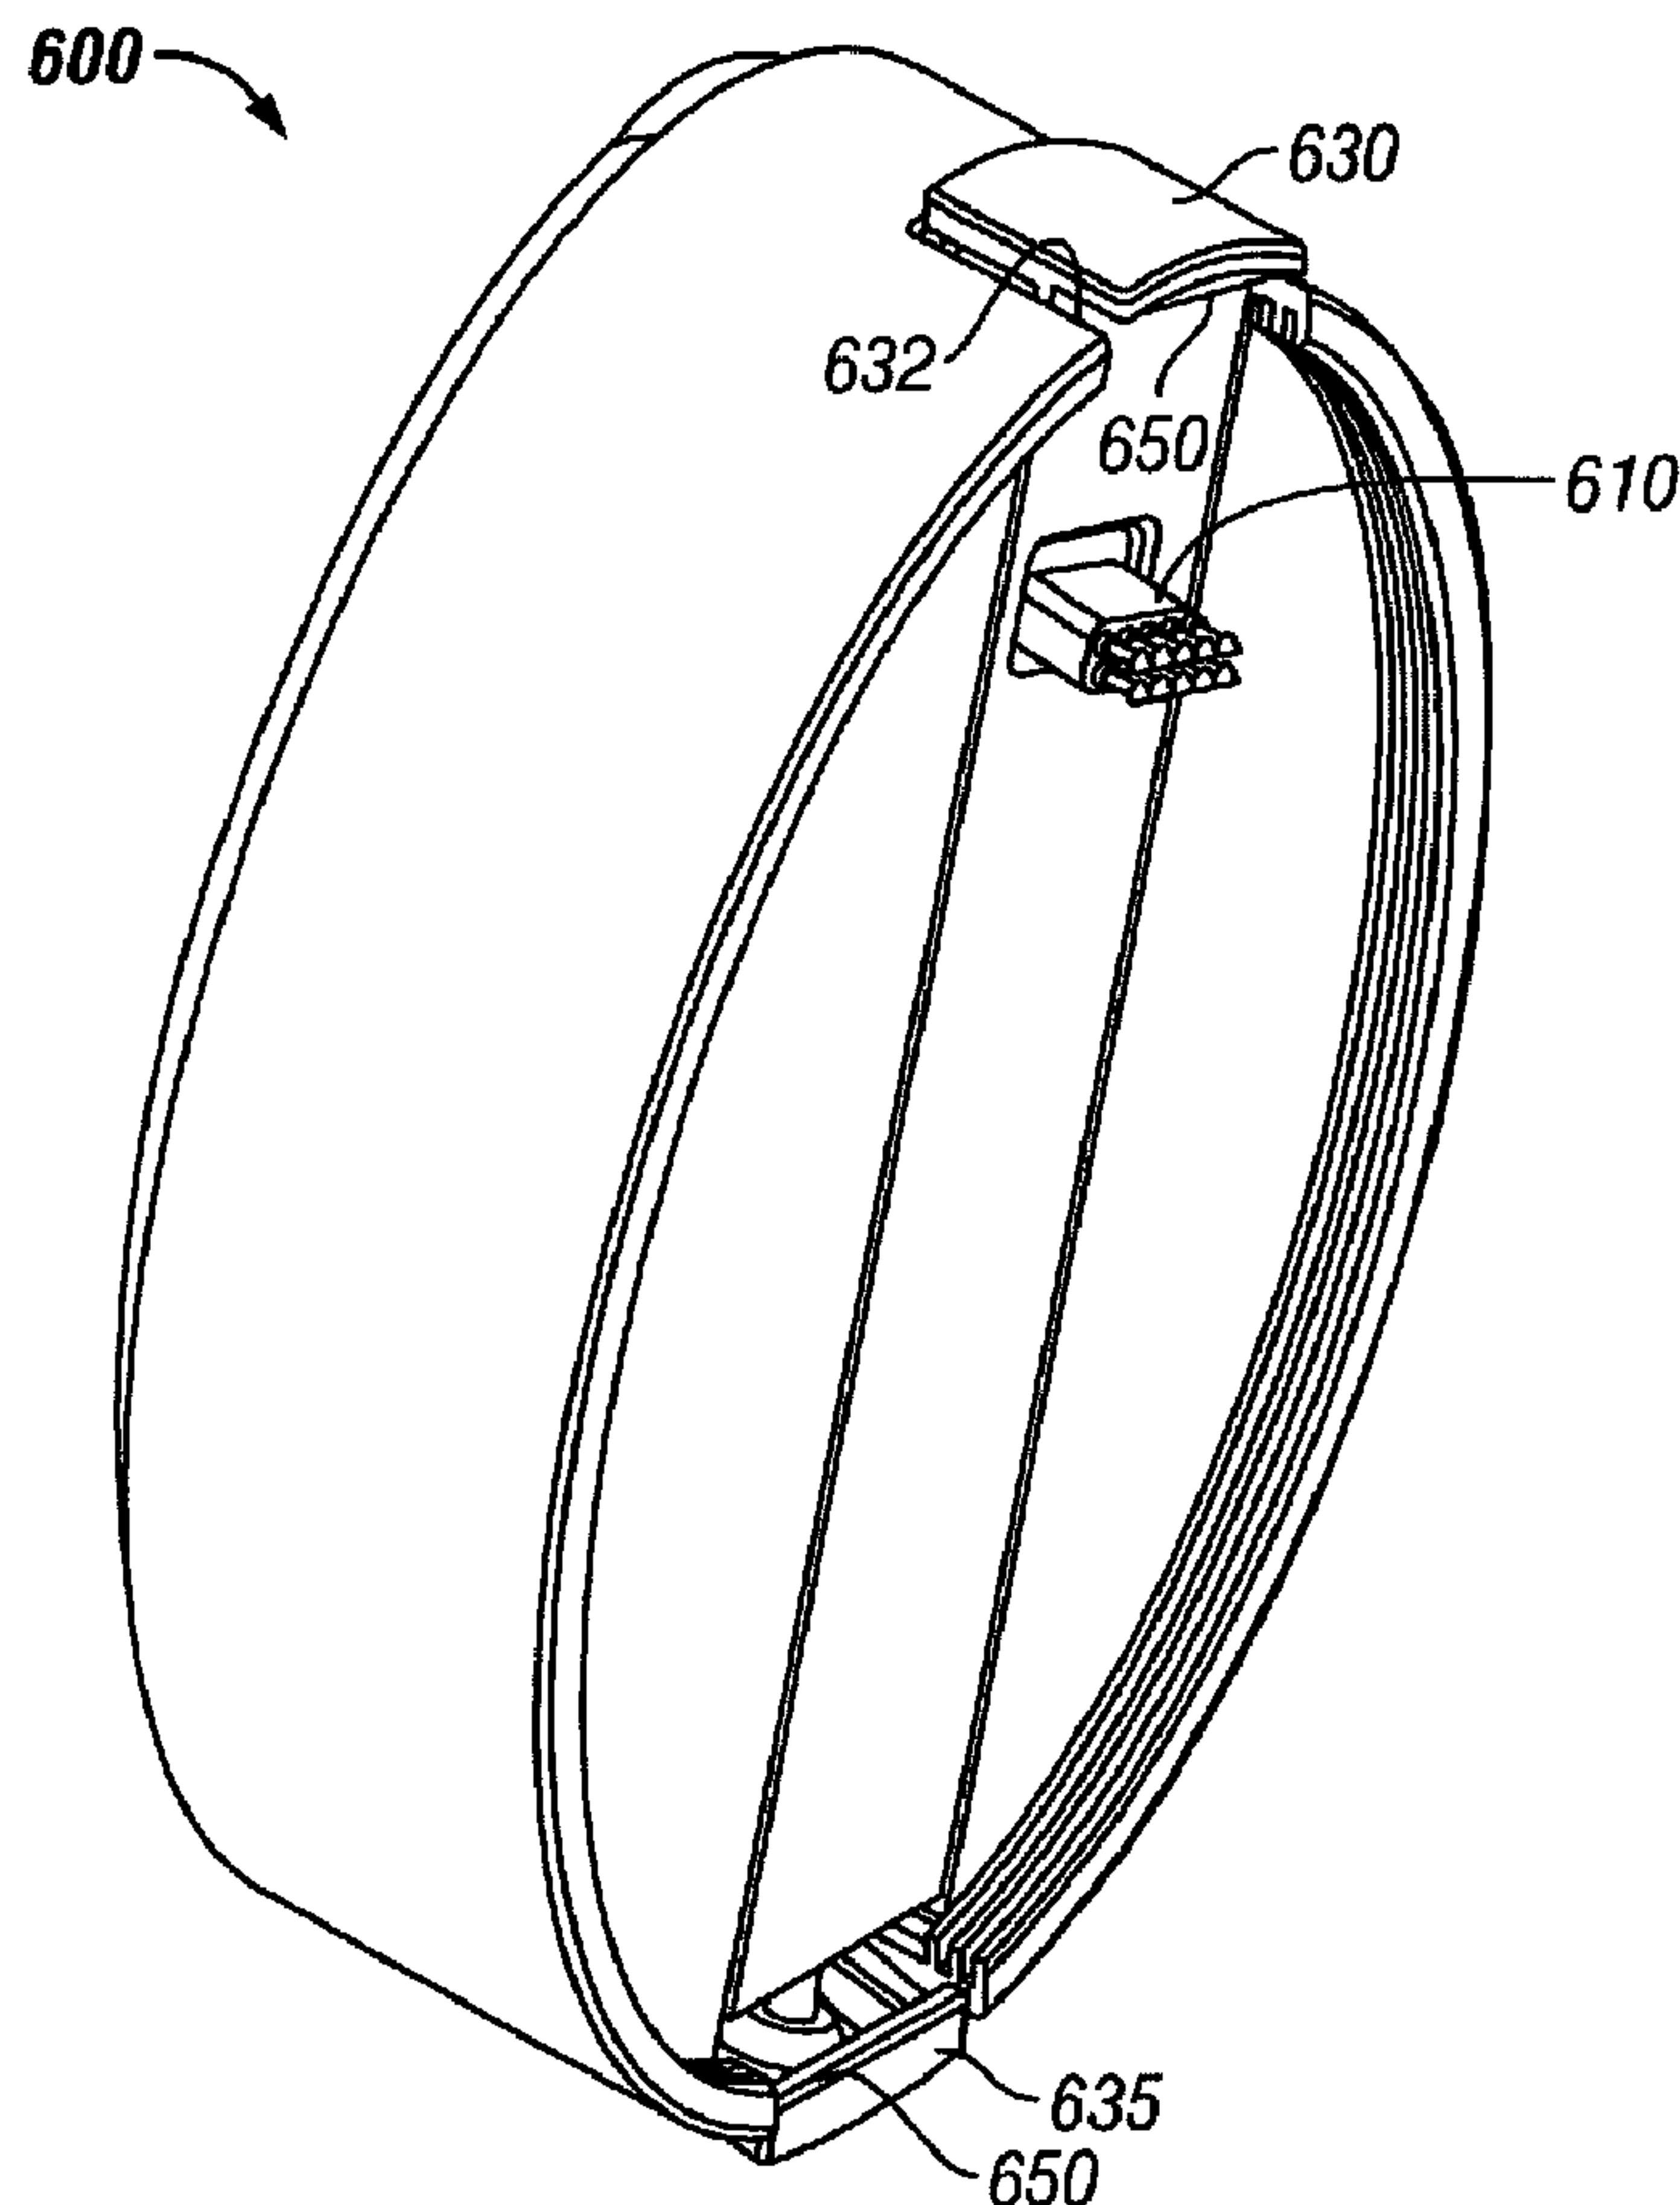

(57) Abrégé/Abstract:

A connectable component module for a reduced pressure treatment system is provided. The module includes a housing with a rim, a recessed end surface, and an extension. A mounting assembly is fixed to the recessed end surface and includes extendable



(57) **Abrégé(suite)/Abstract(continued):**

latches. The latches include a fastener bar that is flush with the rim when the latches are not extended. The module also generally includes a control system contained within the housing. The control system has a communication controller, a communication plug coupled to the communication controller and protruding through an aperture in the mounting assembly and recessed end, and a communication port coupled to the communication controller and exposed to an aperture in the extension.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

PCT

(43) International Publication Date
27 March 2008 (27.03.2008)(10) International Publication Number
WO 2008/036359 A3(51) International Patent Classification:
A61M 1/00 (2006.01)(21) International Application Number:
PCT/US2007/020373(22) International Filing Date:
19 September 2007 (19.09.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/845,993 19 September 2006 (19.09.2006) US
11/901,602 18 September 2007 (18.09.2007) US(71) Applicant (for all designated States except US): **KCI LICENSING INC.** [US/US]; Legal Department - Intellectual Property, P.O. Box 659508, San Antonio, TX 78265-9508 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **LOCKE, Christopher, Brian** [GB/GB]; 6 Bosworth Mews, Tudor Park, Muscliffe, Bournemouth BH9 3SD (GB). **ROBINSON, Timothy, Mark** [GB/GB]; 27 Wellington Terrace, Basingstoke, Hampshire RG23 8HH (GB). **BEARD, Mark, Stephen, James** [GB/GB]; 4 Monks Close, West Moors, Ferndown, Dorset BH22 0HE (GB). **TOUT, Aidan, Marcus** [GB/GB]; The Annex, Schiehallion, York Drove, Normansland, Wiltshire SP5 2BT (GB).(74) Agents: **MASON, Robert, W.** et al.; Kinetic Concepts, Inc., P.O. Box 659508, San Antonio, TX 78265-9508 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL,

[Continued on next page]

(54) Title: COMPONENT MODULE FOR A REDUCED PRESSURE TREATMENT SYSTEM

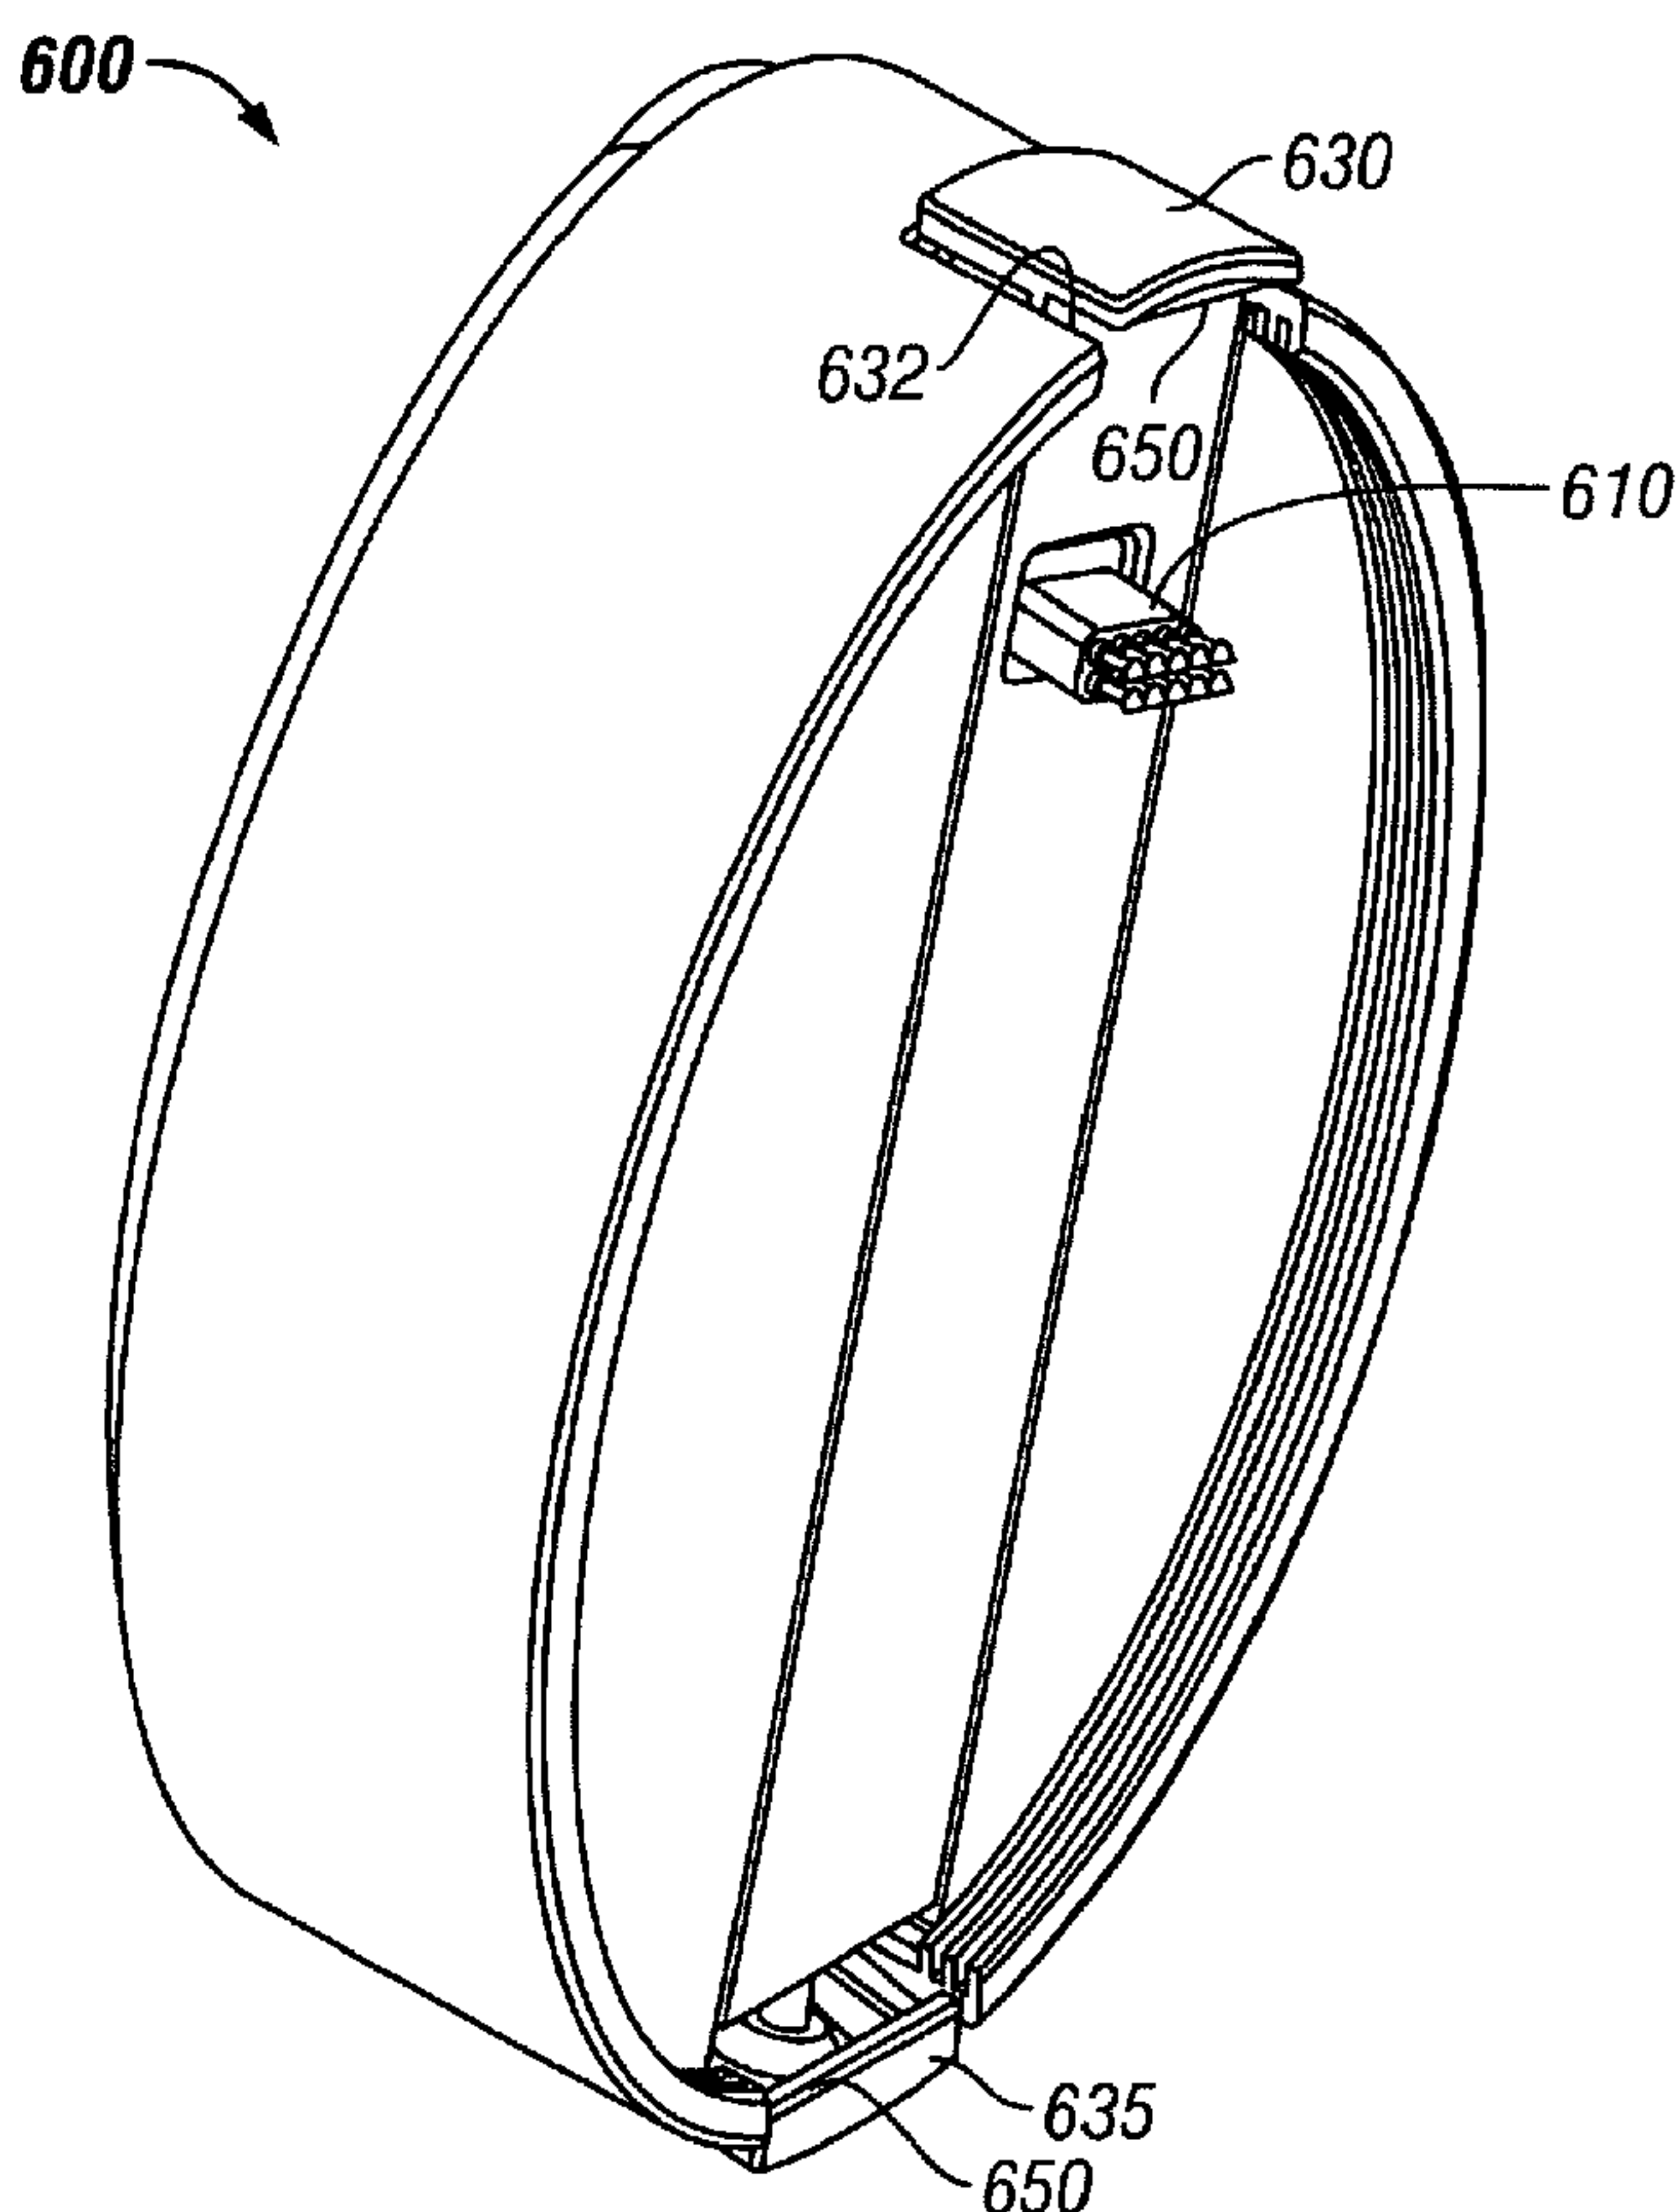

(57) Abstract: A connectable component module for a reduced pressure treatment system is provided. The module includes a housing with a rim, a recessed end surface, and an extension. A mounting assembly is fixed to the recessed end surface and includes extendable latches. The latches include a fastener bar that is flush with the rim when the latches are not extended. The module also generally includes a control system contained within the housing. The control system has a communication controller, a communication plug coupled to the communication controller and protruding through an aperture in the mounting assembly and recessed end, and a communication port coupled to the communication controller and exposed to an aperture in the extension.

WO 2008/036359 A3

WO 2008/036359 A3

PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))*

Published:

— *with international search report*

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,

(88) Date of publication of the international search report:
3 July 2008

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates generally to tissue treatment systems and in particular to a component module for a reduced pressure treatment system.

2. Description of Related Art

[0002] Clinical studies and practice have shown that providing a reduced pressure in proximity to a tissue site augments and accelerates the growth of new tissue at the tissue site. The applications of this phenomenon are numerous, but application of reduced pressure has been particularly successful in treating wounds. This treatment (frequently referred to in the medical community as “negative pressure wound therapy,” “reduced pressure therapy,” or “vacuum therapy”) provides a number of benefits, including faster healing and increased formation of granulation tissue. Typically, reduced pressure is applied to tissue through a porous pad or other manifold unit. The porous pad contains cells or pores that are capable of distributing reduced pressure to the tissue and channeling fluids that are drawn from the tissue. The porous pad often is incorporated into a dressing having other components that facilitate treatment.

[0003] While existing reduced pressure treatment systems have enjoyed wide commercial and medical success, it would be advantageous to expand the functionality of these systems to provide a more comprehensive treatment regimen.

[0004] A need exists, therefore, for an expandable reduced pressure treatment system that allows component modules to be combined with the expandable reduced pressure treatment system and other modules to provide additional treatment features and options.

BRIEF SUMMARY OF THE INVENTION

[0005] The limitations of conventional reduced pressure treatment systems are improved by the systems and methods of the present invention. A connectable component module for a reduced pressure treatment system is provided in accordance with the principles of the present invention. The module generally includes a housing having a rim, a recessed end surface, and an extension. A mounting assembly is fixed to the recessed end surface and includes an extendable first latch and an extendable second latch. The first latch and the second latch each include a fastener bar that is substantially flush with the rim when the first latch and the second latch are not extended. A first aperture extends through the mounting assembly and recessed end surface, and a second aperture extends through the extension. The module also generally includes a control system contained within the housing. The control system has a communication controller, such as a controller area network controller, a communication plug coupled to the communication controller and protruding through the first aperture, and a communication port coupled to the communication controller and exposed to the second aperture.

[0006] Also in accordance with the principles of the present invention, an expandable reduced pressure treatment system is provided. The system includes a control system having a treatment controller and a communication controller, such as a controller area network controller, a communication port coupled to the communication controller, and a reduced pressure source coupled to the treatment controller. A manifold unit is in fluid communication with the reduced pressure source. A removable component module is coupled to the control system through the communication port.

[0007] Other objects, features, and advantages of the present invention will become apparent with reference to the drawings and detailed description that follow.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Figure 1 is a schematic diagram of a reduced pressure treatment system according to an embodiment of the present invention;

[0009] Figure 2 is a block diagram of an exemplary control system of a reduced pressure control unit according to an embodiment of the present invention;

[0010] Figure 3 illustrates a front perspective view of one embodiment of a control unit that houses the control system of Figure 2;

[0011] Figure 4 illustrates an enlarged partial cross-section view of a control unit similar to the control unit of Figure 3 along line 4-4;

[0012] Figure 5 illustrates an enlarged partial cross-section view of a control unit similar to the control unit of Figure 3 along line 5-5;

[0013] Figure 6 illustrates a perspective view of a first end of a component module according to an embodiment of the present invention;

[0014] Figure 7 illustrates a perspective view of a second end of the component module of Figure 6;

[0015] Figure 8 illustrates a perspective view of the first end of the component module of Figure 6 with extended latches;

[0016] Figure 9 illustrates a perspective view of the second end of the component module of Figure 6 with extended latches; and

[0017] Figure 10 illustrates an enlarged perspective view of a communication plug of the component module of Figure 6.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0018] In the following detailed description of the preferred embodiments, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration specific preferred embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is understood that other embodiments may be utilized and that logical structural, mechanical, and electrical changes may be made without departing from the spirit or scope of the invention. To avoid detail not necessary to enable those skilled in the art to practice the invention, the description may omit certain information known to those skilled in the art. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims.

[0019] In the context of this specification, the term “reduced pressure” generally refers to a pressure less than the ambient pressure at a tissue site that is being subjected to treatment. In most cases, this reduced pressure will be less than the atmospheric pressure of the location at which the patient is located. Although the terms “vacuum” and “negative pressure” may be used to describe the pressure applied to the tissue site, the actual pressure applied to the tissue site may be significantly less than the pressure normally associated with a complete vacuum. Consistent with this nomenclature, an increase in reduced pressure or vacuum pressure refers to a relative reduction of absolute pressure, while a decrease in reduced pressure or vacuum pressure refers to a relative increase of absolute pressure.

[0020] Figure 1 is a schematic diagram of a reduced pressure treatment system 100 according to the present invention. The reduced pressure treatment system 100 comprises a dressing 110, which generally includes a manifold unit that is applied to, or within, a tissue site 120 for treatment. The dressing 110 is fluidly connected to a reduced pressure source 120 by a conduit 130. In certain embodiments, the reduced pressure source 120 may be integrated with a reduced pressure control unit 140, as described below, and the reduced pressure treatment system 100 may also include a canister 150 for collecting liquid and other non-gaseous exudates extracted from the tissue site.

[0021] Figure 2 is a block diagram of an exemplary control system 200 of the reduced pressure control unit 140. The control system 200 includes a treatment controller 202 and a graphical user interface (GUI) controller 204. The treatment controller 202 may include one or more processors 206 that execute software 208. The processor(s) 206 may be in communication with a memory 210 and input/output (I/O) unit 212. The software 208 may be

configured to control a number of different operations of the reduced pressure treatment system 100, such as controlling tissue treatment, monitoring sensors and generating alarms and performing communications with systems and devices external to the control unit 140 in conjunction with the I/O unit 212 and GUI controller 204. It should be understood that the software 208 may further be configured to perform different and/or other functions.

[0022] The I/O unit 212 may enable the control system 200 to communicate with external modules, systems, and networks, for example. In one embodiment, the I/O unit 212 may operate in conjunction with a controller area network (CAN) or modified CAN, as described further herein. The processor 206 may further execute software to receive and process CAN data being received via the I/O unit 212.

[0023] A storage unit 214, such as a disk drive or storage medium, may be in communication with the treatment controller 202. Databases 216a-216n (collectively 216) may be used to store treatment or other information. The databases may be configured as relational databases or otherwise. Other information, such as software, may be stored on the storage unit 214.

[0024] The GUI controller 204 may include one or more processors 218 that execute software 220. The software 220 may be configured to generate a graphical user interface with which an operator, patient, technician, or other user may interface to control the system 100. The processor 218 may be in communication with a memory 222, I/O unit 224, and display driver 226. The memory 222 may store current parameters associated with displaying the GUI. For example, if the GUI is being used to display a particular screen shot, the screen shot may be stored in the memory 222. The I/O unit 224 may be used to interface with the treatment controller 202 and other devices.

[0025] A display and touch screen assembly 228 may be connected to the GUI controller 204 and be used to display the GUI generated by the GUI controller 204. The screen 228 enables an operator to merely touch the screen with his or her finger or stylus, as understood in the art, to interface with the GUI. By providing a touch screen, inclusion of a keyboard or keypad may be avoided. However, it should be understood that an external keyboard or keypad may be utilized in accordance with the principles of the present invention. A backlight inverter 230 may be connected to the GUI controller 204 and screen assembly 228. Alternatively, the backlight inverter 230 may be incorporated into the screen assembly 228. In operation, the backlight inverter may enable the screen assembly 228 to be inverted for different ambient lighting conditions. For example, a user of the system 100 may be treating a patient at night and use backlight inverter 230 to selectively turn on the backlight of

the screen assembly 228 so that he or she can see the GUI better. Alternatively, the backlight inverter may be used to turn the light on the screen assembly 228 off at night to allow a patient to sleep in a darker environment.

[0026] A speaker 232 may be in communication with the GUI controller 204. The speaker may be used to provide sound notification to the user when action is required, or when an alarm condition has occurred.

[0027] A unified display interface (UDI) 234 may be utilized in accordance with the principles of the present invention. The UDI 234 may be used as a digital video interface to assist with video presentation. In addition, a number of communication ports 236 may be provided to enable a user to connect external devices to the control system 200. For example, the input ports 236 may include a CAN port 236a to enable the control system 200 to interface with other treatment systems, memory card port 236b to enable a user to transport data from one device to another, universal serial bus (USB) port to enable an operator to connect devices to the control system 200, such as printers, and Infrared Data Association (IrDA) port 236d to enable a user to interface other devices configured with an IrDA port to the system. It should be understood that other communication ports currently available or available in the future may be utilized in accordance with the principles of the present invention. For example, a communication port for connecting to a local or wide area network may be provided to enable a user to connect the control system 200 to a network.

[0028] A controller area network is a communication bus that was originally developed for automotive applications in the early 1980s. The CAN protocol was internationally standardized in 1993 as ISO 11898-1 and includes a data link of the seven layer IOS/OSI reference model. CAN, which is now available from a large number of semiconductor manufacturers in hardware form, provides two communication services: (i) sending a message (data frame transmission) and (ii) requesting a message (remote transmission request, RTR). All other services, such as error signaling and automatic re-transmission of erroneous frames, are user-transparent, which means that the CAN circuitry automatically performs these services without the need for specific programming.

[0029] A CAN controller is comparable to a printer or typewriter. Language, grammar, and vocabulary is defined for a particular use. CAN provides a multi-master hierarchy that allows for building of intelligent and redundant systems. The use of CAN with the tissue treatment system enables additional component modules, as described further herein, to operate in conjunction with the system. The component modules may operate as nodes, where each node on the CAN receives messages and decides whether a message is relevant.

Data integrity is maintained because all devices in the system receive the same information. CAN also provides sophisticated error detection mechanisms and re-transmission of faulty messages.

[0030] In one embodiment, the language, grammar, and vocabulary may be customized for the system so that only devices that have the same language, grammar, and vocabulary can communicate with the system. By operating with such a customized or proprietary system, control over the quality of modules and devices that interface with the system may be maintained.

[0031] Referring still to Figure 2, in operation, the communication ports 236 may be utilized to enable users to import or export data to and from the control system 200. For example, patient information, treatment information, and images associated with patient wounds may be communicated over a communication port 236. Other information, including software updates, may be communicated over one or more communication ports 236.

[0032] A lithium-ion (Li-Ion) battery 238 and DC socket 240 may be connected to the therapy controller 202. An external adapter (not shown) may be connected to a wall socket (not shown) to convert AC power to DC power for supplying DC power to the treatment controller 202 and other electrical components within the control system 200. If the external power should fail, then the Li-Ion battery 238 powers the control system 200. Alternatively, should the control system 200 be used in a location without power or be used in reliance on battery power, the Li-Ion battery 238 provides power to the control system 200.

[0033] A manifold controller 240 may be connected to the treatment controller 202 and be used to control various devices of the dressing 110 and receive feedback information from sensors disposed on the dressing 110. The manifold controller 240 may communicate with the treatment controller 202 while performing treatment. The manifold controller 240 may include analog and digital circuitry (not shown) for communicating with the various devices on the dressing 110. In one embodiment, the manifold controller 240 may include one or more digital-to-analog (D/A) and analog-to-digital (A/D) converters (not shown) to enable digital and analog signals to be passed between the various devices (e.g., sensors) on the dressing 110. Still yet, one or more amplifiers (not shown) may be included with the manifold controller 240.

[0034] As shown, a number of transducers (i.e., sensors) and devices may be connected to the manifold controller 240. A reduced pressure source, such as a vacuum pump 242, may be connected to the manifold controller 240. A valve 244 and pump valve 246 may be connected to the manifold controller 240 and used to control air being moved within the

manifold unit. A number of sensors may also be connected to the manifold controller 240, including a flow sensor 248, ambient pressure sensor 250, feedback pressure sensor 252, and pump pressure sensor 254. These sensors may be conventional airflow and pressure sensors as understood in the art. A canister release button LED 256 may also be connected to the manifold controller 240.

[0035] In operation, the manifold controller 240 may communicate signals between the treatment controller 202 and devices coupled to the dressing 110. In communicating the signals, the manifold controller 240 may condition the signals by converting the signals between analog and digital signals, amplify signals and amplify drive signals for the vacuum pump 242 and valves 244 and 246. In one embodiment, the manifold controller 240 includes a processor (not shown) to perform local processing and control to offload some of the processing and control the processor 206 of the treatment controller 202.

[0036] Figure 3 is a front perspective view of one embodiment of a control unit 300 that houses the control system 200. As Figure 3 illustrates, the control unit 300 includes a housing 305 having a shoulder 310 and an extension 315. The extension 315 includes an end surface 320, a first ridge 325, and a second ridge 330. The second ridge is generally located on the end surface 320 substantially opposite the first ridge 325. The general steps of the control unit 300 illustrated in Figure 3 is an elliptic cylinder, but any geometric configuration that provides sufficient interior capacity for the control system 200 and the reduced pressure source 120 is acceptable. The extension 315 includes an aperture 335, through which the CAN port 236a is exposed to the exterior of the end surface 320.

[0037] Figure 4 is an enlarged partial cross-section view of a control unit similar to the control unit 300 along line 4-4. In particular, Figure 4 illustrates a partial housing 405 having a shoulder 410 and an extension 415. The extension 415 includes an end surface 420, a first ridge 425, and a second ridge 430 substantially opposite the first ridge 425. An aperture 435 extends from the exterior of the end surface 420 to the interior of the housing 405.

[0038] Figure 5 is an enlarged partial cross-section view of a control unit similar to the control unit 300 along line 5-5. In particular, Figure 5 illustrates a partial housing 505 having a shoulder 510 and an extension 515 with an end surface 520.

[0039] In any embodiment of the control unit, the housing may be manufactured as separate components and subsequently assembled, or may be manufactured as a single unit.

[0040] Figure 6 is a perspective view of a first end of an embodiment of a component module 600. The component module 600 may include a variety of equipment that is useful for tissue treatment, including without limitation a wound camera, cyclic/next generation skin

stretching, capacitive volume and wound contour mapping, wound bed pH monitoring, wound warming/climate control, wound moisture and temperature monitoring, electrical stimulation, UV therapy, and wound healing marker measurement. The component module 600 typically includes a control system similar to the control system 200 described above. In particular, the component module 600 includes a CAN controller (not shown) and a CAN port (see Figure 7). The component module 600 also includes a CAN plug 610, which protrudes through an aperture 615 and interfaces with the CAN port 236a of the control system 200. As Figure 6 illustrates, the component module 600 includes a housing 620 having a rim 625, a recessed end surface 630, and notches 632. The component module 600 further includes a mounting assembly 635 fixed to the recessed end surface 630. The mounting assembly 635 includes a first latch 640 and a second latch 645 that are positioned within the notches 632. The first latch and the second latch each have a fastener bar 650 that is substantially flush with the rim 625 in the configuration illustrated in Figure 6. The fastener bars 650 are configured to overlap the ridges on other modules or on a control unit, such as ridges 425 and 430 illustrated in Figure 4.

[0041] Figure 7 is a perspective view of a second end of the component module 600 illustrated in Figure 6. This perspective view illustrates a configuration that is substantially similar to the configuration of the control unit 300 described above with reference to Figures 3-5, so that additional component modules may be connected in a chain or series as needed to expand the functionality of a reduced pressure treatment system. In particular, the component module 600 includes the outer surface 620 having a shoulder 705, an extension 710 fixed to the shoulder, and an end surface 715. The extension 710 further includes a first ridge 720 and a second ridge 725, which is generally located opposite the first ridge 720, and an aperture 730, through which a CAN port may be exposed to the exterior of the end surface 715.

[0042] Referring to Figure 8 for illustration, the first latch 630 and the second latch 635 may be extended to mount the component module 600 to a control unit or another component module. In alternate embodiments, the first latch 630, the second latch 635, or both may be rotated about a pin so that only the fastener bar of the latch is extended. Extending the mounting assembly 625 allows the fastener bars 650 to be placed over the ridges on another component module or control unit, and then collapsed onto the extension to secure the component module 600.

[0043] Figure 9 illustrates the second end of the component module 600 shown in Figure 7, with the first latch 630 extended.

[0044] Figure 10 is an enlarged perspective view of an embodiment of a CAN plug 610. In this embodiment, the CAN plug 610 consists of a plurality of pin connectors that align with corresponding plate connectors in a CAN port. Each pin connector may be wired as desired to a control system within a component module.

[0045] It should be apparent from the foregoing that an invention having significant advantages has been provided. While the invention is shown in only a few of its forms, it is not so limited and is susceptible to various changes and modifications without departing from the spirit thereof.

CLAIMS

We claim:

1. A reduced pressure treatment component module comprising:
 - a substantially elliptic cylindrical housing having a rim, a recessed end surface, and an extension;
 - a mounting assembly fixed to the recessed end surface, the mounting assembly comprising an extendable first latch and an extendable second latch, wherein the first latch and the second latch each comprise a fastener bar that is substantially flush with the rim when the first latch and the second latch are not extended;
 - a first aperture through the mounting assembly and recessed end surface;
 - a second aperture through the extension;
 - a control system contained within the housing, the control system having a communication controller;
 - a communication plug coupled to the serial bus controller and protruding through the first aperture; and
 - a communication port coupled to the serial bus controller and exposed to the second aperture.
2. The module according to claim 1, wherein the communication controller is a controller area network controller.
3. The module according to claim 1, wherein the extension comprises a first ridge and a second ridge opposite the first ridge.
4. The module according to claim 1, wherein the second latch pivots about an axis to extend the fastener bar.

5. A reduced pressure treatment system, comprising:

a control system having a treatment controller and a communication controller;
a communication port coupled to the communication controller;
a reduced pressure source coupled to the treatment controller;
a manifold unit in fluid communication with the reduced pressure source; and
a removable component module coupled to the control system through the communication port.


6. The system of claim 5, further comprising:

a first housing that encloses the control system, the first housing comprising a shoulder and an extension surface;
a second housing that encloses the component module, the second housing comprising a rim and a recessed end surface;
a mounting assembly having a latch;
a first aperture through the mounting assembly and recessed end surface; and
a second aperture through which the communication port is exposed to the extension surface, the second aperture aligned with the first aperture;
wherein the recessed end surface receives the extension surface and the latch fastens to the extension surface to secure the second housing to the first housing.

7. The system of claim 6, wherein the extension surface comprises a ridge and the latch fastens to the ridge to secure the second housing to the first housing.
8. The system of claim 6, wherein the extension surface comprises a ridge and the latch comprises a fastener bar that overlaps the ridge to secure the second housing to the first housing.
9. The system of claim 6, wherein the extension surface comprises a first ridge and a second ridge, and the mounting assembly comprises a first fastener bar and a second fastener bar that overlap the first ridge and the second ridge to secure the second housing to the first housing.
10. The system of claim 5, wherein the communication controller is a controller area network controller.
11. The system of claim 6, wherein the first housing and the second housing are substantially elliptic cylinders.
12. The system of claim 5, wherein the component module is a wound camera.
13. The system of claim 5, wherein the component module is a cyclic skin stretcher.
14. The system of claim 5, wherein the component module is a capacitive volume and wound contour mapping module.
15. The system of claim 5, wherein the component module is a wound bed pH monitor.
16. The system of claim 5, wherein the component module is a wound climate control module.
17. The system of claim 5, wherein the component module is a wound moisture and temperature monitor.
18. The system of claim 5, wherein the component module is an electrical stimulation module.
19. The system of claim 5, wherein the component module is an ultraviolet therapy module.
20. The system of claim 5, wherein the component module is a wound healing marker measurement module.

21. A reduced pressure treatment component module comprising:

- a housing;
- a processor located within the housing;
- a means for connecting the processor to an external control system;
- a means for connecting the housing to an external control unit; and
- a means for connecting the housing to a second component module.

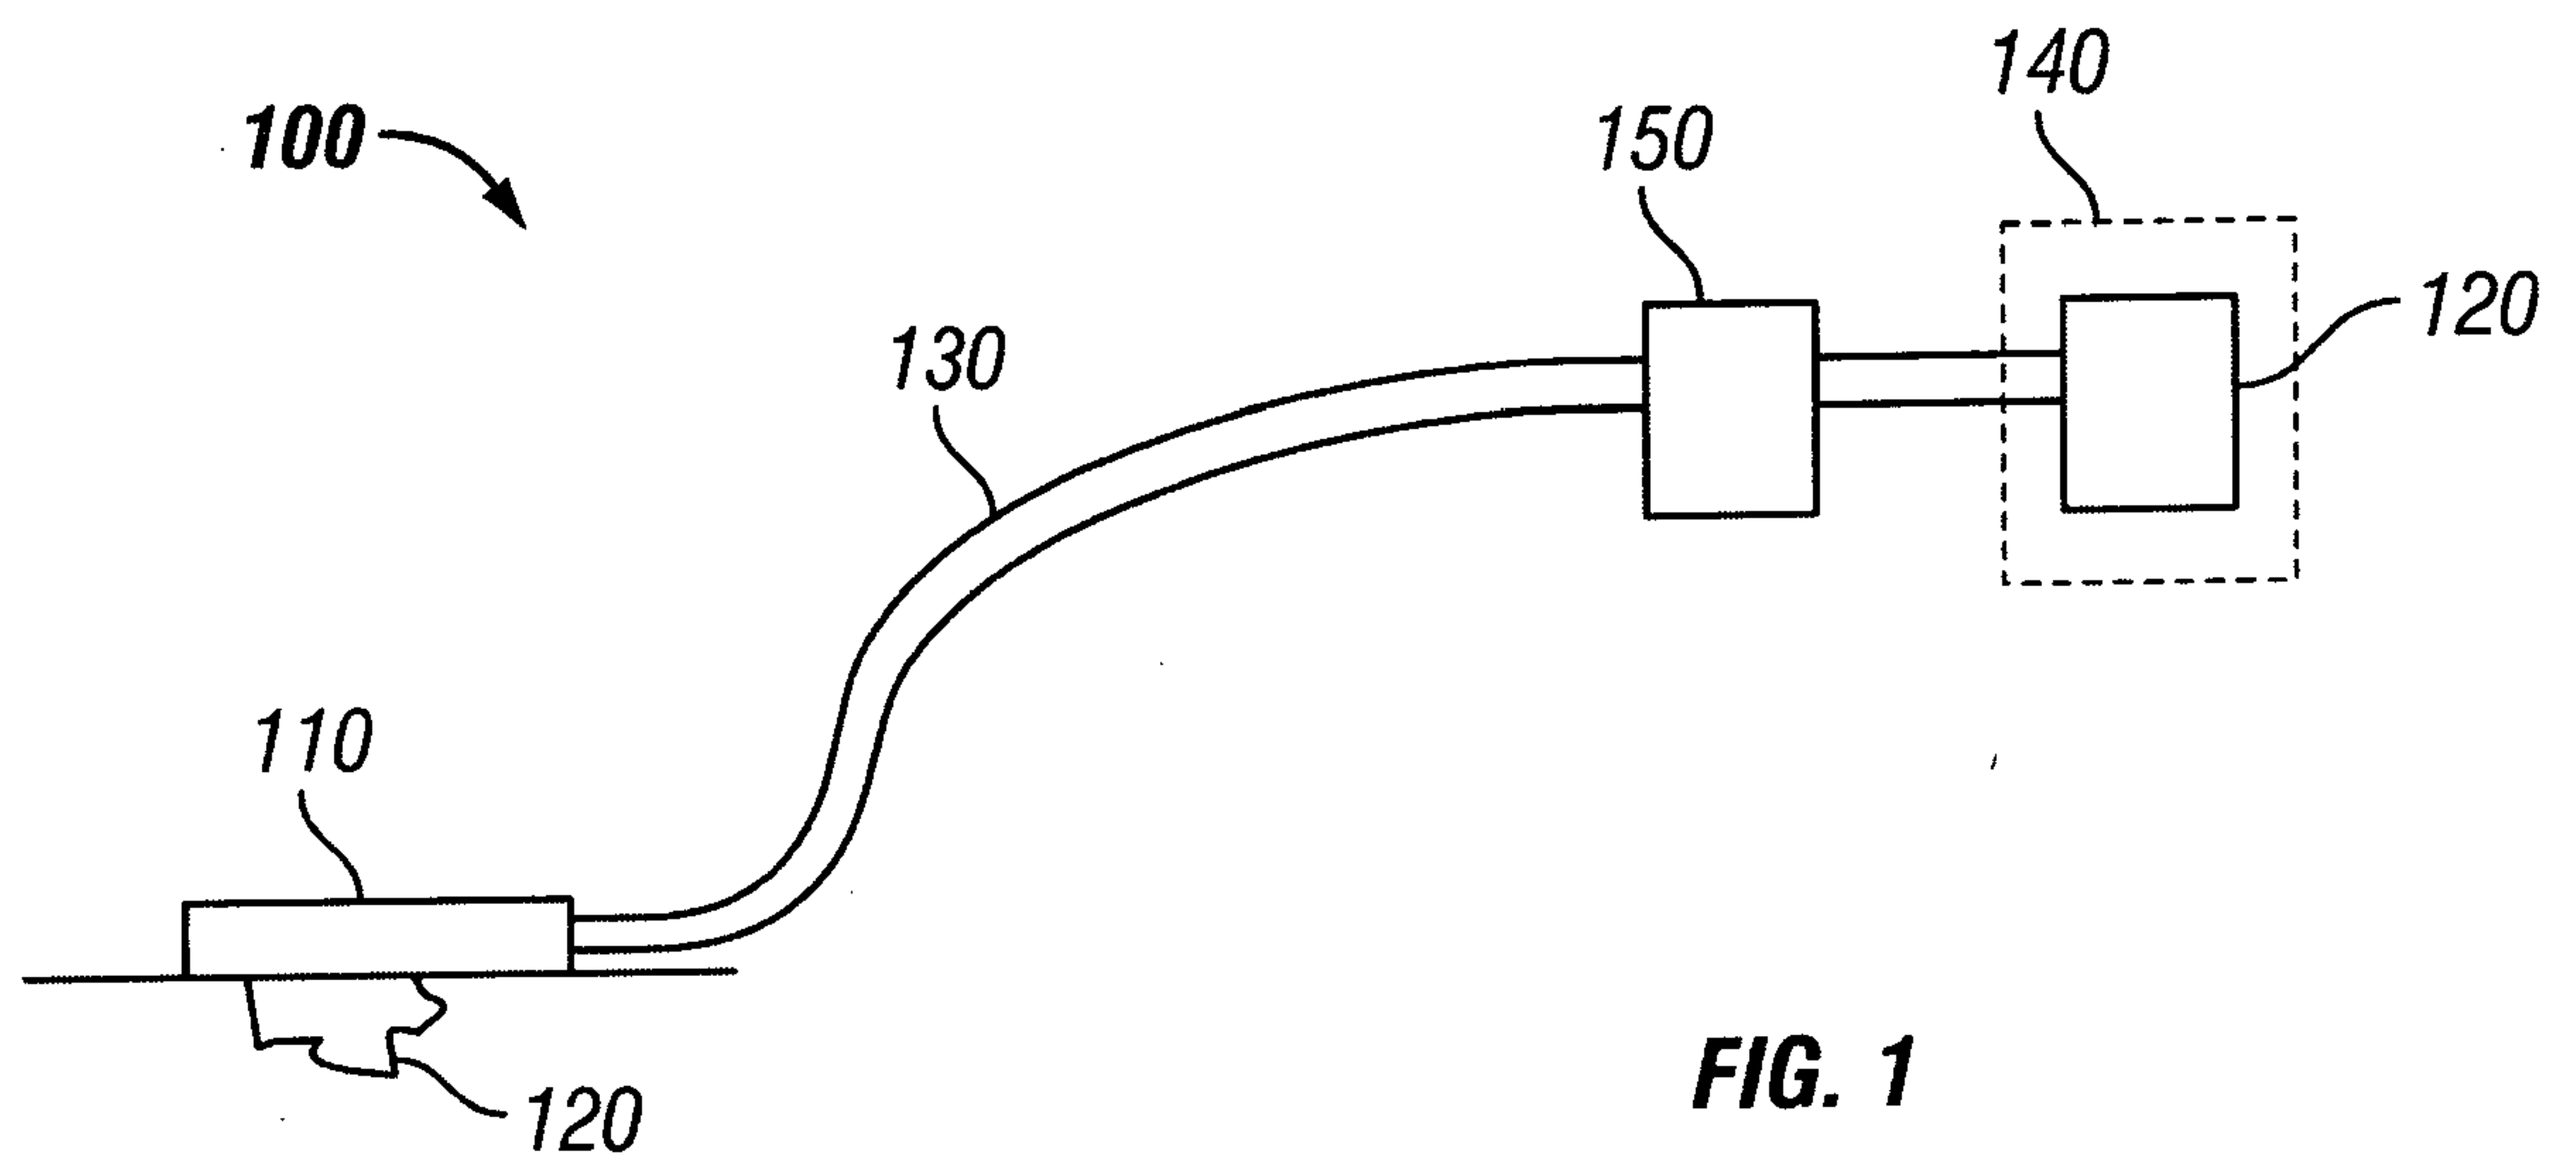1/9**FIG. 1**

2/9

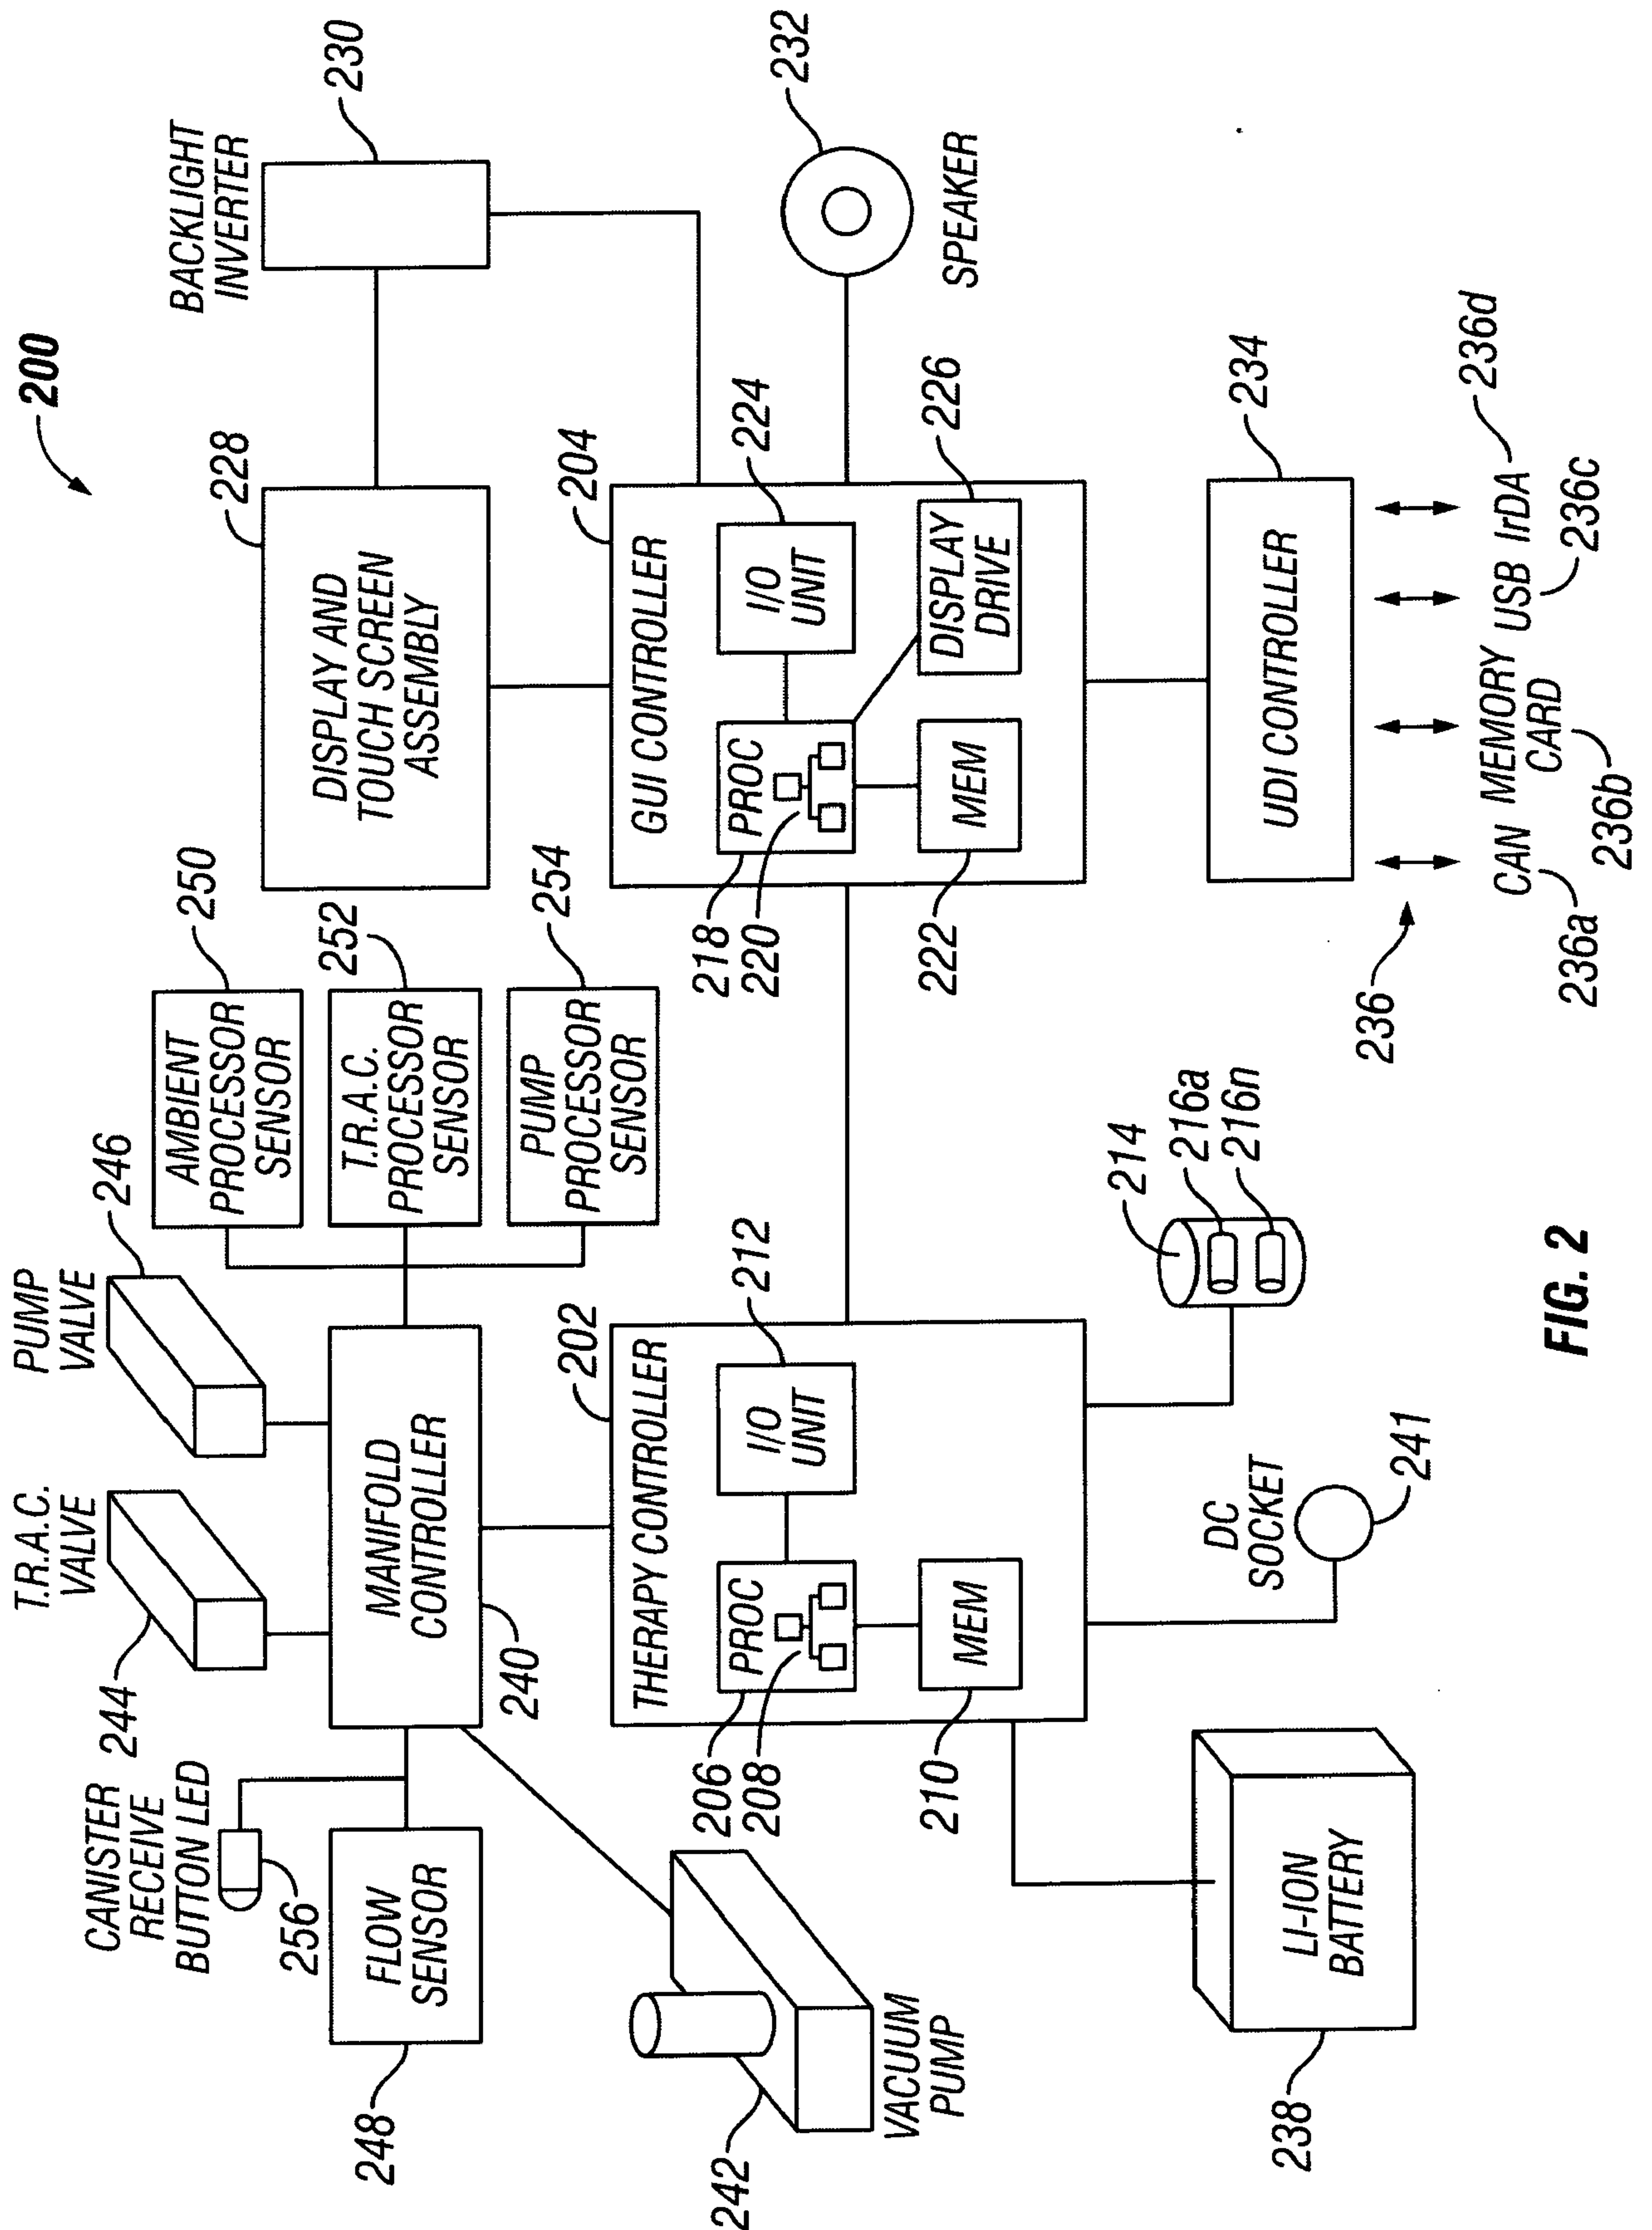
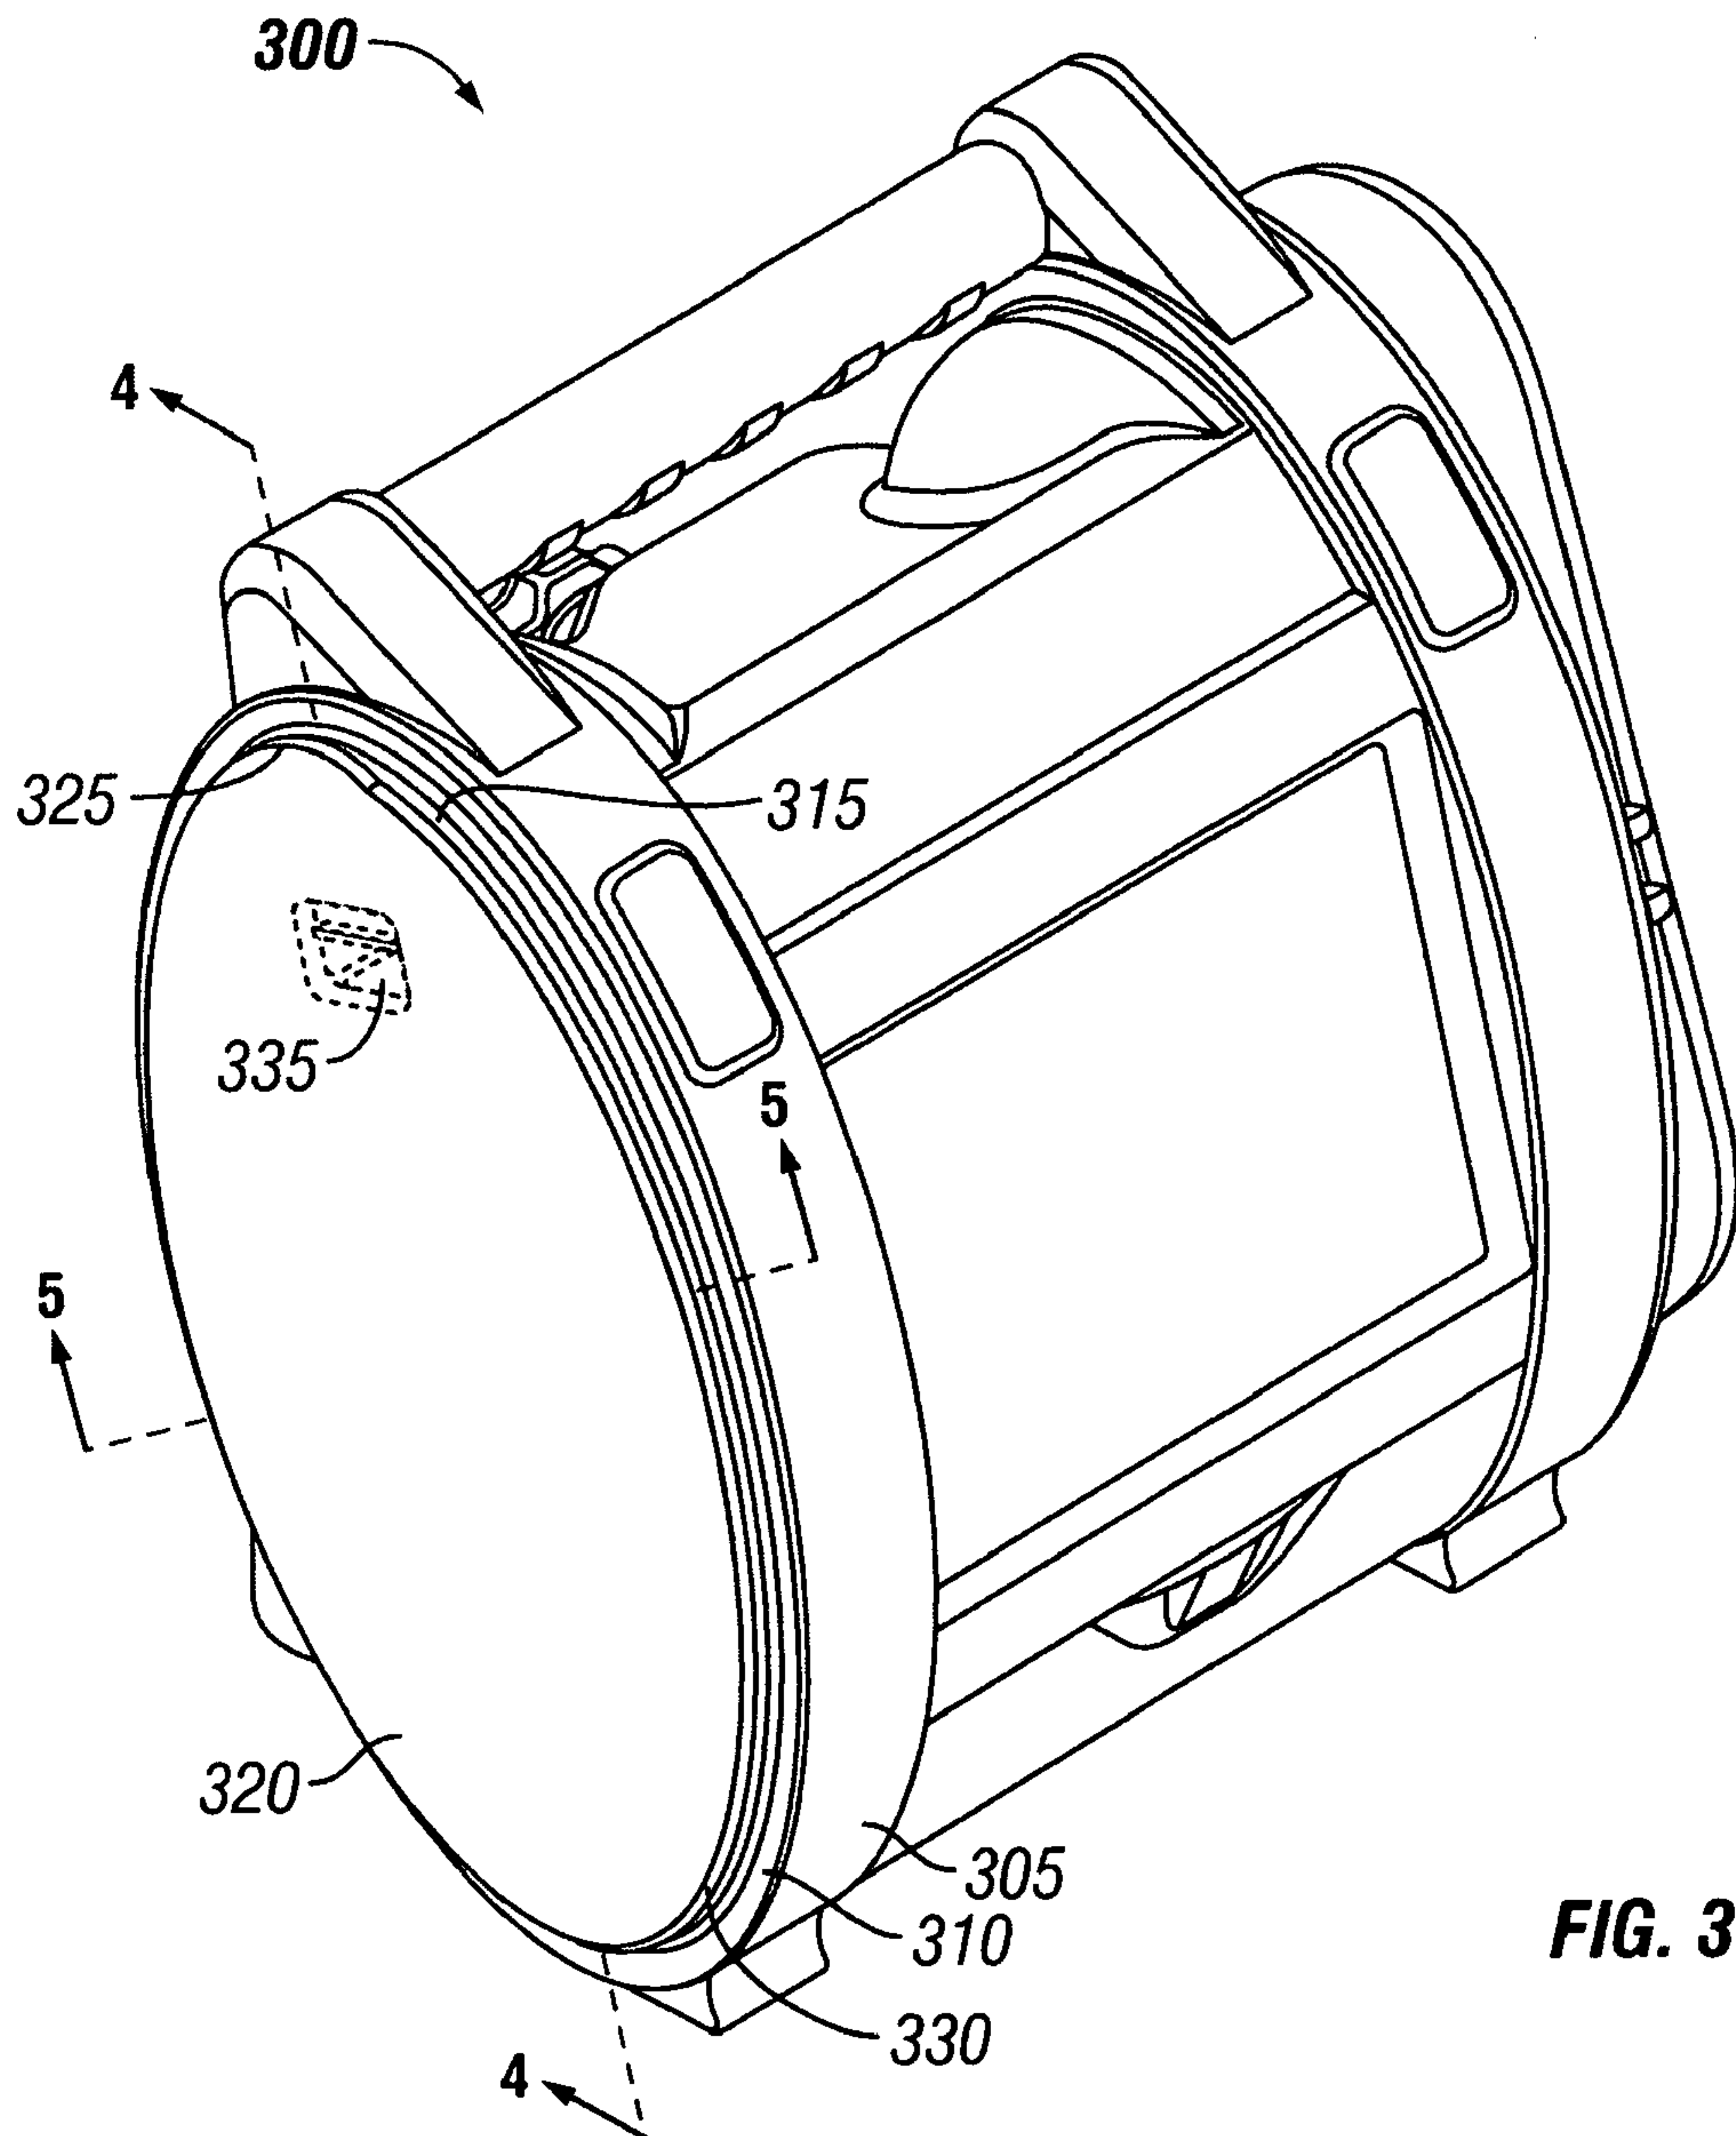
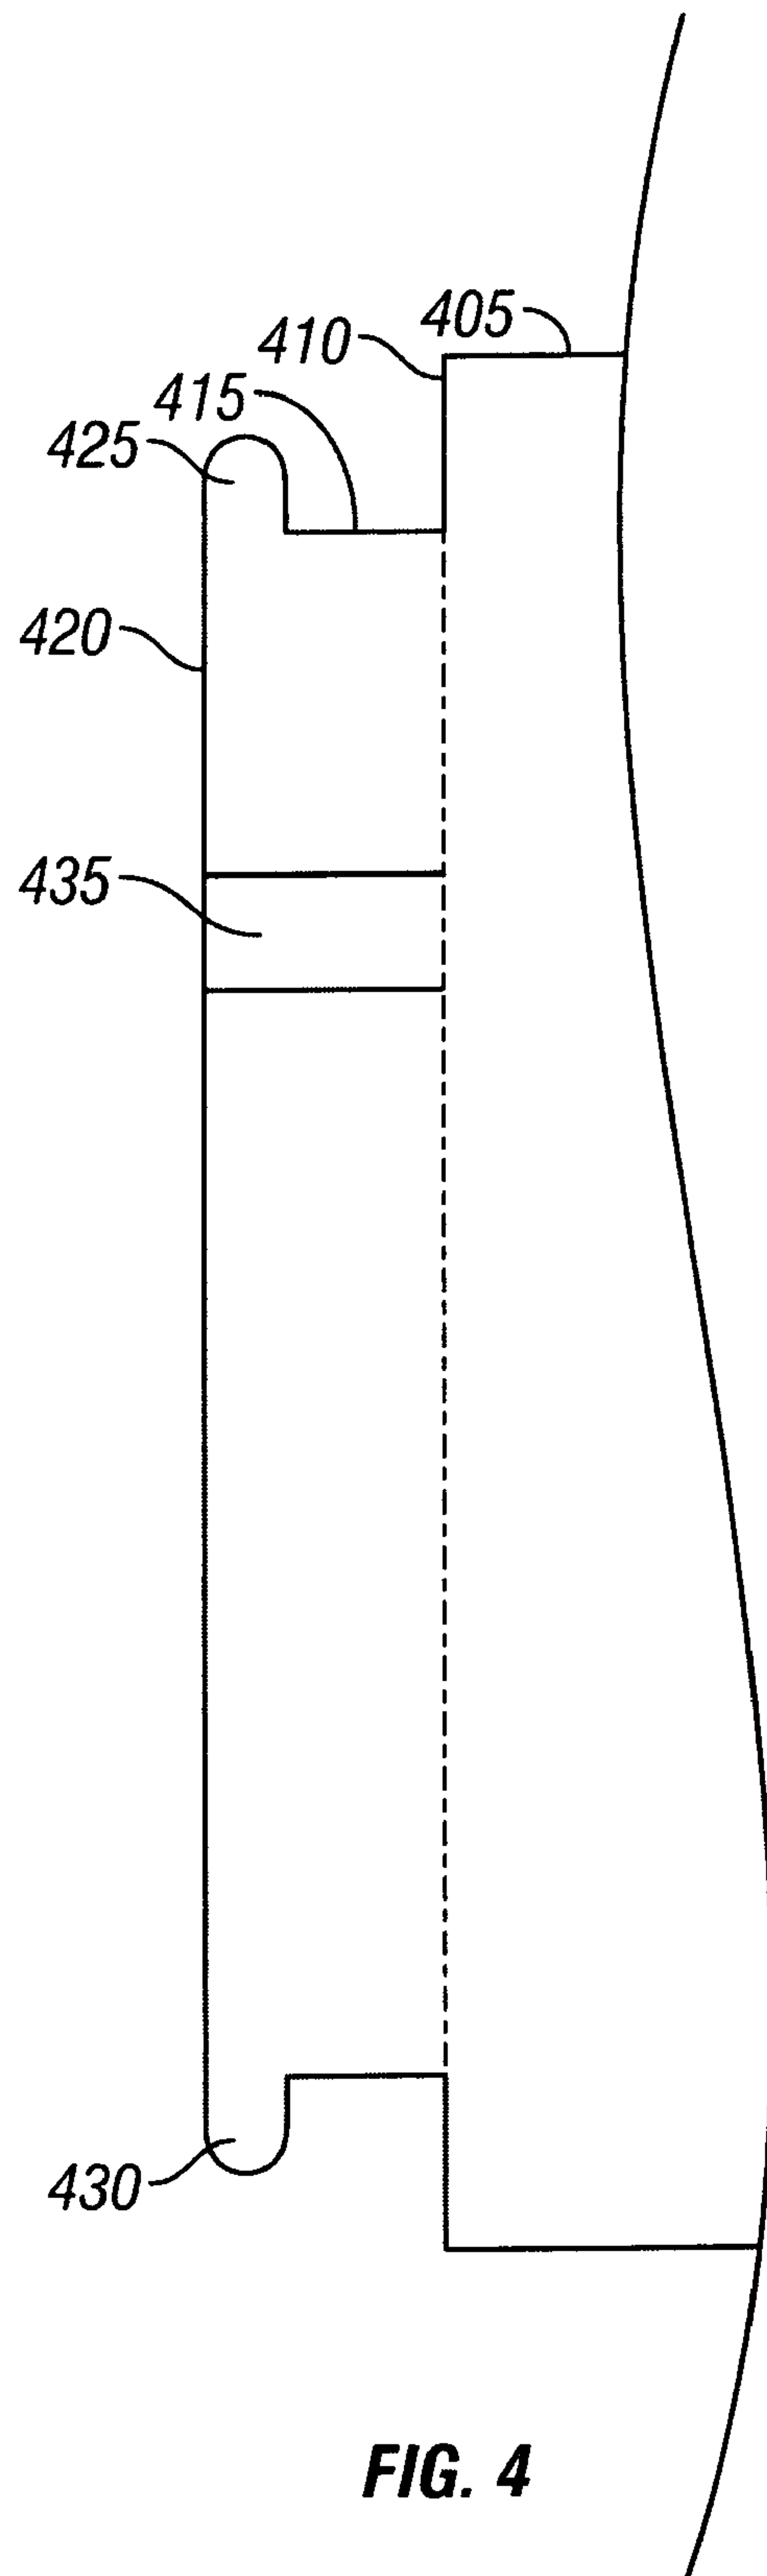
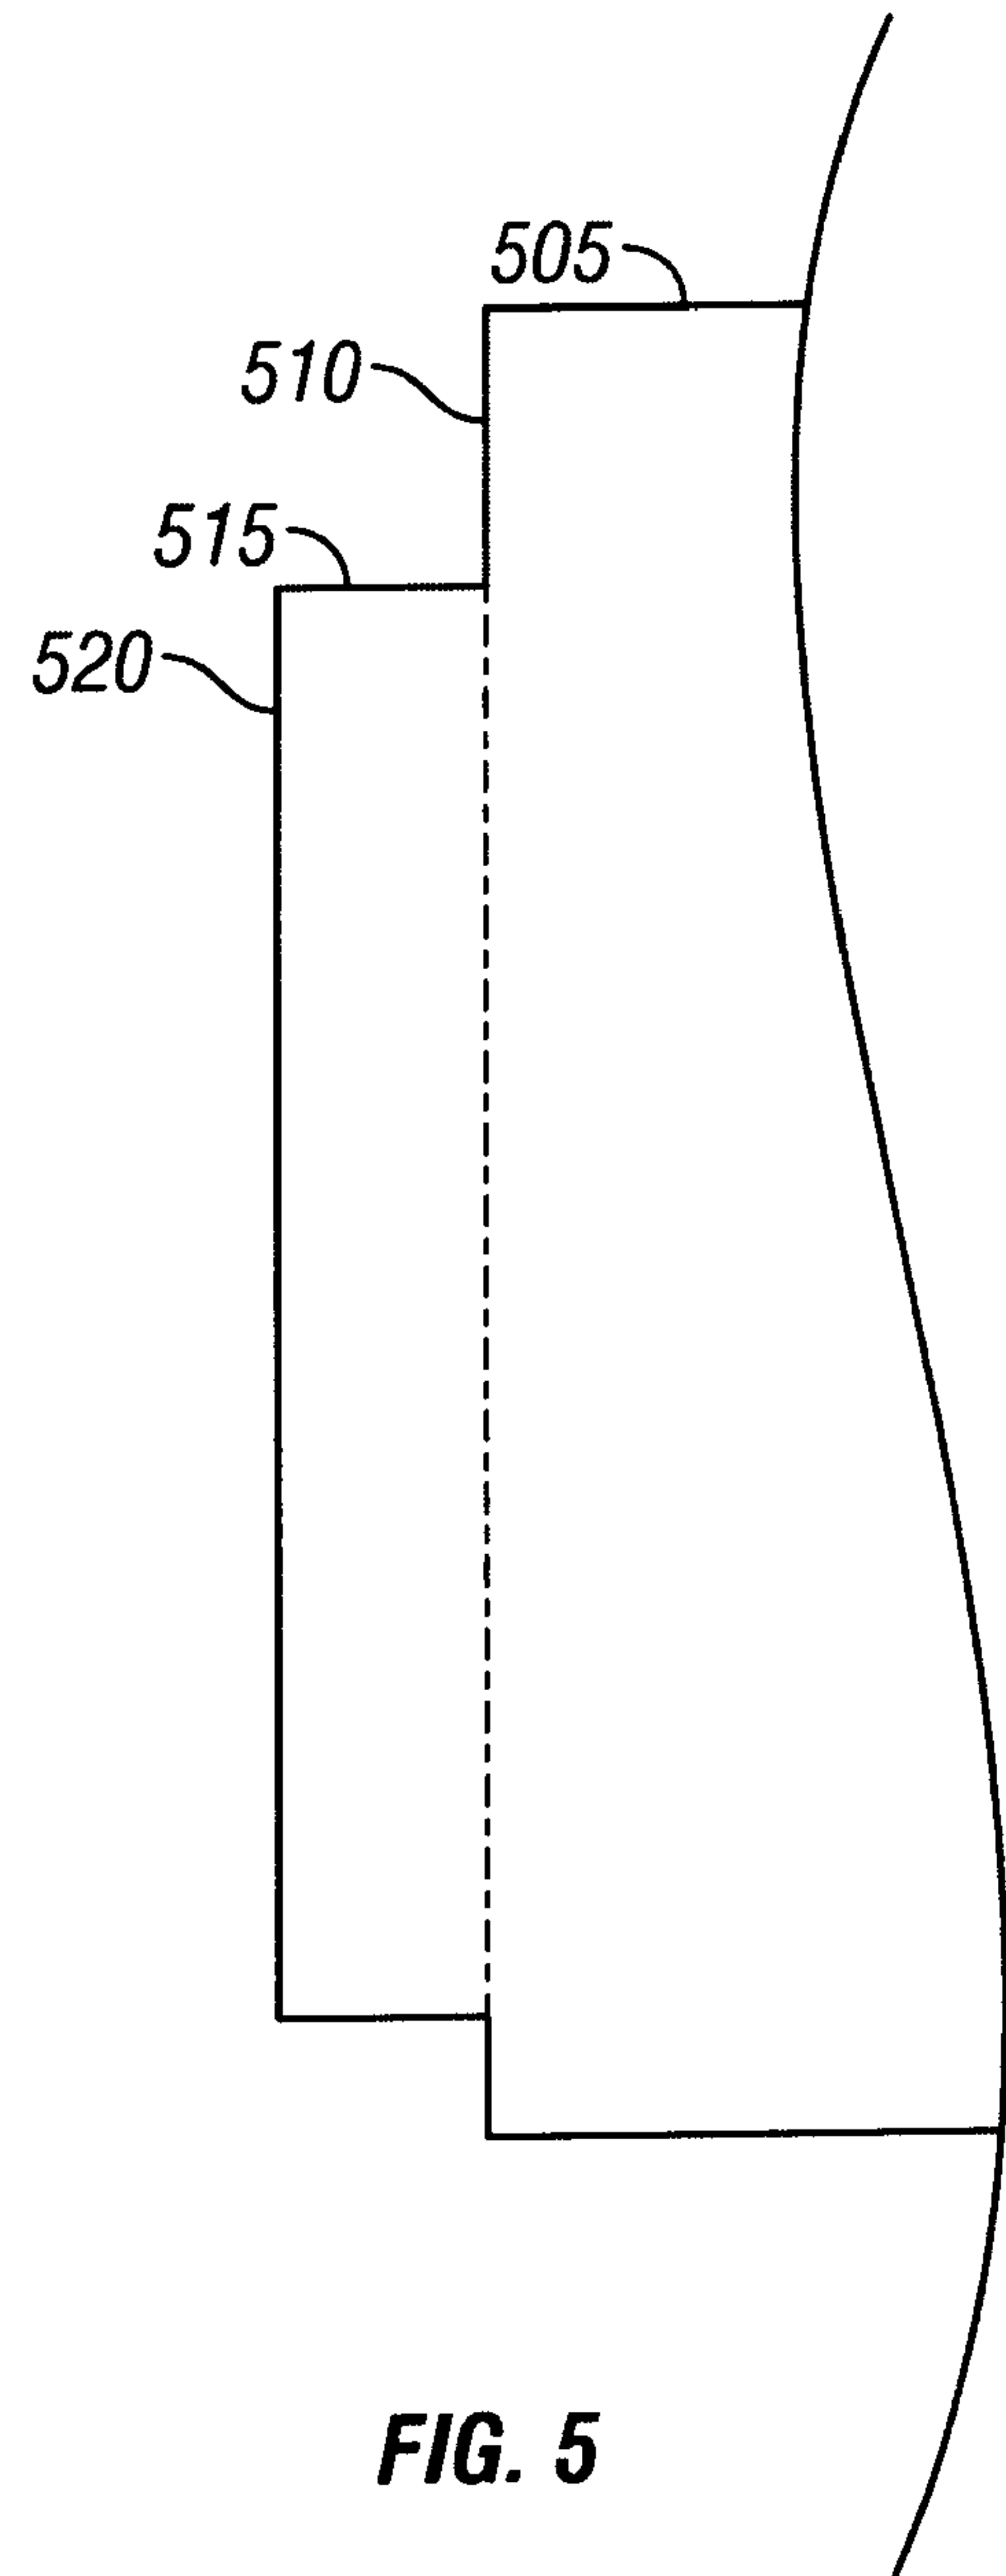
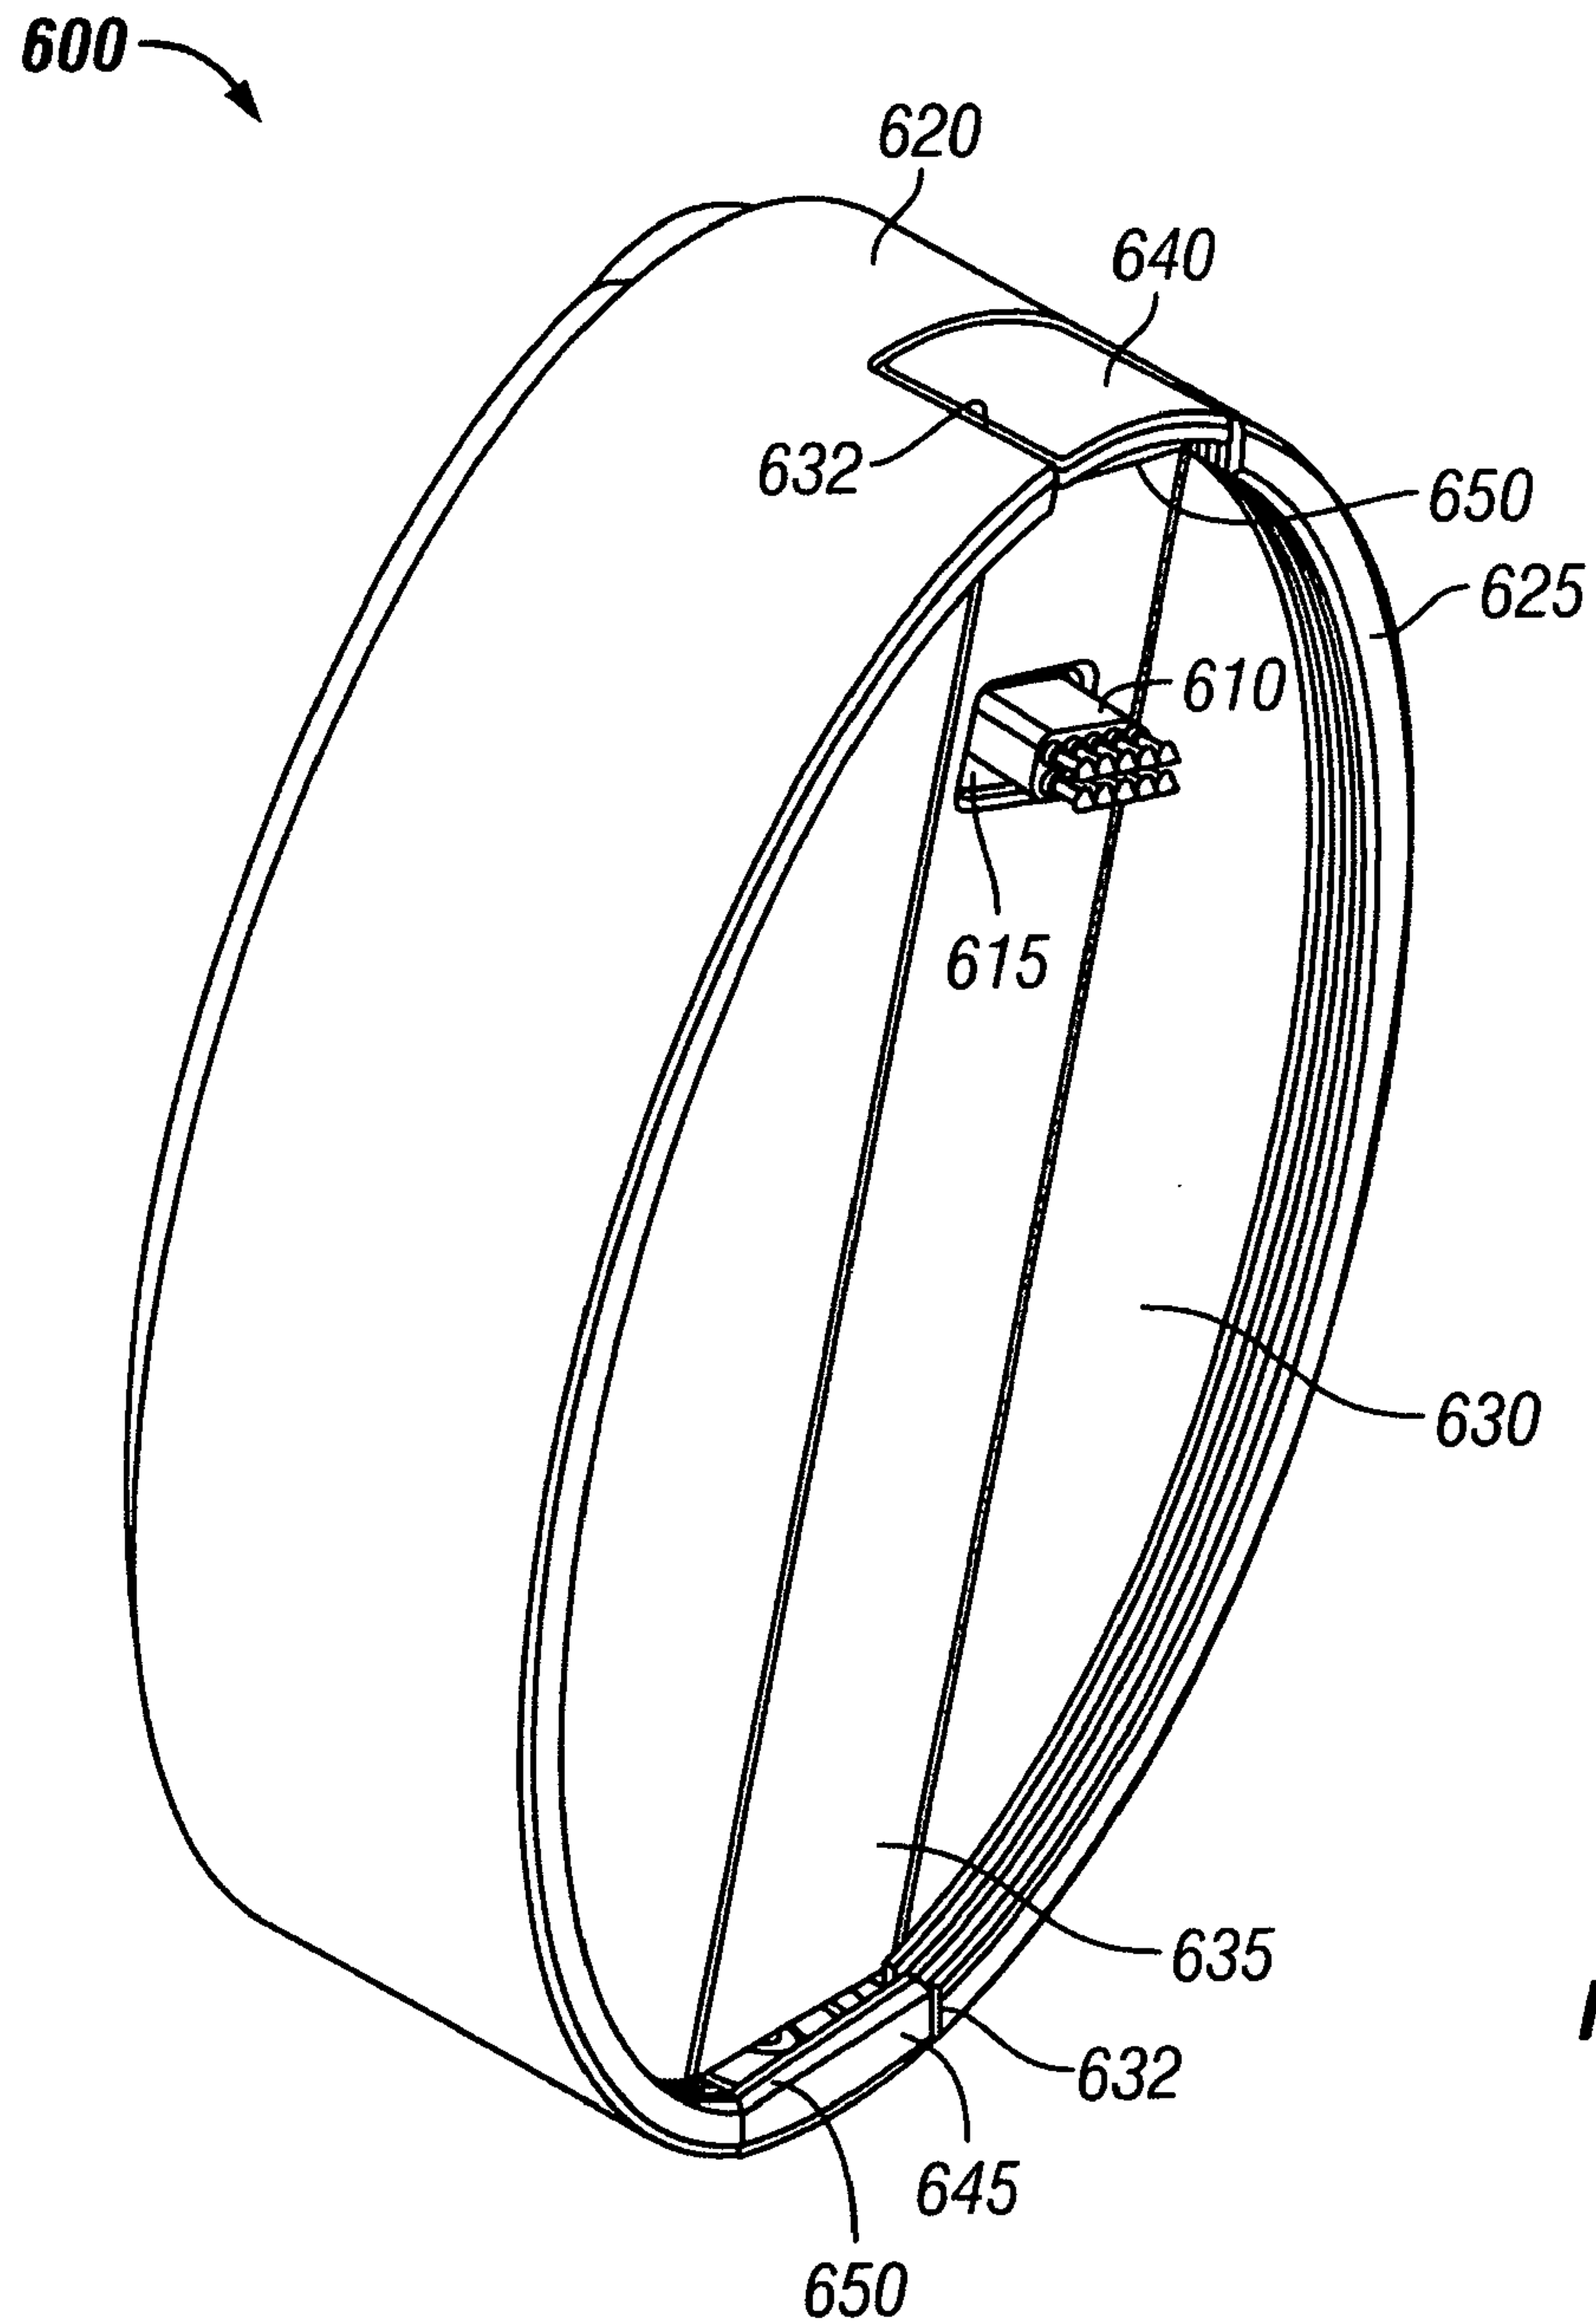
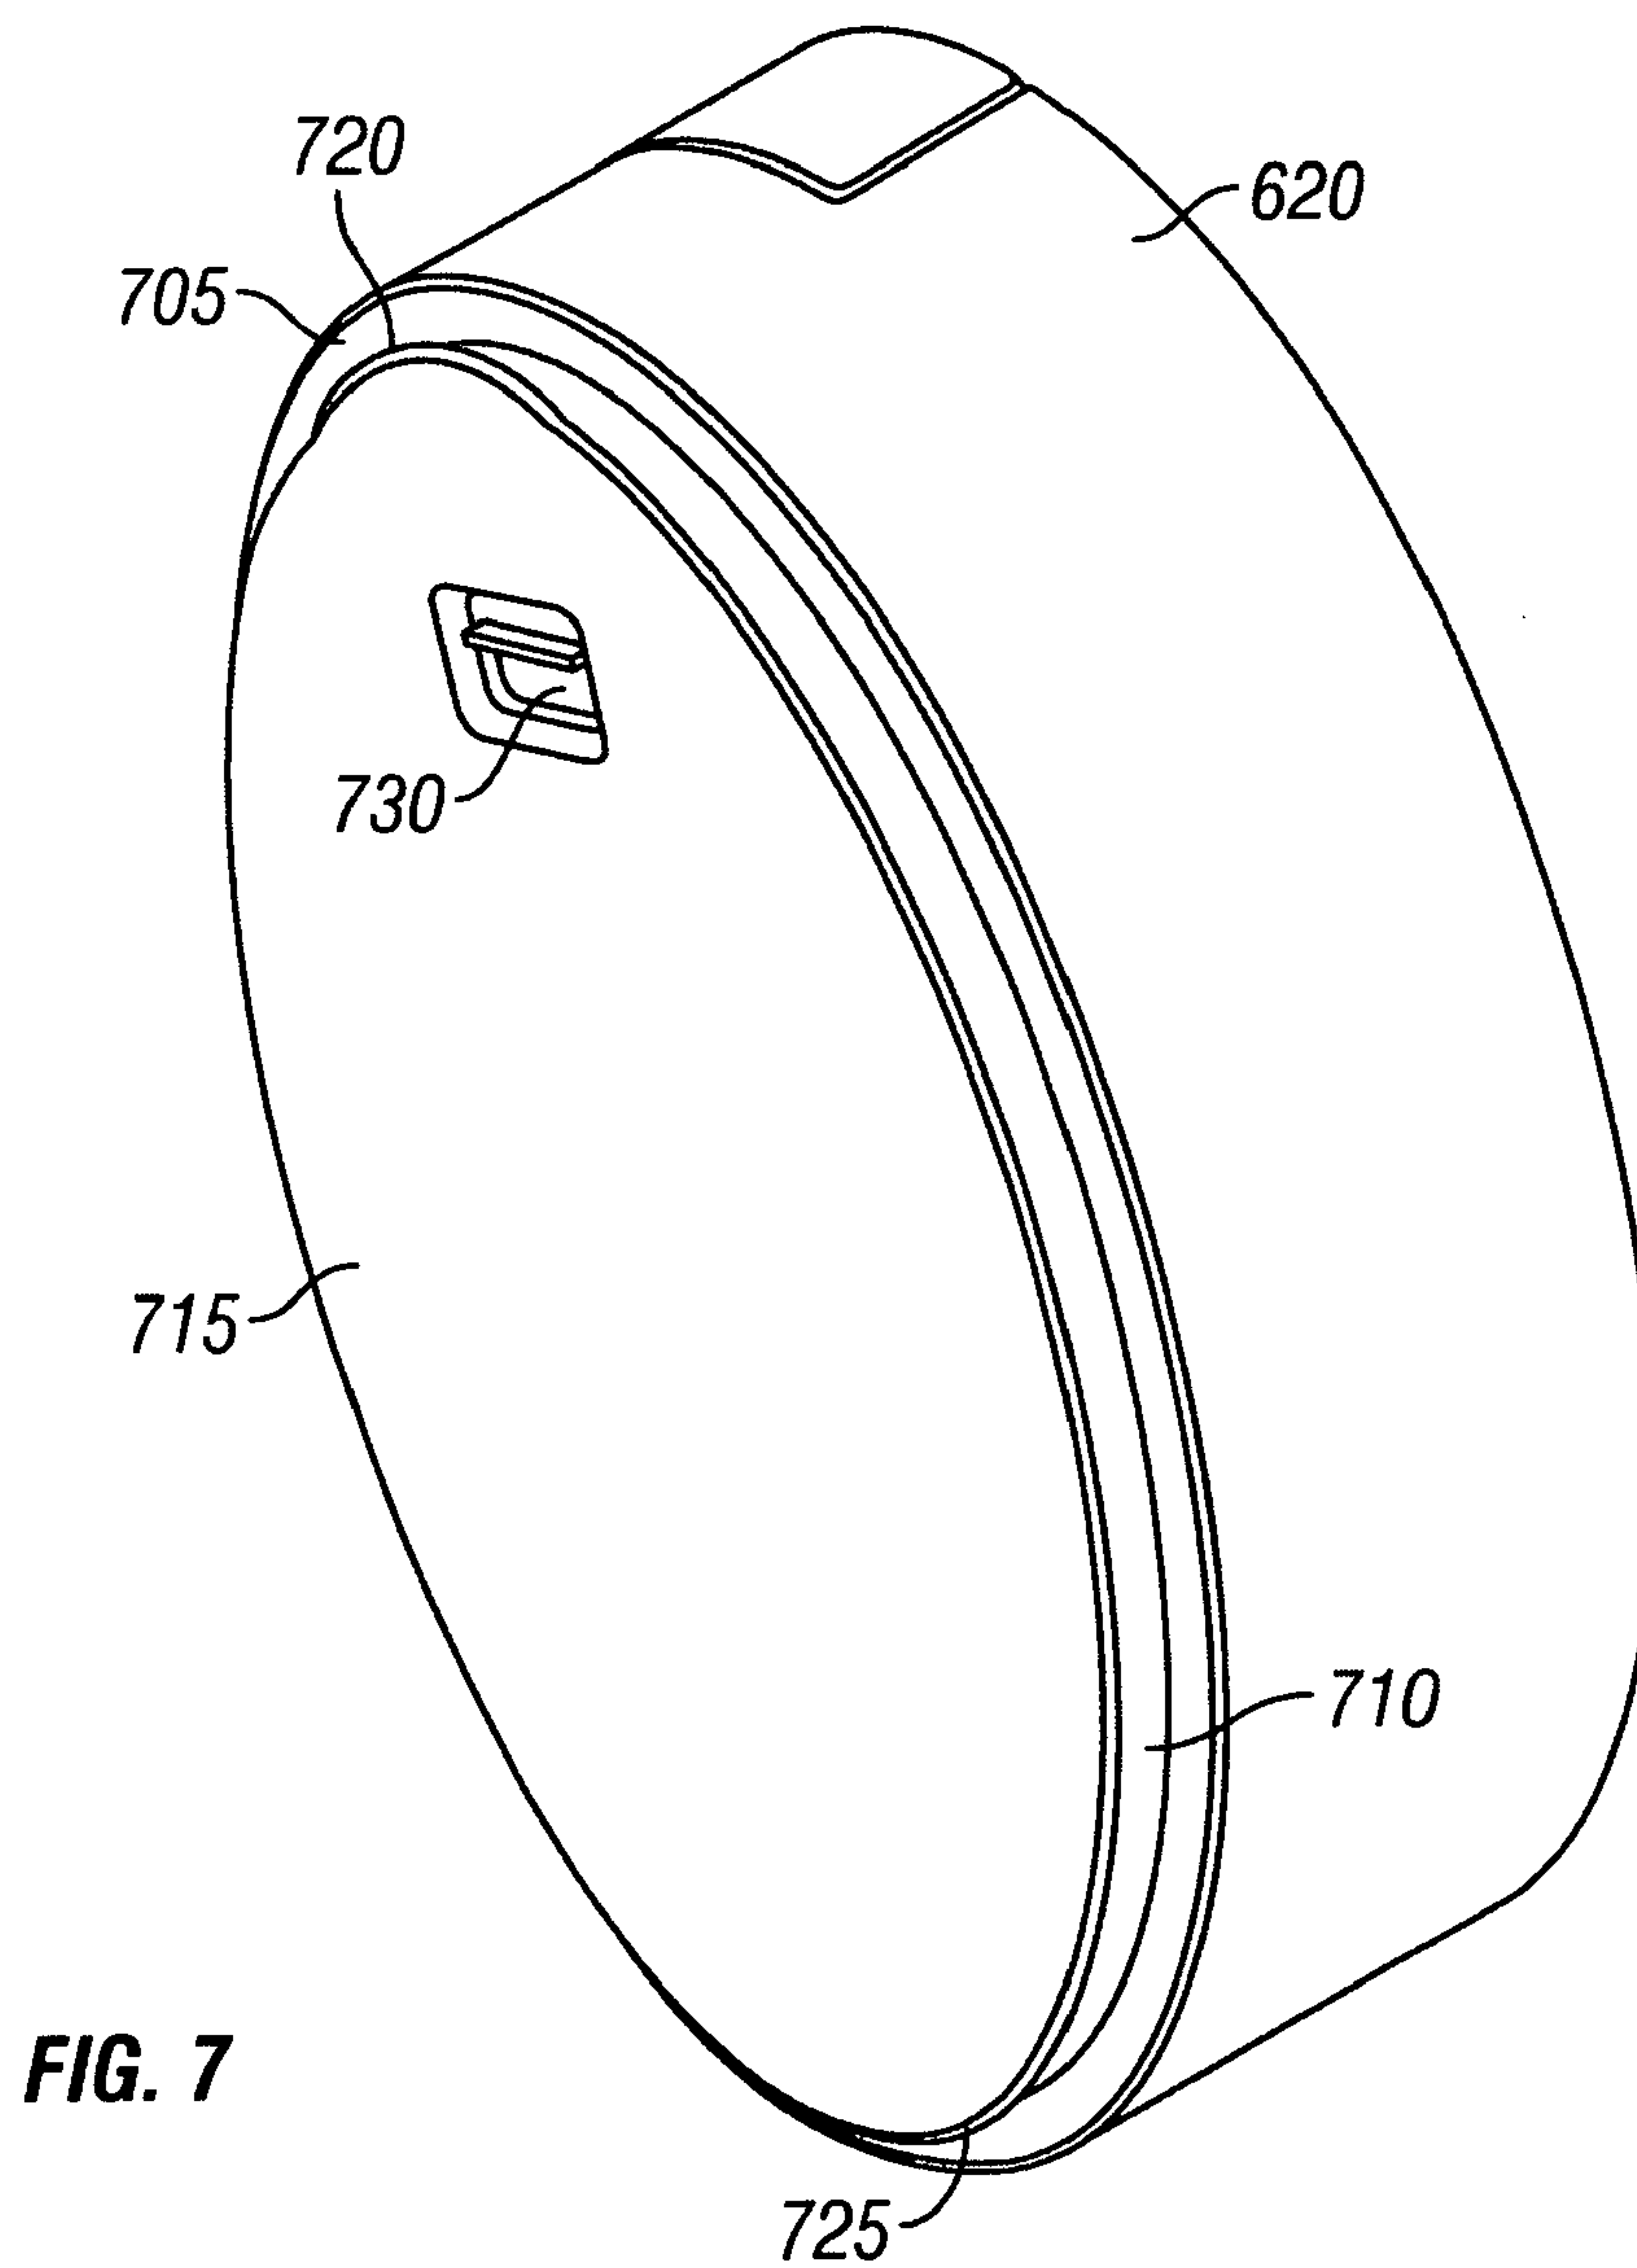



FIG. 2

3/9**FIG. 3**

4/9**FIG. 4****FIG. 5**

5/9**FIG. 6**

6/9

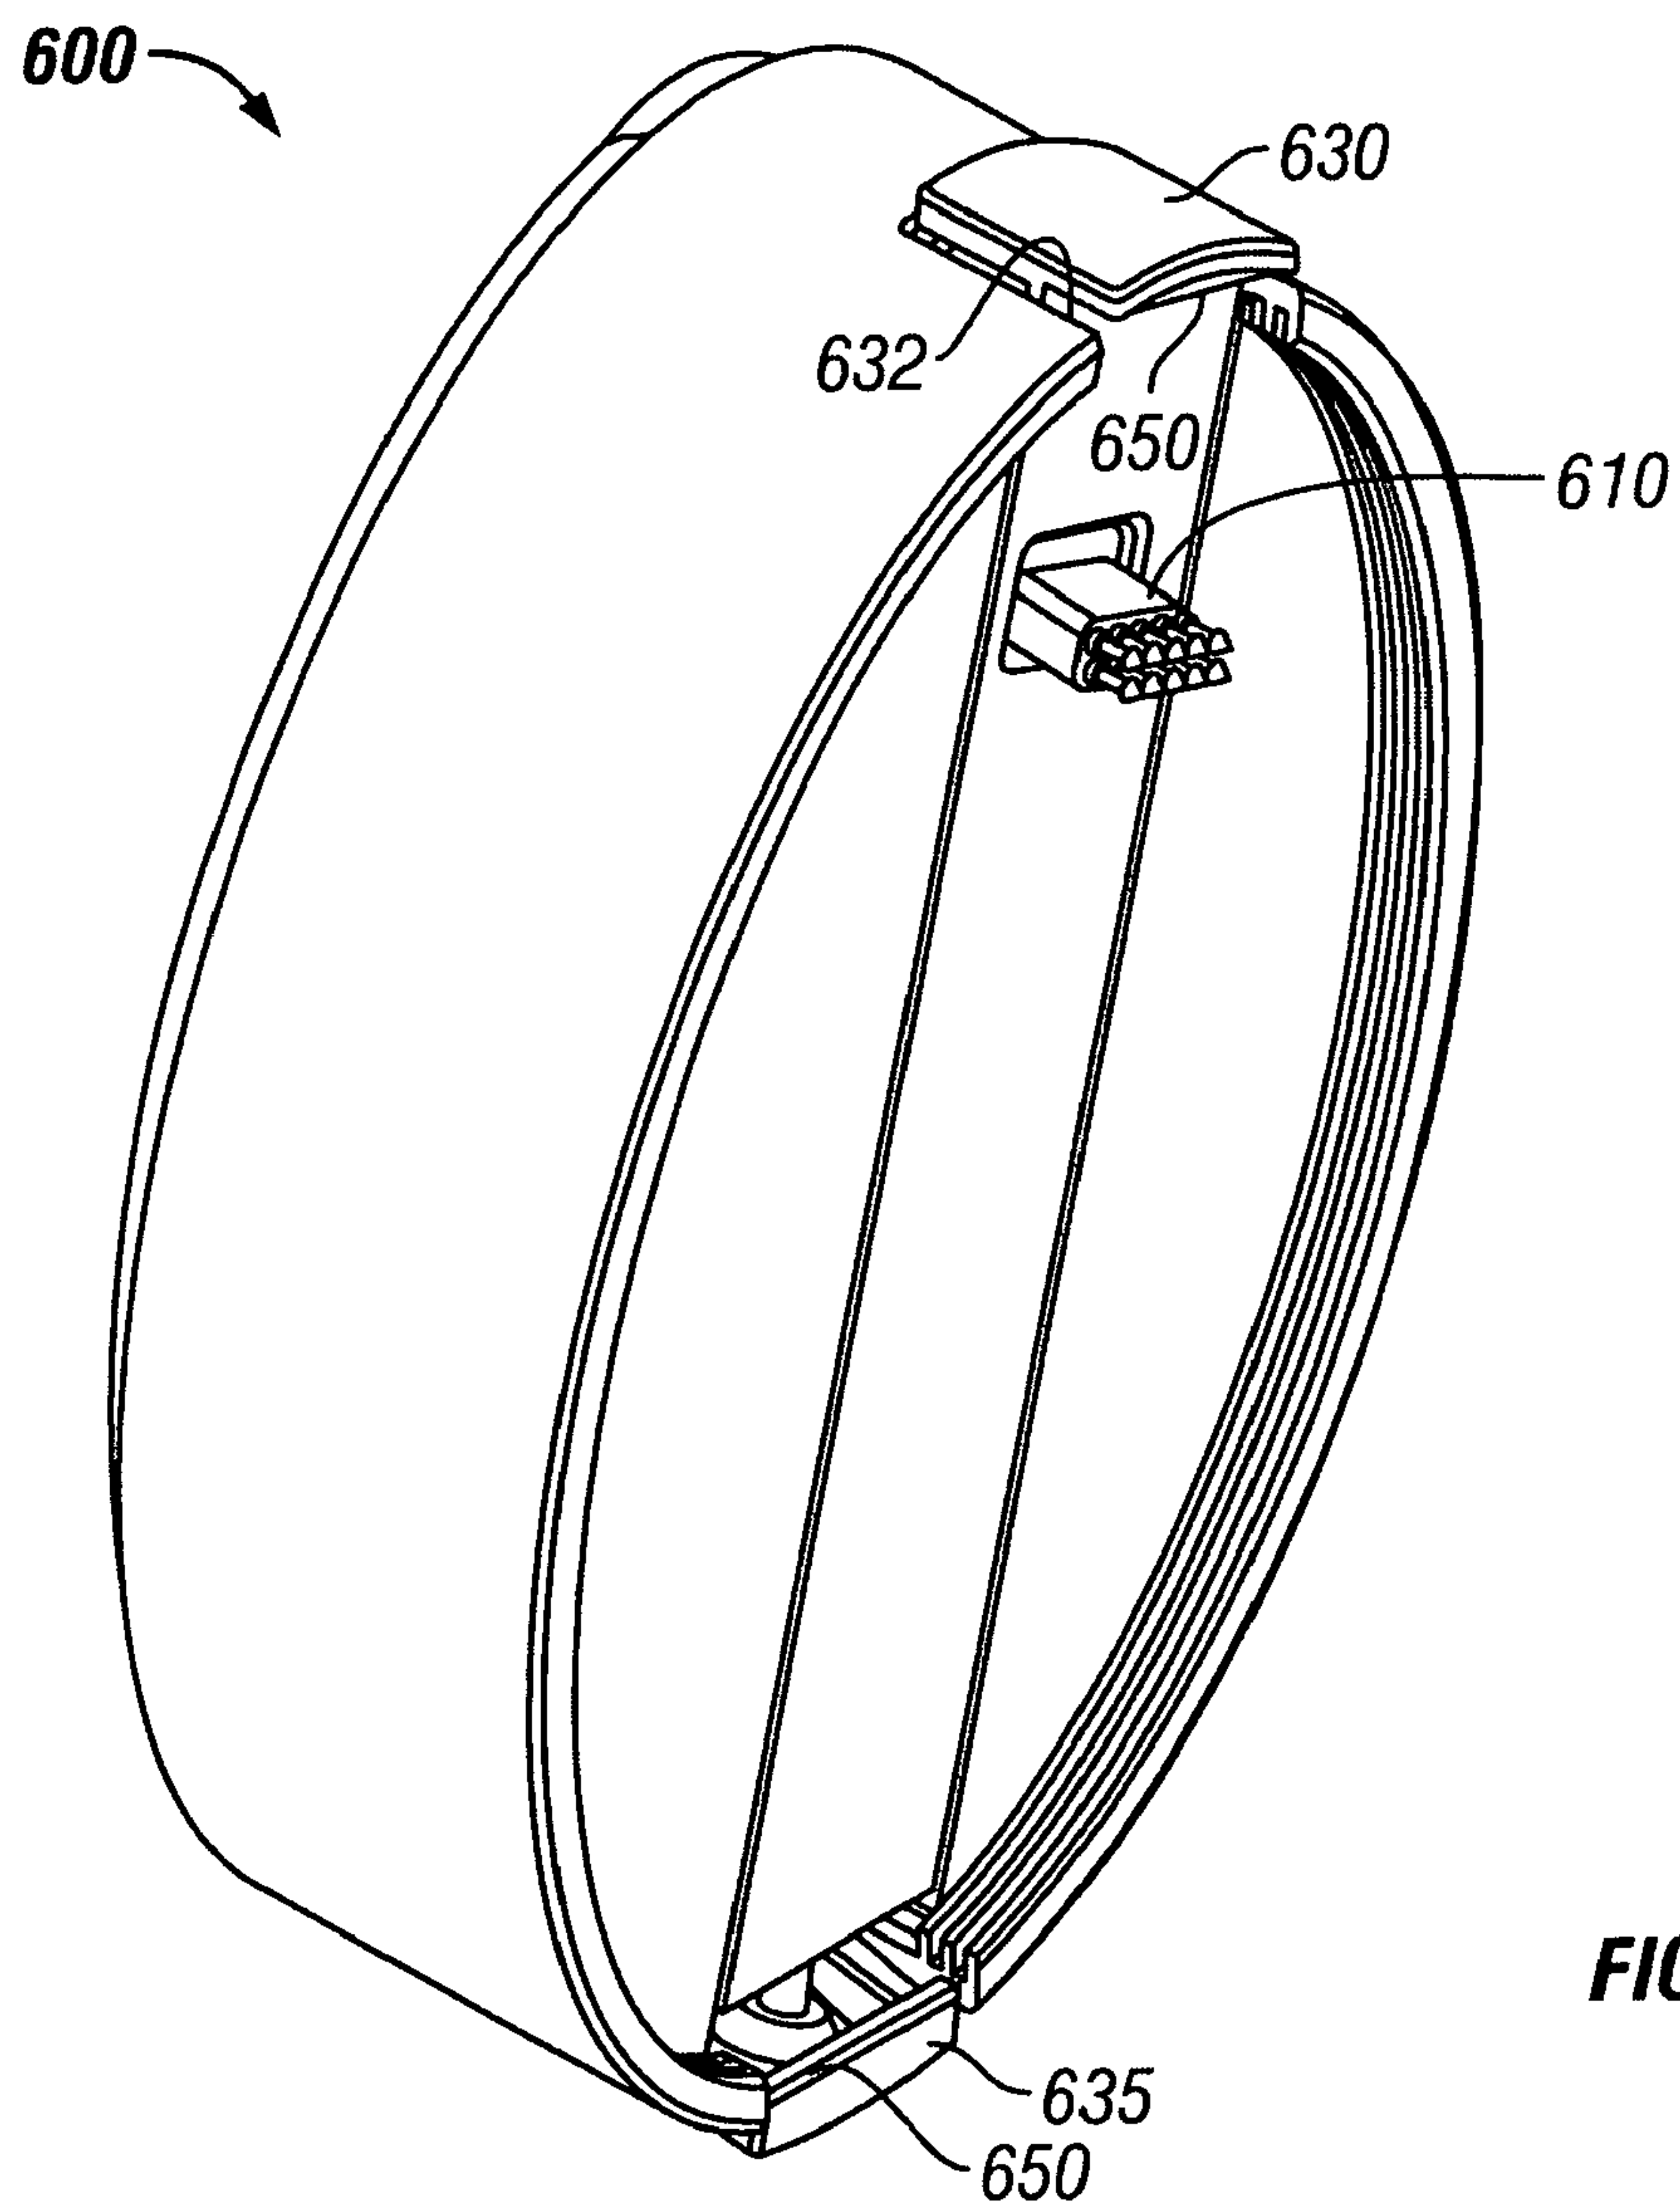7/9**FIG. 8**

8/9


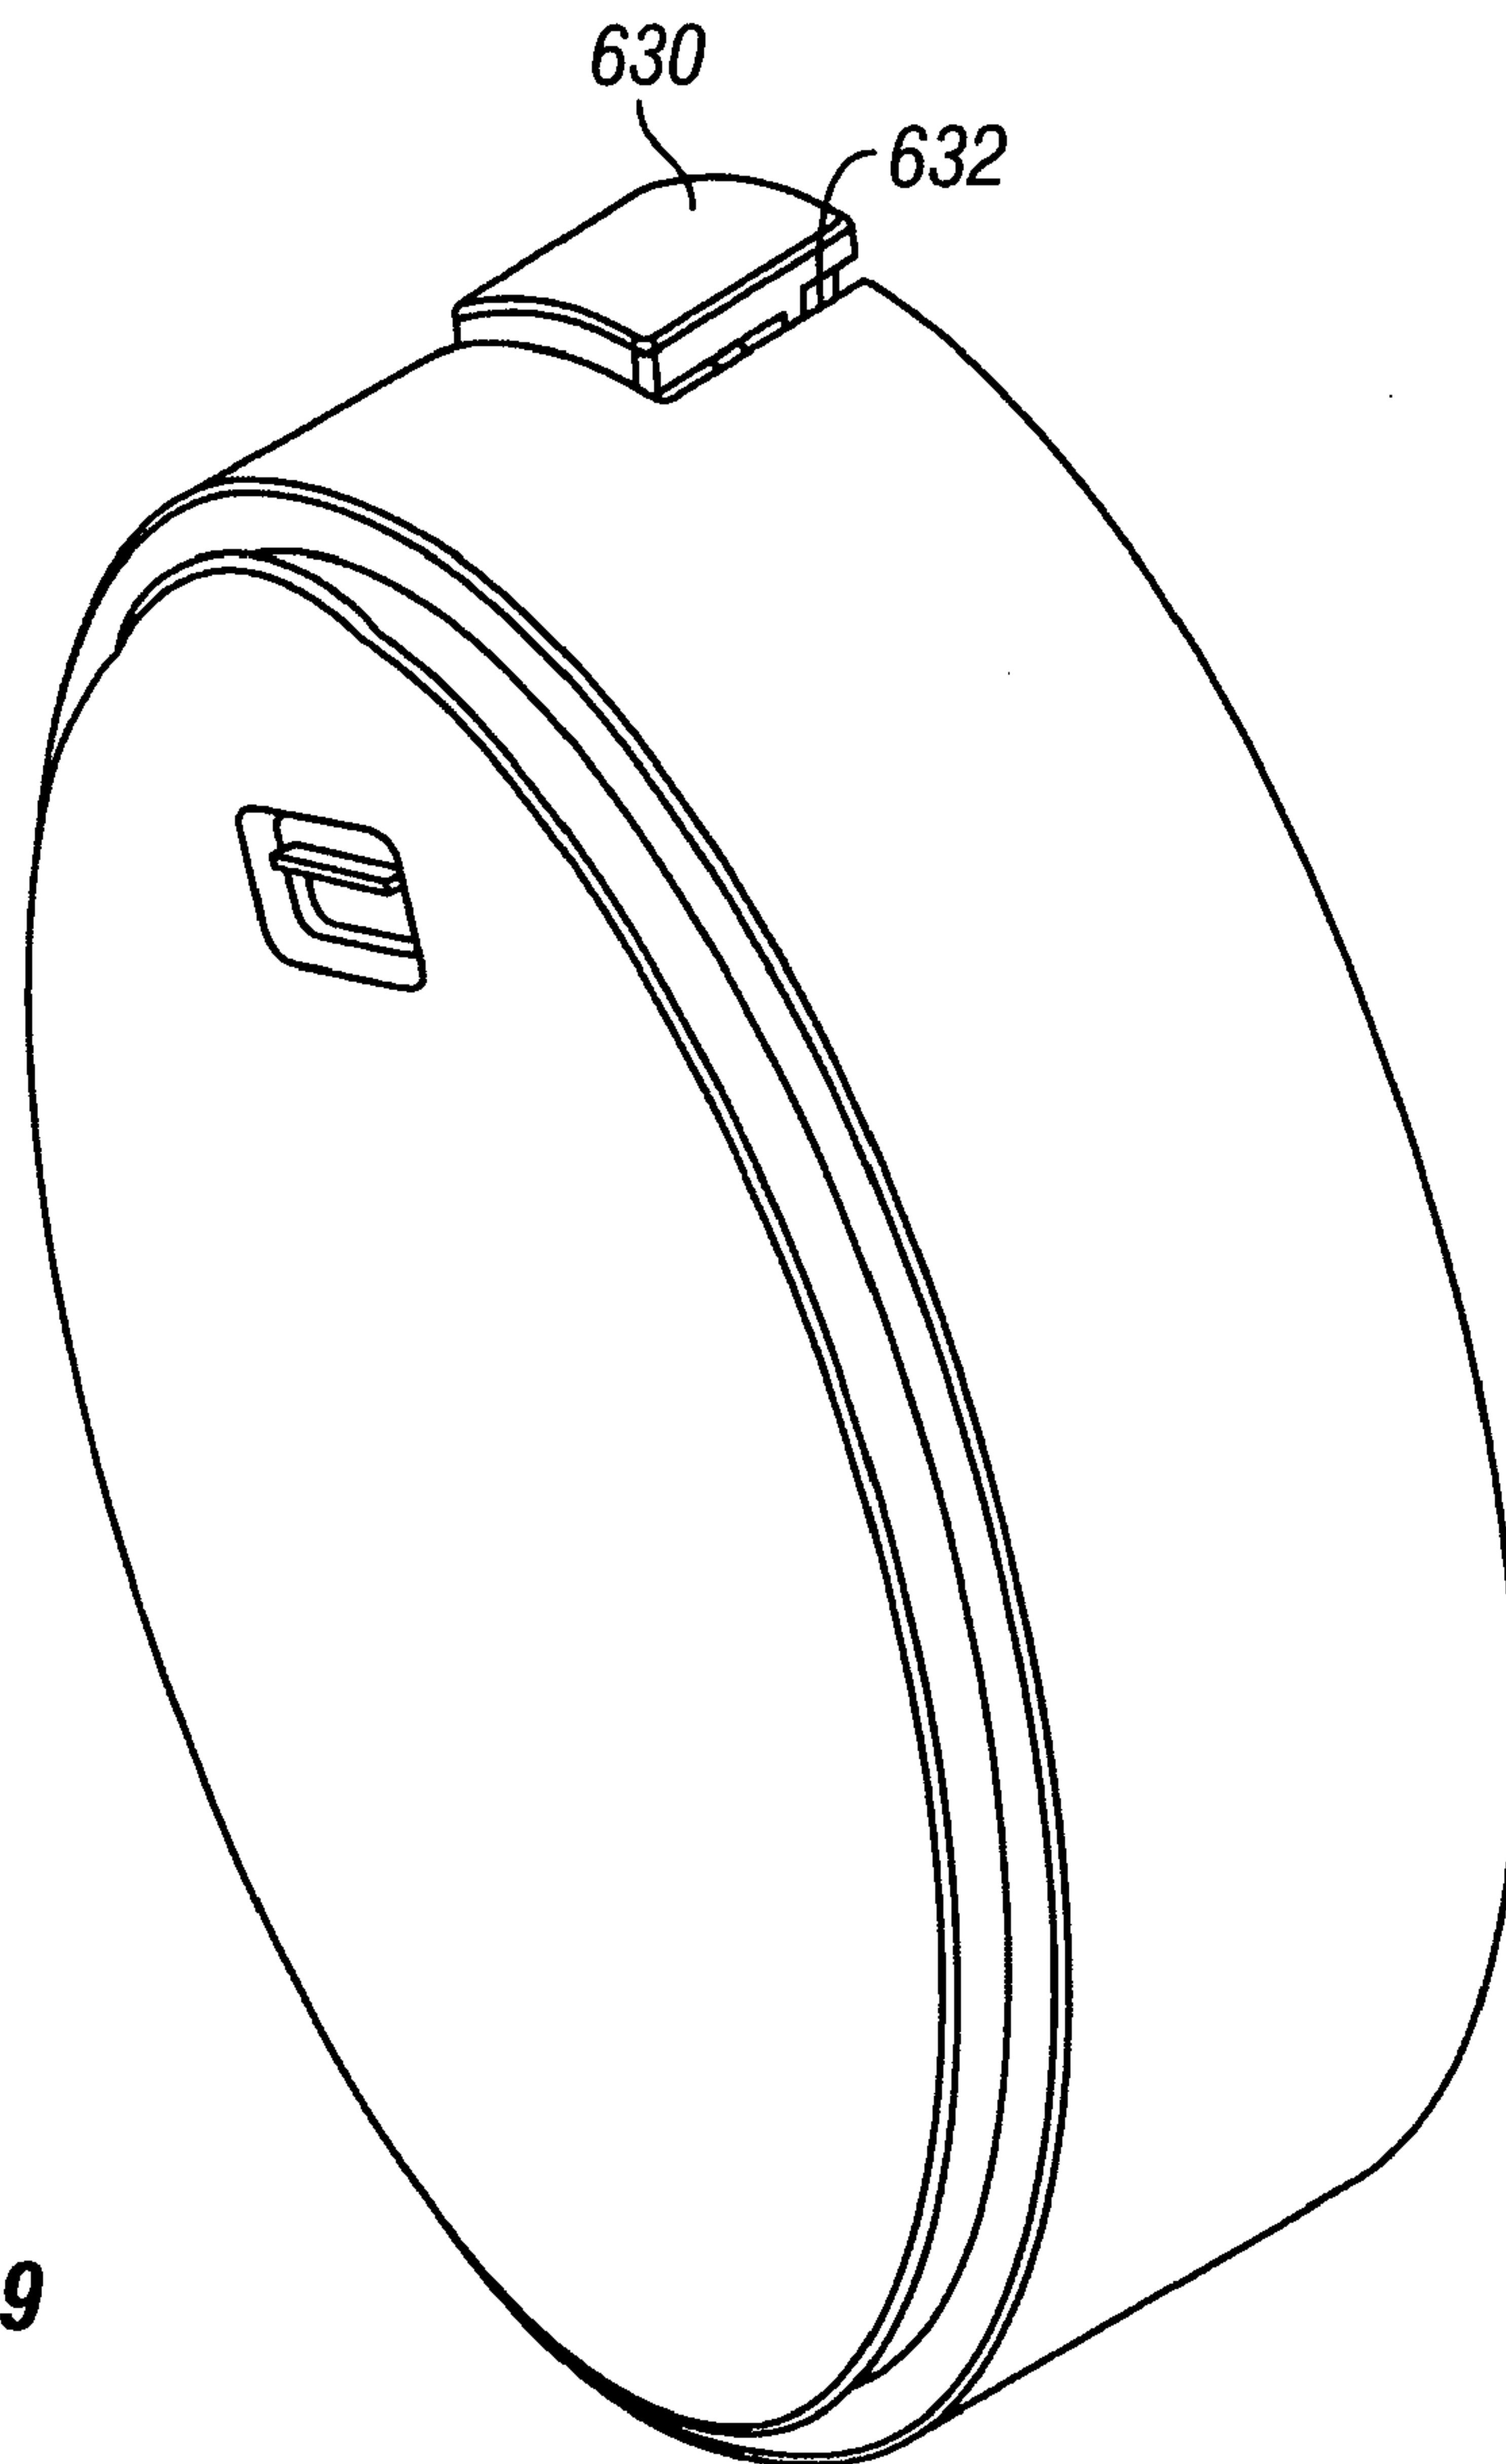


FIG. 9

9/9**FIG. 10**

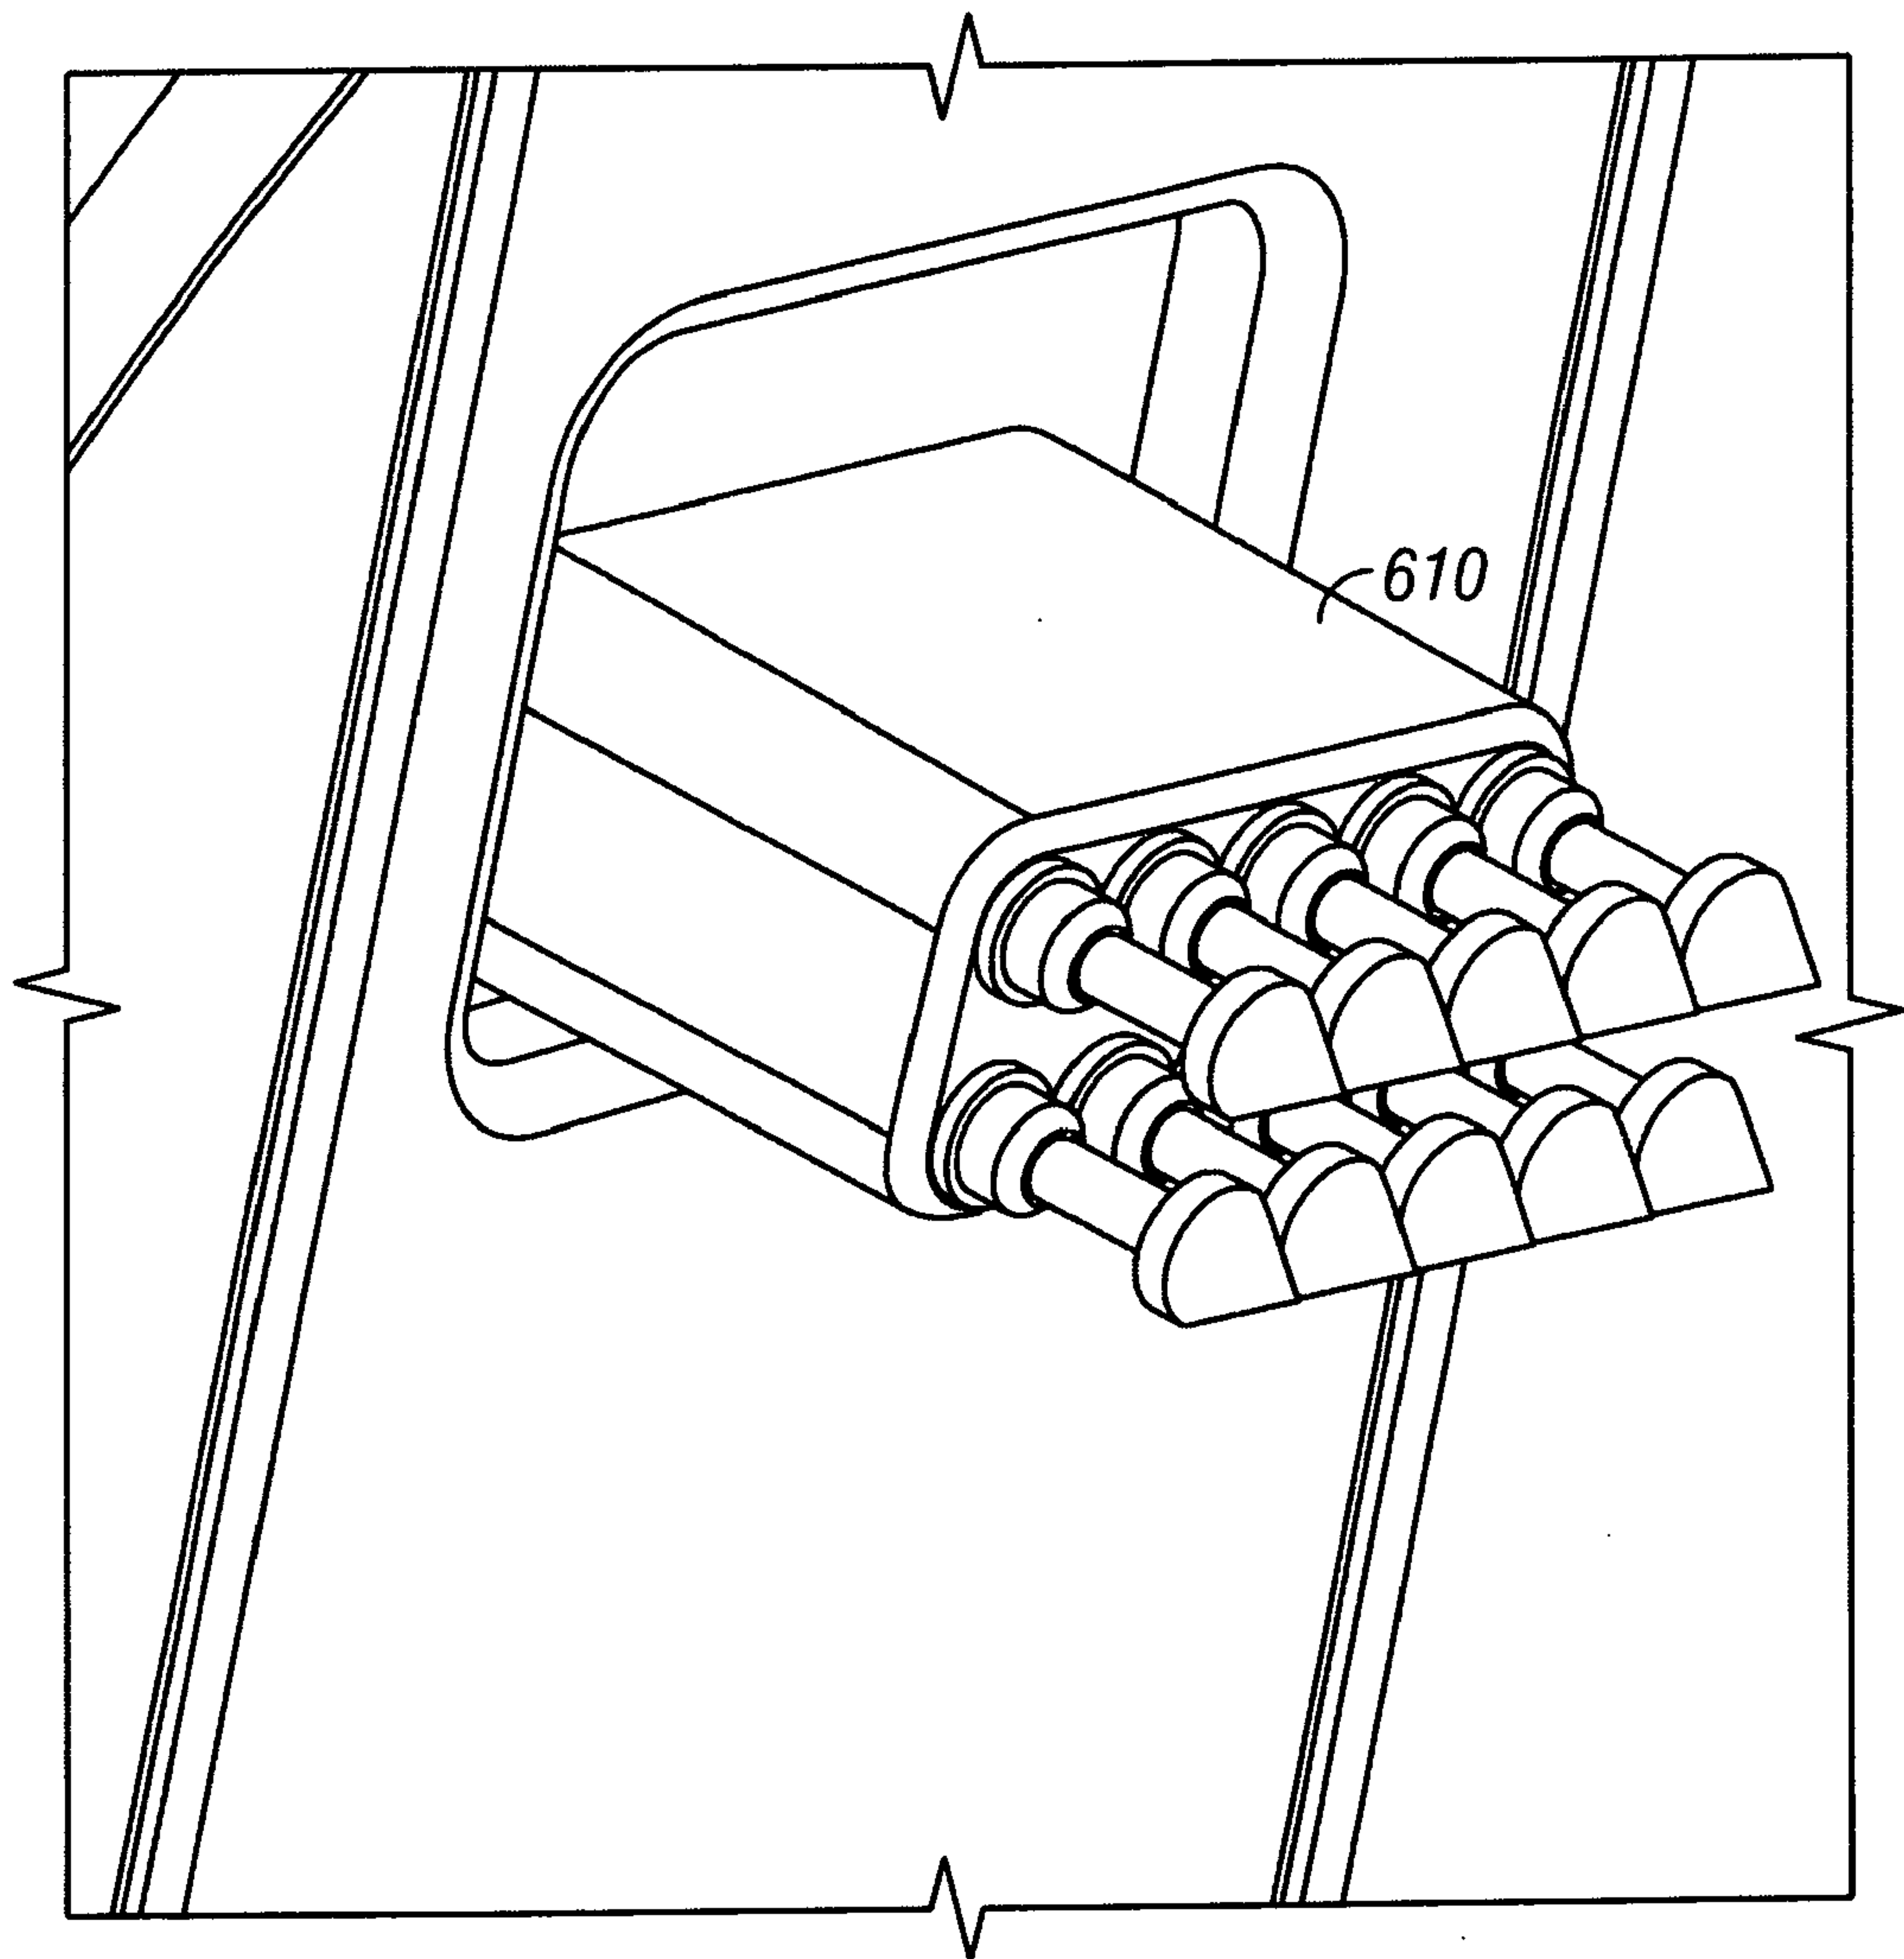