



(51) International Patent Classification:

E21B 31/06 (2006.01) E21B 47/092 (2012.01)
E21B 33/072 (2006.01)

(21) International Application Number:

PCT/US2022/011158

(22) International Filing Date:

04 January 2022 (04.01.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17/141,417 05 January 2021 (05.01.2021) US

(71) Applicant: SAUDI ARABIAN OIL COMPANY
[SA/SA]; 1 Eastern Avenue, Dhahran, 31311 (SA).

(71) Applicant (for AG only): ARAMCO SERVICES COMPANY [US/US]; Law Department, Two Allen Center, 1200 Smith St., 27th Floor, Houston, TX 77002 (US).

(72) Inventors: AL AHMARI, Abdulrahman; Saudi Arabian Oil Company, P.O. Box 4672, Saudi Aramco, Dhahran,

31311 (SA). AL DABBOUS, Mohammed; Saudi Arabian Oil Company, P.O. Box 7379, Unit 2-Saudi Aramco, Qatif, 32636-2988 (SA).

(74) Agent: RHEBERGEN, Constance, Gall; Bracewell LLP, P.O. Box 61389, Houston, TX 77208-1389 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: REMOVAL OF DOWNHOLE FERROMAGNETIC DISK

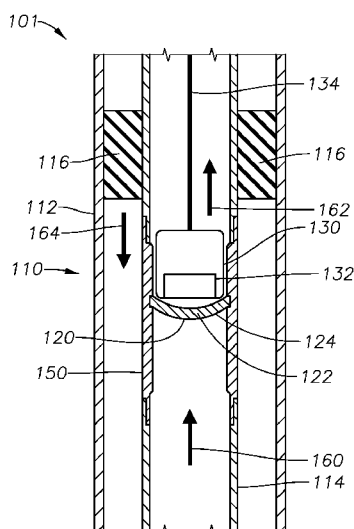


FIG. 1A

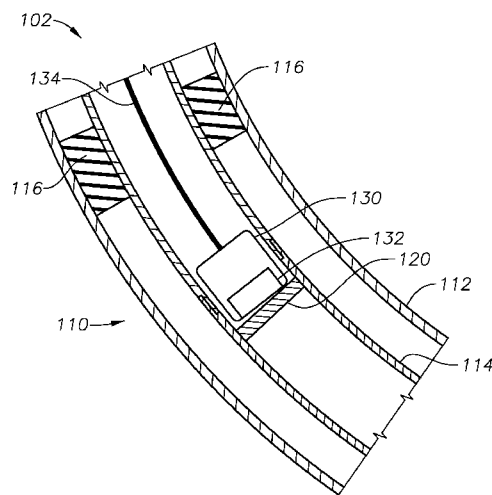


FIG. 1B

(57) Abstract: Methods and systems are provided for dislodging a ferromagnetic disk removably installed in a wellbore. The disk can be installed in the wellbore during oil and gas well completion and production activities to maintain pressure within the wellbore. More specifically, the disclosure relates to using a strong magnet installed within a magnetic tool to dislodge and remove a ferromagnetic disk without breaking the disk. The strong magnet can be a neodymium magnet, electromagnet, or other types of strong magnets.

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

PCT PATENT APPLICATION**REMOVAL OF DOWNHOLE FERROMAGNETIC DISK****FIELD**

[0001] This disclosure relates to systems and methods for downhole tool removal. More specifically, this disclosure relates to removing a ferromagnetic disk installed in a wellbore.

BACKGROUND

[0002] During hydrocarbon well drilling and completion activities, production casing and production tubing is installed in a wellbore. Prior to production packer installation, disks – often ceramic disks – are installed within the wellbore to maintain pressure and isolate the production tubing for wellbore operations. Once production packers are installed in the production casing, the disk is broken so that well flowback operations can begin. Ceramic disks are a substantial expense.

[0003] Ceramic disks are generally ruptured with milling tools directed downhole with coiled tubing. Milling tools are drill-like tools that mechanically destroy the disk, so that the disk cannot be reused. Ceramic disks can also be broken by go-devils or dropping tools down the wellbore. The conventional method of milling or breaking the ceramic disks results in the use of heavy equipment, takes substantial time and energy, and results in debris formation in the wellbore. The conventional method of milling or breaking the ceramic disks can also result in complications related to coil tubing or debris getting locked-up (or stuck) within a wellbore, or breakage of heavy equipment. Additionally, it can take substantial time and energy to lower tools downhole, and other downhole operations may not be able to be performed downhole when the milling or tool drop is being performed, or when the tools are lowered downhole. Due to the

long tool transit time downhole and due to the risk of damage or lock-up from lowering and raising downhole tools through the wellbore, performing more than one tasks with the same tools or during a tool run is advantageous. Therefore, additional methods of removing disks installed downhole are desired, including methods performing multiple tasks with the same apparatus.

SUMMARY OF THE INVENTION

[0004] Disclosed herein are methods and systems for removing downhole, ferromagnetic disks from wellbores. The ferromagnetic disks can be installed in a wellbore during wellbore operations. The wellbore operations can include packer installation, wellbore isolation sub installation, logging operations, or other well completion or production activities. The ferromagnetic disks include an core containing iron and a coating containing a protective coating. The ferromagnetic disks can be installed in wellbore nipples, landing nipples, sealing sections of wellbore production piping, wellbore subs, or other sections of the production piping or casing of the wellbore. The ferromagnetic disks can be installed using conventional tools including wireline and slickline tools.

[0005] More specifically, the disclosure relates to lowering a magnetic tool containing an industrial strength, strong magnet down a wellbore. The strong magnet in the magnetic tool removably attaches to the ferromagnetic disk, and when force is applied, the ferromagnetic disk can be dislodged from the wellbore casing or the wellbore tubing.

[0006] Therefore, disclosed is a method of dislodging a ferromagnetic disk removably installed in a wellbore having a wellbore environment. The method includes the step of lowering a magnetic tool down a wellbore. The magnetic tool includes a strong magnet operable to removably attach to the ferromagnetic disk with a magnetic force. The method also includes the step of attaching the strong magnet to the ferromagnetic disk with the magnetic force. The ferromagnetic disk includes a core and a coating, where the core includes iron and the coating include a protective coating shielding the core from exposure to the wellbore environment. The ferromagnetic disk is operable to maintain a desired wellbore pressure within the wellbore during a wellbore operation. The method also includes the step of applying a force through the magnetic tool containing the strong magnet, so that the force in combination with a wellbore pressure is operable to dislodge the ferromagnetic disk without breakage, where the ferromagnetic disk is removably attached to the strong magnet, so that the desired wellbore pressure is no longer maintained by the ferromagnetic disk and the ferromagnetic disk is recoverable from the wellbore in an unruptured state.

[0007] In some embodiments, the method also includes the step of removing the ferromagnetic disk from the wellbore with the magnetic tool. The ferromagnetic disk is reusable

in a plurality of wellbores. In some embodiments, the strong magnet is a neodymium magnet. The neodymium magnet has a maximum energy product greater than 35 mega gauss oersteds. In other embodiments, the strong magnet is an electromagnet.

[0008] In some embodiments, the method also includes the steps of removably attaching downhole debris to the magnetic tool, where the downhole debris includes a metal component attracted to the strong magnet; and removing the downhole debris from the wellbore.

[0009] In some embodiments, the strong magnet generates a magnetic field, and the method also includes the steps of measuring a magnetic field strength of the magnetic field in a receiver, generating magnetic field data, and correlating the magnetic field data to stress characteristics of the surrounding rock, so that the single run of the magnetic tool is operable to provide dual functionality of dislodging the ferromagnetic disk and collecting magnetic field data.

[0010] In some embodiments, the ferromagnetic disk is removably installed in a disk sub. In other embodiments, the ferromagnetic disk is removably installed in a nipple installed within the wellbore.

[0011] Further disclosed is a system for removing the ferromagnetic disk removably installed in the wellbore having the wellbore environment, where the system includes the ferromagnetic disk operable to maintain a wellbore pressure within the wellbore during a wellbore operation. The ferromagnetic disk includes the core and the coating, the core containing iron and the coating containing the protective coating shielding the core from exposure to the wellbore environment. The system also includes the magnetic tool containing the strong magnet. The magnetic tool is attached to a surface link. The surface link is operable to raise and lower the magnetic tool in the wellbore. The strong magnet is operable to generate a magnetic force to attract the ferromagnetic disk with breaking the ferromagnetic disk.

[0012] In some embodiments, the strong magnet is an electromagnet, and the surface link supplies electricity to activate or deactivate the electromagnet. The system can also include a receiver, and where the strong magnet generates a magnetic field, the receiver is operable to measure and interpret the magnetic field so that surrounding rock characteristic can be identified.

[0013] In some embodiments, the strong magnet is a neodymium magnet. The strong magnet has a maximum energy product greater than 35 mega gauss oersteds. In other

embodiments, the strong magnet has a maximum energy product greater than 42 mega gauss oersteds.

[0014] In some embodiments, the strong magnet as a pull force greater than a difference between a resulting downhole force and a resulting disk force, where the resulting disk force is a combination of forces operable to maintain the ferromagnetic disk in the wellbore.

[0015] In some embodiments, the ferromagnetic disk is installed in a nipple installed within the wellbore. The system can also include the ferromagnetic disk with an embedded electronic sensor operable to measure a wellbore parameter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] These and other features, aspects, and advantages of the present disclosure will become better understood with regard to the following descriptions, claims, and accompanying drawings. It is to be noted, however, that the drawings illustrate only several embodiments of the disclosure and are therefore not to be considered limiting of the scope as it can admit to other equally effective embodiments.

[0017] FIG. 1A is a schematic of a vertical wellbore ferromagnetic disk removal system, according to an embodiment.

[0018] FIG. 1B is a schematic of a horizontal wellbore ferromagnetic disk removal system, according to an embodiment.

[0019] FIG. 2 is a schematic of a ferromagnetic disk and debris removal system, according to an embodiment.

[0020] FIG. 3 is a schematic of a ferromagnetic disk removal system with receiver, according to an embodiment.

[0021] In the accompanying Figures, similar components or features, or both, can have a similar reference label. For the purpose of the simplified schematic illustrations and descriptions of FIGS. 1A through 3, the numerous pumps, valves, temperature and pressure sensors, electronic controllers, and the like that can be employed and well known to those of ordinary skill in the art are not included. Further, accompanying components that are in conventional industrial operations are not depicted. However, operational components, such as those described in the present disclosure, can be added to the embodiments described in this disclosure.

DETAILED DESCRIPTION OF THE INVENTION

[0022] While the disclosure will be described with several embodiments, it is understood that one of ordinary skill in the relevant art will appreciate that many examples, variations and alterations to the systems and methods described are within the scope and spirit of the disclosure. Accordingly, the embodiments of the disclosure described are set forth without any loss of generality, and without imposing limitations, on the claims.

[0023] Advantages of the present disclosure include a removal of the disk without damage, so that the ferromagnetic disk can be reused in other wellbores. The use of heavy downhole milling tools that can get stuck is avoided, as is the generation of downhole debris. Additionally, in some embodiments, the magnetic tool does not require electricity or power downhole. In some embodiments, the magnetic tool has a dual functionality as it is fitted with the receiver, allowing for information to be gathered regarding the composition of the surrounding rock formations, including measuring for authogenic rock formations. In some embodiments, the ferromagnetic disk is embedded with the electronic sensors, which can measure and store information on the wellbore parameters. The ferromagnetic disk is removed intact, so that the disk can be reused in other wellbores, providing cost savings.

[0024] Referring to FIG. 1A, vertical wellbore ferromagnetic disk removal system **101** is depicted. Wellbore **110** includes production casing **112** and production tubing **114**. Installed in the annulus between production casing **112** and production tubing **114** are packers **116**. Disk sub **150** is installed within production tubing **114**. In some embodiments, production tubing **114** is partially made of fiberglass. Disk sub **150** is an optional component. Disk sub **150** can be a component of a drillstring, or a type portion of piping in which a disk is installed either pre-production piping installation or post-production piping installation. Installed within disk sub **150** is ferromagnetic disk **120**. Ferromagnetic disk **120** can be installed using conventional tools including wireline and slickline tools. Once ferromagnetic disk **120** is installed, ferromagnetic disk **120** creates a barrier that can maintain pressure in wellbore **110**. Ferromagnetic disk **120** can be installed to maintain or hold pressure in wellbore **110** during a wellbore operation. The wellbore operation can include the installation of packers **116**. Ferromagnetic disk **120** can withstand and maintain wellbore pressures from 10 psi to 10,000 psi, and wellbore temperatures from 50 °F to 250 °F.

[0025] Ferromagnetic disk **120** contains core **122** and coating **124**. Core **122** contains an iron component, so that ferromagnetic disk **120** attracts magnets. In some embodiment, core **122** contains at least 60% iron, alternately at least 70% iron, alternately at least 80% iron, and alternately at least 90% iron. Coating **124** is a protective coating encompassing core **122** so that core **122** is not exposed to the wellbore environment, including corrosive wellbore components. Coating **124** can be any type of protective coating such as polymer or rubber. In some embodiments, ferromagnetic disk **120** includes electronic sensors in core **122** or coating **124**, which can monitor information on the wellbore environment, such as pressure and temperature, and store the information in micro-memory. Ferromagnetic disk **120** can be any type of disk capable of maintaining pressure in production tubing **114** while the wellbore operation is being performed. Ferromagnetic disk **120** is a semispheric shape. Ferromagnetic disk **120** can be a flat, plate-like disk wedged within production tubing **114** or otherwise installed within production tubing **114**. Ferromagnetic disk **120** can be any shape or size. In some embodiments, ferromagnetic disk **120** is a convex/concave shape, where the convex side faces the higher of the pressures within the wellbore. Ferromagnetic disk **120** can be installed by methods known in the art. Ferromagnetic disk **120** can be reusable in different wellbores.

[0026] Magnetic tool **130** is deployed by lowering into production tubing **114**. Magnetic tool **130** contains strong magnet **132** and is attached to surface link **134**. Surface link **134** can be coiled tubing, slick line, wire line, cable, string, tool line, any type of physical connection from magnetic tool **130** to the surface (not shown), or any combination of the same. Strong magnet **132** can be any type strong magnet available. Strong magnet **132** can be an electromagnetic, a neodymium magnet, or any other type of strong, industrial magnet. In some embodiments, strong magnet **132** has a maximum energy product of 35 mega gauss oersteds or greater. In some embodiments, strong magnet **132** has a maximum energy product of about 42 mega gauss oersteds or greater. In some embodiments, strong magnet **132** has a maximum energy product of about 52 mega gauss oersteds or greater. Strong magnet **132** generates a magnetic field and a magnetic force that attracts iron-containing objects. In embodiments where strong magnet **132** is an electromagnetic, surface link **134** contains power lines to transfer power to the electromagnet.

[0027] The lowering of magnetic tool **130** can be performed by method known in the art, such as coiled tubing, slick line, wire line, or tractors. Surface link **134** can be used to lower magnetic tool **130**. Magnetic tool **130** is lowered into wellbore **110** towards ferromagnetic disk

120. The exact depth of ferromagnetic disk **120** in wellbore **110** or the exact depth magnetic tool **130** is lowered in wellbore **110** can be determined by methods known in the art, such as case coil lock. Magnetic tool **130** is lowered into wellbore **110** either making contact with ferromagnetic disk **120** so that magnetic tool **130** removably attaches to ferromagnetic disk **120**. In some embodiments, magnetic tool **130** is in close proximity to making contact with ferromagnetic disk **120** so that the distance between magnetic tool **130** and ferromagnetic disk **120** is less than about 6 inches, alternately less than about 3 inches, alternately less than about 1 inch.

[0028] Magnetic tool **130** removably attaches to ferromagnetic disk **120** and as magnetic tool **130** is raised, strong magnet **132** generates pull force **162**. Pull force **162** is the amount of force applied through magnetic tool **130** and surface link **134** to generate enough upward force, along with resulting downhole force **160**, to overcome resulting disk force **164** which is holding ferromagnetic disk **120** in place so that ferromagnetic disk **120** can be dislodged from disk sub **150**. Resulting downhole force **160** can result from the amount of force generated by the wellbore fluids or wellbore pressure. Ferromagnetic disk **120** remains unbroken and in an unruptured state. The summation of pull force **162** and resulting downhole force **160** must be greater than resulting disk force **164**; however, the difference between the resulting downhole force **160** and resulting disk force **164** must not exceed the breakaway force of strong magnet **132**, otherwise magnetic tool **130** exerting pull force **162** will break away from ferromagnetic disk **120**. Therefore, the breakaway force of strong magnet **132** must exceed pull force **162**.

[0029] Magnetic tool **130** can then be pulled to the surface (not shown) through wellbore **110** with ferromagnetic disk **120** removably attached to strong magnet **132**. Ferromagnetic disk **120** can be reused in a second wellbore. Ferromagnetic disk **120** can also be retested, refurbished, or both before reuse in the second wellbore.

[0030] Referring now to FIG. 1B, horizontal wellbore ferromagnetic disk removal system **102** is depicted, and shares many of the same elements and characteristics of vertical wellbore ferromagnetic disk removal system **101**. In some embodiments, ferromagnetic disk **120** is installed in the vertical portion of the horizontal wellbore, or in the substantially vertical portion of the horizontal wellbore.

[0031] Referring to FIG. 2, ferromagnetic disk and debris removal system **201** is depicted, and shares many of the same elements and characteristics of vertical wellbore ferromagnetic disk

removal system **101**. Advantageously, ferromagnetic disk and debris removal system **201** has a dual functionality when deployed in wellbore **110**. Debris **240** is located within wellbore **110**. Debris **240** includes iron containing debris, such as pieces of downhole tools, metal shavings, screws, or other objects. Debris **240** removably attaches to magnetic tool **130**. As magnetic tool **130** is removed from wellbore **110**, debris **240** is removed with magnetic tool **130**. In some embodiments, ferromagnetic disk **120** can be removed along with debris **240**.

[0032] Ferromagnetic disk **120** is installed in wellbore **110** in nipple **252**. Nipple **252** is a completion component that provides a sealing area and a locking profile (not pictured). Nipple **252** is used in wellbore **110** for the installation of ferromagnetic disk **120**. Nipple **252** can be a landing nipple, and can include a sealing area with a locking profile that locks ferromagnetic disk **120** in place. The locking profile can have mechanisms that hold ferromagnetic disk **120** in place during wellbore operations. The mechanisms in the locking profile can then deactivate so that ferromagnetic disk **120** is no longer locked into place in nipple **252**, and can be released by magnetic tool **130**. In some embodiments, nipple **252** is only a restriction and does not include a locking mechanism.

[0033] Referring to FIG. 3, ferromagnetic disk removal system with receiver **301** is depicted, and shares many of the same elements and characteristics of vertical wellbore ferromagnetic disk removal system **101**. Advantageously, ferromagnetic disk removal system with receiver **301** has a dual functionality when deployed in wellbore **110**. Ferromagnetic disk removal system with receiver **301** includes receiver **360** which is attached to surface link **134**. Receiver **360** measures and interprets the magnetic field strength (H) of the magnetic field generated by strong magnet **132**. Receiver **360** measures both the direction and magnitude of the magnetic field. Using a μ constant based on the type of fluid found in wellbore **110**, the flux density (B) of the magnetic field can be calculated. The magnetic field data can then be interpreted so that information on the surrounding rock formations outside of wellbore **110** can be gathered and correlated to stress characteristics over a specific area. This information can be used for authogenic rock identification.

[0034] Although the present disclosure has been described in detail, it should be understood that various changes, substitutions, and alterations can be made without departing from the

principle and scope of the disclosure. Accordingly, the scope of the present disclosure should be determined by the following claims and their appropriate legal equivalents.

[0035] The singular forms “a,” “an,” and “the” include plural referents, unless the context clearly dictates otherwise.

[0036] As used in the specification and in the appended claims, the words “has,” and “include” and all grammatical variations thereof are each intended to have an open, non-limiting meaning that does not exclude additional elements or steps.

[0037] Ranges may be expressed throughout as from about one particular value, or to about another particular value. When such a range is expressed, it is to be understood that another embodiment is from the one particular value or to the other particular value, along with all combinations within said range.

CLAIMS

What is claimed is:

1. A method of dislodging a ferromagnetic disk removably installed in a wellbore having a wellbore environment, the method comprising the steps of:

lowering a magnetic tool down the wellbore, the magnetic tool comprising a strong magnet operable to removably attach to the ferromagnetic disk with a magnetic force;

attaching the strong magnet to the ferromagnetic disk with the magnetic force, the ferromagnetic disk comprising a core and a coating, the core comprising iron and the coating comprising a protective coating shielding the core from exposure to the wellbore environment, the ferromagnetic disk operable to maintain a desired wellbore pressure within the wellbore during a wellbore operation; and

applying a force through the magnetic tool comprising the strong magnet, such that the force in combination with a wellbore pressure is operable to dislodge the ferromagnetic disk without breakage, the ferromagnetic disk being removably attached to the strong magnet, such that the desired wellbore pressure is no longer maintained by the ferromagnetic disk and the ferromagnetic disk is recoverable from the wellbore in an unruptured state.

2. The method of claim 1, further comprising the step of removing the ferromagnetic disk from the wellbore with the magnetic tool.

3. The method of any of claims 1 or 2, wherein the ferromagnetic disk is reusable in a plurality of wellbores.

4. The method of any of claims 1-3, wherein the strong magnet is a neodymium magnet.

5. The method of claim 4, wherein the neodymium magnet has a maximum energy product greater than 35 mega gauss oersteds.

6. The method of any of claims 1-3, wherein the strong magnet is an electromagnet.

7. The method of any of claims 1-6, further comprising the steps of:

removably attaching downhole debris to the magnetic tool, the downhole debris comprising a metal component attracted to the strong magnet; and

removing the downhole debris from the wellbore.

8. The method of any of claims 1-7, wherein the strong magnet generates a magnetic field, and further comprising the steps of:

measuring a magnetic field strength of the magnetic field in a receiver, generating magnetic field data; and

correlating the magnetic field data to stress characteristics of a surrounding rock such that a single run of the magnetic tool is operable to provide dual functionality of dislodging the ferromagnetic disk and collecting the magnetic field data.

9. The method of any of claims 1-8, wherein the ferromagnetic disk is removably installed in a disk sub.

10. The method of any of claims 1-8, wherein the ferromagnetic disk is removably installed in a nipple installed within the wellbore.

11. A system for removing a ferromagnetic disk removably installed in a wellbore having a wellbore environment, the system comprising:

the ferromagnetic disk operable to maintain a wellbore pressure within the wellbore during a wellbore operation, the ferromagnetic disk comprising a core and a coating, the core comprising iron and the coating comprising a protective coating shielding the core from exposure to the wellbore environment;

a magnetic tool comprising a strong magnet, the magnetic tool attached to a surface link, wherein the strong magnet is operable to generate a magnetic force to attract the ferromagnetic disk without breaking the ferromagnetic disk; and

the surface link operable to raise and lower the magnetic tool in the wellbore.

12. The system of claim 11, wherein the strong magnet is an electromagnet, and further wherein the surface link supplies electricity to activate or deactivate the electromagnet.

13. The system of any of claims 11 or 12, wherein the strong magnet generates a magnetic field, and further comprising a receiver operable to measure and interpret the magnetic field such that surrounding rock characteristics can be identified.

14. The system of any of claims 11 or 13, wherein the strong magnet is a neodymium magnet.

15. The system of any of claims 11-14, wherein the strong magnet has a maximum energy product greater than 35 mega gauss oersteds.

16. The system of claim 14, wherein the neodymium magnet has a maximum energy product of 42 mega gauss oersteds.

17. The system of any of claims 11-16, wherein the strong magnet has a pull force greater than a difference between a resulting downhole force and a resulting disk force, the resulting disk force a combination of forces operable to maintain the ferromagnetic disk in the wellbore.
18. The system of any of claims 11-17, wherein the ferromagnetic disk is installed in a nipple in the wellbore.
19. The system of any of claims 11-18, wherein the ferromagnetic disk comprises an embedded electronic sensor operable to measure a wellbore parameter.



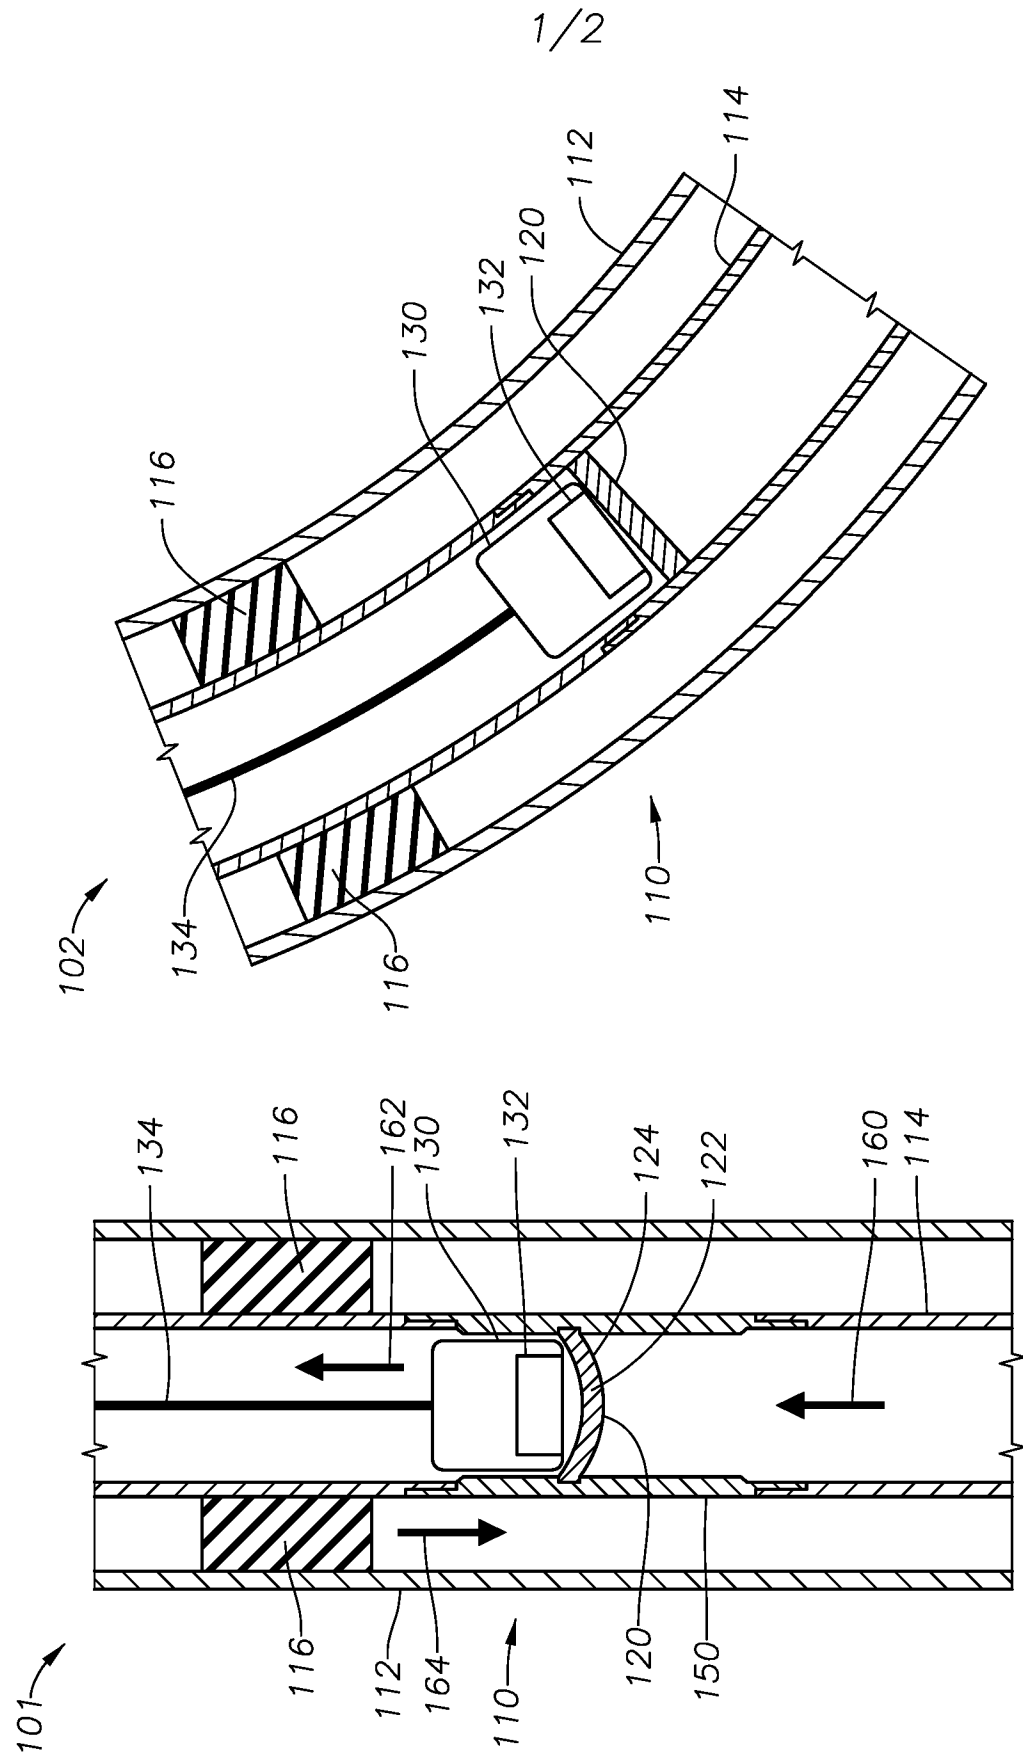


FIG. 1B

FIG. 1A

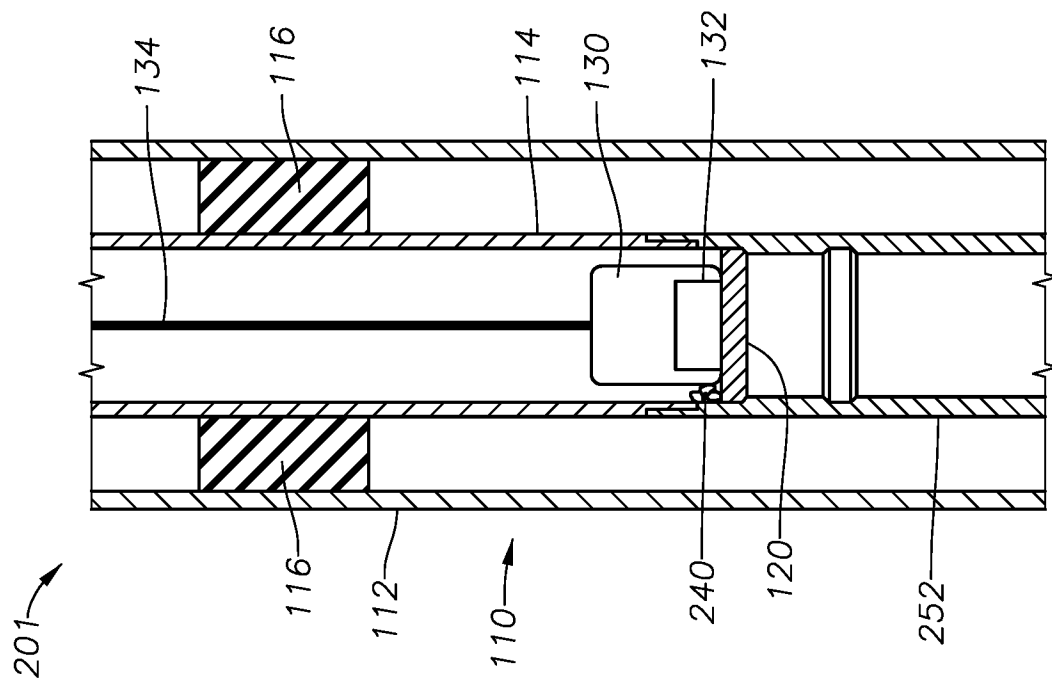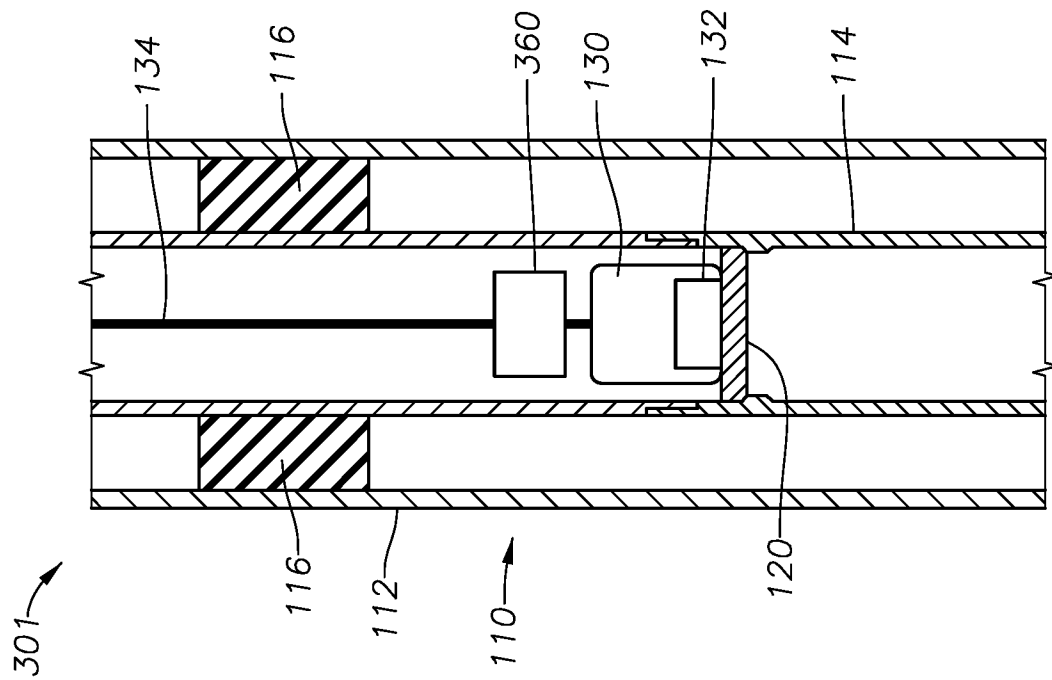

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2022/011158

A. CLASSIFICATION OF SUBJECT MATTER INV. E21B31/06 E21B33/072 E21B47/092 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) E21B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 10 669 813 B2 (GAS SENSING TECH CORP [US]) 2 June 2020 (2020-06-02) column 13, line 1 - line 23; figure 6 -----	1-19
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance;; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance;; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 18 February 2022		Date of mailing of the international search report 03/03/2022
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Strømmen, Henrik

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2022/011158

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 10669813	B2	02-06-2020	AU 2016311089 A1	01-02-2018
			US 2019010782 A1	10-01-2019
			US 2020291746 A1	17-09-2020
			WO 2017034977 A1	02-03-2017
