



(51) International Patent Classification:

B01D 69/02 (2006.01)

B01D 69/14 (2006.01)

B01D 69/12 (2006.01)

(21) International Application Number:

PCT/US2019/021780

(22) International Filing Date:

12 March 2019 (12.03.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/641,637

12 March 2018 (12.03.2018)

US

(71) Applicant: TERAPORE TECHNOLOGIES, INC.

[US/US]; 407 Cabot Road, South San Francisco, California 94080 (US).

(72) Inventors: **DORIN, Rachel M.**; c/o TeraPore Technologies, Inc., 407 Cabot Road, South San Francisco, California 94080 (US). **GU, Yibei**; c/o TeraPore Technologies, Inc., 407 Cabot Road, South San Francisco, California 94080 (US). **SHETHJI, Jayraj K.**; c/o TeraPore Technologies, Inc., 407 Cabot Road, South San Francisco, California 94080 (US). **ROBBINS, Spencer**; c/o TeraPore Technologies, Inc., 407 Cabot Road, South San Francisco, California 94080 (US).

(74) Agent: **DUNCAN, Cole**; Blank Rome LLP, 1825 Eye Street, NW, Washington, District of Columbia 20006 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

(54) Title: ISOPOROUS MESOPOROUS ASYMMETRIC BLOCK COPOLYMER MATERIALS WITH MACROVOIDS AND METHOD OF MAKING THE SAME

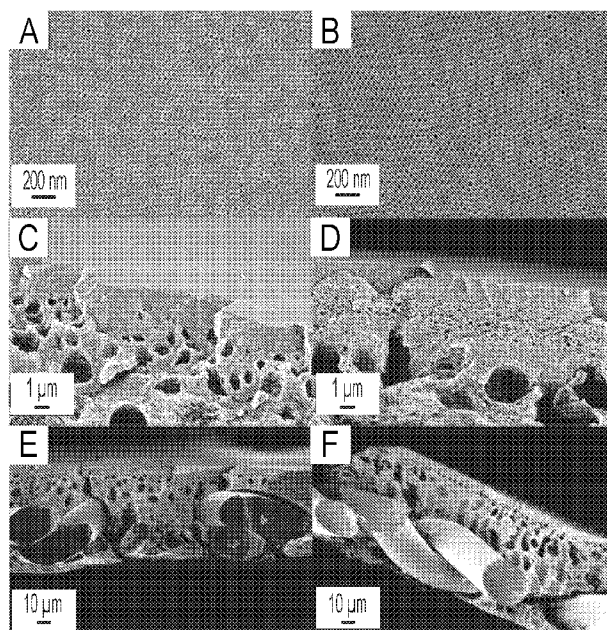


FIG. 1

(57) Abstract: A mesoporous isoporous asymmetric material includes at least one diblock or multiblock copolymer, wherein the material has a transition layer having a thickness of at least 300 nm and a low macrovoid density, and the material has a sub-structure adjacent to said transition layer and said sub-structure comprises a high macrovoid density. A method for producing mesoporous isoporous asymmetric materials having macrovoids can include: dissolving at least one diblock or multiblock copolymer in a solution, the solution having one or more solvents and one or more nonsolvents, to form a polymer solution; dispensing the polymer solution onto a substrate or mold, or through a die or template; removing at least a portion of solvent and/or nonsolvent from the polymer solution to form a concentrated polymer solution; and exposing the concentrated polymer solution to a nonsolvent causing precipitation of at least a portion of the polymer from the concentrated polymer solution.



KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Isoporous mesoporous asymmetric block copolymer materials with macrovoids and method of making the same

Cross Reference to Related Application

[0001] This application claims the benefit of U.S. Provisional Application No. 62/641,637 filed March 12, 2018, the entire contents of which are incorporated by reference herein.

Field of the Invention

[0002] Embodiments relate to diblock or multiblock copolymer based isoporous mesoporous asymmetric materials comprising macrovoids.

Background of the Invention

[0003] Mesoporous isoporous block copolymer materials are known and are useful due to their small, uniform pores. Combining an asymmetric structure with the mesoporous isoporous structure makes the materials very useful for high resolution, high flux separations wherein the mesoporous isoporous “skin” enables high resolution separations and the asymmetric structure enables high flux. The manufacturing of these materials, however, often results in macrovoids that are deemed undesirable. It is widely taught that macrovoids in membranes are undesirable as they cause mechanical weakness and can breach the skin causing defects.

[0004] Abetz 2014a and Abetz 2015 teach about self-assembled diblock copolymer membranes made with solvent mixtures primarily based on tetrahydrofuran (THF) and dimethylformamide (DMF) at different ratios with various poly(styrene-*block*-4-vinylpyridine) polymers at multiple concentration (19 to 35 wt%) and short evaporation windows (5-10 s). No macrovoids are shown in the materials’ structures in the library of conditions explored. Abetz 2014b also characterizes the adsorption of lysozyme protein near its isoelectric point (11.4). However, these membranes demonstrate more than 120 $\mu\text{g}/\text{cm}^2$ in lysozyme adsorption and it teaches that the lysozyme adsorption is independent of the membrane pore size and polymer used for the membrane formation.

[0005] Besides the well-known typically DMF/THF solvent composition, diblock copolymer membranes from solvents combination of: 1,4-dioxane (DOX)/THF, DOX/DMF, DOX/THF/DMF are also taught in Abetz 2012, Abetz 2014b, Abetz 2015, Abetz 2017, Peinemann 2010, Peinemann 2011, and Peinemann 2014a.

[0006] A method of forming isoporous membranes with a sponge-like structure based on self-assembly of block copolymers is described by Peinemann & Abetz 2007 (also see '694 application'). However, none of the structures include macrovoids. Additionally, in Peinemann & Nunes 2012, it is taught in paragraph [0011] that "The method (694 application) has been difficult to reproduce. When the procedure described in the '694 application is applied to commercially available purified block copolymers it does not lead to isoporous membranes." Peinemann & Nunes 2012 also does not include the macrovoid structural feature. While the 694 application states that "Optionally, the casting solution can also contain one or more non-solvents for the block copolymer in addition to a solvent," no mention of expected outcome is discussed.

[0007] Peinemann 2014b teaches a DMF/DOX/Acetone (24 wt%/42 wt%/16 wt%) solvent composition to make diblock copolymer membranes. However, the membranes made from this solution do not comprise macrovoids or a transition layer.

[0008] Table of Related Art

Abetz 2014a	Self-organized isoporous membranes with tailored pore sizes, <i>Journal of Membrane Science</i> , 451, 2014 266-275
Abetz 2015	Performance Study of Isoporous membranes with tailored pore sizes, <i>Journal of Membrane Science</i> , 495, 2015, 334-340
Abetz 2014b	Protein separation performance of self-assembled block copolymer membranes, <i>RSC Advances</i> , 2014, 4, 10252-10260

Peinemann 2010	Ultraporous Films with Uniform Nanochannels by Block Copolymer Micelles Assembly, <i>Macromolecules</i> , 43, 2010, 8079-8085
Peinemann 2011	From Micelle Supramolecular Assemblies in Selective Solvents to Isoporous Membranes. <i>Langmuir</i> 2011, 27, 10184–10190
Peinemann 2014a	Time-Resolved GISAXS and Cryo-Microscopy Characterization of Block Copolymer Membrane Formation. <i>Polymer</i> 2014, 55, 1327–1332
Abetz 2012	Structure Formation of Integral Asymmetric Composite Membranes of Polystyrene-block-Poly(2-vinylpyridine) on a Nonwoven, <i>Macromolecular Materials and Engineering</i> , 2012, 297, 790-798
Abetz 2017	Influence of Solvent on the Structure of an Amphiphilic Block Copolymer in Solution and in Formation of an Integral Asymmetric Membrane, <i>ACS Applied Materials & Interfaces</i> , 9, 37, 2017 31224-31234
Peinemann & Abetz 2007	Asymmetric superstructure formed in a block copolymer via phase separation, <i>Nature Materials</i> 6, 2007, 992-996
Peinemann & Abetz 2009, or 694 application	US2009/0173694A1
Peinemann & Nunes 2012	US2012/0318741A1
Peinemann 2014b	Block Copolymer/Homopolymer Dual-Layer Hollow Fiber Membranes, <i>Journal of Membrane Science</i> , 427, 2014, 39-44

Brief Description of Drawings

[0009] **Fig. 1** is scanning electron microscopy (SEM) images of disclosed materials of Example 1. Fig. 1a, 1c, 1e: materials made from SV168 in 1,4-dioxane/acetone (80/20 wt% solvent composition) polymer solution. Figs. 1b, 1d, 1f: materials made from SV168 in 1,4-dioxane/acetone (60/40 wt% solvent composition) polymer solution. Figs 1a, 1b.: isoporous mesoporous materials; Figs. 1c, 1d: cross-sectional structures near the isoporous mesoporous skin; Figs. 1e, 1f: overall cross-sectional structures.

[0010] **Fig. 2** is scanning electron microscopy (SEM) images of disclosed materials of Example 1. Figs. 2a and 2d show a film where: SV168 is dissolved in 10 wt% polymer concentration in DOX/ACE (70 wt%/30 wt% solvent composition) 60 s evaporation time; Figs. 2b and 2e show a film where: SV221 is dissolved in 10 wt% polymer concentration in DOX/ACE (60 wt%/40 wt% solvent composition) 45 s evaporation time; Figs. 2c and 2f show

a film where: SV273 is dissolved in 10 wt% polymer concentration in DOX/ACE (60 wt%/40 wt% solvent composition), 45 s evaporation time. Figs. 2a, 2b, 2c: isoporous mesoporous skin; Figs. 2d, 2e, 2f: cross-sectional structures near the isoporous mesoporous skin.

[0011] **Fig. 3** is scanning electron microscopy (SEM) images of comparative examples of Example 1, lacking both macrovoids and a transition layer. Figs. 3a and 3c show a film where: SV168 is cast from 17 wt% polymer concentration in DMF/THF/DOX (33.3 wt%/33.3 wt%/33.3 wt% solution composition) and evaporated for 40s. Figs. 3b and 3d show a film where: SV168 is cast from 19 wt% polymer concentration in DMF/THF (40 wt%/60 wt% solution composition) and evaporated for 20 s. Figs. 3a and 3b skin layer; Figs. 3c and 3d: overall cross-sectional structures.

[0012] **Fig. 4** is photographs of disclosed and comparative example from Example 1. Innovative example material (Fig 4a) with macrovoids and transition layer integrating into a porous support versus comparative example (Fig. 4b) material without macrovoids or transition layer.

[0013] **Fig. 5** is a graph displaying the amount of protein adsorption of materials according to various aspects of the present disclosure.

Detailed Description of the Invention

[0014] The following description of the embodiments is merely exemplary in nature and is in no way intended to limit the subject matter of the present disclosure, their application, or uses.

[0015] As used throughout, ranges are used as shorthand for describing each and every value that is within the range. Any value within the range can be selected as the terminus of the range.

[0016] For the purposes of this specification and appended claims, unless otherwise indicated, all numbers expressing quantities, percentages or proportions, and other numerical values used in the specification and claims, are to be understood as being modified in all instances by the term “about.” The use of the term “about” applies to all numeric values, whether or not

explicitly indicated. This term generally refers to a range of numbers that one of ordinary skill in the art would consider as a reasonable amount of deviation to the recited numeric values (i.e., having the equivalent function or result). For example, this term can be construed as including a deviation of ± 10 percent, alternatively ± 5 percent, and alternatively ± 1 percent of the given numeric value provided such a deviation does not alter the end function or result of the value. Accordingly, unless indicated to the contrary, the numerical parameters set forth in this specification and attached claims are approximations that can vary depending upon the desired properties sought to be obtained by the present invention.

[0017] It is noted that, as used in this specification and the appended claims, the singular forms “a,” “an,” and “the,” include plural references unless expressly and unequivocally limited to one referent. As used herein, the term “include” and its grammatical variants are intended to be non-limiting, such that recitation of items in a list is not to the exclusion of other like items that can be substituted or added to the listed items. For example, as used in this specification and the following claims, the terms “comprise” (as well as forms, derivatives, or variations thereof, such as “comprising” and “comprises”), “include” (as well as forms, derivatives, or variations thereof, such as “including” and “includes”) and “has” (as well as forms, derivatives, or variations thereof, such as “having” and “have”) are inclusive (i.e., open-ended) and do not exclude additional elements or steps. Accordingly, these terms are intended to not only cover the recited element(s) or step(s), but may also include other elements or steps not expressly recited. Furthermore, as used herein, the use of the terms “a” or “an” when used in conjunction with an element may mean “one,” but it is also consistent with the meaning of “one or more,” “at least one,” and “one or more than one.” Therefore, an element preceded by “a” or “an” does not, without more constraints, preclude the existence of additional identical elements.

[0018] The present disclosure relates to an isoporous mesoporous block copolymer asymmetric material comprising a transition layer and further comprising macrovoids. Embodiments disclosed herein also relate to methods of producing said materials. The disclosed materials

show remarkably low protein adsorption and integrate with porous supports. Comparable materials lacking both macrovoids and a transition layer show much higher protein adsorption and do not integrate with porous supports, both of which are undesirable.

[0019] In the context of the disclosure, isoporous means having a substantially narrow pore diameter distribution. For example, a narrow pore size distribution. In the context of the disclosure, mesoporous means the pore diameters ranges from 1 nm to 200 nm. One surface of the material disclosed comprises isoporous mesopores, which is the selective layer, or “skin”. In the context of the disclosure, macroporous or macropore means that at least two pore dimensions are greater than 1 micron. In the context of the disclosure, freestanding means not integrally joined with a porous support material.

[0020] In some embodiments, the materials comprise at least one diblock copolymer or multiblock copolymer, having a structure in the form of A-B, B-A, B-A-B, A-B-A-B, B-A-B-A, or A-B-A, wherein A and B represent two distinct types of block chemistries. In a preferable embodiment, A is a hydrophilic and/or hydrogen-bonding block and B is a hydrophobic block. Suitable hydrogen-bonding and/or hydrophilic blocks include, but are not limited to, polyvinylpyridines, polyethylene oxides, polyacrylic acids, poly(hydroxystyrene), polyacrylates and polymethacrylates, substituted polyacrylates and polymethacrylates. More specific examples of hydrophilic blocks include: poly(acrylic acid), poly(acrylamide), poly(vinylpyridine), poly(vinylpyrrolidone), poly(vinyl alcohol), naturally derived polymers such as cellulose and chitosan, poly(ether), poly(maleic anhydride), poly(N-isopropylacrylamide), poly(styrene sulfonate), poly(allylhydrochloride), poly(sulfone), poly(ethersulfone), poly(ethylene glycol), poly(2-hydroxyethyl methacrylate). More specific examples of hydrogen-bonding blocks include: poly(vinylpyridine), poly(ethylene oxide), poly(methacrylate), poly(methyl methacrylate), poly(dimethylethyl amino ethyl methacrylate), poly(dimethylaminoethyl methacrylate) poly(acrylic acid), poly(hydroxystyrene), poly(dimethylacrylamide). Suitable hydrophobic blocks can include, but are not limited to,

polystyrenes, e.g., polystyrene and poly(alkyl substituted styrene) such as poly(alpha-methyl styrene), polypropylenes, poly(vinyl chlorides), polybutadiene, poly(isoprene), poly(ethylene-*stat*-butylene), poly(ethylene-*alt*-propylene), and polytetrafluoroethylenes. Furthermore, substituted analogues of the above are suitable.

[0021] The materials' cross-sectional structures are asymmetric, wherein the average pore size increases as the distance from the skin increases. More specifically, in some embodiments the skin of the material comprises mesoporous isopores, and as the distance from this layer increases, the average pore size increases. The pore density can be in the range of at least 10^{13} pores/m² to at least 10^{14} pores/m².

[0022] Macrovoids, or macropores, are pores with at least one characteristic length substantially larger than the typical size of the surrounding pores. For the purpose of describing the disclosed invention, we define a macrovoid or macropore as a void with at least one characteristic length greater than about 0.5 micron. Typical shapes of macrovoids can be, but are not limited to, the following:

- a. Spherical: approximately spheroidal void structures with approximate diameter of at least about 0.5 micron.
- b. Tear-like: void structures with at least two distinctly different characteristic lengths and at least two characteristic lengths greater than 0.5 micron. These void structures include, but are not limited to structures resembling a tear drop, pear-like or piriform shapes, and bell-like shapes.
- c. Finger-like: void structures with at least two dimensions greater than 0.5 micron and an aspect ratio greater than 3.

[0023] The isoporous mesoporous materials also comprise a transition layer with a thickness of at least about 300 nm wherein there is a low macrovoid density and one surface comprises the mesoporous isoporous "skin". A low macrovoid density means a ratio of macrovoids to mesopores of at most 2×10^{-9} . For example, for a typical mesoporous isoporous

diblock material skin pore density of 10^{14} pores/m², this correlates to 2×10^5 macrovoids/m². This transition layer extends onto an adjacent sub-structure with a thickness of about 1 micron to about 500 microns. The macrovoids are present at high density in the sub-structure layer compared to the transition layer. A high macrovoid density means at least 10^6 macrovoids/m². This high macrovoid density is significantly higher than the low macrovoid density of the transition layer. With a low macrovoid density within at least about 300 nm of the skin, it will reduce the fracturing resulting from the macrovoids, and enhance the overall mechanical integrity. Furthermore, the distance from the mesoporous isoporous skin can mitigate top surface defects caused by macrovoids intersecting the skin and can prevent any skin defects from propagating into the sub-structures.

[0024] In at least one embodiment, the transition layer is at least about 300 nm. In at least one embodiment, the transition layer is at least about 350 nm. In at least one embodiment, the transition layer is at least about 400 nm. In at least one embodiment, the transition layer is at least about 450 nm. In at least one embodiment, the transition layer is at least about 500 nm.

[0025] In some embodiments of the material, the mesopores are in the range of about 1 nm to about 200 nm. In some embodiments, the mesopores are in the range of about 5 nm to about 200 nm. In some embodiments, the mesopores are in the range of about 5 nm to about 100 nm. In some embodiments, the mesopores are in the range of about 5 nm to about 50 nm.

[0026] In some applications, macrovoids may also be desired to reduce the amount of polymer needed for the material, making large-scale synthesis more practical while using less starting materials. In some embodiments, the mesoporous isoporous material is freestanding and has a dried density of less than about 0.26 g/cm³. In some embodiments, the mesoporous isoporous material is freestanding and has a dried density of less than about 0.22 g/cm³. In some embodiments, the mesoporous isoporous material is freestanding and has a dried density of less than about 0.20 g/cm³. In some embodiments, the mesoporous isoporous material is freestanding and has a dried density of less than about 0.18 g/cm³. In some embodiments, the

mesoporous isoporous material is freestanding and has a dried density of less than about 0.10 g/cm³. Area and mass measurements of the material can be measured on dried material and drying can be performed by heating in an oven at 65 °C for 48 h.

[0027] In some instances, a material in accordance with the present disclosure can be produced by a method comprising the following steps:

1. Dissolving at least one diblock or multiblock copolymer in a solution, the solution comprising at least one solvent and at least one nonsolvent to form a polymer solution;
2. Dispensing the polymer solution onto a substrate or mold, or through a die or template;
3. Removing at least a portion of solvent and/or nonsolvent from the polymer solution for at least 20 seconds to form a concentrated polymer solution;
4. Exposing the concentrated polymer solution to a nonsolvent causing precipitation of at least a portion of the dissolved polymer from the concentrated polymer solution; and
5. Optionally, washing the precipitated polymer product.

[0028] In some instances, a material in accordance with the present disclosure can be produced by a method comprising the following steps:

1. Dissolving at least one diblock or multiblock copolymer in a solution, the solution comprising at least 33% by weight of one solvent or a combination of solvents and at least 18% by weight of one nonsolvent or a combination of nonsolvents, to form a polymer solution;
2. Dispensing the polymer solution onto a substrate or mold, or through a die or template;
3. Removing at least a portion of solvent and/or nonsolvent from the polymer solution to form a concentrated polymer solution;

4. Exposing the concentrated polymer solution to a nonsolvent causing precipitation of at least a portion of the dissolved polymer from the concentrated polymer solution; and
5. Optionally, washing the precipitated polymer product.

[0029] In some instances, a mesoporous isoporous asymmetric material comprising macrovoids and a transition layer can be produced by a method comprising the following steps:

1. Dissolving at least one diblock or multiblock copolymer in a solution, the solution comprising at least 33% by weight of one solvent or a combination of solvents and at least 18% by weight of one nonsolvent or a combination of nonsolvents, to form a polymer solution;
2. Dispensing the polymer solution onto a substrate or mold, or through a die or template;
3. Removing at least a portion of solvent and/or nonsolvent from the polymer solution to form a concentrated polymer solution;
4. Exposing the concentrated polymer solution to a nonsolvent causing precipitation of at least a portion of the polymer from the concentrated polymer solution; and
5. Optionally, washing the precipitated polymer product.

[0030] In some instances, a mesoporous isoporous asymmetric material comprising macrovoids and a transition layer can be produced by a method comprising the following steps:

1. Dissolving at least one diblock or multiblock copolymer in a solution, the solution comprising at least one solvent and at least one nonsolvent with a polymer concentration of at most 16% by weight, to form a polymer solution;
2. Dispensing the polymer solution onto a substrate or mold, or through a die or template;

3. Removing at least a portion of solvent and/or nonsolvent from the polymer solution to form a concentrated polymer solution;
4. Exposing the concentrated polymer solution to a nonsolvent causing precipitation of at least a portion of the dissolved polymer from the concentrated polymer solution; and
5. Optionally, washing the precipitated polymer product.

[0031] In some instances, a material in accordance with the present disclosure can be produced by a method comprising the following steps:

1. Dissolving at least one diblock or multiblock copolymer in a solution, the solution comprising at least one solvent and at least one nonsolvent with a polymer concentration of at most 16% by weight, to form a polymer solution;
2. Dispensing the polymer solution onto a substrate or mold, or through a die or template;
3. Removing at least a portion of solvent and/or nonsolvent from the polymer solution to form a concentrated polymer solution;
4. Exposing the concentrated polymer solution to a nonsolvent causing precipitation of at least a portion of the dissolved polymer from the concentrated polymer solution; and
5. Optionally, washing the precipitated polymer product.

[0032] In some instances, a mesoporous isoporous asymmetric material comprising macrovoids and a transition layer can be produced by a method comprising the following steps:

1. Dissolving at least one diblock or multiblock copolymer in a solution, the solution comprising at least one solvent and at least one nonsolvent, to form a polymer solution;
2. Dispensing the polymer solution onto a substrate or mold, or through a die or template;

3. Removing at least a portion of solvent and/or nonsolvent from the polymer solution for at least 20 seconds to form a concentrated polymer solution;
4. Exposing the concentrated polymer solution to a nonsolvent causing precipitation of at least a portion of the polymer from the concentrated polymer solution; and
5. Optionally, washing the precipitated polymer product.

[0033] In some embodiments, the concentration of polymer in the polymer solution is from about 3 to 16% by weight. In at least one embodiment, the concentration of polymer in the polymer solution is from about 5 to about 16% by weight. In at least one embodiment, the concentration of polymer in the polymer solution is from about 10 to about 16% by weight. In at least one embodiment, the concentration of polymer in the polymer solution is from about 8 to about 16% by weight. In at least one embodiment of the above materials or methods, at least one diblock copolymer or multiblock copolymer is dissolved in step 1 of one of the above embodiments. In at least one embodiment, more than one diblock or multiblock copolymer is included in the polymer solution and/or material.

[0034] In some embodiments, at least a portion of the solvent(s) and/or nonsolvent(s) are removed from the polymer solution for at least about 20 seconds. In at least one embodiment, at least a portion of the solvent(s) and/or nonsolvent(s) are removed from the polymer solution for at least about 25 seconds. In at least one embodiment, at least a portion of the solvent(s) and/or nonsolvent(s) are removed from the polymer solution for at least about 30 seconds. In at least one embodiment, at least a portion of the solvent(s) and/or nonsolvent(s) are removed from the polymer solution for at least about 35 seconds. In at least one embodiment, at least a portion of the solvent(s) and/or nonsolvent(s) are removed from the polymer solution for at least about 40 seconds. In at least one embodiment, at least a portion of the solvent(s) and/or nonsolvent(s) are removed for at least about 45 seconds. In at least one embodiment, at least a portion of the solvent(s) and/or nonsolvent(s) are removed from the polymer solution for at

least about 50 seconds. In at least one embodiment, at least a portion of the solvent(s) and/or nonsolvent(s) are removed from the polymer solution for at least about 55 seconds. In at least one embodiment, at least a portion of the solvent(s) and/or nonsolvent(s) are removed from the polymer solution for at least about 60 seconds. In at least one embodiment, at least a portion of the solvent(s) and/or nonsolvent(s) are removed from the polymer solution for at least about 65 seconds. In some embodiments, the solvent(s) and/or nonsolvent(s) are removed from the polymer solution for example, by an evaporation process. In some instances, the evaporation process can be performed under ambient pressure (1 atm). In some instances, the evaporation process can be performed under reduced pressure. In some instances, the evaporation process can be performed in an inert atmosphere such as nitrogen or argon.

[0035] In some embodiments, a polymer solution in accordance with the present disclosure comprises at least one solvent for the block copolymer or block copolymers, and at least one nonsolvent for the block copolymer or block copolymers. Any solvents and/or nonsolvents in the polymer solution should be miscible with each other. The designation of solubility or insolubility of a block copolymer or block in a given chemical or mixture of chemicals depends on the polymer chemistry and/or composition. In some embodiments, at least one solvent is an ether such as 1,4-dioxane or tetrahydrofuran. In some embodiments, at least one nonsolvent is one of the following classes: ketone, ester, alcohol, sulfoxide, sulfone. Some examples of nonsolvents include: acetone, methyl ethyl ketone, methyl isobutyl ketone, methyl amyl ketone, dimethyl ketone, cyclohexanone, propanone, ethyl acetate, propyl acetate, ethanol, isopropanol, benzyl alcohol, butanol, dimethylsulfoxide, and sulfolane.

[0036] In some embodiments, a polymer solution in accordance with the present disclosure comprises at least about 33% of one solvent or a combination of solvents and at least about 18% by weight of one nonsolvent or a combination of nonsolvents. In some embodiments of the materials or methods, the polymer solution comprises at least 33% of one solvent or a combination of solvents and about 18% to about 64% by weight of one nonsolvent or a

combination of nonsolvents. In some embodiments, a polymer solution in accordance with the present disclosure comprises about 33% to about 79% of one solvent or a combination of solvents and about 18% by weight of one nonsolvent or a combination of nonsolvents. In some embodiments, a polymer solution in accordance with the present disclosure comprises at least about 50% of one solvent or a combination of solvents and at least about 20% by weight of one nonsolvent or a combination of nonsolvents. In some embodiments, a polymer solution in accordance with the present disclosure comprises at least about 50% of one solvent or a combination of solvents and at least about 18% by weight of one nonsolvent or a combination of nonsolvents.

[0037] The solvent/nonsolvent percentages totaling 100% can be called “solution composition” and are by weight and include only the solvents’/nonsolvents’ weight (that is, the prior to addition of the polymer to the solution to form the polymer solution). In some embodiments, a solution composition in accordance with the present disclosure comprises about 60% of one solvent or a combination of solvents and about 40% by weight of one nonsolvent or a combination of nonsolvents. In some embodiments, a solution composition in accordance with the present disclosure comprises about 70% of a solvent or a combination of solvents and about 30% by weight of one nonsolvent or a combination of nonsolvents. In some embodiments, a solution composition in accordance with the present disclosure comprises about 80% of one solvent or a combination of solvents and about 20% by weight of a nonsolvent or a combination of nonsolvents. In some embodiments of the above methods and materials, at least one diblock copolymer or multiblock copolymer is dissolved in step 1 of one of the above embodiments. In some embodiments of the above methods and materials, the polymer solution or material comprises more than one diblock or multiblock copolymer.

[0038] The radius of curvature to fracture can be measured on freestanding materials in the wet state. More specifically, to measure the radius of curvature to fracture, the wet material is curved around a steel rod or other comparable rod or tube of known diameter, forming a “C”

shape around the rod. The material is then uncurled and observed for macroscopic cracking along the fold. This test may be performed with the skin facing either towards or away from the rod. The contact length of the material to the rod is approximately 1 cm. In at least one embodiment, a material in accordance with various aspects of the present disclosure can be folded and unfolded according to the above procedure around a rod of diameter down to about 0.020 inches without cracking. In at least one embodiment, a material in accordance with various aspects of the present disclosure can be folded and unfolded according to the above procedure around a rod of diameter down to about 0.028 inches without cracking. In at least one embodiment, a material in accordance with various aspects of the present disclosure can be folded and unfolded according to the above procedure around a rod of diameter down to about 0.030" without cracking. In at least one embodiment, a material in accordance with various aspects of the present disclosure can be folded and unfolded according to the above procedure around a rod of diameter down to about 0.032 inches without cracking. In at least one embodiment, a material in accordance with various aspects of the present disclosure can be folded and unfolded according to the above procedure around a rod of diameter down to about 0.035 inches without cracking. In at least one embodiment, a material in accordance with various aspects of the present disclosure can be folded and unfolded according to the above procedure around a rod of diameter down to about 0.05 inches without cracking. In at least one embodiment, a material in accordance with various aspects of the present disclosure can be folded and unfolded according to the above procedure around a rod of diameter down to about 0.1 inches without cracking.

[0039] In some instances, isoporous mesoporous materials in accordance with various aspects of the present disclosure are freestanding. In some instances, isoporous mesoporous materials in accordance with various aspects of the present disclosure also comprise a porous support or are placed on a porous support. In some instances, isoporous mesoporous materials in accordance with various aspects of the present disclosure also comprise multiple porous

supports or are placed on multiple porous supports or some combination of the above. The porous support material(s) may act as a mechanical substrate and provide additional mechanical properties such as stability or biocompatibility or other additional functionalities. The porous support material(s) can include various materials or physical properties for the various layers, thicknesses of the various layers, as well as variations in the pore size and structures. Suitable materials could include knitted, woven, or nonwoven materials, such as gauze, cotton, cellulose-based fabrics, rayon, polyesters, polyethylenes, graphene, graphene oxide, carbon foams, open cell foams such as polyurethane base, polystyrene, rayon, metal, metal oxide, or semiconductor mesh-like support structures. It may be desirable to integrate the mesoporous isoporous materials with aforementioned porous supports. For example, one or more mesoporous isoporous materials may be integrated with one or more porous support materials, preventing delamination or breakage of the material, whereas comparable mesoporous isoporous materials without a transition layer delaminate and break easily. While it is acknowledged that different modes of action are at work within the scope of the invention, in many embodiments, a mechanism of integration of the materials with porous supports is that the macrovoids mitigate stresses at the interface of the porous support, preventing delamination and cracking.

[0040] In some embodiments, at least one of said copolymers comprises an A block and a B block, wherein the A block is hydrophilic and/or hydrogen bonding and the B block is hydrophobic. In some embodiments, the block structure is a combination of A and B blocks, for example, A-B, B-A, B-A-B, A-B-A, B-A-B-A, A-B-A-B, etc. In at least one embodiment, at least one copolymer comprises an A block and a B block, wherein the A block is hydrophilic and/or hydrogen bonding and the B block is hydrophobic and the A block is a poly(vinylpyridine). In a least one embodiment, at least one copolymer comprises an A block and a B block, wherein the A block is hydrophilic and/or hydrogen bonding and the B block is hydrophobic and the A block is a poly(vinylpyridine) and the B block is poly(styrene). In at

least one embodiment, at least one copolymer comprises an A block and a B block, wherein the A block is hydrophilic and/or hydrogen bonding and the B block is hydrophobic and the A block is poly(4-vinylpyridine) and the B block is poly(styrene). In at least one embodiment, at least one copolymer comprises an A block and a B block, wherein the A block is hydrophilic and/or hydrogen bonding and the B block is hydrophobic and the A block is poly(2-vinylpyridine) and the B block is poly(styrene). In at least one embodiment, at least one copolymer comprises an A block and a B block, wherein the A block is hydrophilic and/or hydrogen bonding and the B block is and the B block is a modified/or substituted poly(styrene), such as poly(hydroxystyrene) or poly(tert-butylstyrene). In at least one embodiment, at least one copolymer comprises an A block and a B block, wherein the A block is hydrophilic and/or hydrogen bonding and the B block is hydrophobic and the A block is poly(ethylene oxide). Further embodiments are conceivable from suitable blocks listed throughout this disclosure.

[0041] If the materials are to be used in biological-related applications, it is desirable to have low protein fouling properties. A typical method to measure the protein adsorption of a membrane material is by exposing the membrane to a protein solution with the pH near the protein isoelectric point (IEP). The overall charges of the proteins are neutral at/around the IEP, so electrostatic interactions between the protein and membrane can be excluded in the measurement. In the context of the disclosure, “low protein fouling” is defined as adsorbing less than 100 $\mu\text{g}/\text{cm}^2$ lysozyme (Lys) and/or less than 375 $\mu\text{g}/\text{cm}^2$ immunoglobulin G (IgG), as measured using the procedure below. In some embodiments, the mesoporous isoporous materials are low protein fouling materials. In at least one embodiment, the low protein fouling mesoporous isoporous materials according to the present disclosure have a Lys adsorption of less than about 80 $\mu\text{g}/\text{cm}^2$. In at least one embodiment, the low protein fouling mesoporous isoporous materials according to the present disclosure have an IgG adsorption of less than about 300 $\mu\text{g}/\text{cm}^2$. In at least one embodiment, the low protein fouling mesoporous isoporous materials according to the present disclosure have a Lys adsorption of less than about 70 $\mu\text{g}/\text{cm}^2$.

In at least one embodiment, the low protein fouling mesoporous isoporous materials according to the present disclosure have an IgG adsorption of less than about 200 $\mu\text{g}/\text{cm}^2$.

[0042] A procedure for determining if a material is low protein fouling is as follows: Lys (Lysozyme, IEP around 11.4, Lysozyme from chicken egg white, lyophilized powder, protein $\geq 90\%$, $\geq 40,000$ units/mg protein, Sigma-Aldrich) and IgG (Immunoglobulin G, IEP around 7.4 γ -Globulins from bovine blood, $\geq 99\%$ (agarose gel electrophoresis), Sigma-Aldrich) are prepared at 1.0 mg/mL concentration in phosphate-buffered saline (Phosphate Buffered Saline (PBS), 1X, PH=7.4, Quality Biological, VWR) at room temperature with pH around the IEP of the proteins (pH was adjusted by slowly adding sodium hydroxide for Lys). 4 mL of a given protein solution is placed on each material with 4.9 cm^2 area in a small closed dish. A separate 4 mL of a given protein solution is placed in a small closed dish without material ("control"). The dishes are shaken at 80 rpm for 16 hours at 23 °C. The materials are soaked with 4 mL of the aforementioned PBS buffer solution for 20 min. The dish contains the original protein solution is marked "Ads", and the rinsed solution is marked "Wash". The protein concentration is measured by UV-Vis at 280 nm and a standard curve for each protein solution is used to correlate the UV-Vis adsorption and the protein concentration. The protein adsorption on the materials can be calculated as follows: Protein adsorption = $m_{(\text{ads,protein})}/\text{material area} = ([\text{"Control"} \text{ concentration g/mL}] - [\text{"Ads"} \text{ concentration g/mL}] - [\text{"Wash"} \text{ Concentration g/mL}]) * (4.0 \text{ mL}) / 4.9 \text{ cm}^2$.

[0043] The testing procedure may be scaled according to material area if the aforementioned dimension is not appropriate (e.g. not enough area is available to use 4.9 cm^2). The adsorption test is performed on different swatches of material, one for each protein measured.

[0044] The material may be used as separation media, wherein a solute is separated from a liquid. For example, the material may be used as a membrane for separating solutes by a filtration mechanism.

Examples of Preferred Embodiments

[0045] The block copolymers poly(styrene-*block*-4-vinylpyridine) (SV), are synthesized by anionic polymerization with the polymer characteristics in Table 1 below:

	Overall molecular weight Mn (g/mol)	PS Mn (g/mol)	P4VP Mn (g/mol)	P4VP wt%
SV142	141.6k	115.5k	26.1k	13%
SV168	168.4k	133k	35.4k	21%
SV221	220.8k	189.9k	30.9k	14%
SV273	272.8k	237.3k	35.5k	13%

Table 1. Polymer Characteristics

Example 1.

[0046] Example of the Disclosure. The polymer SV168 is dissolved at 10 wt% polymer concentration in 1,4-dioxane (DOX)/acetone (ACE) (80 wt%/20 wt% solution composition) and DOX/ACE (60 wt%/40 wt% solution composition) to provide a polymer solution. The polymer solutions are spread on a porous PET woven support with thickness about 60 μm , on top of a glass slide. The films are evaporated for 45 seconds at room temperature and the films are immersed in a water bath. The membrane precipitates in water. The membrane's isoporous mesoporous structures (Figs. 1a and 1b), cross-sectional structures near the isoporous mesoporous structures (Figs. 1c and 1d) overall structures (Figs. 1e and 1f) are shown in Fig. 1.

[0047] SV168 is dissolved at 10 wt% polymer concentration in DOX/ACE (70 wt%/30 wt% solution composition), SV221 is dissolved at 10 wt% polymer concentration in DOX/ACE (60 wt%/40 wt% solution composition), SV273 is dissolved at 10 wt% polymer concentration in DOX/ACE (60 wt%/40 wt% solution composition). The polymer solutions are spread on a glass plate with gate height about 260 μm , on top of the glass slide, there is a PET woven support with thickness of about 60 μm . The films are evaporated for 60, 45 and 45 seconds, respectively at room temperature and the films are immersed in a water bath. The membranes precipitate in water. The isoporous mesoporous structures (Figs. 2a, 2b, 2c) and cross-sectional structures near the isoporous mesoporous surface (Figs. 2d, 2e, 2f) are shown in Fig. 2.

[0048] Comparative Example. The polymer SV168 is dissolved at 17 wt% polymer concentration in dimethylformamide (DMF)/tetrahydrofuran (THF)/ 1,4-dioxane (DOX) (33.3 wt%/33.3 wt%/33.3 wt% solution composition), and 20 wt% polymer concentration in DMF/THF (40 wt%/60 wt% solution composition) to provide polymer solutions. These conditions are in line with typically reported casting conditions. The polymer solution is spread on a glass plate with gate height about 260 μm , on top of the glass slide, there is an PET woven support with thickness about 60 μm . The films are evaporated for 40 and 30 seconds, respectively at room temperature and the films are immersed in a water bath. Some of the surface structures are not isoporous for the materials, and both lack both macrovoids and a transition layer, as shown in Fig. 3. Additionally, these comparative example materials tend to delaminate and break away from the porous support upon handling. The innovative examples successfully integrate with the porous support, while the comparative examples delaminate from the porous support, failing to integrate with the support. The macroscopic images are shown in Fig. 4.

Example 2.

[0049] Example the Disclosure. The SV168 is dissolved at 10 wt% polymer concentraion in 1,4-dioxane (DOX)/acetone (ACE) (70 wt%/30 wt% solution composition), and at 17 wt% polymer concentration in dimethylformamide (DMF)/tetrahydrofuran (THF)/1,4-dioxane (DOX) (33.3 wt%/33.3 wt%/33.3 wt% solution composition) to provide polymer solutions. The polymer solutions are spread on a glass plate with gate height about 210 μm . There is no porous support material on the glass plate. The films are evaporated for 20 and 40 seconds at room temperature and the films are immersed in a water bath. Upon immersion, the films peel off the glass slide and form freestanding polymer films. The films in Example 3 are cast under the same conditions.

[0050] The thickness of the films are measured and recorded. The films are punched into circles with area of 4.9 cm^2 , and dried in oven of 60 $^{\circ}\text{C}$ for more than 24 hours. The dried film masses are recorded and the density is calculated (density = mass/volume). Three identical film sets are cast and the averages and standard deviations are reported.

Sample	Polymer solution	Evaporation time (s)	Density (g/cm^3)
Inventive example IE-1	SV168 in DOX/ACE	20	0.18 $\pm$ 0.05
Inventive example IE-2	SV168 in DOX/ACE	40	0.18 $\pm$ 0.02
Comparative example CE-1	SV168 in DMF/THF/DOX	20	0.30 $\pm$ 0.03
Comparative example CE-2	SV168 in DMF/THF/DOX	40	0.28 $\pm$ 0.02

Table 2. Densities of various films

Example 3.

[0051] Example of the Disclosure. The same set of materials as Example 2 are used in the protein adsorption experiment. The protein adsorption experiment is a modified known procedure (Abetz 2014b) with two different proteins. The protein adsorption test is described in detail above.

[0052] The results are summarized in Fig. 5. For each protein, the adsorption in the inventive example (grey) is much lower compared to the comparative example (black). The Lys adsorption in the comparative example without macrovoids or transition layer is consistent with previous literature (Abetz 2014b). In comparison, the Lys and IgG adsorption are both much lower in isoporous mesoporous asymmetric films with macrovoids and a transition layer.

Example 4.

[0053] Example of the Disclosure. A mixture of SV block copolymers is also used for making the disclosed films. SV142 and SV221 are dissolved at total 10 wt% polymer concentration in 1,4-dioxane (DOX)/acetone (ACE) (70 wt%/30 wt% solution composition), at various SV ratios. The polymer solutions are spread on a glass plate with gate height about 210 μm . There is no porous support material on the glass plate. The films were evaporated for 40 seconds at room temperature and the films are immersed in a water bath. The IgG adsorption test and density measurements are conducted similarly to Examples above. The results are summarized in Table 3.

Sample	Polymer solution	Density (g/cm³)	IgG adsorption ($\mu\text{g}/\text{m}^2$)
Inventive example IE-3	2.5 wt% SV142 and 7.5 wt% SV221	0.23	98
Inventive example IE-4	5.0 wt% SV142 and 5.0 wt% SV221	0.22	90

Inventive example IE-5	7.5 wt% SV142 and 2.5 wt% SV221	0.22	118
---------------------------	------------------------------------	------	-----

Table 3. SV mixture films' densities and IgG adsorption

Claims

1. A mesoporous isoporous asymmetric material comprising at least one diblock or multiblock copolymer, wherein:
 - a. the material has a transition layer having a thickness of at least 300 nm and a low macrovoid density; and
 - b. the material has a sub-structure adjacent to said transition layer and said sub-structure comprises a high macrovoid density.
2. A mesoporous isoporous asymmetric material freestanding material comprising at least one diblock or multiblock copolymer, wherein the material exhibits a dried density of less than 0.26 g/cm³.
3. The material of claim 1 or 2, wherein the at least one copolymer comprises an A block and a B block, wherein the A block is hydrophilic and/or hydrogen-bonding and the B block is hydrophobic.
4. The material of claim 3 wherein, the A block is a poly(vinylpyridine).
5. The mesoporous isoporous asymmetric material of claim 1, wherein the material is not freestanding and maintains its macroscopic integrity with a porous support.
6. The mesoporous isoporous asymmetric material of any one of claims 1-5, wherein the material exhibits low protein fouling.
7. The mesoporous isoporous asymmetric material of claim 1, wherein said macrovoids comprise at least one of finger-like macrovoids, spherical macrovoids, and tear-like macrovoids.
8. A process using material of any one of claims 1-7 wherein the material is used as separation media.
9. A material made by a method, the method comprising the following steps:

- a. dissolving at least one diblock or multiblock copolymer in a solution, the solution comprising at least 33% by weight of one solvent or a combination of solvents and at least 18% by weight of one nonsolvent or a combination of nonsolvents, to form a polymer solution;
 - b. dispensing the polymer solution onto a substrate or mold, or through a die or template;
 - c. removing at least a portion of solvent and/or nonsolvent from the polymer solution to form a concentrated polymer solution; and
 - d. exposing the concentrated polymer solution to a nonsolvent causing precipitation of at least a portion of the polymer from the concentrated polymer solution.
10. The material of claim 9, wherein the method further comprises:
- e. washing the precipitated polymer product.
11. The material of claim 9 or 10, wherein at least one block copolymer comprises an A block which is hydrophilic and/or hydrogen bonding and a B block which is hydrophobic.
12. The material of any one claims 9-11, wherein the concentration of polymer in the polymer solution is from about 3 to about 30% by weight.
13. A method for producing mesoporous isoporous asymmetric materials comprising macrovoids, the method comprising the following steps:
- a. dissolving at least one diblock or multiblock copolymer in a solution, the solution comprising at least 33% by weight of one solvent or a combination of solvents and at least 18% by weight of one nonsolvent or a combination of nonsolvents, to form a polymer solution;

- b. dispensing the polymer solution onto a substrate or mold, or through a die or template;
 - c. removing at least a portion of solvent and/or nonsolvent from the polymer solution to form a concentrated polymer solution; and
 - d. exposing the concentrated polymer solution to a nonsolvent causing precipitation of at least a portion of the polymer from the concentrated polymer solution.
14. The method of claim 13, wherein the method further comprises:
- e. washing the precipitated polymer product.
15. The method of claim 12 or 13, wherein the at least one block copolymer comprises an A block which is hydrophilic and/or hydrogen bonding and a B block which is hydrophobic.
16. The method of claim 15, wherein the A block is a poly(vinylpyridine).
17. The method of any one of claims 13-16, wherein the concentration of polymer in the polymer solution is from about 3 to about 16% by weight.
18. The method of any one of claims 13-17, wherein at least a portion of solvent and/or nonsolvent is removed for at least 20 seconds.
19. The material of claim 1, wherein the at least one copolymer comprises an A block and B block wherein the A block is hydrophilic and/or hydrogen bonding and the B block is hydrophobic, and said copolymer further has the structure of: A-B, B-A, A-B-A, B-A-B, A-B-A-B, or B-A-B-A.

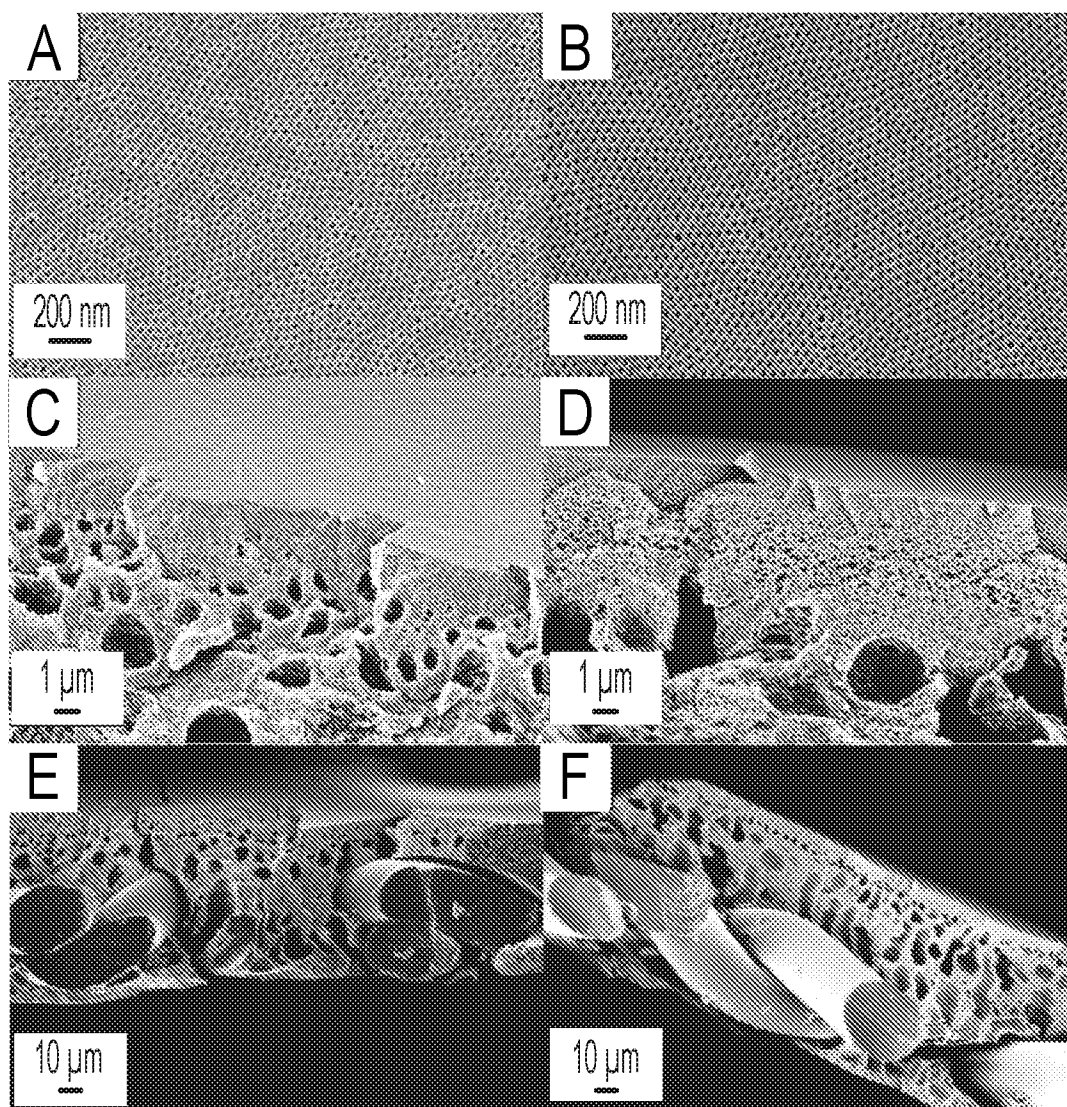


FIG. 1

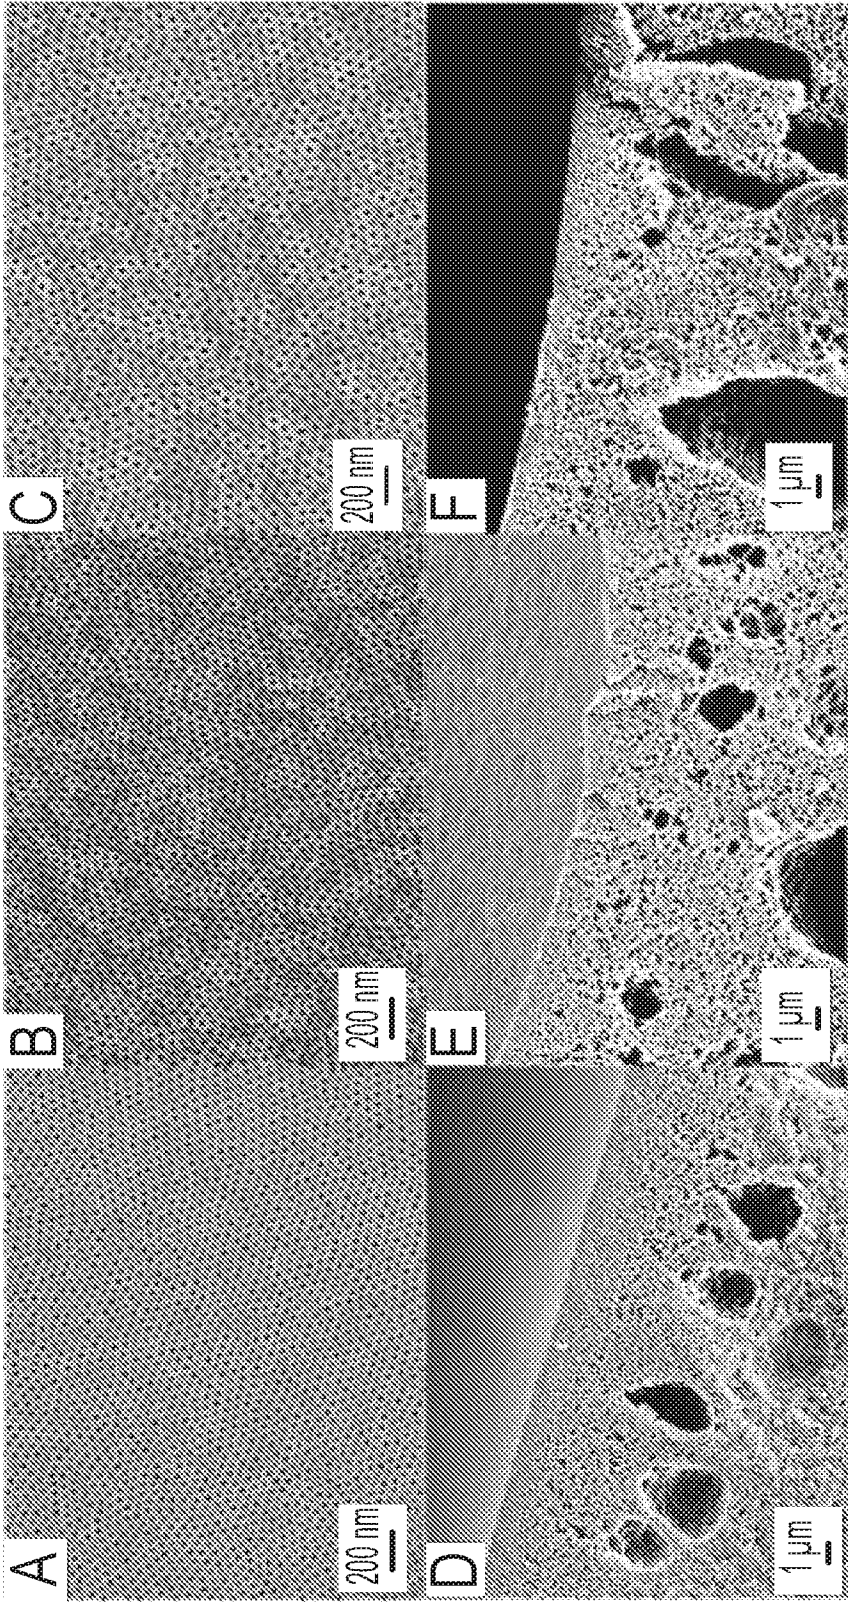


FIG. 2

3/4

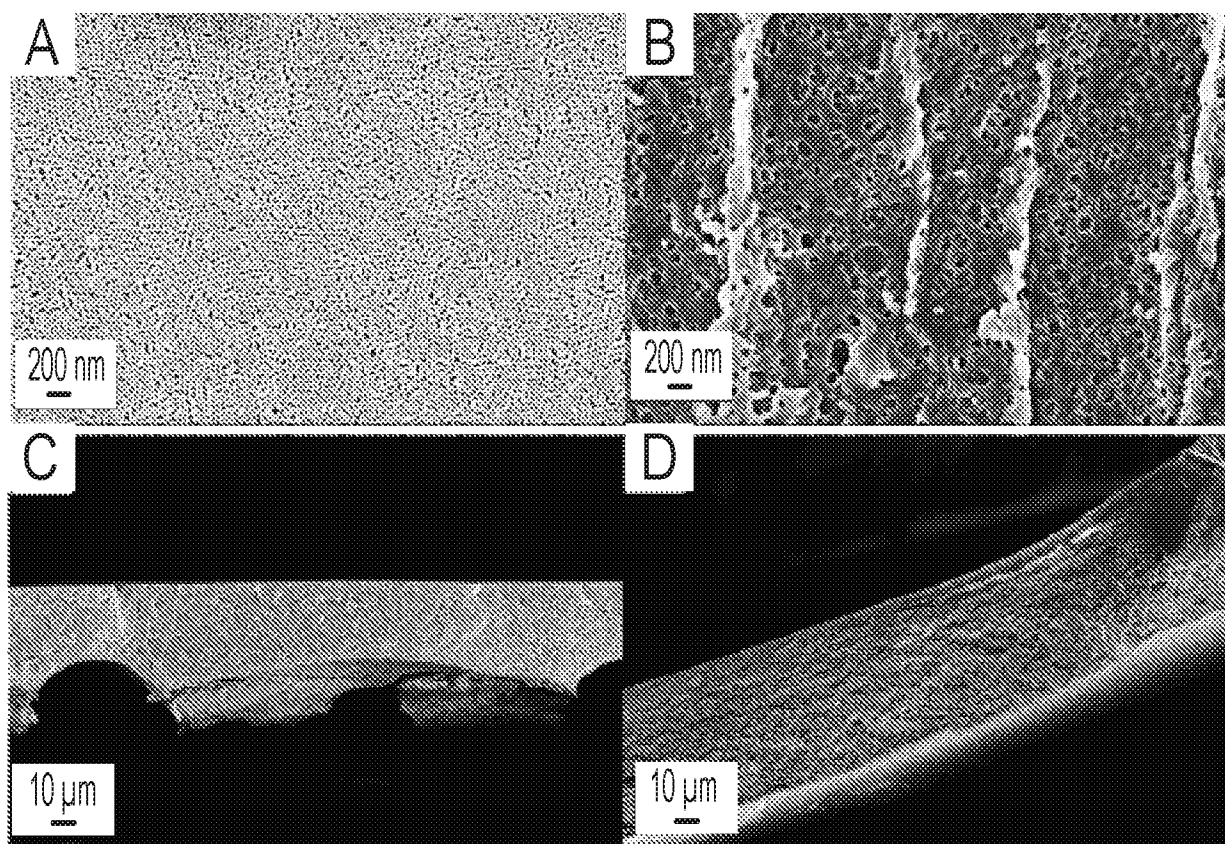


FIG. 3

4/4

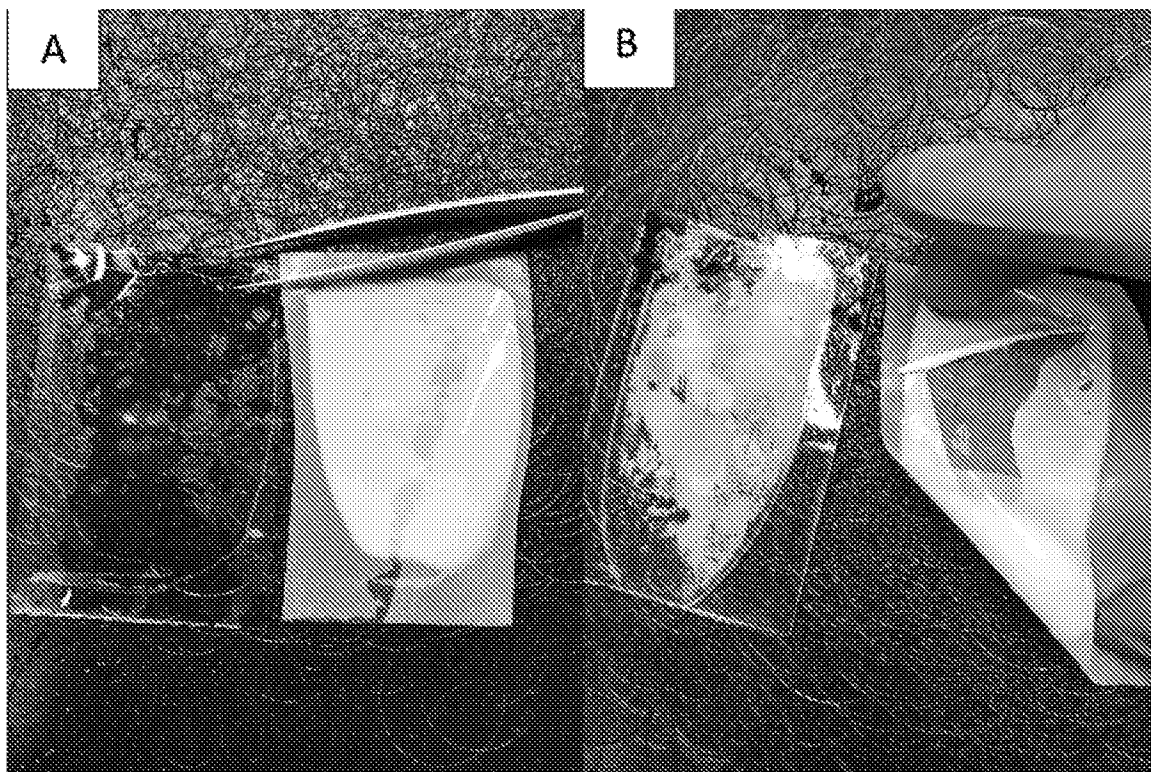


FIG. 4

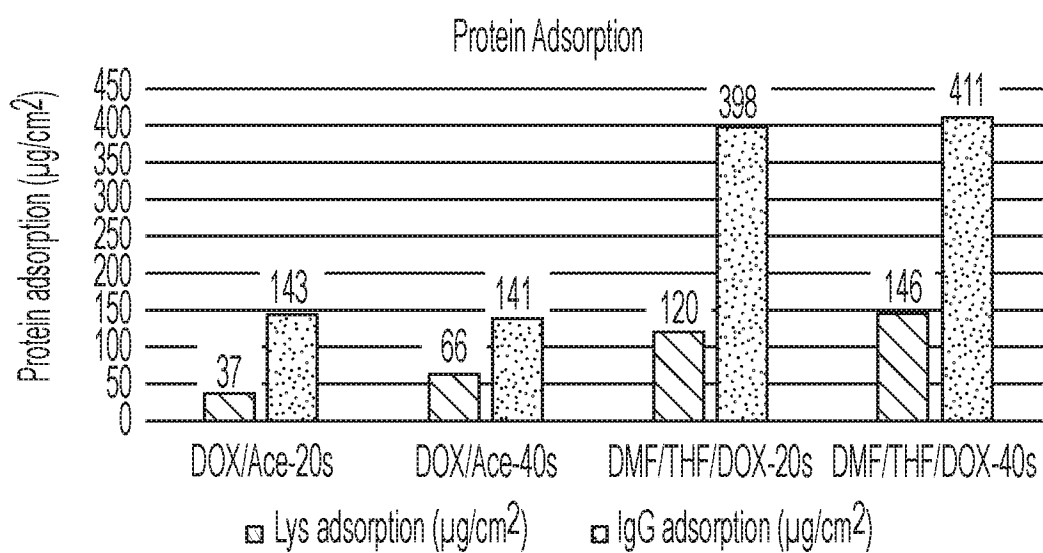


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 19/21780

A. CLASSIFICATION OF SUBJECT MATTER
 IPC(8) - B01D 69/02, B01D 69/12, B01D 69/14 (2019.01)
 CPC - B01D 69/02, B01D 69/12, B01D 69/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History Document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History Document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History Document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2017/0327649 A1 (Cornell University) 16 November 2017 (16.11.2017) Abstract, para [0008], [0049], [0062], [0087], [0091], [0096]-[0097], [0107], [0112].	1-5, 7, 19
A	US 2017/0022337 A1 (Cornell University) 26 January 2017 (26.01.2017) Entire Document.	1-5, 7, 19
A	US 4,880,441 A (Kesting et al.) 14 November 1989 (14.11.1989) Entire Document.	1-5, 7, 19
A	Phillip, et al. "Tuning structure and properties of graded triblock terpolymer-based mesoporous and hybrid films." Nano letters 11.7 (07 June 2011): 2892-2900. Entire Document.	1-5, 7, 19

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

08 May 2019

Date of mailing of the international search report

17 JUL 2019

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
 P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 19/21780

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 6, 8, 12, 15-18
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See Supplemental Box

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-5, 7, 19

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 19/21780

Box III Lack of Unity:

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be searched, the appropriate additional search fees must be paid.

Group I: Claims 1-5, 7, and 19, directed to a mesoporous isoporous asymmetric material.

Group II: Claims 9-11 and 13-14, directed to a method for producing mesoporous isoporous asymmetric materials.

The group of inventions listed above do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons:

Special Technical Features:

Group I requires the special technical feature of a material wherein a. the material has a transition layer having a thickness of at least 300 nm and a low macrovoid density; and b. the material has a sub-structure adjacent to said transition layer and said substructure comprises a high macrovoid density; and a freestanding material, wherein the material exhibits a dried density of less than 0.26 g/cm³, not required by group II.

Group II requires the special technical feature of a method for producing materials, the method comprising the following steps: a. dissolving at least one diblock or multiblock copolymer in a solution, the solution comprising at least 33% by weight of one solvent or a combination of solvents and at least 18% by weight of one nonsolvent or a combination of nonsolvents, to form a polymer solution; b. dispensing the polymer solution onto a substrate or mold, or through a die or template; c. removing at least a portion of solvent and/or nonsolvent from the polymer solution to form a concentrated polymer solution; and d. exposing the concentrated polymer solution to a nonsolvent causing precipitation of at least a portion of the polymer from the concentrated polymer solution, not required by group I.

Common technical features:

Groups I-II share the technical feature of a mesoporous isoporous asymmetric material comprising at least one diblock or multiblock copolymer, comprising macrovoids.

These shared technical features, however, do not provide a contribution over the prior art, as being anticipated by US 2017/0327649 A1 to Cornell University (hereinafter Cornell). Cornell teaches a mesoporous isoporous asymmetric material comprising at least one diblock or multiblock copolymer (Abstract, Methods of making blended, isoporous, asymmetric (graded) films... comprising two or more chemically distinct block copolymers and blended, isoporous, asymmetric (graded) films... comprising two or more chemically distinct block copolymers... The block copolymers may be diblock, triblock and/or multiblock mixes; and para [0087]. In an example, the methods can be used to produce hybrid block copolymer mesoporous films), comprising macrovoids (para [0096]. The film comprises: a surface layer having... a pore density of at least 1×10^{14} pores/m², and an asymmetric hierarchical substructure having... pores having a size of 5 nm to 100 microns; See Instant Specification, para [0022]. We define a macrovoid or macropore as a void with at least one characteristic length greater than about 0.5 micron).

As the technical features were known in the art at the time of the invention, this cannot be considered a special technical feature that would otherwise unify the groups.

Groups I-II therefore lack unity under PCT Rule 13 because they do not share a same or corresponding special technical feature.

Note:

Claims 6, 8, 12, and 15-18 are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).