



(51) International Patent Classification:
C08G 61/12 (2006.01)

(21) International Application Number:
PCT/CN2011/071499

(22) International Filing Date:
3 March 2011 (03.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **TONGJI UNIVERSITY** [CN/CN]; No 1239, Siping Road, Shanghai 200092 (CN).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LI, Xingui** [CN/CN]; Room 8, 578 Tongji Xincun, Shanghai 200092 (CN). **GU, Dunyin** [CN/CN]; 1239 Siping Road, Shanghai 200092 (CN). **HUANG, Meirong** [CN/CN]; Room 8, 578 Tongji Xincun, Shanghai 200092 (CN).

(74) Agent: **UNITALEN ATTORNEYS AT LAW**; 7th Floor, Scitech Place, No.22, Jian Guo Men Wai Ave., Chao Yang District, Beijing 100004 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLUORANTHENE COPOLYMERS AND METHODS OF MAKING AND USING THE SAME

FIG. 1



(57) Abstract: Copolymers having at least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit are disclosed. The copolymer may, for example, emit green light when exposed to a blue or ultraviolet radiation. Methods of making the copolymer are also disclosed, as well as methods and apparatuses for producing light and detecting nitroaromatics using the copolymer.

FLUORANTHENE COPOLYMERS AND METHODS OF MAKING AND USING THE SAME

BACKGROUND

Field

[0001] The present application relates to aromatic copolymers, and in particular, fluorescent copolymers.


Description

[0002] In recent years, attention has been paid to polymerizing aromatic hydrocarbons with dense rings electrochemically and chemically. However, electrochemical polymerization can be difficult to scale-up for manufacturing because the process is limited by the surface area of the working electrodes. Also, some available chemical methods, such as Suzuki coupling and Yamamoto coupling reactions, can require complicated reaction processes. The chemical methods also tend to produce polymers having poor solubility, which can hinder further processing for these polymers. Furthermore, almost all of the existing aromatic hydrocarbons, such as anthracene, phenanthrene, pyrene, fluoranthene, as well as their corresponding polymers, are limited to emitting blue light.

SUMMARY


[0003] Some embodiments disclosed herein include a copolymer comprising an optionally substituted fluoranthene as a first monomer unit and an optionally substituted pyrrole as a second monomer unit.

[0004] In some embodiments, the first monomer unit is represented by Formula I:

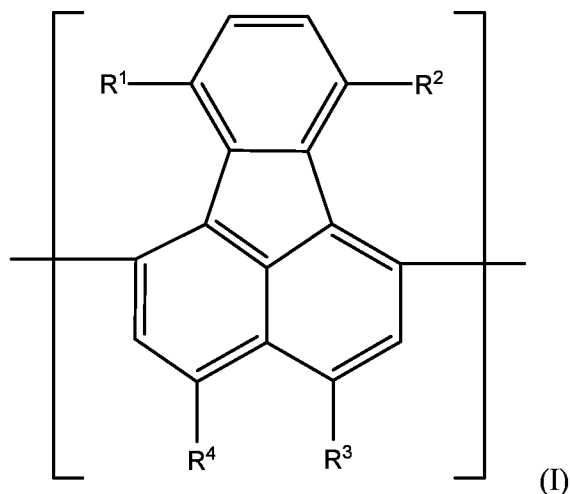

[0005] wherein R^1 , R^2 , R^3 , and R^4 are each independently selected from the group consisting of hydrogen, C_{1-6} alkyl, C_{1-6} haloalkyl, C_{1-6} alkoxy, C_{1-6} hydroxyalkyl, ester, carboxy, and C_{1-6} alkyl- $N(R^5)(R^6)$, and wherein R^5 and R^6 are each independently selected from hydrogen and C_{1-6} alkyl. In some embodiments, R^1 , R^2 , R^3 , and R^4 are each independently selected from the group consisting of hydrogen and C_{1-6} alkyl. In some embodiments, R^1 , R^2 , R^3 , and R^4 are each hydrogen. In some embodiments, R^1 and R^2 are the same. In some embodiments, R^3 and R^4 are the same. In some embodiments, R^1 , R^2 , R^3 , and R^4 are the same.

[0006] In some embodiments, the second monomer unit is represented by Formula II:

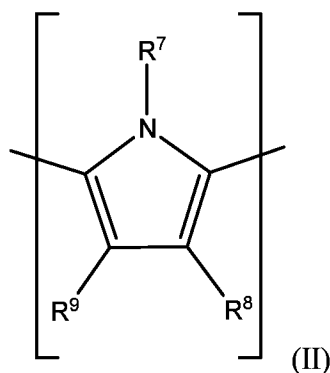

[0007] wherein R^7 , R^8 , and R^9 are each independently selected from the group consisting of hydrogen and C_{1-6} alkyl. In some embodiments, R^7 , R^8 , and R^9 are each

hydrogen. In some embodiments, R^8 and R^9 are the same. In some embodiments, R^7 , R^8 , and R^9 are the same.

[0008] In some embodiments, the copolymer comprises at least about 30% of the first monomer unit by mole. In some embodiments, the copolymer comprises no more than about 99% of the first monomer unit by mole. In some embodiments, the copolymer comprises at least about 1% of the second monomer unit by mole. In some embodiments, the copolymer comprises no more than about 70% of the second monomer unit by mole. In some embodiments, the molar ratio of the first monomer unit to the second monomer unit is about 30:70 to about 99:1.

[0009] In some embodiments, the copolymer exhibits an electrical conductivity of at least $10^{-6} \text{ S}\cdot\text{cm}^{-1}$ when doped with an effective amount of a dopant. In some embodiments, the dopant is iodine.

[0010] In some embodiments, the copolymer exhibits a green emission when exposed to ultraviolet or violet radiation. In some embodiments, the green emission has a wavelength of peak emission of about 490 nm to about 570 nm. In some embodiments, the ultraviolet or violet radiation has a peak wavelength of about 350 nm to about 450 nm.

[0011] In some embodiments, the copolymer has a weight average molecular weight of at least about 500 Da.

[0012] Some embodiments disclosed herein include a method of making a copolymer, the method comprising: forming a composition comprising an oxidizing agent, an optionally substituted pyrrole monomer, and an optionally substituted fluoranthene monomer; and maintaining the composition under conditions effective to polymerize the pyrrole monomer and fluoranthene monomer to form the copolymer.

[0013] In some embodiments, the molar ratio of the pyrrole monomer to the fluoranthene monomer is about 70:30 to about 1:99. In some embodiments, the molar ratio of the oxidizing agent to a total amount of monomer components in the composition is no more than about 5:1.

[0014] In some embodiments, the composition is maintained at a temperature of about 30° C to about 70° C.

[0015] In some embodiments, forming the composition comprises combining (a) a first solution comprising a first solvent and the oxidizing agent and (b) a second solution comprising a second solvent, the pyrrole monomer, and the fluoranthene monomer, wherein: the first solvent is at least partially immiscible in the second solvent; the oxidizing agent is soluble in the first solvent; and both the pyrrole monomer and the fluoranthene monomer are soluble in both the first and second solvents.

[0016] Some embodiments disclosed herein include an apparatus comprising: a light source configured to emit an ultraviolet or violet radiation; and a composition configured to receive at least a portion of the radiation emitted from the light source, wherein the composition comprises a copolymer comprising an optionally substituted fluoranthene as a first monomer unit and an optionally substituted pyrrole as a second monomer unit.

[0017] In some embodiments, the apparatus includes a light detector configured to measure light emitted from the composition. In some embodiments, the apparatus includes a housing, wherein the housing contains the composition and is configured to receive a sample adjacent to the composition.

[0018] Some embodiments disclosed herein include an organic light-emitting diode comprising: a light-emitting active layer; a conducting layer on one side of the light-emitting active layer; a cathode; and an anode, wherein the light-emitting active layer and conducting layer are disposed between the cathode and the anode, and the light-emitting active layer comprises a copolymer comprising an optionally substituted fluoranthene as a first monomer unit and an optionally substituted pyrrole as a second monomer unit.

[0019] Some embodiments disclosed herein include a method of producing light comprising exposing a composition to a violet or ultraviolet radiation, wherein the composition comprises a copolymer comprising an optionally substituted fluoranthene as a first monomer unit and an optionally substituted pyrrole as a second monomer unit.

[0020] Some embodiments disclosed herein include a method for detecting nitroaromatics within a sample, the method comprising: providing a sample suspected of containing one or more nitroaromatics; contacting a composition to the sample, wherein the composition comprises a copolymer comprising an optionally substituted fluoranthene as a first monomer unit and an optionally substituted pyrrole as a second monomer unit; exposing

the composition to a radiation effective to produce fluorescence from the copolymer; and measuring the amount of fluorescence produced by the copolymer.

[0021] In some embodiments, the produced fluorescence is greater in the absence of nitroaromatics than in the presence of nitroaromatics.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The foregoing and other features of the present disclosure will become more fully apparent from the following description and appended claims, taken in conjunction with the accompanying drawings. Understanding that these drawings depict only several embodiments in accordance with the disclosure and are not to be considered limiting of its scope, the disclosure will be described with additional specificity and detail through use of the accompanying drawings.

[0023] **Figure 1** depicts an illustrative embodiment of a lighting apparatus that is within the scope of the present application (not to scale).

[0024] **Figure 2** is an illustrative embodiment of an organic light emitting diode that is within the scope of the present application (not to scale).

[0025] **Figure 3** depicts an illustrative embodiment of an apparatus for detecting nitroaromatics that is within the scope of the present application (not to scale).

[0026] **Figure 4** shows the IR spectra for fluoranthene-pyrrole copolymers with various molar ratios of fluoranthene to pyrrole.

[0027] **Figure 5** shows the UV-visible absorbance spectra for fluoranthene-pyrrole copolymers with various molar ratios of fluoranthene to pyrrole.

[0028] **Figure 6** shows the fluorescence excitation and emission spectra for fluoranthene-pyrrole copolymers with various molar ratios of fluoranthene to pyrrole.

[0029] **Figure 7** is wide-angle X-ray diffractograms for various fluoranthene-pyrrole copolymers.

[0030] **Figure 8** is wide-angle X-ray diffractograms for homogeneous and composite fluoranthene-pyrrole copolymer films.

[0031] **Figure 9** shows the fluorescence spectra for 80/20 fluoranthene-pyrrole copolymers that were polymerized using different molar ratios of oxidizing agent to total monomer components.

[0032] **Figure 10** shows the UV-visible absorbance spectra for 80/20 fluoranthene-pyrrole copolymers that were polymerized using different molar ratios of oxidizing agent to total monomer components.

[0033] **Figure 11** shows the fluorescence spectra for 80/20 fluoranthene-pyrrole copolymers that were polymerized at various temperatures.

[0034] **Figure 12** shows the UV-visible absorbance spectra for 80/20 fluoranthene-pyrrole copolymers that were polymerized at various temperatures.

[0035] **Figure 13** shows the fluorescence spectra of a 20 mg/L solution of 80/20 fluoranthene-pyrrole copolymer after adding various amounts of picric acid.

[0036] **Figure 14** shows the fluorescence spectra of a 1 mg/L solution of 80/20 fluoranthene-pyrrole copolymer after adding various amounts of picric acid.

[0037] **Figure 15** shows the fluorescence spectra of a composite film that includes an 80/20 fluoranthene-pyrrole copolymer. The fluorescence spectra were measured after the film contacted an aqueous solution with various concentrations of picric acid.

[0038] **Figure 16** show the recycling fluorescence response at 504 nm of the composite film containing 0.99 wt% FA/PY copolymer among three picric acid concentrations of: (i) 0 M picric acid, (ii) $2.5 \cdot 10^{-7}$ M picric acid, and (iii) $5.0 \cdot 10^{-6}$ M picric acid.

DETAILED DESCRIPTION

[0039] In the following detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description, drawings, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented here. It will be readily understood that the aspects of the present disclosure, as generally described herein, and

illustrated in the Figures, can be arranged, substituted, combined, and designed in a wide variety of different configurations, all of which are explicitly contemplated and make part of this disclosure.

[0040] Disclosed herein are copolymers having at least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit. The copolymers can, in some embodiments, fluoresce light in the green emission region and exhibit superior solubility properties. The copolymers may be used, for example, in lighting devices and apparatuses for detecting nitroaromatic substances. Also disclosed herein are methods of making the copolymer. The methods can, in some embodiments, include standard polymerization procedures that may be easily scaled for manufacturing purposes. The present application also includes methods of using the copolymer and devices that include the copolymer.

Definitions

[0041] As used herein, “halogen” means any one of the radio-stable atoms of column 7 of the Periodic Table of the Elements, such as, fluorine, chlorine, bromine and iodine.

[0042] As used herein, “alkyl” refers to a straight or branched hydrocarbon chain that comprises a fully saturated (no double or triple bonds) hydrocarbon group. The alkyl group of the compounds may be designated as “C₁-C₄ alkyl” or similar designations. By way of example only, “C₁-C₄ alkyl” indicates that there are one to four carbon atoms in the alkyl chain, i.e., the alkyl chain is selected from methyl, ethyl, propyl, iso-propyl, n-butyl, iso-butyl, sec-butyl, and t-butyl. Typical alkyl groups include, but are in no way limited to, methyl, ethyl, propyl, isopropyl, butyl, isobutyl, tertiary butyl, pentyl, hexyl, and the like. The alkyl group may be substituted or unsubstituted.

[0043] As used herein, “alkoxy” refers to the formula –OR where R is an alkyl as defined above. A non-limiting list of alkoxys is methoxy, ethoxy, n-propoxy, 1-methylethoxy (isopropoxy), n-butoxy, iso-butoxy, sec-butoxy, tert-butoxy, and the like. An alkoxy may be substituted or unsubstituted.

[0044] As used herein, “haloalkyl” refers to an alkyl having one, two, three, or more of the hydrogen atoms substituted with a halogen. Such groups include but are not limited to, chloromethyl, fluoromethyl, difluoromethyl, trifluoromethyl, 1-chloro-2-fluoromethyl and 2-fluoroisobutyl. A haloalkyl may be substituted or unsubstituted.

[0045] As used herein, “hydroxyalkyl” refers to an alkyl group in which one or more of the hydrogen atoms are replaced by a hydroxy group. Examples of hydroxyalkyl groups include but are not limited to, 2-hydroxyethyl, 3-hydroxypropyl, 2-hydroxypropyl, and 2,2-dihydroxyethyl. A hydroxyalkyl may be substituted or unsubstituted.

[0046] As used herein, “ester” refers to a “-C(=O)OR” group in which R can be C₁₋₆ alkyl. An ester may be substituted or unsubstituted.


[0047] As used herein, “carboxy” refers to “C(=O)OH” group.

[0048] As used herein, “substituted” refers to independent replacement of one, two, three, or more of the hydrogen atoms in the specified structure with one of the following substituents: halogen, C₁₋₆ alkyl, C₁₋₆ haloalkyl, C₁₋₆ hydroxyalkyl, C₁₋₆ alkoxy, ester, carboxy, and C₁₋₆ alkyl-N(R^A)(R^B), where R^A and R^B are each independently selected from hydrogen and C₁₋₆ alkyl.

Fluoranthene/Pyrrole Copolymers

[0049] Some embodiments disclosed herein include copolymers having an optionally substituted fluoranthene as a first monomer unit and an optionally substituted pyrrole as a second monomer unit. The fluoranthene may, for example, be a substituted fluoranthene or an unsubstituted fluoranthene. The pyrrole may, for example, be a substituted pyrrole or an unsubstituted pyrrole.


[0050] For purposes of the present application, the nomenclature for fluoranthene and pyrrole substitutions is shown below:

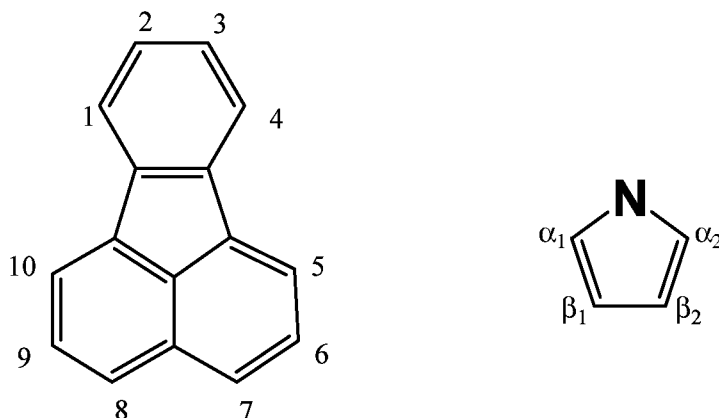

[0051] The fluoranthene monomer unit can be symmetric or asymmetric. In some embodiments, the fluoranthene monomer unit is unsubstituted at the 2-, 3-, 6-, and 9-positions, and optionally substituted at the 1-, 4-, 7-, and 8-positions. Non-limiting examples of substituted fluoranthenes include 1-methylfluoranthene, 1-ethyl-4-methylfluoranthene, 7,8-difluorofluoranthene, and 1,4-dihydroxyfluoranthene. The fluoranthene monomer unit may include, for example, zero, one, two, three, or four substitutions. Meanwhile, the 5-position and 10-position may form the main chain of the polymer. That is, the 5-position and 10-position can be covalently linked to a second monomer unit (e.g., pyrrole or a second fluoranthene monomer unit) and a third monomer unit, respectively.

[0052] The fluoranthene monomer unit substitutions (if any) can optionally be symmetric. In some embodiments, the 1-position and 4-position are substituted with the same class of substituent. For example, the 1-position and 4-position may each be substituted with an alkyl, such as 1-ethyl-4-propylfluoranthene, or a halogen, such as 1-fluoro-4-chlorofluoranthene. The 1-position and 4-position can also be substituted, for example, with the same group (e.g., 1,4-dimethylfluoranthene). In some embodiments, the 7-position and 8-position are substituted with the same class of substituent or the same group.


[0053] The fluoranthene monomer unit may, in some embodiments, be represented by Formula I:

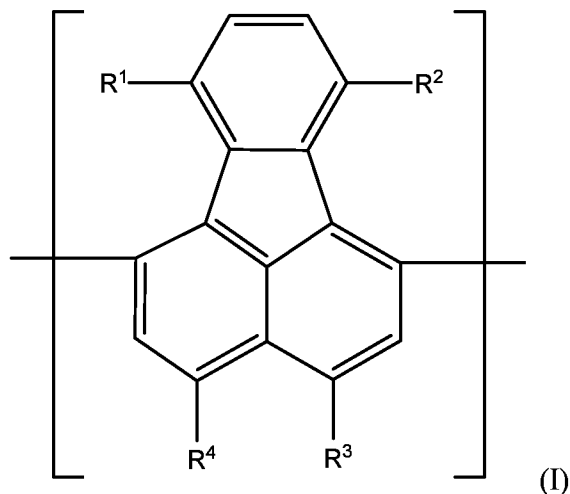

where R^1 , R^2 , R^3 , and R^4 are each independently selected from the group consisting of hydrogen, C_{1-6} alkyl, C_{1-6} haloalkyl, C_{1-6} alkoxy, C_{1-6} hydroxyalkyl, ester, carboxy, and C_{1-6} alkyl- $N(R^5)(R^6)$, and where R^5 and R^6 are each independently selected from hydrogen and C_{1-6} alkyl. In some embodiments, R^1 and R^2 are each the same class of substituent. In some embodiments, R^1 and R^2 are each the same. In some embodiments, R^3 and R^4 are each the same class of substituent. In some embodiments, R^3 and R^4 are each the same. In some embodiments, R^1 , R^2 , R^3 , and R^4 are each hydrogen. In some embodiments, R^1 , R^2 , R^3 , and R^4 are the same.

[0054] In some embodiments, the pyrrole monomer unit is optionally substituted at the β_1 - and β_2 -position. In some embodiments, the pyrrole monomer unit is optionally substituted at the nitrogen. The pyrrole monomer unit can include, for example, zero, one, two, or three substitutions. Meanwhile, the α_1 - and α_2 -position may form the main chain of the polymer. That is, the α_1 -position and α_2 -position can be covalently linked to a second monomer unit and third monomer unit, respectively. The β_1 - and β_2 -position can be substituted, in some embodiments, with the same class of substituent or the same group.

[0055] The pyrrole monomer unit may, in some embodiments, be represented by Formula II:

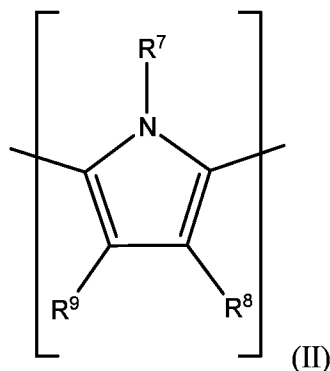

where R^7 , R^8 , and R^9 are each independently selected from the group consisting of hydrogen and C_{1-6} alkyl. In some embodiments, R^8 and R^9 are each C_{1-6} alkyl. In some embodiments, R^8 and R^9 are each the same group. In some embodiments, R^8 and R^9 are each hydrogen. In some embodiment, R^7 is hydrogen. In some embodiments, R^7 , R^8 and R^9 are each the same group.

[0056] The skilled artisan, guided by the teachings of the present application, can modify the relative amount of the fluoranthene monomer unit and the pyrrole monomer unit in the copolymer to adjust the properties of the polymer. For example, the relative molar ratio of the fluoranthene monomer unit to the pyrrole monomer unit can be adjusted to obtain a copolymer that fluoresces in the green region (e.g., emits light having a wavelength of peak emission in the green region). As another example, the relative molar ratio of the fluoranthene monomer unit to the pyrrole monomer can be adjusted to obtain a copolymer that is soluble in an organic solvent (e.g., at least 1 mg/L dissolves in an organic solvent). The relative molar ratio of the fluoranthene monomer unit to the pyrrole monomer unit in the copolymer can be, for example, at least about 30:70; at least about 40:60; at least about 50:50; at least about 60:40; at least about 70:30; at least about 80:20; or at least about 90:10. The relative molar ratio of the fluoranthene monomer unit to the pyrrole monomer unit in the copolymer can be, for example, less than or equal to about 99:1; less than or equal to about 95:5; less than or equal to about 90:10; or less than or equal to about 85:15.

[0057] The total molar amount of each monomer unit in the copolymer is also not particularly limited. The total amount of fluoranthene monomer unit in the copolymer can be,

for example, at least about 30% by mole; at least about 40% by mole; at least about 50% by mole; at least about 60% by mole; at least about 70% by mole; at least about 80% by mole; or at least about 90% by mole. The total amount of fluoranthene monomer unit in the copolymer can be, for example, less than or equal to about 99% by mole; less than or equal to about 95% by mole; less than or equal to about 90% by mole; or less than or equal to about 85% by mole.

[0058] The total amount of pyrrole monomer unit in the copolymer can include, for example, at least about 1% by mole; at least about 5% by mole; at least about 10% by mole; or at least about 15% by mole. The total amount of pyrrole monomer unit in the copolymer can include, for example, less than or equal to about 70% by mole; less than or equal to about 60% by mole; less than or equal to about 50% by mole; less than or equal to about 40% by mole; less than or equal to about 30% by mole; less than or equal to about 20% by mole; or less than or equal to about 10% by mole.

[0059] It will be appreciated that the “total amount” of the pyrrole monomer unit or fluoranthene monomer unit can include the combined amount of any substituted or unsubstituted monomer units. For example, the copolymer may include 30% by mole fluoranthene as a monomer unit and 30% by mole 1-methylfluoranthene as a monomer unit. The total amount of fluoranthene in this case would be 60% by mole in the copolymer. As another example, the copolymer may include 10% by mole 1,4-difluorofluoranthene as a monomer unit and 70% by mole 1-methylfluoranthene as a monomer unit. This copolymer would include 80% by mole fluoranthene. The total amount of monomer may also be expressly limited to one or more specific monomers (or a sub-genus of monomers) disclosed in the present application.

[0060] The copolymer may optionally include other monomer units. For example, the copolymer could include various aryls or heterocycles, such as fluorene or thiophene. The copolymer may include, for example, less than or equal to about 10% by mole of other monomer units; less than or equal to about 5% by mole of other monomer units; less than or equal to about 1% by mole of other monomer units; less than or equal to about 0.5% by mole of other monomer units; or less than or equal to about 0.1% by mole of other monomer units. The copolymer may include, for example, at least about 0.1% by mole of other monomer

units; at least about 0.5% by mole of other monomer units; at least about 1% by mole of other monomer units; at least about 5% by mole of other monomer units. In some embodiments, the copolymer consists essentially of a fluoranthene monomer unit and a pyrrole monomer unit. That is, the copolymer includes a fluoranthene monomer unit, a pyrrole monomer unit, and amounts of other monomer units that do not substantially alter the green emission of the copolymer. In some embodiments, the copolymer consists of fluoranthene monomer units and pyrrole monomer units.

[0061] The copolymer can be a random copolymer or a block copolymer. The copolymer may also form an amorphous solid or a semi-crystalline solid. In some embodiments, the copolymer has a molecular weight that is sufficiently low for the copolymer to be soluble in an organic solvent, such as tetrahydrofuran (THF), n-methyl pyrrolidone (NMP), and dimethyl sulfoxide (DMS). In some embodiments, the copolymer has a degree of cross-linking sufficiently low for the copolymer to be soluble in an organic solvent, such as tetrahydrofuran, n-methyl pyrrolidone, and dimethyl sulfoxide. The weight average molecular weight of the copolymer can be, for example, about 500 Da; about 1,000 Da; about 1,500 Da; about 2,000 Da; about 2,500 Da; or ranges between any two of these values.

[0062] The copolymer may, in some embodiments, exhibit electrical conductivity when doped with an effective amount of dopant. For example, an 80/20 fluoranthene-pyrrole copolymer can exhibit a conductivity of about $2.7 \cdot 10^{-3} \text{ S}\cdot\text{cm}^{-1}$ when doped with iodine vapor. In some embodiments, the copolymer exhibits a conductivity of at least about $10^{-6} \text{ S}\cdot\text{cm}^{-1}$ when doped with an effective amount of dopant. In some embodiments, the copolymer exhibits a conductivity of at least about $10^{-5} \text{ S}\cdot\text{cm}^{-1}$ when doped with an effective amount of dopant. In some embodiments, the copolymer exhibits a conductivity of at least about $10^{-4} \text{ S}\cdot\text{cm}^{-1}$ when doped with an effective amount of dopant. In some embodiments, the copolymer exhibits a conductivity of at least about $10^{-3} \text{ S}\cdot\text{cm}^{-1}$ when doped with an effective amount of dopant. In some embodiments, the copolymer exhibits a conductivity of at least about $10^{-2} \text{ S}\cdot\text{cm}^{-1}$ when doped with an effective amount of dopant. Non-limiting examples of dopants include halogenated compounds, such as iodine, bromine, chlorine, iodine trichloride; protonic acids such as sulfuric acid, hydrochloric acid, nitric acid, perchloric acid; Lewis

acids, such as aluminum trichloride, ferric trichloride, molybdenum chloride; and organic acids, such as acetic acid, trifluoroacetic acid, and benzenesulfonic acid. In some embodiments, the dopant is iodine.

[0063] The copolymer can also exhibit fluorescence when exposed to radiation. In some embodiments, the copolymer may exhibit green emission when exposed to blue or ultraviolet radiation. The green emission may, for example, have a wavelength of peak emission of about 490 nm to about 570 nm. The blue or ultraviolet radiation may, for example, have a peak wavelength of about 350 nm to about 450 nm.

[0064] Some embodiments disclosed herein include a composition comprising one or more copolymers having at least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit. The copolymer can be any of the copolymers described in the present application. The composition can, for example, include at least about 1% by weight of the copolymer; at least about 5% by weight of the copolymer; at least about 10% by weight of the copolymer; at least about 25% by weight of the copolymer; or at least about 50% by weight of the copolymer. The composition can be a solid, such as a film. The composition can also be a solution, such as the copolymer dissolved or dispersed in a solvent. In some embodiments, the composition can be a blend that includes other polymers. Generally, any inert polymer may be blended with the copolymer; such inert polymers can be, for example, acrylics, polyolefins, polyamides, polyesters, fluoropolymers, vinyl polymers, and the like. For example, the composition can be a blend of 80/20 fluoranthene-pyrrole copolymer and poly(methyl methacrylate).

Method of Making Fluoranthene/Pyrrole Copolymers

[0065] Some embodiments disclosed herein include a method of making a copolymer having at least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit. Any of the copolymers described above can be prepared using this process.

[0066] The method can include, in some embodiments, oxidative polymerization of an optionally substituted fluoranthene and an optionally substituted pyrrole. In some

embodiments, the method includes forming a composition comprising an oxidizing agent, an optionally substituted pyrrole monomer, and an optionally substituted fluoranthene monomer; and maintaining the composition under conditions effective to polymerize the pyrrole monomer and fluoranthene monomer to form the copolymer.

[0067] The skilled artisan, guided by the teachings of the present application, will appreciate that any of the monomer units described above with respect to the copolymer structure have corresponding monomers that will form the monomer units upon polymerization. Thus, for example, the monomer units in the copolymer can include a covalent attachment at both the 5-position and 10-position, whereas the corresponding monomer that polymerizes to form the monomer unit can include hydrogen at both the 5-position and 10-position. It is therefore contemplated that certain embodiments of the method include polymerizing one or more specific monomer structures that correspond with one or more of the monomer units described above. Similarly, the molar ratio of the monomer components, as well as the total molar percentage of each monomer component in the polymer, may also be the same as discussed above with respect to the copolymer. For example, the molar ratio of the optionally substituted fluoranthene monomer to the optionally substituted pyrrole monomer that polymerize to form the copolymer may be about 70:30 to about 99:1.

[0068] The step of forming the composition is not particularly limited. Any suitable method of combining the ingredients is within the scope of the present application. For example, the oxidizing agent can be combined (e.g., mixed or dissolved) in a first solvent, while both the optionally substituted fluoranthene monomer and optionally substituted pyrrole monomer can be combined (e.g., mixed or dissolved) in a second solvent. The second solvent may then be added drop-wise to the first solvent. The first and second solvents may be the same or different. In some embodiments, the first solvent is at least partially immiscible in the second solvent. In some embodiments, the oxidizing agent is soluble in the first solvent. In some embodiments, both the optionally substituted pyrrole monomer and the optionally substituted fluoranthene monomer are soluble in both the first and second solvents. Non-limiting examples for the first solvent include nitromethane,

nitroethane, and propylene carbonate. Non-limiting examples for the second solvent include nitromethane, nitroethane, hexane, and chloroform.

[0069] Without being bound to any particular theory, it is believed that the oxidative polymerization occurs via dehydrogen coupling between the fluoranthene and pyrrole monomers. Thus, oxidative agents that can dehydrogenate and dissolve in the solvent system (e.g., nitromethane) without excessive side-reactions could be selected as the oxidizing agent. Examples of oxidizing agents include, but are not limited to, AlCl_3 , MoCl_5 and CuCl_2 .

[0070] The molar ratio of the oxidizing agent to the total amount of monomer components in the composition can be, for example, at least about 1:1; at least about 1.5:1; at least about 2:1; or at least about 2.5:1. The molar ratio of the oxidizing agent to the total amount of monomer components in the composition can be, for example, less than or equal to about 5:1; less than equal to about 4.5:1; less than or equal to about 4:1; less than equal to about 3.5:1; or less than equal to about 3:1.

[0071] After forming the composition having the monomer components and oxidizing agent, the composition can be maintained at conditions effective to polymerize the pyrrole monomer and fluoranthene monomer to form the copolymer. For example, the composition can be maintained at about atmospheric pressure and a temperature of about 30 °C to about 70 °C. In some embodiments, the temperature can be about 40 °C to about 60 °C. In some embodiments, the temperature can be about 45 °C to about 55 °C. Specific examples of temperatures include about 35 °C, about 40 °C, about 45 °C, about 50 °C, about 55 °C, about 60 °C, about 65 °C, about 70 °C, and ranges between any two of these values. The composition may be maintained at the conditions for a period of time sufficient to obtain the copolymer. The composition, for example, may be maintained at the conditions for at least about 30 minutes; at least about 1 hour; at least about 2 hours; at least about 3 hours; at least about 4 hours; at least about 5 hours, or ranges between any two of these values.

Methods and Apparatuses for Emitting Light

[0072] Some embodiments of the present application include methods and apparatuses for forming light.

[0073] A method of producing light can include exposing a composition to a violet or ultraviolet radiation, where the composition includes a copolymer having at least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit. The method of producing light can include any of the copolymers described in this application. The blue or ultraviolet radiation may, for example, have a peak wavelength of about 350 nm to about 450 nm. In some embodiments, the method produces green light. For example, the green emission may have a wavelength of peak emission of about 490 nm to about 570 nm.

[0074] **Figure 1** depicts an illustrative embodiment of a lighting apparatus that is within the scope of the present application. Lighting apparatus **100** includes substrate **110** having a light source **120** disposed above substrate **110**. The light source can be coupled to an electric source and configured to emit blue or ultraviolet radiation. For example, the light source can be an indium gallium nitride (InGaN) semiconductor. Copolymer **130** is disposed above light source **120** and configured to receive at least a portion of the radiation from light source **120**. Copolymer **130** can be a powder dispersed in encapsulant resin **140**. For example, encapsulant resin **140** may be an epoxy. As an alternative, the copolymer can be a film disposed above the light source (not shown).

[0075] In some embodiments, the apparatus includes: a light source configured to emit an ultraviolet or violet radiation; and a composition configured to receive at least a portion of the radiation emitted from the light source, where the composition includes a copolymer having an optionally substituted fluoranthene as a first monomer unit and an optionally substituted pyrrole as a second monomer unit. The copolymer can be any of the copolymers described in this application.

[0076] The copolymers of the present application may also be included in an organic light emitting diode (OLED). OLEDs are well-known in the art. For example, U.S. Patent No. 6,322, 910 discloses various configurations for OLEDs. A typical OLED can include a light emitting layer disposed between a cathode and anode. A current flow between the cathode and anode can result in electrons recombining with electron holes in the light emitting layer. This recombination can result in emission. Thus, for example, an OLED can

include one or more of the copolymers of the present application in the light emitting layer. In some embodiments, the OLED can include multiple emissive layers.

[0077] **Figure 2** is an illustrative embodiment of an organic light emitting diode that is within the scope of the present application. OLED **200** includes anode **210** having conducting layer **220** above anode **210**. Emissive layer **230** is disposed between conductive layer **220** and cathode **240**. The anode can be, for example, indium tin oxide (ITO), which can optionally be disposed on a transparent substrate (e.g., glass) (not shown). Meanwhile, metals with low work functions, such as barium or calcium, can be used to form the cathode. The conductive layer can be a conductive polymer, such as poly(3,4-ethylenedioxythiophene) poly(styrenesulfonate) (PEDOT:PSS). The emissive layer can include any of the copolymers in the present application.

Methods and Apparatuses for Detecting Nitroaromatics

[0078] Some embodiments of the present application include methods and apparatuses for detecting nitroaromatics. With being bound to any particular theory, it is believed that nitroaromatics can quench fluorescence of the copolymers described in the present application. Thus, if the copolymer exhibits reduced fluorescence, this may be correlated with exposing the polymer to a nitroaromatic.

[0079] Non-limiting examples of nitroaromatics that may be detected using the methods and apparatuses disclosed in the present application include picric acid, nitrobenzene, dinitrobenzene, nitrotoluene, TNT (3,4,6-trinitrotoluene), DNT (2, 4-dinitrotoluene), nitrophenol, 1,3,5-trinitrobenzene (TNB), and 2,6-dinitrobenzonitrile (DNB).

[0080] In some embodiments, a method for detecting nitroaromatics includes: (a) providing a sample suspected of containing one or more nitroaromatics; (b) contacting a composition to the sample, where the composition includes a copolymer having at least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit; (c) exposing the composition to a radiation effective to produce fluorescence from the copolymer; and (d) measuring the amount of fluorescence produced by the copolymer. In some embodiments, the produced fluorescence is greater in the absence of nitroaromatics than in the presence of nitroaromatics. The

fluorescence can be measured, for example, by measuring the fluorescence intensity at a pre-determined color or wavelength. For example, the intensity of green emission at a wavelength of about 510 nm can be measure. In some embodiments, the radiation effective to produce fluorescence from the copolymer is a blue or ultraviolet radiation.

[0081] **Figure 3** depicts an illustrative embodiment of an apparatus for detecting nitroaromatics that is within the scope of the present application. Apparatus **300** can include housing **310** that contains copolymer film **320**, light source **330**, light detector **340**, and port **350**. Copolymer film **320** can include any of the copolymers described in the present application. Light source **330** is configured to emit radiation effective to produce fluorescence from copolymer film **320**. For example, light source **330** can be an InGaN semiconductor that emits blue or ultraviolet radiation. Light detector **340** can be configured to measure light emission from the copolymer. Port **350** can be configured to receive a sample into the housing. Thus, for example, a sample suspected of containing nitroaromatic may be placed into housing **310** via port **350**, so that the sample contacts copolymer film **320**. Light source **330** may then emit light and the fluorescence is detected by light detector **340**. The amount of fluorescence may then be correlated with the presence of nitroaromatics in the sample.

[0082] In some embodiments, the apparatus for detecting nitroaromatics includes a processor coupled to at least the light source and light detector (not shown). The processor may be configured to synchronize both emitting light from the light source and detecting fluorescence with the light detector. The processor may also receive measurement data from the light detector and automatically correlate this data with the presence of nitroaromatics.

[0083] In at least some of the previously described embodiments, one or more elements used in an embodiment can interchangeably be used in another embodiment unless such a replacement is not technically feasible. It will be appreciated by those skilled in the art that various other omissions, additions and modifications may be made to the methods and structures described above without departing from the scope of the claimed subject matter. All such modifications and changes are intended to fall within the scope of the subject matter, as defined by the appended claims.

[0084] With respect to the use of substantially any plural and/or singular terms herein, those having skill in the art can translate from the plural to the singular and/or from the singular to the plural as is appropriate to the context and/or application. The various singular/plural permutations may be expressly set forth herein for sake of clarity.

[0085] It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims (*e.g.*, bodies of the appended claims) are generally intended as “open” terms (*e.g.*, the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted as “having at least,” the term “includes” should be interpreted as “includes but is not limited to,” etc.). It will be further understood by those within the art that if a specific number of an introduced claim recitation is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the following appended claims may contain usage of the introductory phrases “at least one” and “one or more” to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim recitation to embodiments containing only one such recitation, even when the same claim includes the introductory phrases “one or more” or “at least one” and indefinite articles such as “a” or “an” (*e.g.*, “a” and/or “an” should be interpreted to mean “at least one” or “one or more”); the same holds true for the use of definite articles used to introduce claim recitations. In addition, even if a specific number of an introduced claim recitation is explicitly recited, those skilled in the art will recognize that such recitation should be interpreted to mean at least the recited number (*e.g.*, the bare recitation of “two recitations,” without other modifiers, means at least two recitations, or two or more recitations). Furthermore, in those instances where a convention analogous to “at least one of A, B, and C, etc.” is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (*e.g.*, “a system having at least one of A, B, and C” would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). In those instances where a convention analogous to “at least one of A, B, or C, etc.” is used, in general such a construction is intended in the sense one having

skill in the art would understand the convention (*e.g.*, “a system having at least one of A, B, or C” would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). It will be further understood by those within the art that virtually any disjunctive word and/or phrase presenting two or more alternative terms, whether in the description, claims, or drawings, should be understood to contemplate the possibilities of including one of the terms, either of the terms, or both terms. For example, the phrase “A or B” will be understood to include the possibilities of “A” or “B” or “A and B.”

[0086] In addition, where features or aspects of the disclosure are described in terms of Markush groups, those skilled in the art will recognize that the disclosure is also thereby described in terms of any individual member or subgroup of members of the Markush group.

[0087] As will be understood by one skilled in the art, for any and all purposes, such as in terms of providing a written description, all ranges disclosed herein also encompass any and all possible sub-ranges and combinations of sub-ranges thereof. Any listed range can be easily recognized as sufficiently describing and enabling the same range being broken down into at least equal halves, thirds, quarters, fifths, tenths, etc. As a non-limiting example, each range discussed herein can be readily broken down into a lower third, middle third and upper third, etc. As will also be understood by one skilled in the art all language such as “up to,” “at least,” “greater than,” “less than,” and the like include the number recited and refer to ranges which can be subsequently broken down into sub-ranges as discussed above. Finally, as will be understood by one skilled in the art, a range includes each individual member. Thus, for example, a group having 1-3 articles refers to groups having 1, 2, or 3 articles. Similarly, a group having 1-5 articles refers to groups having 1, 2, 3, 4, or 5 articles, and so forth.

[0088] While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. The various aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope and spirit being indicated by the following claims.

EXAMPLES

[0089] Additional embodiments are disclosed in further detail in the following examples, which are not in any way intended to limit the scope of the claims.

Example 1: Polymerization of Copolymers

[0090] The chemical oxidative polymerization for the synthesis of the fluoranthene-pyrrole copolymer was carried out with FeCl_3 as both catalyst and oxidant in $n\text{-C}_6\text{H}_{14}/\text{CH}_3\text{NO}_2$ biphasic medium at 50°C .

[0091] A typical procedure included adding fluoranthene (2.4 mmol) and pyrrole (0.6 mmol) solution in $n\text{-C}_6\text{H}_{14}$ (15 mL) dropwise to FeCl_3 (9 mmol) solution in CH_3NO_2 (10 mL) at 50°C in a water bath with constant stirring for 6 hours. As soon as the monomer solution was added, the reaction mixture turned a dark color. After reaction, the copolymer precipitate was isolated by centrifugation and washed with an excess of ethanol and distilled water until the top layer liquid in the centrifuge tubes became colorless. After that, the liquid was tested for residual Fe^{2+} and Fe^{3+} by adding potassium ferricyanide and potassium ferrocyanide to a sample of the aqueous solution. The sample did not exhibit a blue color; therefore, the sample included very low amounts of Fe^{2+} and Fe^{3+} . Then HCl was used to replace trace amounts of FeCl_3 and FeCl_2 (reduction product of FeCl_3) on the backbone of the copolymer. Subsequently, ammonia was employed to remove the HCl remaining in the copolymer and a tan powder of purified 80/20 fluoranthene-pyrrole copolymer was obtained after drying under an IR lamp. The polymerization procedure was repeated with various molar ratios shown in **Table 1**.

[0092] The solubility of the copolymer powders was also evaluated by thoroughly dispersing a 3 mg sample within 5 mL of solvent. After the mixture was swayed for 24 hours at room temperature, the solubility of the polymers was observed. The results are shown in **Table 1** below.

Table 1: Summary of Polymerization Results

Fluoranthene-Pyrrole Ratio	Yield (%)	Color of powder	THF Solubility	NMP Solubility	DMSO Solubility
100/0	39.6	red-brown	Soluble	Soluble	Soluble
90/10	44.6	tan	Soluble	Soluble	Soluble
80/20	57.0	tan	Soluble	Soluble	Soluble
70/30	45.9	dark brown	Mainly soluble	Soluble	Soluble
60/40	40.7	dark brown	Slightly soluble	Partially soluble	Mainly soluble
50/50	60.9	blackish brown	Slightly soluble	Partially soluble	Mainly soluble
0/100	98.8	black	Insoluble	Insoluble	Insoluble

Example 2: Copolymer Conductivity

[0093] The copolymers powders prepared according to Example 1 and sufficient I₂ particles were kept in a sealed tube at 80° C under atmospheric pressure for a week. The copolymer powder did not directly contact the I₂ particles. After I₂ vapor doping, the copolymer powder turned to black. The bulk electrical conductivity of the copolymer powders before and after doping was measured by a two-electrode method using a UT70 A multimeter at ambient temperature.

[0094] The electrical conductivity is shown in **Table 2**. This Example demonstrates that incorporating pyrrole monomer units can increase the conductivity of the resulting copolymer.

Table 2: Summary of Electrical Conductivity Results

Fluoranthene-Pyrrole Ratio	Undoped Conductivity (S/cm)	I₂-doped Conductivity (S/cm)	Ratio of Doped-Undoped Conductivity
100/0	$2.1 \cdot 10^{-8}$	$5.6 \cdot 10^{-6}$	266
90/10	$9.2 \cdot 10^{-7}$	$8.1 \cdot 10^{-5}$	88
80/20	$3.3 \cdot 10^{-6}$	$2.7 \cdot 10^{-3}$	818
70/30	$4.2 \cdot 10^{-6}$	$6.4 \cdot 10^{-3}$	1524
60/40	$7.2 \cdot 10^{-6}$	$2.1 \cdot 10^{-2}$	2917
50/50	$2.5 \cdot 10^{-5}$	$4.6 \cdot 10^{-2}$	1.84
0/100	$9.9 \cdot 10^{-4}$	0.08	81

Example 3: IR Spectra

[0095] IR spectra were recorded with a Nicolet Magna-IR 550 spectrometer in a reflection mode. Representative IR reflection spectra for fluoranthene-pyrrole copolymers with a molar ratio of 100/0, 80/20, 60/40 and 0/100 are shown in **Figure 4**.

[0096] This Example demonstrates that the copolymer is structurally distinct from the fluoranthene monomer.

Example 4: UV-visible Spectra

[0097] The UV-Visible absorption spectra were measured on a Lambda 35 UV-Vis spectrophotometer between 200 and 900 nm in NMP. The results are shown in **Figure 5** and the key parameters of the spectra are summarized in **Table 3**.

Table 3: Summary UV-visible Spectra

Fluoranthene-Pyrrole Ratio	Band I (nm)	Band II (nm)	Band III (nm)	Intensity ratio (III / I)
Fluoranthene Monomer	356	367	401	0.36
100/0	371	500	534	1.14
90/10	370	498	527	0.95
80/20	370	498	535	0.93
70/30	355	495	533	0.88
60/40	335	495	533	0.88
50/50	368	499	535	0.94
0/100	384	-	-	-

[0098] This Example demonstrates that increasing the pyrrole monomer content increase the π -conjugation and decreases the band-gap in the copolymer.

Example 5: Fluorescence Spectra

[0099] The fluorescence excitation and emission spectra of the copolymer solutions were obtained at slit widths of 2.5 nm using a F-7000 FL Spectrophotometer. **Figure 6** shows the excitation and emission for various fluoranthene-pyrrole copolymers. The spectral characteristics are summarized in **Table 4**.

Table 4: Summary of Fluorescent Spectra

Fluoranthene-Pyrrole Ratio	Excitation $\lambda_{Ex}(nm)$	Emission $\lambda_{Em}(nm)$	Stokes' Shift (nm)
Fluoranthene Monomer	364	445	89
100/0	364	467	96
90/10	401	488	118
80/20	416	512	142
70/30	365	490	135
60/40	372	472	137
50/50	371	467	99

[0100] This Example demonstrates that the relative monomer unit content can be modified to adjust the fluorescence properties of the copolymer.

Example 6: Copolymer X-ray Diffraction

[0101] The copolymers powders prepared according to Example 1 were examined using X-ray diffraction. Wide-angle X-ray diffractograms were obtained using a Rigaku D/max2550VB3+/PC model X-ray diffractometer with CuK_{α} radiation having a wavelength of 0.15406 nm over a 2θ range from 3° to 90° . The results are shown in **Figure 7**.

[0102] This Example shows that the copolymer can be semi-crystalline and incorporate crystal packing feature found in both the polyfluoranthene and polypyrrole homopolymers.

Example 7: Copolymer Films

[0103] A composite film was fabricated by ultrasonically dissolved about 1 part by weight of undoped 80/20 fluoranthene-pyrrole copolymer prepared according to Example 1 and 99 parts by weight of poly(methyl methacrylate) (PMMA) in methylene chloride. The solution was cast onto a quartz plate. After drying for a period of time, the film with a thickness of about 30 μm was formed on the quartz plate for fluorescence characterization. The prepared sensing film was stored in a desiccator until use.

[0104] A second homogeneous film was formed using the same solvent casting procedures. Only the homogeneous film did not exhibit measurable fluorescence, while the heterogeneous film produced detectable fluorescence.

[0105] The wide-angle X-ray diffractograms for the composite film and homogeneous film are shown in **Figure 8**.

[0106] The Example demonstrates that a small amount of crystalline copolymer was not detected by X-ray diffraction because the content of the copolymer is too low to aggregate. Therefore, the composite film is a “solid solution” containing the copolymer in PMMA “solvent,” which may inhibit self-quenching observed in pure copolymer solid films.

Example 8: Modifying Polymerization Conditions

[0107] Additional copolymers were prepared using generally the same procedures described in Example 1. However, in one set of experiments the molar ratio of FeCl₃ to total monomer components was 1:1, 3:1, or 5:1 to form an 80/20 fluoranthene-pyrrole copolymer. The fluorescence spectra and UV-visible spectra for these copolymers were determined according to the same procedures in Examples 5. The results are shown in **Figure 9** and **Figure 10**.

[0108] In another set of experiments, the temperature during polymerization was varied to 30° C, 50° C, or 70° C to form an 80/20 fluoranthene-pyrrole copolymer. The fluorescence spectra are shown in **Figure 11**. For comparison, **Figure 11** also includes the fluorescence spectra for a copolymer film prepared according to generally the same procedures in Example 7. The UV-visible spectra are shown in **Figure 12**.

[0109] This Example demonstrates that the polymerization conditions can alter the copolymer structure and fluorescence properties.

Example 9: Copolymer Solution for Sensing Nitroaromatic Picric Acid

[0110] Two solutions of 80/20 fluoranthene-pyrrole copolymer were prepared: (i) 20 mg/L in NMP and (ii) 1 mg/L in NMP. Picric acid (2,4,6-trinitrophenol) was incrementally added to each solution while the amount of the copolymer remained constant (i.e., 1 mg/L or 20 mg/L of 80/20 fluoranthene-pyrrole copolymer in NMP). The

fluorescence was measured using a 415 nm excitation wavelength. The results for the concentrated solution and dilute solution are shown in **Figures 13 and 14**, respectively.

[0111] This Example demonstrates that the copolymer's fluorescence is quenched by nitroaromatics and the quenching is proportional to the concentration of the nitroaromatic. Accordingly, fluoranthene-pyrrole copolymers can be used to detect nitroaromatics based on changes to the fluorescence spectra.

Example 10: Copolymer Films for Sensing Nitroaromatic Picric Acid

[0112] A composite copolymer film prepared according to the general procedures in Example 7 was contacted with various aqueous solutions containing various concentrations of picric acid. The fluorescence of the copolymer film was measured after contacting each solution. The results are shown in **Figure 15**. This result demonstrates that solid forms of the copolymer can also be used to detect nitroaromatics.

[0113] Considering the film sensors were capable of detecting nitroaromatics, the reversibility and selectivity of this detection was further investigated. Initially, the composite film containing 0.99 wt% the FA/PY copolymer was placed in the cuvette filled with blank solution (pure water). Upon being excited at 370 nm, the composite film emitted fluorescence at 504 nm and its intensity was recorded. Subsequently, the blank solution was replaced by 2.50×10^{-7} M picric acid aqueous solution, and a reduced fluorescence intensity was recorded. After that, the composite film was taken out of the solution and washed with water until the fluorescence intensity in the blank water remained almost was restored to near its original intensity. The cleaned composite film in the cuvette was refilled with 5.00×10^{-6} M picric acid aqueous solution, and a further reduction in fluorescence intensity was recorded. These procedures were repeated four times. The results are shown in **Figure 16**. The average fluorescence intensity values are 397.40 (RSD=0.0527%) for the blank solution (n=5), 287.86 (RSD=0.353%) for the 2.5×10^{-7} M picric acid solution (n=4), and 212.34 (RSD=0.423%) for the 5.0×10^{-6} M picric acid solution (n=4). This result indicates that the reversibility and reproducibility of the sensing film to nitroaromatics can be satisfactory. The recovery of the film was independent of the concentration switch from low to high or the reverse.


[0114] The selectivity of the composite copolymer film was also tested by exposing the film to possible interfering molecules at high concentrations. The fluorescence intensity when contacting $2.5 \cdot 10^{-7}$ M picric acid in aqueous solution (F_1) was compared with the fluorescence intensity when contacting $2.5 \cdot 10^{-7}$ M picric acid in aqueous solution with an additional molecule. The results are shown in **Table 5**. This result demonstrates the copolymer can be highly selective for detecting nitroaromatics because other molecules generally have a minimal effect on fluorescence.

Table 5: Effect of Possible Interfering Molecules on Fluorescence Intensity

Interfering Molecule	Concentration (M)	Fluorescence Intensity (F_2)	Fluorescence Change $\Delta F = (F_1 - F_2)$	$\Delta F/F_1$ (%)
Na^+	1.00×10^{-2}	394.6	2.6	0.65
K^+	1.00×10^{-2}	396.6	0.6	0.15
Ca^{2+}	1.00×10^{-2}	395.8	1.4	0.35
Ni^{2+}	1.00×10^{-3}	393.4	3.8	0.96
Cu^{2+}	1.00×10^{-2}	395.3	1.9	0.48
Hg^{2+}	1.00×10^{-3}	394.7	2.5	0.63
Pb^{2+}	1.00×10^{-3}	392.5	4.7	1.18
Cl^-	1.00×10^{-3}	399.4	-2.2	-0.55
NO_3^-	1.00×10^{-4}	393.1	4.1	1.03
SCN^-	1.00×10^{-3}	391.7	5.5	1.38
ClO_4^-	1.00×10^{-4}	394.6	2.6	0.65
SO_4^{2-}	1.00×10^{-3}	393.8	3.4	0.86
Nitric acid	1.00×10^{-4}	393.1	4.1	1.03
Hydrochloric acid	1.00×10^{-3}	399.4	-2.2	-0.55
Sulfuric acid	1.00×10^{-3}	393.8	3.4	0.86
Perchloric acid	1.00×10^{-4}	394.6	2.6	0.65
Aniline	1.00×10^{-3}	402.3	-5.1	-1.28
Phenol	1.00×10^{-3}	395.4	1.8	0.45
Acetone	1.00×10^{-3}	396.1	1.1	0.28

WHAT IS CLAIMED IS:


1. A copolymer comprising at least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit.
2. The copolymer of Claim 1, where the first monomer unit is represented by Formula I:

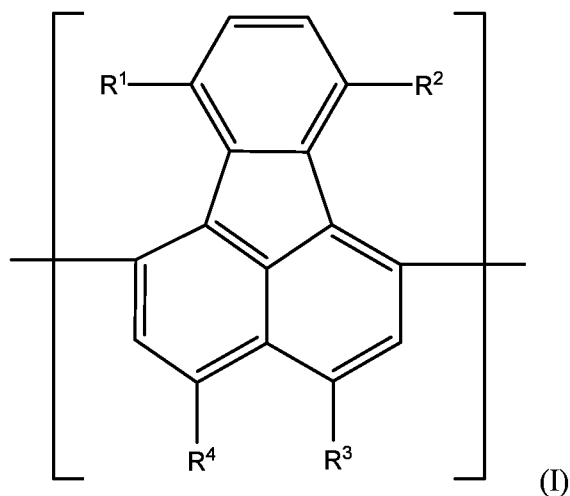

wherein R^1 , R^2 , R^3 , and R^4 are each independently selected from the group consisting of hydrogen, C_{1-6} alkyl, C_{1-6} haloalkyl, C_{1-6} alkoxy, C_{1-6} hydroxyalkyl, ester, carboxy, and C_{1-6} alkyl- $N(R^5)(R^6)$, and

wherein R^5 and R^6 are each independently selected from hydrogen and C_{1-6} alkyl.

3. The copolymer of Claim 2, wherein R^1 , R^2 , R^3 , and R^4 are each independently selected from the group consisting of hydrogen and C_{1-6} alkyl.
4. The copolymer of Claim 2, wherein R^1 , R^2 , R^3 , and R^4 are each hydrogen.
5. The copolymer of Claim 2, wherein R^1 and R^2 are the same.
6. The copolymer of Claim 2, wherein R^3 and R^4 are the same.
7. The copolymer of any one of Claims 1-6, wherein the second monomer unit is represented by Formula II:

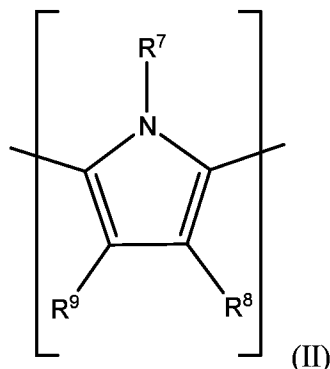

wherein R^7 , R^8 , and R^9 are each independently selected from the group consisting of hydrogen and C_{1-6} alkyl.

8. The copolymer of Claim 7, wherein R^7 , R^8 , and R^9 are each hydrogen.
9. The copolymer of Claim 7, wherein R^8 and R^9 are the same.
10. The copolymer of any one of Claims 1-9, wherein the copolymer comprises at least about 30% of the first monomer unit by mole.
11. The copolymer of any one of Claims 1-10, wherein the copolymer comprises no more than about 99% of the first monomer unit by mole.
12. The copolymer of any one of Claims 1-11, wherein the copolymer comprises at least about 1% of the second monomer unit by mole.
13. The copolymer of any one of Claims 1-12, wherein the copolymer comprises no more than about 70% of the second monomer unit by mole.
14. The copolymer of any one of Claims 1-13, wherein the molar ratio of the first monomer unit to the second monomer unit is about 30:70 to about 99:1.
15. The copolymer of any one of Claims 1-14, wherein the copolymer exhibits an electrical conductivity of at least $10^{-6} \text{ S}\cdot\text{cm}^{-1}$ when doped with an effective amount of a dopant.
16. The copolymer of Claim 15, wherein the dopant is iodine.
17. The copolymer of any one of Claims 1-16, wherein the copolymer exhibits a green emission when exposed to ultraviolet or violet radiation.
18. The copolymer of Claim 17, wherein the green emission has a wavelength of peak emission of about 490 nm to about 570 nm.

19. The copolymer of any one of Claims 17-18, wherein the ultraviolet or violet radiation has a peak wavelength of about 350 nm to about 450 nm.

20. The copolymer of any one of Claims 1-19, wherein the copolymer has a weight average molecular weight of at least about 1,000 Da.

21. A method of making a copolymer, the method comprising:

forming a composition comprising an oxidizing agent, at least one optionally substituted pyrrole monomer, and at least one optionally substituted fluoranthene monomer; and

maintaining the composition under conditions effective to polymerize the pyrrole monomer and fluoranthene monomer to form the copolymer.

22. The method of Claim 17, wherein the molar ratio of the pyrrole monomer to the fluoranthene monomer is about 70:30 to about 1:99.

23. The method of any one of Claims 21-22, wherein the molar ratio of the oxidizing agent to a total amount of monomer components in the composition is no more than about 3:1.

24. The method of any one of Claims 21-23, wherein the composition is maintained at a temperature of about 30° C to about 70° C.

25. The method of any one of Claims 21-24, wherein forming the composition comprises combining (a) a first solution comprising a first solvent and the oxidizing agent and (b) a second solution comprising a second solvent, the pyrrole monomer, and the fluoranthene monomer, wherein:

the first solvent is at least partially immiscible in the second solvent;

the oxidizing agent is soluble in the first solvent; and

both the pyrrole monomer and the fluoranthene monomer are soluble in both the first and second solvents.

26. An apparatus comprising:

a light source configured to emit an ultraviolet or violet radiation; and

a composition configured to receive at least a portion of the radiation emitted from the light source, wherein the composition comprises a copolymer comprising at

least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit.

27. The apparatus of Claim 26, further comprising a light detector configured to measure light emitted from the composition.

28. The apparatus of any one of Claims 27, further comprising a housing, wherein the housing contains the composition and is configured to receive a sample adjacent to the composition.

29. An organic light-emitting diode comprising:

a light-emitting active layer;

a conducting layer on one side of the light-emitting active layer;

a cathode; and

an anode, wherein the light-emitting active layer and conducting layer are disposed between the cathode and the anode, and the light-emitting active layer comprises a copolymer comprising at least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit.

30. A method of producing light comprising exposing a composition to a violet or ultraviolet radiation, wherein the composition comprises a copolymer comprising at least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit.

31. A method for detecting nitroaromatics within a sample, the method comprising:

providing a sample suspected of containing one or more nitroaromatics;

contacting a composition to the sample, wherein the composition comprises a copolymer comprising at least one optionally substituted fluoranthene as a first monomer unit and at least one optionally substituted pyrrole as a second monomer unit;

exposing the composition to a radiation effective to produce fluorescence from the copolymer; and

measuring the amount of fluorescence produced by the copolymer.

32. The method of Claim 31, wherein the produced fluorescence is greater in the absence of nitroaromatics than in the presence of nitroaromatics.

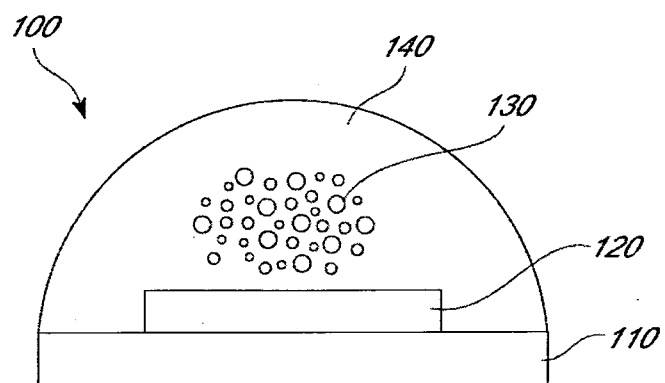


FIG. 1

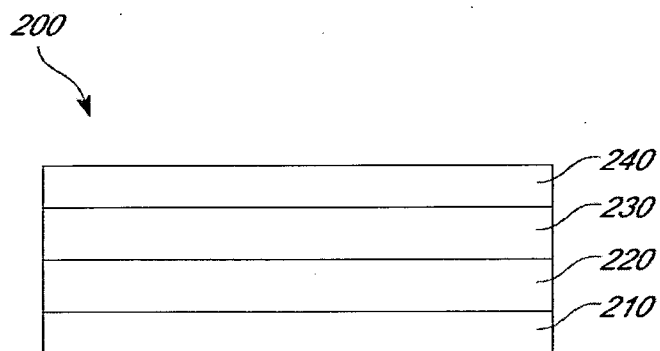


FIG. 2

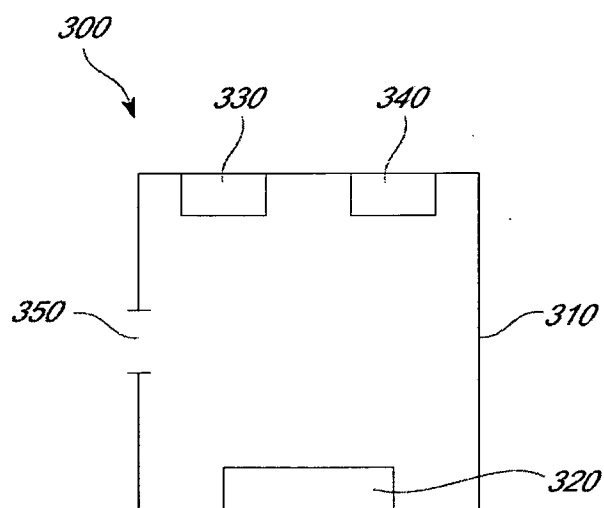
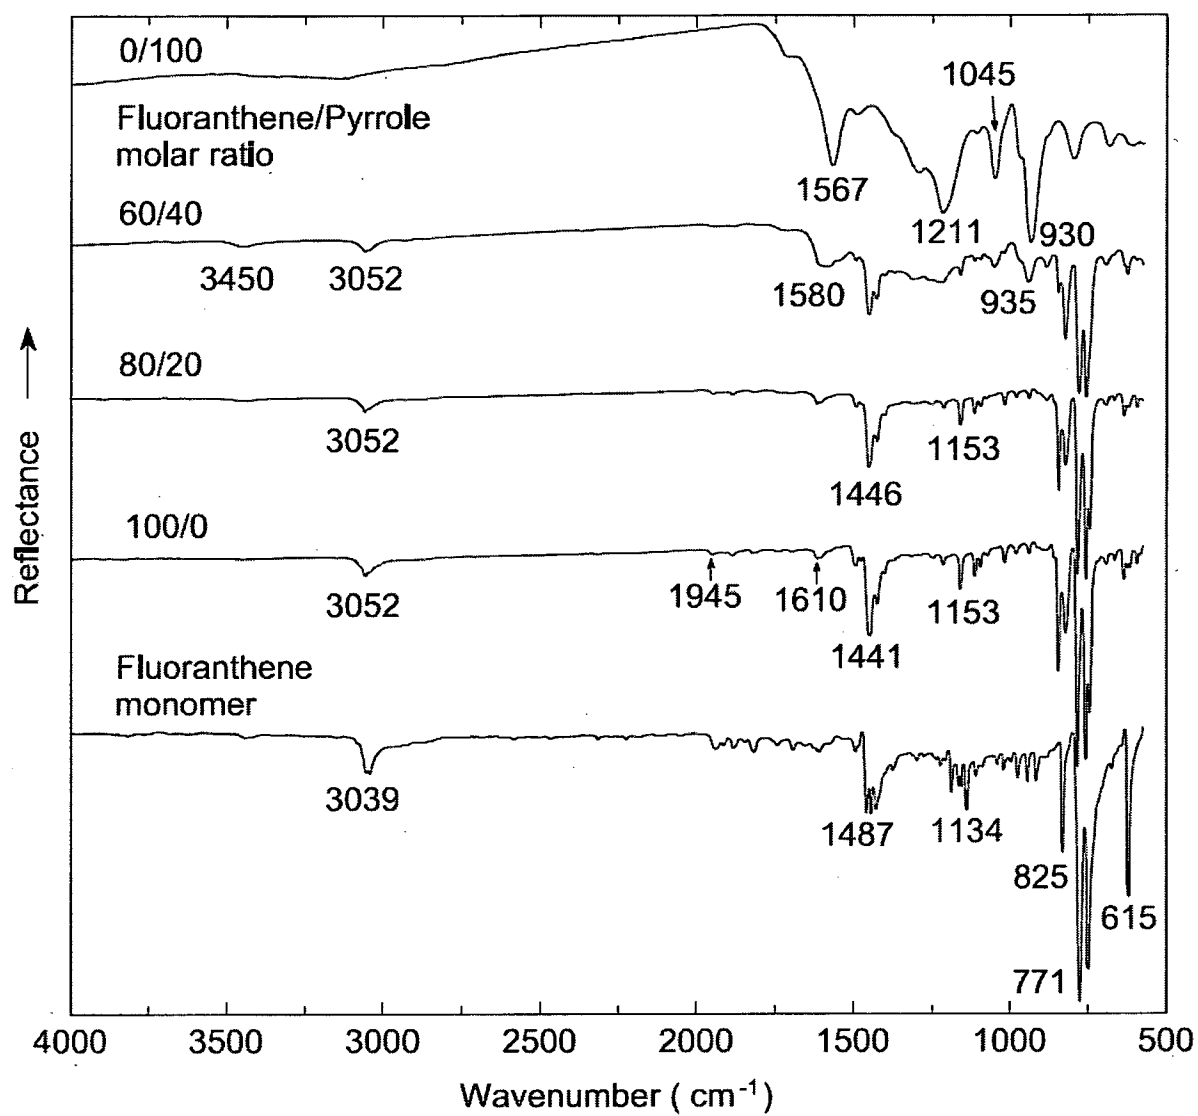


FIG. 3

**FIG. 4**

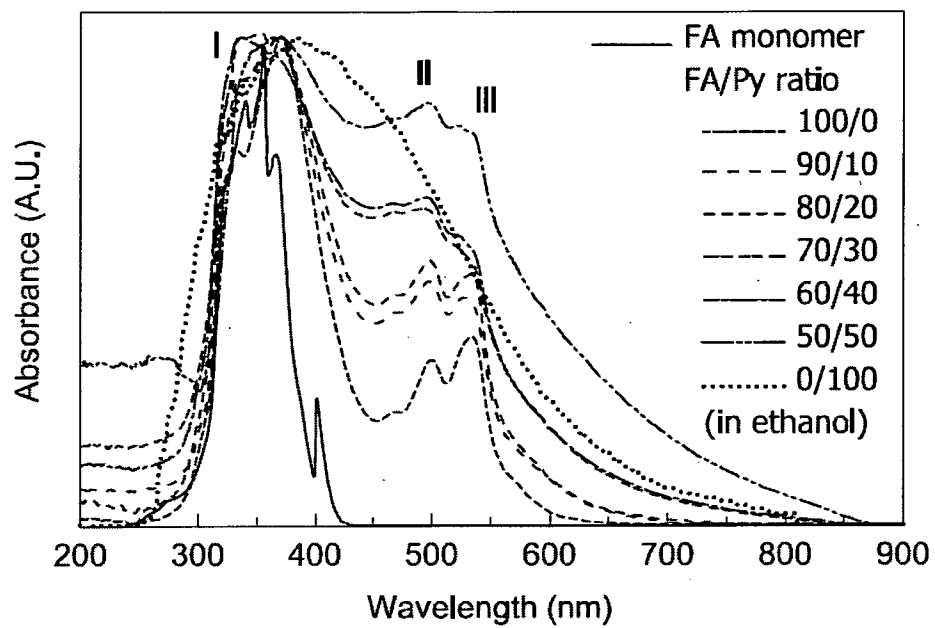


FIG. 5

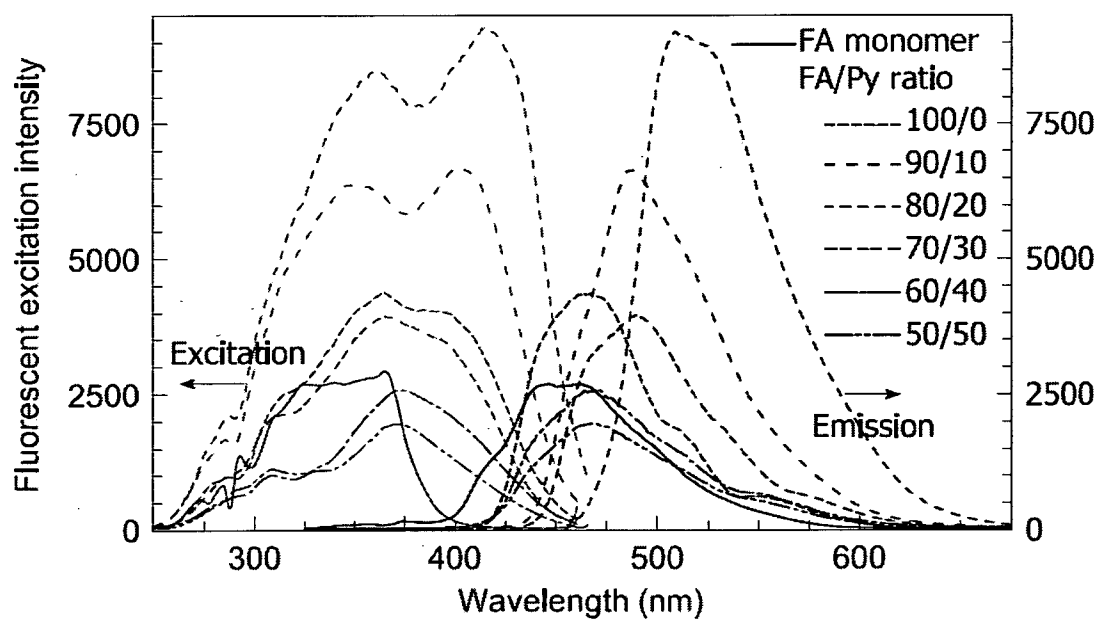
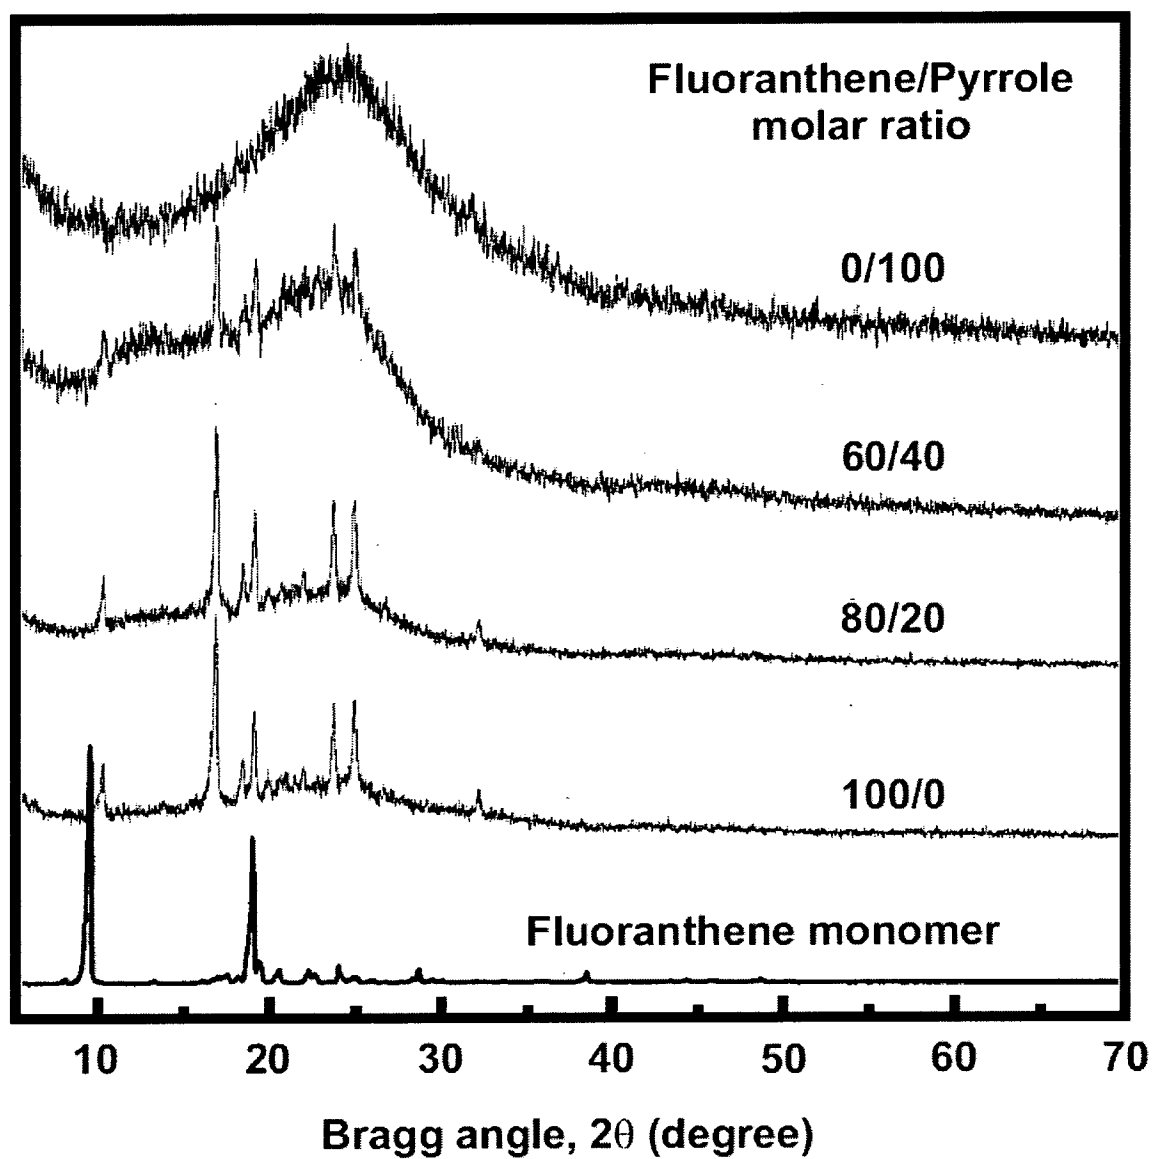
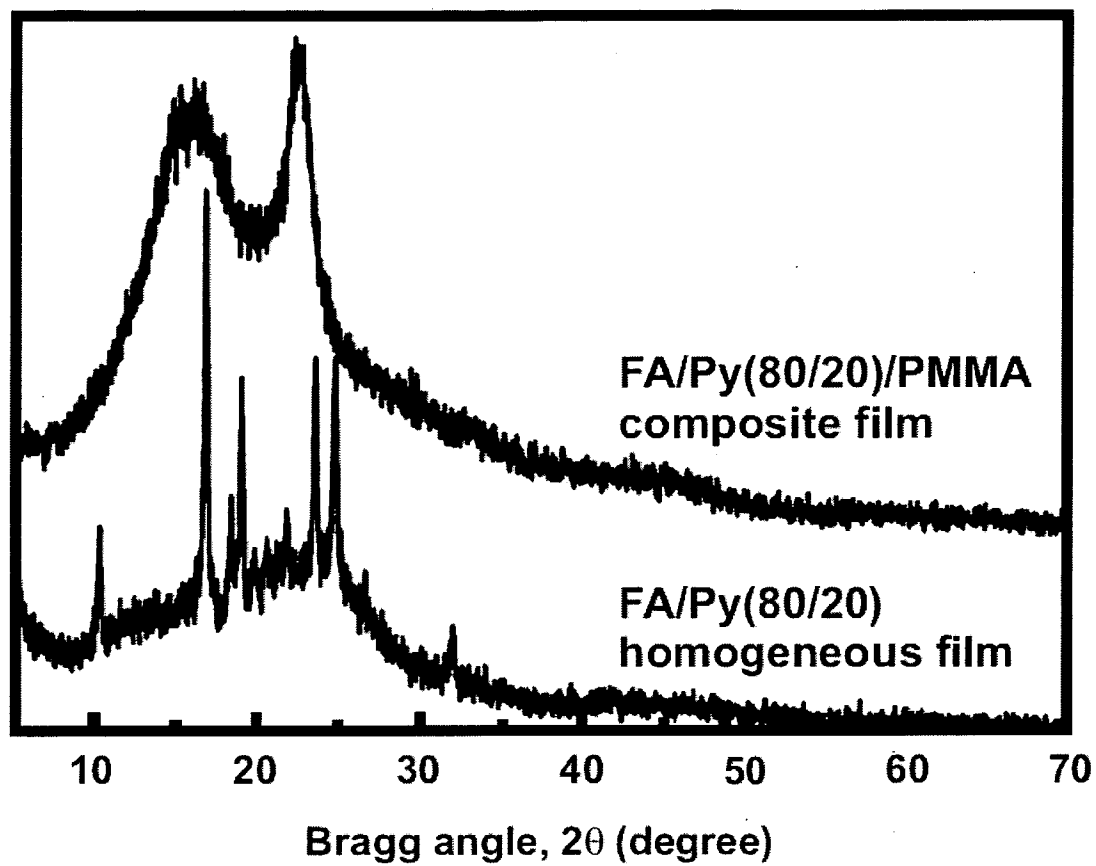


FIG. 6

*FIG. 7*

*FIG. 8*

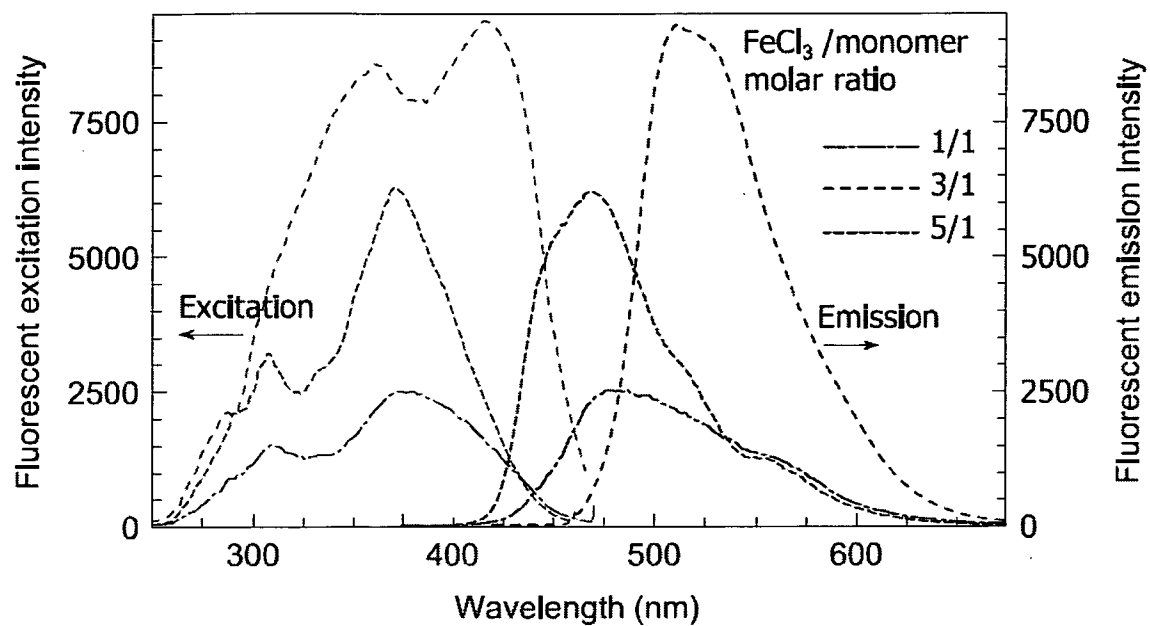


FIG. 9

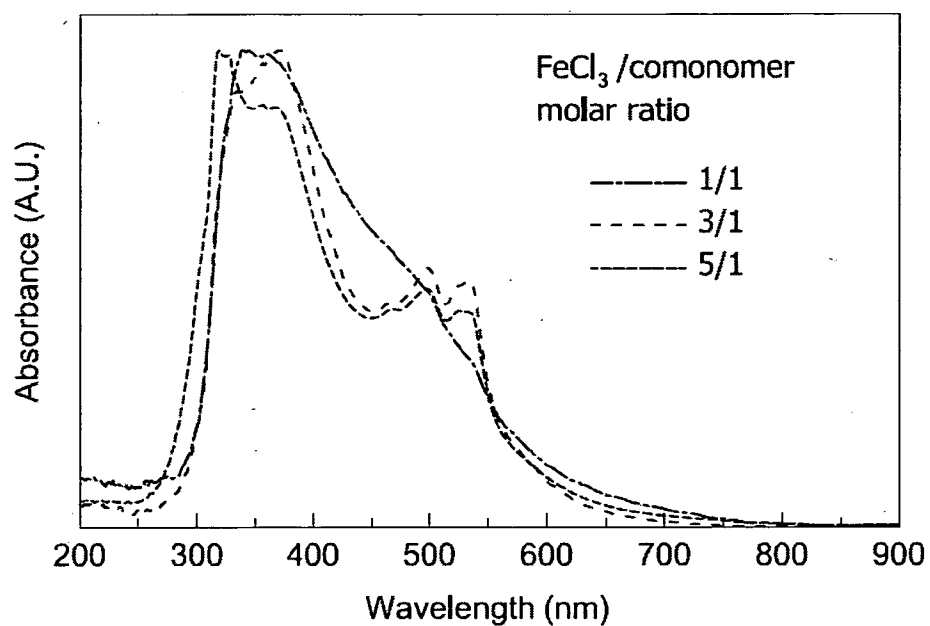


FIG. 10

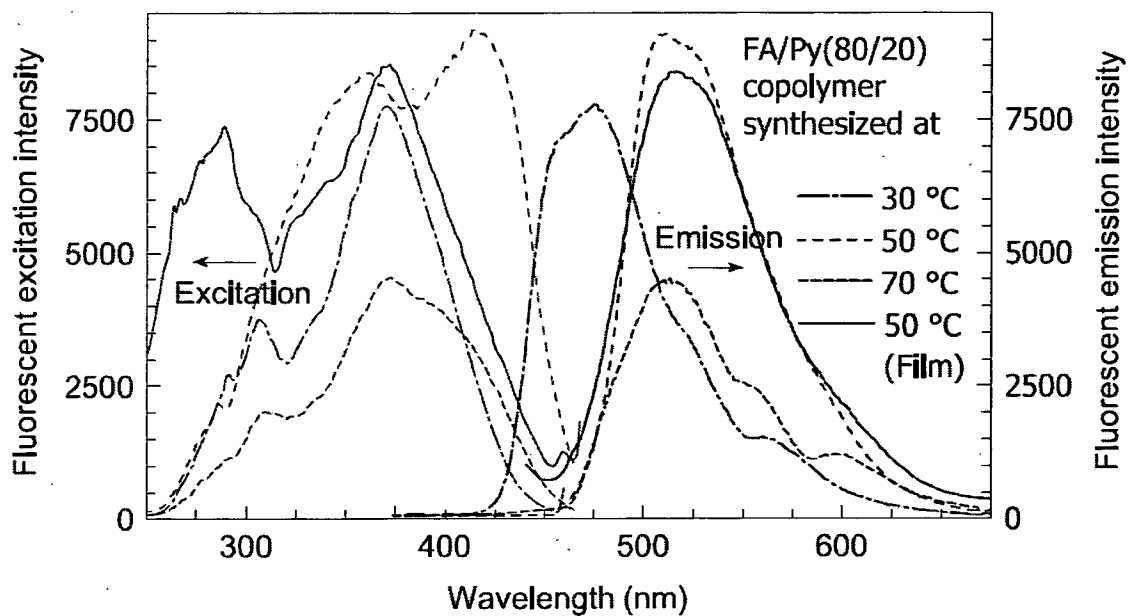


FIG. 11

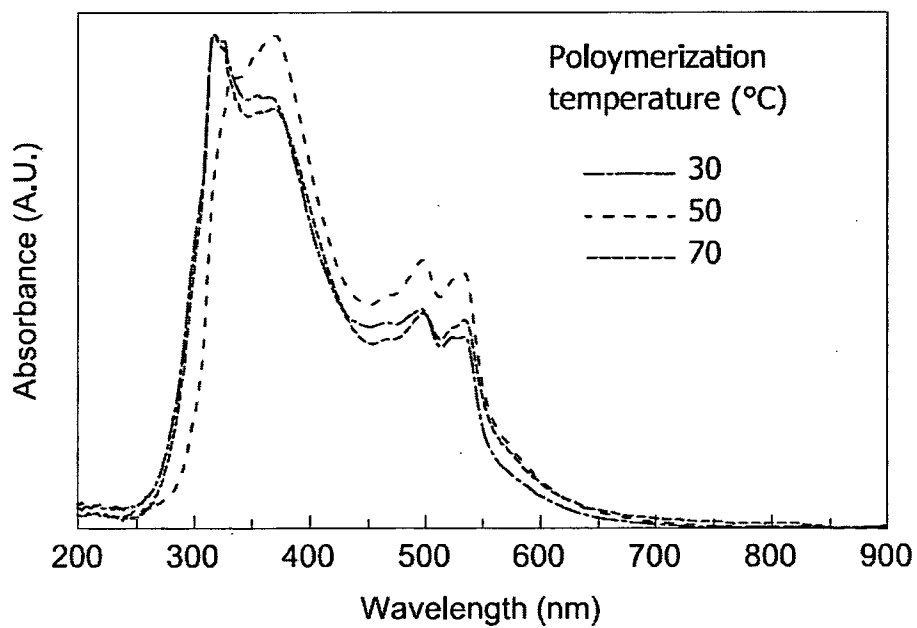


FIG. 12

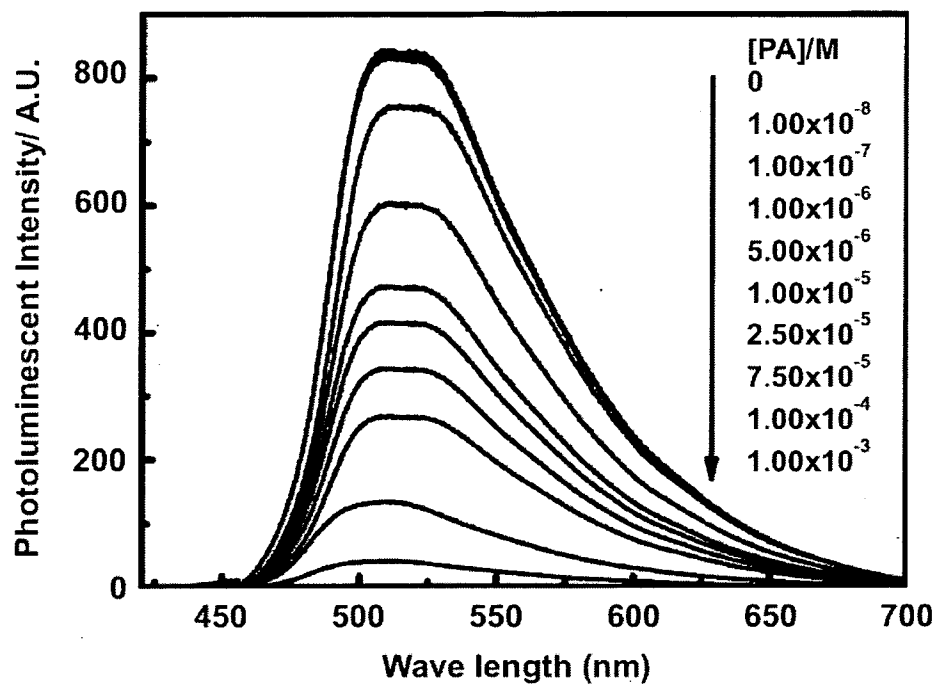


FIG. 13

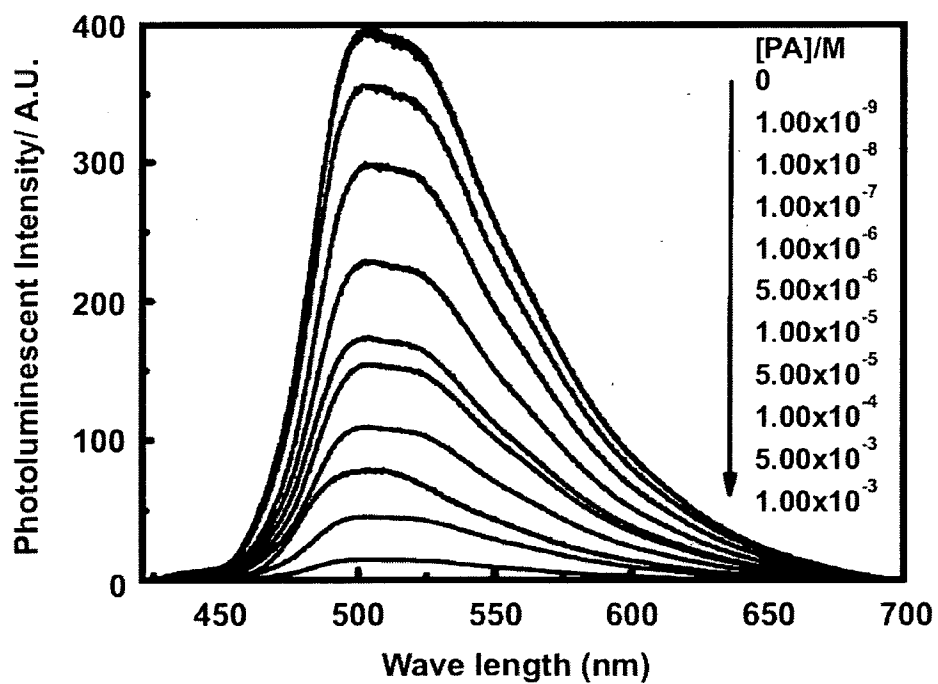


FIG. 14

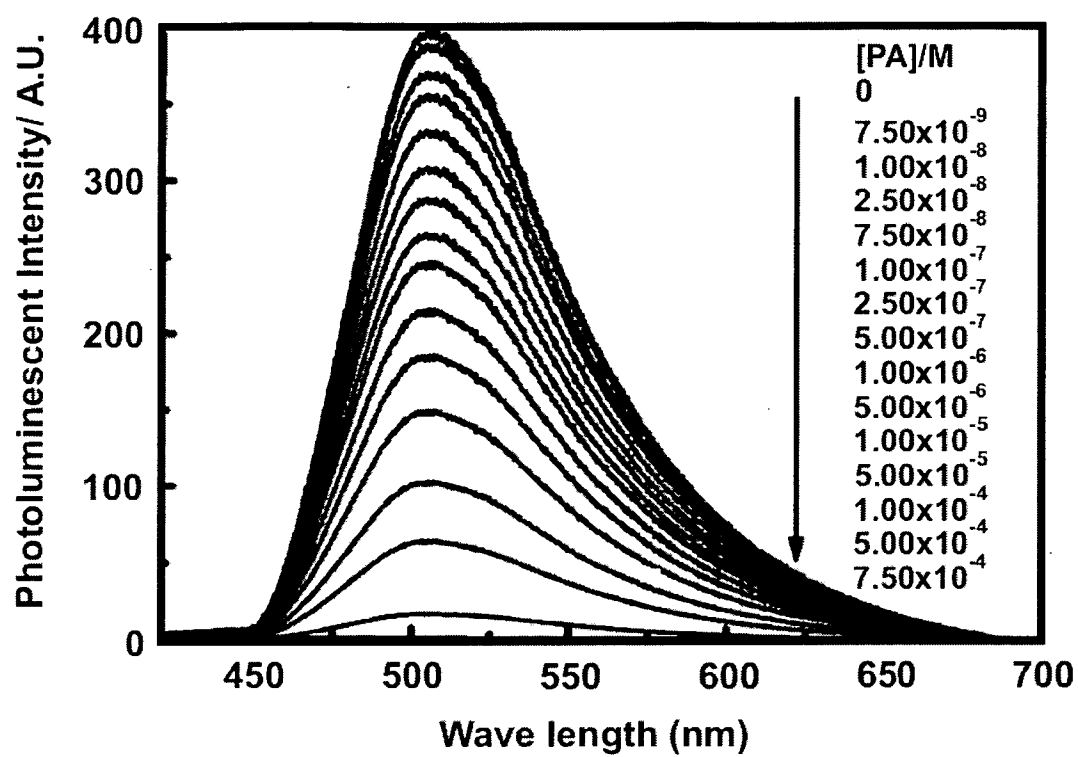
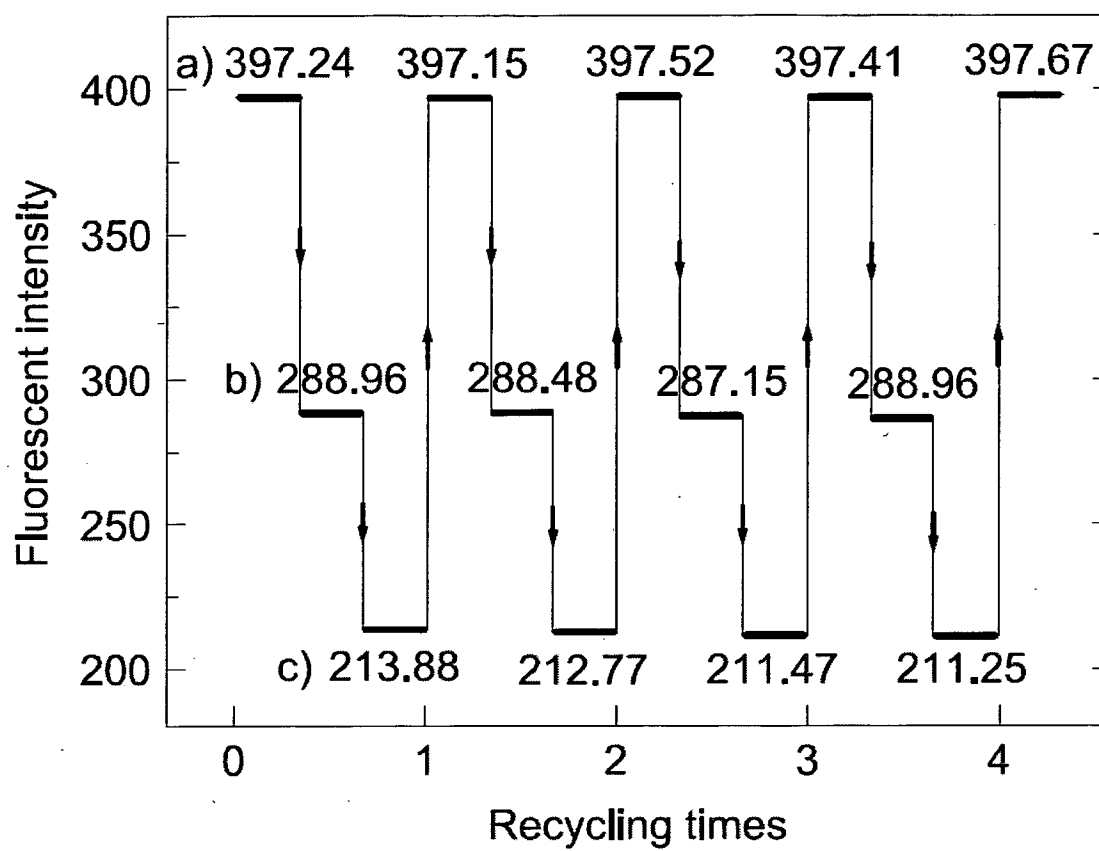


FIG. 15

*FIG. 16*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2011/071499

A. CLASSIFICATION OF SUBJECT MATTER

C08G 61/12 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: C08G 61/12

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, CPRS, CNKI, CA on WEB: fluoranthene???, pyrrole??, oxid????

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO2010023443A2 (CAMBRIDGE DISPLAY TECHNOLOGY LTD) 04 March 2010 (04.03.2010) The whole document	1-32
A	CN101328255A (UNIV TONGJI) 24 December 2008 (24.12.2008) The whole document	1-32

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&” document member of the same patent family
“O” document referring to an oral disclosure, use, exhibition or other means	
“P” document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
15 November 2011 (15.11.2011)Date of mailing of the international search report
24 Nov. 2011 (24.11.2011)Name and mailing address of the ISA/CN
The State Intellectual Property Office, the P.R.China
6 Xitucheng Rd., Jimen Bridge, Haidian District, Beijing, China
100088
Facsimile No. 86-10-62019451Authorized officer
LIANG, Shuang
Telephone No. (86-10)62084228

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2011/071499

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
WO2010023443A2	04.03.2010	GB2463040A	03.03.2010
		WO2010023443A3	27.05.2010
		TW201022403A	16.06.2010
		KR20110043791A	27.04.2011
		DE112009002093T5	07.07.2011
		US2011180758A1	28.07.2011
		CN102137911A	27.07.2011
CN101328255A	24.12.2008	CN101328255B	22.09.2010