

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 March 2001 (15.03.2001)


PCT

(10) International Publication Number
WO 01/17643 A1

- (51) International Patent Classification⁷: B01D 11/02 (72) Inventors; and
(75) Inventors/Applicants (for US only): CORR, Stuart [GB/GB]; 31 Foxhills Close, Appleton, Warrington, Cheshire WA4 5DH (GB). LOW, Robert, Elliott [GB/GB]; 17 The Crescent, Leftwich, Northwich, Cheshire (GB). MORRISON, James, David [GB/GB]; 39 Sandown Crescent, Sandiway, Northwich, Cheshire CW8 2QN (GB). MURPHY, Frederick, Thomas [GB/GB]; 53 Fairways, Frodsham, Cheshire WA6 7RY (GB). DOWDLE, Paul, Alan [GB/GB]; 72 Holly Road, Haydock, St. Helens, Merseyside WA11 OJT (GB).
- (21) International Application Number: PCT/GB00/03319
- (22) International Filing Date: 31 August 2000 (31.08.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
9920949.6 6 September 1999 (06.09.1999) GB (74) Agent: POWELL, Timothy, J.; Eric Potter Clarkson, Park View House, 58 The Ropewalk, Nottingham NG1 5DD (GB).
- (71) Applicant (for all designated States except US): IMPERIAL CHEMICAL INDUSTRIES PLC [GB/GB]; Imperial Chemical House, Millbank, London SW1P 3JF (GB). (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR REMOVING SOLVENT RESIDUES

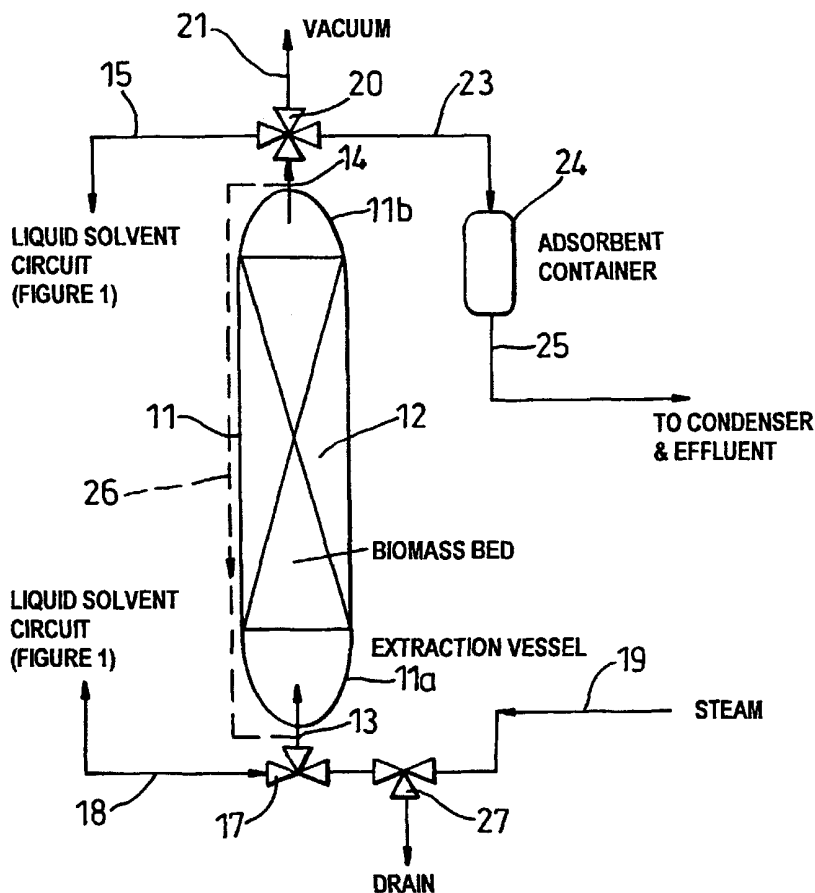

(57) Abstract: In the field of biomass extraction, there is a need for effective removal of solvent from spent biomass material. An apparatus for removing solvent residues includes a vessel (11) for containing biomass; a steam source (19) for supplying steam to contact the biomass; and a separator (24) for separating solvent from steam that has contacted the biomass. The disclosure includes a method of use of the apparatus.



WO 01/17643 A1



HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— *With international search report.*

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

APPARATUS AND METHOD FOR REMOVING SOLVENT RESIDUES

This invention concerns apparatuses and a method for removing solvent residues in particular after "extraction" of biomass. Biomass extraction is the extraction of flavours, fragrances or pharmaceutically active ingredients from materials of natural origin (these materials being referred to as "biomass").

Examples of biomass materials include but are not limited to flavoursome or aromatic substances such as coriander, cloves, star anise, coffee, orange juice, fennel seeds, cumin, ginger and other kinds of bark, leaves, flowers, fruit, roots, rhizomes and seeds. Biomass may also be extracted in the form of biologically active substances such as pesticides and pharmaceutically active substances or precursors thereto, obtainable e.g. from plant material, a cell culture or a fermentation broth.

15

There is growing technical and commercial interest in using near-critical solvents in such extraction processes. Examples of such solvents include liquefied carbon dioxide or, of particular interest, a family of solvents based on organic hydrofluorocarbon ("HFC") species.

20

By the term "hydrofluorocarbon" we are referring to materials which contain carbon, hydrogen and fluorine atoms only and which are thus chlorine-free.

Preferred hydrofluorocarbons are the hydrofluoroalkanes and particularly the C₁₋₄ hydrofluoroalkanes. Suitable examples of C₁₋₄ hydrofluoroalkanes which may be used as solvents include, inter alia, trifluoromethane (R-23), fluoromethane (R-41), difluoromethane (R-32), pentafluoroethane (R-125), 1,1,1-trifluoroethane (R-143a), 1,1,2,2-tetrafluoroethane (R-134), 1,1,1,2-

tetrafluoroethane (R-134a), 1,1-difluoroethane (R-152a), heptafluoropropanes and particularly 1,1,1,2,3,3,3-heptafluoropropane (R-227ea), 1,1,1,2,3,3-hexafluoropropane (R-236ea), 1,1,1,2,2,3-hexafluoropropane (R-236cb), 1,1,1,3,3,3-hexafluoropropane (R-236fa), 1,1,1,3,3-pentafluoropropane (R-245fa), 1,1,2,2,3-pentafluoropropane (R-245ca), 1,1,1,2,3-pentafluoropropane (R-245eb), 1,1,2,3,3-pentafluoropropane (R-245ea) and 1,1,1,3,3-pentafluorobutane (R-365mfc). Mixtures of two or more hydrofluorocarbons may be used if desired.

10 R-134a, R-227ea, R-32, R-125, R-245ca and R-245fa are preferred.

An especially preferred hydrofluorocarbon for use in the present invention is 1,1,1,2-tetrafluoroethane (R-134a).

15 It is possible to carry out biomass extraction using other solvents such as chlorofluorocarbons ("CFC's") and hydrochlorofluorocarbons ("HCFC's"), and/or mixtures of solvents. CFC's and HCFC's are not approved for food use and consequently are rarely employed in extraction processes in which the depleted biomass residue is intended as e.g. an animal feed.

20

Known extraction processes using solvents are normally carried out in closed-loop extraction equipment. A typical example 10 of such a system is shown schematically in Figure 1.

25 In this typical system, liquefied solvent is allowed to percolate by gravity in downflow through a bed of biomass held in vessel 11. Thence it flows to evaporator 12 where the volatile solvent is vaporised by heat exchange with a hot fluid. The vapour from evaporator 12 is then compressed by compressor 13.

The compressed vapour is next fed to a condenser 14 where it is liquefied by heat exchange with a cold fluid. The liquefied solvent is then optionally collected in intermediate storage vessel 15 or returned (line 16) directly to the extraction vessel 1 to complete the circuit.

5

One of the key areas of concern relating to the use of solvents such as are used in biomass extraction processes is the level of residual solvent on the biomass material after extraction is complete. High levels of residual HFC (or other) solvent may be regarded as undesirable from a number of aspects:

10

- loss of HFC to atmosphere
- loss of HFC from the recycle process potentially increasing top-up costs
- landfill, incineration, composting and other biomass disposal regulatory issues
- 15 • suitability of depleted biomass for use as an animal feedstuff supplement

In order to improve the rate of solvent extraction, the biomass is usually chopped or ground in some manner in order to increase the surface area in contact with the extraction solvent. Whilst beneficially increasing the rate of extraction of the desired components during biomass extraction, this increased surface area acts to increase the quantity of solvent that can remain adsorbed onto and in the biomass after extraction. Clearly some cost-effective method of achieving acceptable residual HFC solvent levels in the exhausted biomass would be of significant value in the development of the technology.

25

A combination of evacuation and heat (e.g. using a heating jacket surrounding extraction vessel 11) may act to reduce the levels of residual solvent in the

biomass over a period of time. This method however has a number of potential disadvantages including:

- prolonged evacuation time to achieve low residue levels
 - poor heat transfer into the packed-bed of biomass from the vessel jacket
- 5 resulting in uneven heating and possible thermal deterioration of the biomass (charring, caramelisation etc.)

Such charring and caramelisation are particularly undesirable since they may adversely impact the commercial value of the biomass extracts.

10

According to the invention in a first aspect there is provided apparatus as defined in Claim 1.

In use of the apparatus steam advantageously strips solvent (that typically is an HFC such as 1,1,1,2- tetrafluoroethane, or mixtures of HFC's) from the biomass. The solvent is then entrained in the steam and conveyed to the separator, where the steam and the solvent are separated to allow recovery and/or disposal of the solvent.

20 In use of the apparatus the steam may contact the biomass once; or the apparatus may optionally include means such as pipework and valves permitting the steam to contact the biomass more than once.

Preferably the source of steam supplies steam at or near atmospheric pressure.

25

Alternatively the source of steam supplies steam at super-atmospheric pressure.

In preferred embodiments the separator is or includes an adsorbent material for removing solvent entrained with the steam. More preferably the adsorbent material is or includes activated carbon. These features conveniently make the solvent available for recycling, or permit ready disposal of the solvent.

5

The adsorbent filter material may also act to reduce any volatilised organic materials present in the depleted biomass, again improving the quality of the effluent condensate. Depending on the nature of the adsorbent and on economic attractiveness, a concentrated stream of recovered HFC may be obtained from thermal regeneration of the adsorbent. Alternatively, the loaded adsorbent provides a convenient, compact and cost-effective package for appropriate disposal.

Claims 7 and 8 define optional forms of apparatus of the invention, that include a condenser either upstream or downstream of the separator, to condense the stream and facilitate separation of the steam and solvent from one another.

Claim 8 defines a preferred form of extractor vessel. The purpose of the optional connection to a vacuum or to suction is to permit evacuation of the vessel at the end of a biomass extraction, thereby removing from the vessel the bulk of the solvent therein. This means that the steam serves primarily to strip solvent that is adsorbed onto the surface of the biomass.

The vacuum connection may also advantageously be used to purge the vessel of e.g. water, when it is required to extract a new bed of biomass.

Preferably the extraction vessel is in use vertical, with the inlet at its lower end and the outlet at its upper end. This advantageously allows the charging of the

extraction vessel with a packed bed of biomass. Such a packed bed may advantageously occupy substantially the entire cross-section of part of the vessel.

This arrangement has advantages in reducing the energy consumption of biomass
5 extraction apparatus as shown in Figure 1.

The extraction vessel may optionally include a selectively operable condenser (cooling) jacket. This allows steam condensing advantageously to occur within the extraction vessel.

10

Preferably the extraction vessel includes thermal insulation. This advantageously reduces heat transfer from the vessel during both the biomass extraction and desorption (solvent recovery) processes.

15 According to a second aspect of the invention there is provided a method as defined in Claim 14. This method may conveniently be practised using apparatus as defined herein.

Further, advantageous features of the method are defined in Claims 15 to 22 and
20 24.

The method of the invention is superior to simple heating and/or evacuation, because

- the temperature of the biomass is raised rapidly and directly through intimate contact with steam
- steam flow acts to maintain a low partial pressure of HFC solvent in the vapour space around the biomass thus aiding transfer of HFC from the biomass to the steam stream

25

- water from the steam is likely to act to displace HFC from the surface of the biomass through preferential adsorption thus further improving the rate and effectiveness of desorption relative to a flow of other gases such as nitrogen.

5

There now follows a description of a preferred embodiment of the invention, by way of non-limiting example, with reference being made to the accompanying drawings in which:

10 Figure 1 is a schematic representation of a prior art closed loop biomass extraction circuit; and

Figure 2 is a schematic representation of apparatus according to the invention, that may be included in the Figure 1 circuit.

15 Referring to Figure 2 there is shown a part of the Figure 1 circuit, modified in accordance with the invention. The remainder of the circuit part-illustrated in Figure 2 is as shown in Figure 1.

Figure 2 shows the extraction vessel 11 of the Figure 1 apparatus, in the form of
20 a hollow cylinder, closed at each end 11a,11b and being in the preferred embodiment of flanged tube construction. In the preferred embodiment vessel 11 is vertical as shown, although other orientations, e.g. inclined or horizontal, are possible. A packed bed 12 of biomass is in use of the apparatus supported within extraction vessel 11, the cross-section of the packed bed 12 being
25 substantially the same as that of the entire cross-section of the vessel 11 over a substantial part of its length.

The vessel 11 is used for biomass extraction, during which solvent such as an HFC is fed into the bottom 11a of vessel 11 via an inlet 13. The solvent passes upwards through the biomass, contacting it and entraining biomass extract. The solvent and extract mixture is conveyed via outlet 14 and delivery line 15 to the remainder of the extraction circuit of Figure 1. In other words, the solvent/extract liquor passes via line 15 to the evaporator 12 of Figure 1.

A source of steam (e.g. a factory steam supply or a steam generator) is also connectable to inlet 13 from a line 19. This is achieved, e.g. by means of a flow control valve 17 to which both the solvent line 18 and steam line 19 are connected. The flow control valve is operable e.g. under computer control to direct either the solvent from line 18 or the steam in line 19 via the inlet 13.

Thus the steam line 19 is connectable to supply steam, at atmospheric or super-atmospheric pressure, to the biomass in vessel 11

Steam line 19 includes an optional drain valve 27 for draining fluid from line 19.

A flow control valve 20 is operable e.g. under computer control to connect the outlet 14 to the solvent/extract delivery line 15; to suction or a vacuum (e.g. generated by a vacuum pump) 21 (for purposes described hereinbelow); or to a further steam line 23 for delivering steam, that has contacted the biomass, and solvent entrained therewith, to a separator in the form of a hollow container 24, in fluid communication with line 23 and containing an adsorbent material such as activated carbon.

When valve 20 is controlled to connect outlet 14 to steam line 23, steam and solvent pass to container 24 where the adsorbent material separates the steam and solvent from one another.

As shown in Figure 2 the container 24 includes an outlet 25 remote from line 23, by means of which steam may pass to a condenser (not shown) and thence, in liquid form, to an effluent drain or reservoir.

In an alternative embodiment the condenser may be operatively connected in line 23, upstream of container 24, to permit condensation of the steam before removal of the solvent therefrom by means of the adsorbent material.

Other optional features of the apparatus, that may improve energy utilisation in use, include but are not limited to :

- heat recovery from the condensate into the steam generator feed water
- use of a jacket around the extraction vessel as the steam condenser to minimise condensation within the extraction vessel during desorption
- use of an insulated extraction vessel to maintain the internal temperature of the vessel during both extraction and desorption stages

20

The apparatus may also optionally include a switchable recirculation loop for the steam, whereby the steam may be caused to contact the biomass more than once. The re-circulation loop may be constituted by the line 26 shown dotted in Figure 2. The flow of steam via line 26 may be determined by e.g. computer controlled valves connecting line 26 to inlet 13 and outlet 14 at either end. The extent of use of a given quantity of steam would be determined by the extent to which it becomes saturated with the solvent.

In use of the apparatus of Figure 2, following completion of biomass extraction, valve 17 is closed so that neither solvent (from line 18) nor steam (from line 19) enters vessel 11.

5 Outlet 14 is then connected, through operation of valve 20, to vacuum 20. The bulk of liquid solvent in vessel 11 is consequently sucked out of vessel 11 by vacuum 20, until the solvent remaining in vessel 11 is constituted substantially by solvent adsorbed onto the biomass.

10 At this point valve 20 operates to connect outlet 14 to line 23, and valve 17 operates to connect inlet 13 to steam line 19. Steam then flows into vessel 11 and contacts the biomass, thereby removing solvent from the biomass and conveying it via line 23 to the separator constituted by container 24 and the adsorbent material therein.

15

If line 26 is present, some or all of the steam may be recycled one or more times, using control of the various valves in the apparatus, so that the steam contacts the biomass more than once.

20 After passing through the adsorbent material in container 24 the steam passes via line 25 for condensing and draining.

If the condenser is in line 23 upstream of container 24, the steam is of course in liquid form by the time it contacts the adsorbent material. In this case there may
25 be no need for subsequent condensing.

After desorption of solvent from the biomass is complete, the biomass is discharged from the extraction vessel and the vessel recharged with fresh

biomass and evacuated using vacuum 21 prior to introduction of fresh solvent from the extraction solvent circuit.

Following completion of the desorption process the adsorbent material may if desired be removed from the container 24 and heated to recover solvent
5 therefrom.

Alternatively the adsorbent material including adsorbed solvent may be disposed of in e.g. a landfill site or by incineration.

10 If the apparatus includes a steam generator, heat from the steam condenser may conveniently be used as a pre-heat for water in the steam generator.

CLAIMS

1. Apparatus for removing solvent residue from a bed of biomass, comprising an extraction vessel for containing biomass, that permits a solvent or
5 a solvent mixture to contact biomass therein to effect extraction; a source of steam, selectively connectable to supply steam to biomass in the extraction vessel; a separator for separating steam, that has contacted biomass in the extraction vessel, and solvent entrained therewith; and a delivery line for steam/solvent selectively interconnectable between the extraction vessel and the
10 separator to permit passage of steam and solvent entrained therewith to the separator.
2. Apparatus according to Claim 1 wherein the source of steam supplies steam at atmospheric pressure.
15
3. Apparatus according to Claim 1 wherein the source of steam supplies steam at super-atmospheric pressure.
4. Apparatus according to any preceding claim wherein the separator is or
20 includes an adsorbent material for removing solvent entrained with the steam.
5. Apparatus according to Claim 4 wherein the adsorbent material is or includes activated carbon.
- 25 6. Apparatus according to Claim 4 or Claim 5 wherein the separator includes an inlet for receiving steam and solvent from the extraction vessel and an outlet, the outlet being operatively connected to a condenser to condense the steam after removal of the solvent therefrom by means of the separator.

7. Apparatus according to any of Claims 1 to 5 including a condenser operatively connected in series with and upstream of the separator, whereby the steam is condensed before removal of solvent therefrom by means of the separator.
8. Apparatus according to any preceding claim wherein the extraction vessel is a cylindrical chamber closed at either end and having an inlet at one end and an outlet at its other end, the hollow interior of the chamber being for containing biomass, the inlet being selectively connectable to a source of solvent and a source of steam; and the outlet being selectively connectable as part of a circuit for recovering biomass extract; to a vacuum; or to the said separator.
9. Apparatus according to Claim 8, wherein the extraction vessel is in use vertical, with the inlet at its lower end and the outlet at its upper end.
10. Apparatus according to any preceding claim, wherein the extraction vessel contains a packed bed of biomass.
11. Apparatus according to Claim 10 wherein the packed bed of biomass occupies substantially the entire cross-section of at least a portion of the extraction vessel.
12. Apparatus according to any preceding claim including a steam condenser jacket around at least part of the extraction vessel.
13. Apparatus according to any preceding claim including thermal insulation for the extraction vessel.

14. A method of removing solvent residues from a bed of biomass, comprising contacting the biomass with steam; passing the steam, in vapour or liquid form, and solvent entrained therewith, to a separator; and separating the steam and the solvent from one another in the separator.
15. A method according to Claim 14 wherein the step of separating includes contacting an adsorbent with the steam/solvent mixture.
16. A method according to Claim 14 or Claim 15 including the step of condensing the steam after passing it to the separator.
17. A method according to Claim 14 or Claim 15 including the step of condensing the steam before passing it to the separator.
18. A method according to Claim 17 wherein the condensing occurs within a vessel containing the biomass.
19. A method according to Claim 14 or any claim dependent therefrom, wherein the step of contacting the biomass with steam occurs in a vessel, and the method includes the step of partially or substantially evacuating the vessel before the steam contacts the biomass.
20. A method according to Claim 15 or any claim dependent therefrom, including the step of heating the adsorbent to recover solvent therefrom.
21. A method according to any of Claims 15 to 19 including the step of disposing of the adsorbent and the solvent therewith.

22. A method according to Claim 16 or Claim 17 or any claim dependent therefrom, wherein the step of condensing the steam includes recovering heat from the condensate and using the recovered heat to pre-heat water for steam
5 generation.

23. Solvent recovered by the method of any of Claims 14 to 20, Claim 22 when dependent from any of Claims 14 to 20.

1/1

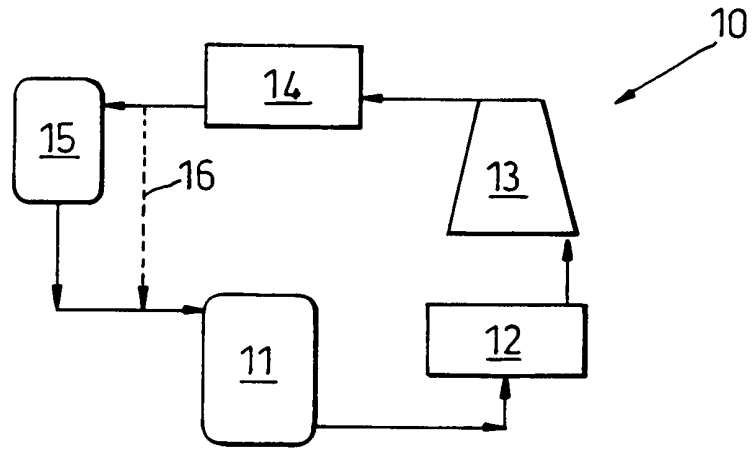


Fig. 1

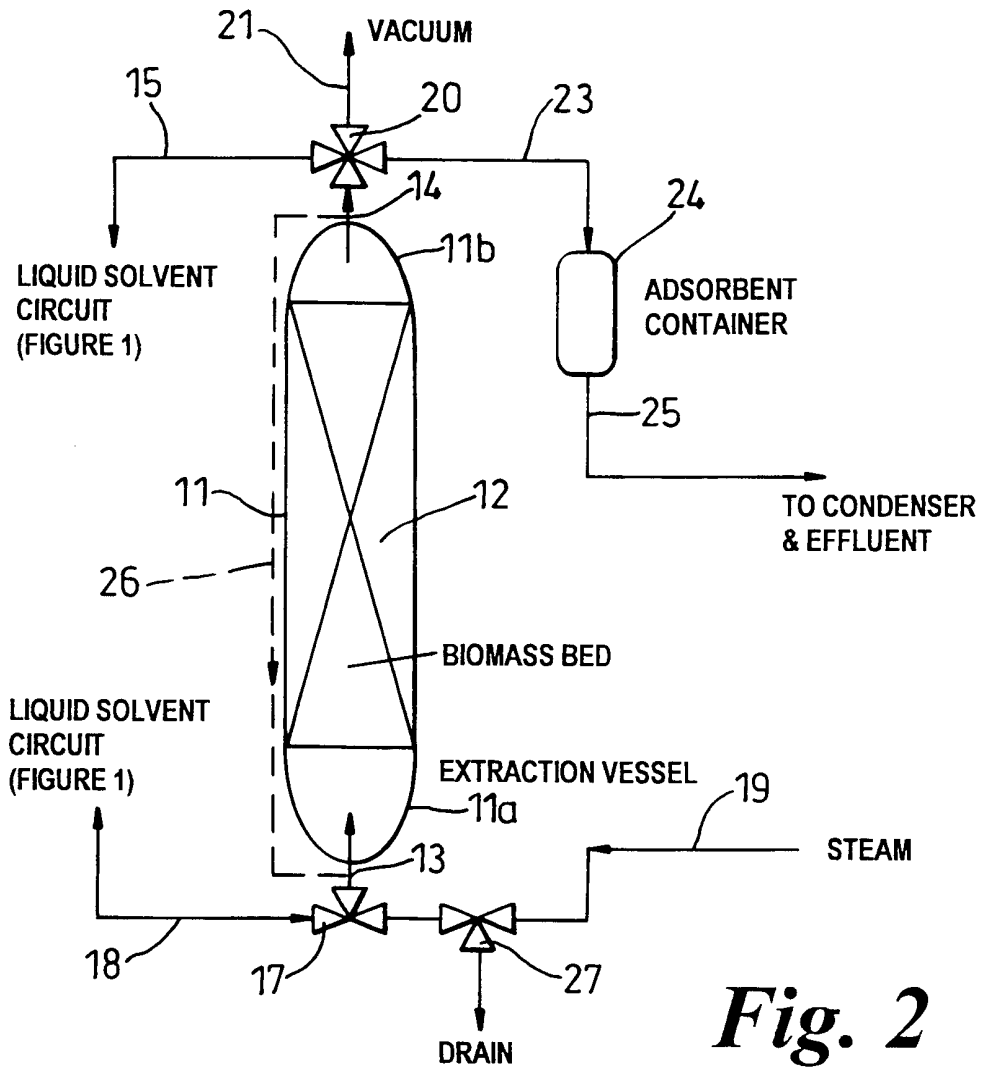


Fig. 2

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/03319

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B01D11/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01D A23F A23L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 35 38 745 A (EXTRAKTIONSTECHNIK GMBH) 7 May 1987 (1987-05-07)	1-3,7, 9-11,13, 14,22,23
Y	column 2, line 1-32	4,5, 15-17,20
X	CH 289 059 A (METALLGESELLSCHAFT AG) 28 February 1953 (1953-02-28)	1-3,7, 9-11,13, 14,22,23
Y	page 1, line 1-15	4,5, 15-17,20
Y	US 4 289 505 A (HARDISON LESLIE C ET AL) 15 September 1981 (1981-09-15) column 2, line 7-32 column 3, line 34-52	4,5, 15-17,20

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

13 November 2000

Date of mailing of the international search report

27/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Persichini, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/03319

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3538745 A	07-05-1987	DE 3661461 D EP 0224026 A GR 3000035 T	26-01-1989 03-06-1987 31-01-1990
CH 289059 A	28-02-1953	CH 290283 A	30-04-1953
US 4289505 A	15-09-1981	CA 1157392 A GB 2077617 A,B	22-11-1983 23-12-1981