




(86) Date de dépôt PCT/PCT Filing Date: 2003/03/28
(87) Date publication PCT/PCT Publication Date: 2003/10/16
(45) Date de délivrance/Issue Date: 2008/03/25
(85) Entrée phase nationale/National Entry: 2004/10/01
(86) N° demande PCT/PCT Application No.: DE 2003/001037
(87) N° publication PCT/PCT Publication No.: 2003/085350
(30) Priorité/Priority: 2002/04/04 (DE102 14 854.6)

(51) Cl.Int./Int.Cl. *F41A 23/24* (2006.01),
F41H 7/02 (2006.01)
(72) Inventeur/Inventor:
ZUREK, RUDOLF, DE
(73) Propriétaire/Owner:
KRAUSS-MAFFEI WEGMANN GMBH & CO. KG, DE
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : VEHICULE BLINDE, NOTAMMENT VEHICULE DE COMBAT
(54) Title: ARMORED VEHICLE, ESPECIALLY A COMBAT VEHICLE

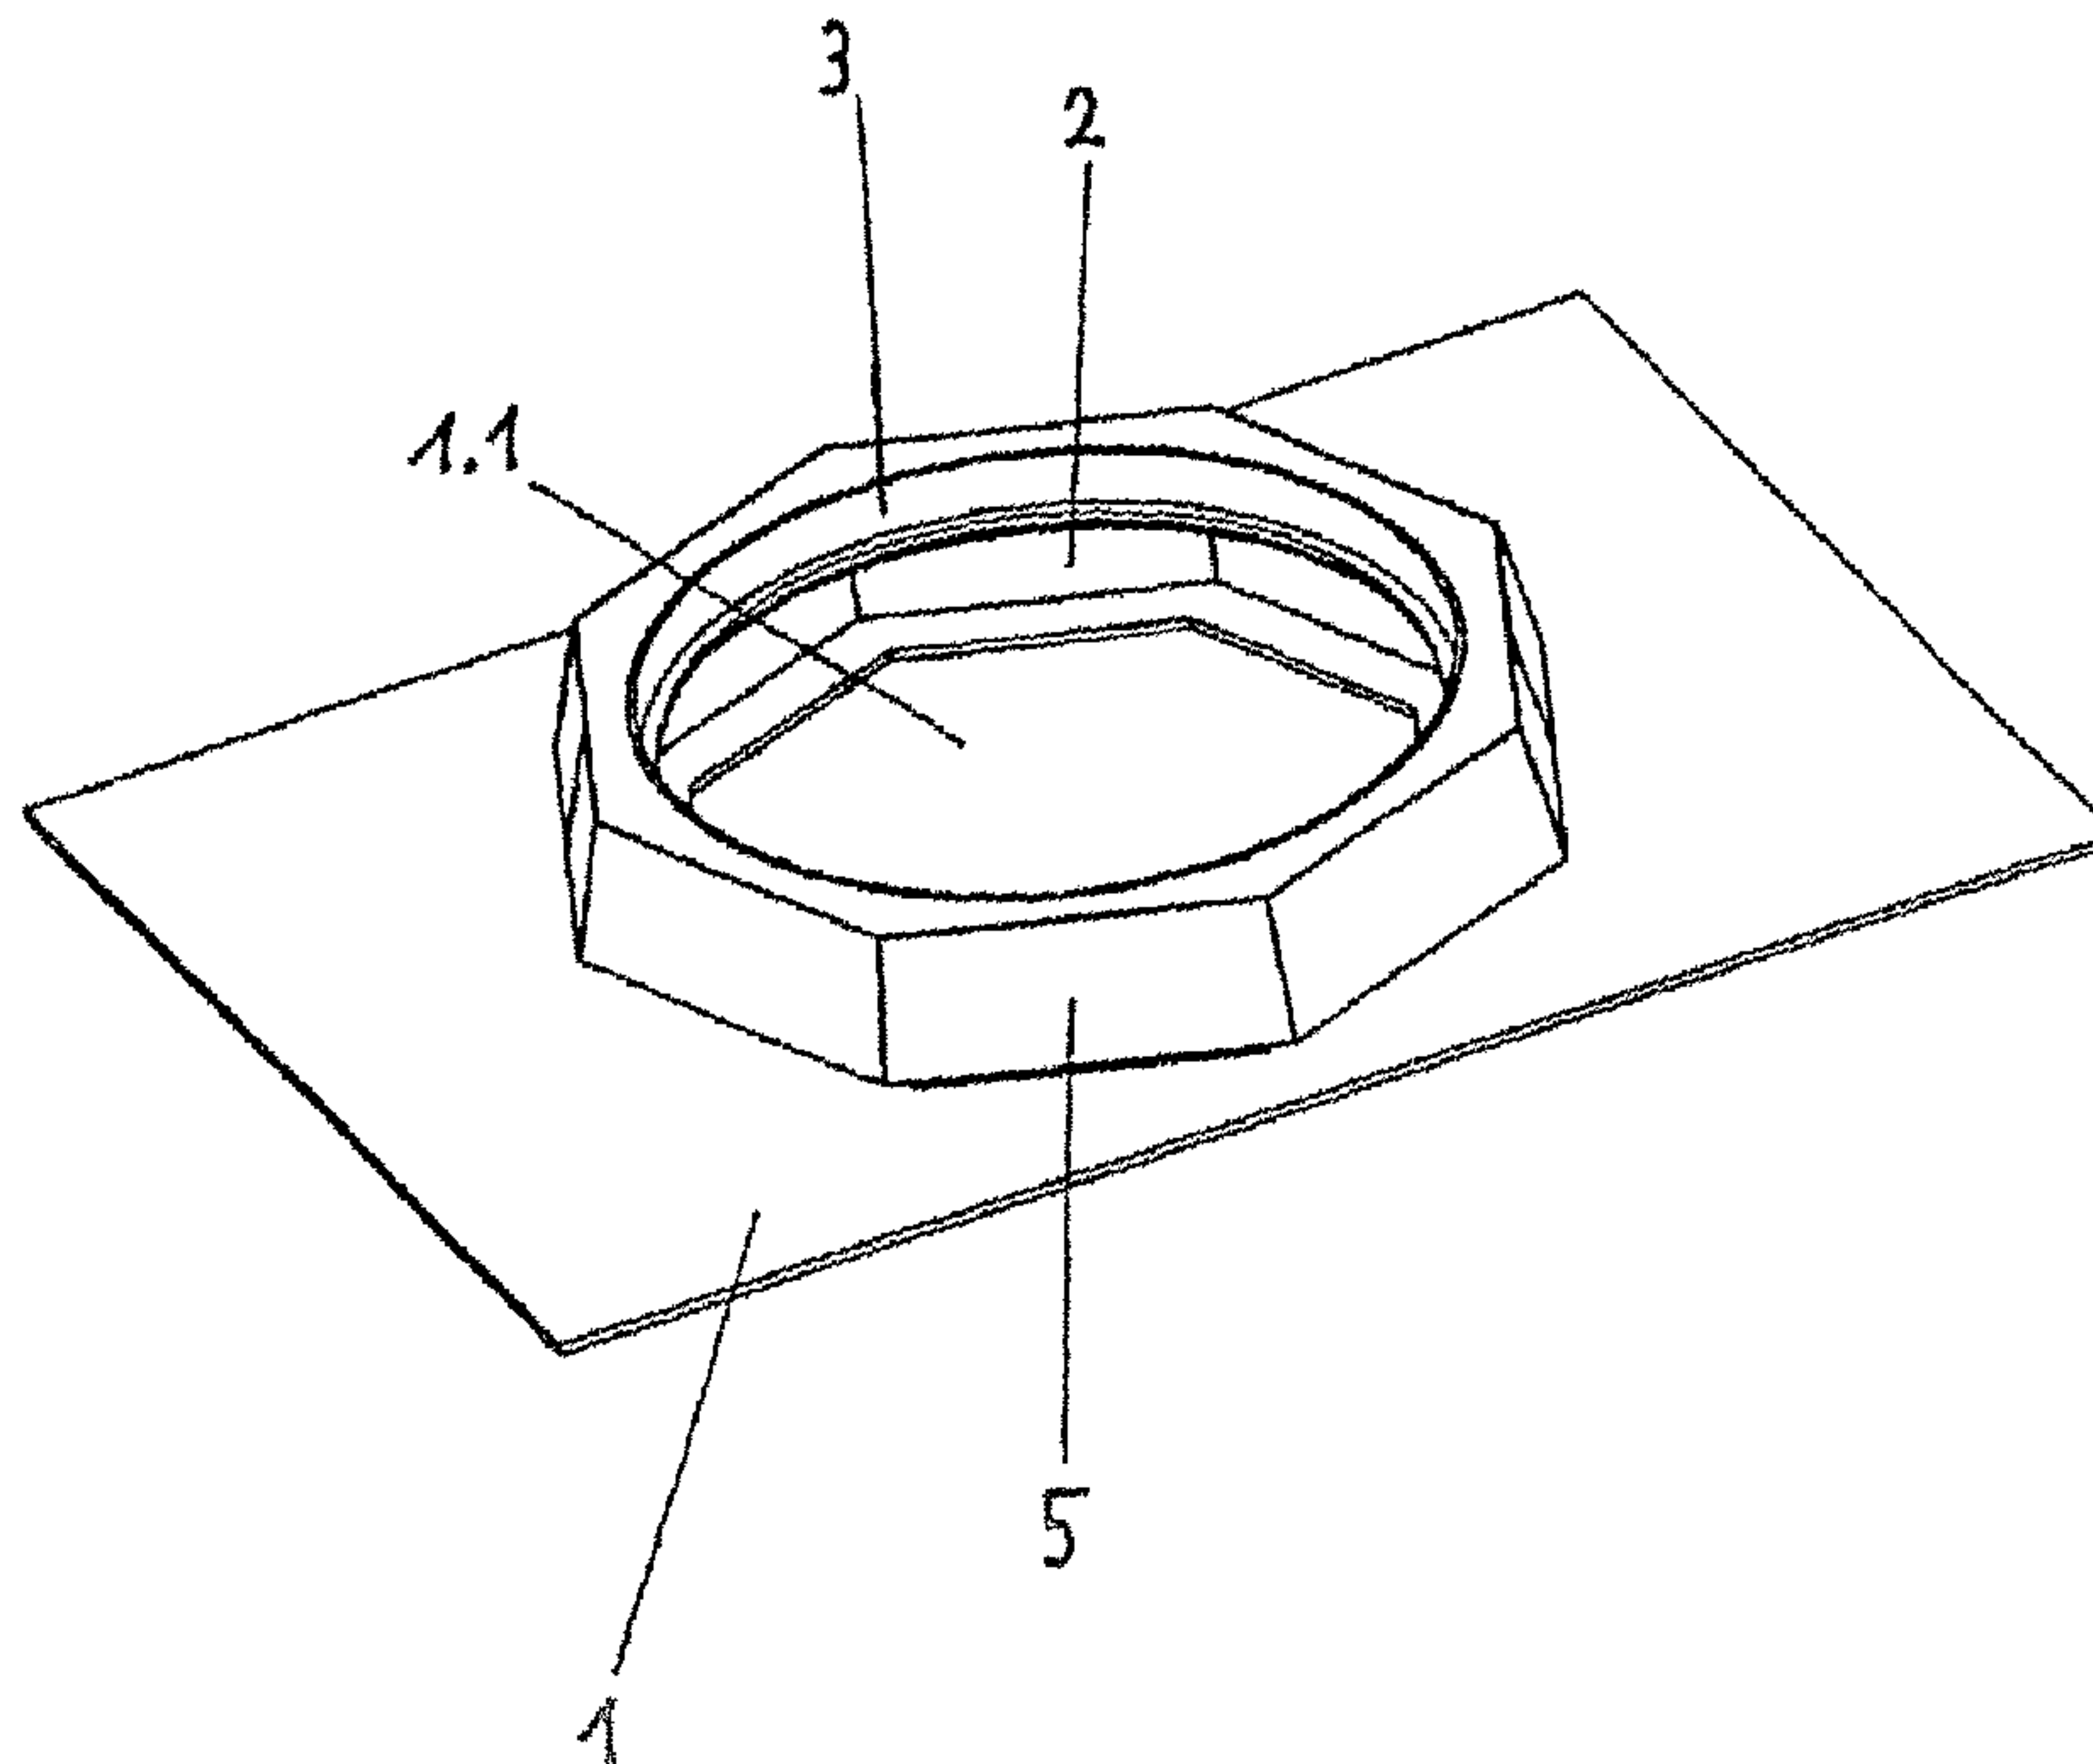

(57) **Abrégé/Abstract:**

The invention relates to an armoured vehicle, especially a combat vehicle comprising a vehicle housing which is mounted on a running carriage and has a roof plate (1) on its upper side, in which an opening (1.1) is surrounded by a frame, the gun carriage of a weapon being mounted on a pivot bearing in said opening. Said frame consists of two parts which are fixed to each other and concentrically arranged inside each other, namely a non mechanically finished outer part (2), with wide tolerances, which is connected to the vehicle housing by means of welding, and a mechanically finished inner part (3), with narrow tolerances, which is positively engaged with the outer part. The pivot bearing of the gun carriage is arranged on said inner part. The production means can be sharply reduced by means of the inventive embodiment, as only the inner part (3) of the collar must be finished, as opposed to the entire vehicle housing.

ABSTRACT

The invention relates to an armoured vehicle, especially a combat vehicle comprising a vehicle housing which is mounted on a running carriage and has a roof plate (1) on its upper side, in which an opening (1.1) is surrounded by a frame, the gun carriage of a weapon being mounted on a pivot bearing in said opening. Said frame consists of two parts which are fixed to each other and concentrically arranged inside each other, namely a non mechanically finished outer part (2), with wide tolerances, which is connected to the vehicle housing by means of welding, and a mechanically finished inner part (3), with narrow tolerances, which is positively engaged with the outer part. The pivot bearing of the gun carriage is arranged on said inner part. The production means can be sharply reduced by means of the inventive embodiment, as only the inner part (3) of the collar must be finished, as opposed to the entire vehicle housing.

23623-51

ARMORED VEHICLE, ESPECIALLY A COMBAT VEHICLE

The invention relates to an armored vehicle, especially a combat vehicle.

5

Gun carriage mountings are conventionally undertaken in frames that are welded into the vehicle housing of armored vehicles, and are subsequently mechanically finished with the overall vehicle housing for producing the tolerances that are required for the pivot bearing. This has been shown to be a drawback in that with modern armored vehicles, increasingly used for the housing structures are metal plates having thin wall thicknesses, and the ballistic protection is produced by auxiliary armoring. To minimize the manufacturing costs, it is attempted to dispense with the mechanical finishing of the finally welded vehicle housing, and to weld in tolerated components in a correctly mounted manner. On the other hand, the pivot bearings of gun carriages require very closely tolerated frames, the realization of the welding of which requires a considerable expenditure for equipment and production.

20

It is an object of the invention to embody an armored vehicle, especially a combat vehicle, in such a way that on the one hand closely tolerated

23623-51

installation conditions can be ensured for the pivot bearing, and on the other hand, the frame for receiving the gun carriage can be produced very economically and without the conventional mechanical finishing of the overall vehicle.

5 An aspect of the invention comprises an armoured vehicle having a vehicle housing disposed on a carriage, wherein an upper side of said vehicle housing has a roof plate in which is disposed an opening, said vehicle comprising: a frame that surrounds said opening and in which is adapted to be mounted, via a pivot bearing, the gun carriage of a weapon, wherein
10 said frame comprises two parts that are concentrically disposed within one another and are secured to one another, namely a non-mechanically finished outer part that has coarse tolerances and is welded to said vehicle housing, and a mechanically finished inner part that has close tolerances and is positively connected with said outer part, and wherein said pivot
15 bearing for said gun carriage is disposed on said inner part.

The basic concept of the invention consists in the separation of the frame construction into a coarsely tolerated, non-mechanically finished outer part that is welded onto the housing structure, and a closely tolerated, mechanically finished inner part. In so doing, the positive
20 connection of inner part and outer part can be carried out by means of a sealing process with a suitable sealing compound or filler, whereby the inner part can be brought into a correct mounting position via a simple device.

In the following, an embodiment of the invention is described in greater detail with the aid of the accompanying drawing. The drawings show:

- Fig. 1 an isometric illustration of a combat vehicle that is otherwise not illustrated;
- 5 Fig. 1A a detailed portion from Fig. 1 taken along the line I -I
- Fig. 2 an illustration analogous to Fig. 1 showing the roof plate of Fig. 1 with the outer part of the frame placed thereon;
- 10 Fig. 2A a detailed portion of Fig. 2 taken along the line II-II;
- Fig. 3 an illustration analogous to Fig. 2 showing the roof plate with the outer portion of the frame and inserted interlocking elements;
- 15 Fig. 3A a detailed portion of Fig. 3 taken along the line III-III;
- Fig. 4 an isometric illustration of the inner part for the outer part of Figs. 2 and 3 of the frame;
- 20 Fig. 4A a detailed portion of Fig. 4 taken along the line IV-IV;

Fig. 5 an enlarged partial cross-section taken along the line V-V in Fig. 5A showing the frame with the inner part inserted into the outer part;

5 Fig. 5A a reduced view onto the frame of Fig. 5;

Fig. 6 an enlarged partial section taken along the line VI-VI in Fig. 6A showing the frame of Fig. 5;

10 Fig. 6A a reduced view onto the frame of Fig. 6;

Fig. 7 an isometric illustration of the frame of Figs. 5 and 6.

15 Fig. 1 shows the roof plate 1 of a combat vehicle, the remainder of which is not illustrated; the roof plate is provided with an opening 1.1 that is to be surrounded by a frame for receiving the pivot bearing of a gun carriage. In the illustrated embodiment, the opening 1.1 has a polygonal configuration; however, a round opening can also be arranged at this location.

20

As explained in the following, the frame, which is to surround the opening 1.1, is built up of two components that are concentrically

disposed in one another and are secured to one another, namely a non-mechanically finished outer part 2 that has coarse tolerances and is connected by welding to the roof plate 1 of the vehicle housing, and a mechanically finished inner part 3 that has close tolerances and is positively connected with the outer part 2; the non-illustrated pivot bearing of the gun carriage is disposed on the inner part.

Fig. 2 initially illustrates the outer part 2 that is fixedly connected with the roof plate 1. It is constructed as a closed collar that is embodied as a bending construction or of abutting plates that are fixedly interconnected by welding. In the illustrated embodiment, the collar comprises collar plates 2.1 that are disposed perpendicular to the roof plate 1. However, the collar plates can also be disposed at an angle to the roof plate. As can be seen in Fig. 1, the collar plates 2.1 are disposed in a polygonal manner. In principle, it would also be possible to construct a collar having a circular contour, although as will be described subsequently, the polygonal configuration of the collar has advantages with regard to manufacture, structure and protection. Inserted on the inner side of the collar that is constructed from the collar plates 2.1, at a prescribed distance from the roof plate 1, is a collar ring having a polygonal outer circumference that is adapted to the inner circumference of the collar; the collar ring is composed of

individual base plates 2.1 that are welded to one another, and is disposed in such a way that its upper side forms a plateau. The plateau can also comprise a single piece or can be composed of two halves.

5

The inner circumference of the collar ring that is composed of the base plates 2.2 has a circular configuration, and the collar ring is welded into the collar.

10

An inner part is now to be inserted into the outer part 2 and to be positively anchored there. In order to enable such a positive anchoring, interlocking elements 2.3 are inserted into the outer part 2, as can be seen in Figs. 3 and 3A. For this purpose, the collar that is composed of the collar plates 2.1 is provided in the corner regions of

15

the abutting collar plates with slots that extend parallel to the roof plate and into which the interlocking elements 2.3 are inserted. In this connection, the polygonal shape of the collar has proven itself in that the interlocking elements 2.3 are supported in the slots due to the collar plates 2.1 that extend at an angle to one another. The

20

interlocking elements 2.3 are inserted after the inner part 3 is inserted into the outer part 2. The inner part 3 illustrated in Fig. 4 has a cylindrical ring 3.1, the diameter of which is smaller than the smallest

diameter of the collar, and on the underside of which is welded on an annular bearing plate 3.2, while on the other side an annular plate 3.3 is welded on. In the illustrated embodiment, both the top plate 3.3 as well as the bearing plate 3.2 have a polygonal outer periphery and a circular inner periphery. The minimum outer diameter of the top plate corresponds at least to the minimum outer diameter of the collar, while the maximum outer diameter of the bearing plate 3.2 is smaller than the minimum inner diameter of the collar yet greater than the inner diameter of the collar ring composed of the base plates 2.2.

The inner part 3 is now introduced into the outer part 2, the interlocking elements are inserted into the slots in the corner regions of the collar plates 2.1, and the interior space of the frame, in the region between outer part 2 and inner part 3, is, after appropriate sealing by means of seals 6.1 and 6.2, filled with a filler 7. In this connection, one seal 6.1 is disposed at the upper annular gap between the top plate 3.3 and the upper edge of the collar plates 2.1, and the other seal 6.2 is disposed between the upper side of the collar ring, which is composed of the base plates 2.2, and the underside of the bearing plate 3.2. In so doing, the inner part 3 is positively and fixedly anchored in the outer part 2, as can be seen in Figs. 5 and 6. In this connection, the top plate 3.3 projects beyond the upper side of the outer part 2. Prior to

introduction of the inner part 3 into the outer part 2, the inner part 3 can be machined or finished to have the close tolerances that are required for receiving the pivot bearing.

5 Special protection modules, as armor protection, can be disposed on the frame that is produced in this manner, as can be seen in Figs. 5 and 6. In the illustrated embodiment, such protection modules are rectangular plates 4 that are disposed on the outside of the collar plates 2.1 of the outer part 2. Here also the polygonal configuration of
10 the collar is advantageous since the protection modules can be embodied as planar and squared-off plates.

When the collar plates 2.1 are disposed in a perpendicular manner, it is expedient, in order to protect against radar detection, to cover the
15 frame in the installed state by a hood or shroud, as illustrated in Figs. 5-7. The outer shape of the hood or shroud 5, which is placed upon the frame from above, is adapted to the polygonal periphery of the collar, whereby however the outer walls of the shroud 5 that are disposed opposite the collar plates 2.1 extend at an angle to the roof
20 plate 1. With regard to the selection of material and its shape, the shroud 5 is optimized relative to radar signature, and ventilation slots

can be provided between the shroud 5 and the roof plate 1, as well as in the upper portion of the shroud, as can be seen in Figs. 5 and 6.

23623-51

CLAIMS:

1. An armoured vehicle having a vehicle housing disposed on a carriage, wherein an upper side of said vehicle housing has a roof plate in which is disposed an opening, said vehicle comprising:

a frame that surrounds said opening and in which is adapted to be mounted, via a pivot bearing, the gun carriage of a weapon, wherein said frame comprises two parts that are concentrically disposed within one another and are secured to one another, namely a non-mechanically finished outer part that has coarse tolerances and is welded to said vehicle housing, and a mechanically finished inner part that has close tolerances and is positively connected with said outer part, and wherein said pivot bearing for said gun carriage is disposed on said inner part.

2. The armored vehicle according to claim 1, wherein said outer part of said frame is provided with a collar embodied as a closed ring, wherein said collar is composed of polygonally disposed collar plates that abut one another, are interconnected, and are disposed at a predetermined angle to said roof plate, wherein a collar ring having a polygonal outer periphery is disposed on an inner side of said collar at a prescribed distance from said roof plate, and wherein an upper side of said collar ring forms a plateau.

3. The armored vehicle according to claim 2, wherein said collar plates are disposed perpendicular to said roof plate.

4. The armored vehicle according to claim 2, wherein said collar plates are disposed at an inclined arrangement to said roof plate.

5. The armored vehicle according to any one of claims 2 to 4, wherein said collar ring is composed of individual base plates that are welded together.

6. The armored vehicle according to any one of claims 2 to 5, wherein said collar plates are interconnected by welding, and wherein said collar ring is welded into said collar.

7. The armored vehicle according to any one of claims 2 to 6, wherein said collar ring has a circular inner periphery.

8. The armored vehicle according to any one of claims 1 to 7, wherein said outer part is provided with a collar, wherein said inner part of said frame is provided with a cylindrical ring having a diameter smaller than the smallest diameter of said collar and on an underside of which is disposed an annular bearing plate and on an upper side of which is disposed an annular top plate, and wherein a minimum outer diameter of said top plate corresponds at least to a minimum outer diameter of said collar while a maximum outer diameter of said bearing plate is less than a minimum inner diameter of said collar yet greater than an inner diameter of a collar ring that is disposed on an inner side of said collar.

9. The armored vehicle according to claim 8, wherein said top plate and said bearing plate are welded to said cylindrical ring.

23623-51

10. The armored vehicle according to claim 8 or 9, wherein at least one of said top plate and said bearing plate have a polygonal outer periphery and a circular inner periphery.

5 11. The armored vehicle according to any one of claims 8 to 10, wherein in a state of said inner part where it is inserted into said outer part, sealing material is disposed between an upper side of said collar ring and an underside of said bearing plate.

10 12. The armored vehicle according to any one of claims 8 to 11, wherein slots are disposed in said collar that extend parallel to said roof plate, and wherein in a state of said inner part where it is inserted into said outer part, interlocking elements are inserted into said slots and
15 extend beyond said bearing plate of said inner part.

13. The armored vehicle according to claim 12, wherein with a collar that is provided with polygonally disposed collar plates, said slots are disposed in corner regions of abutting ones of said collar plates.

20 14. The armored vehicle according to any one of claims 1 to 13, wherein in a mounted state of said frame, an inner space of said frame is filled with a filler in a region between said outer part and said inner part.

15. The armored vehicle according to any one of claims
25 1 to 14, wherein protective modules are mounted or adapted to be mounted on an outer side of said collar.

16. The armored vehicle according to any one of claims 1 to 15, wherein a shroud covers said frame in a mounted state thereof, wherein said shroud has an outer shape that

is adapted to a polygonal periphery of said collar, and wherein outer walls of said shroud that are opposite said collar plates extend at an angle to said roof plate.

17. The armored vehicle according to claim 16, wherein
5 said shroud, with regard to a selection of a material and shape thereof, is embodied in a manner that is optimized relative to a radar signature.

18. The armored vehicle according to claim 16 or 17,
wherein ventilation slots are provided between said shroud
10 and said roof plate as well as in an upper portion of said shroud.

FETHERSTONHAUGH & CO.

PATENT AGENTS

OTTAWA, CANADA

Fig. 1

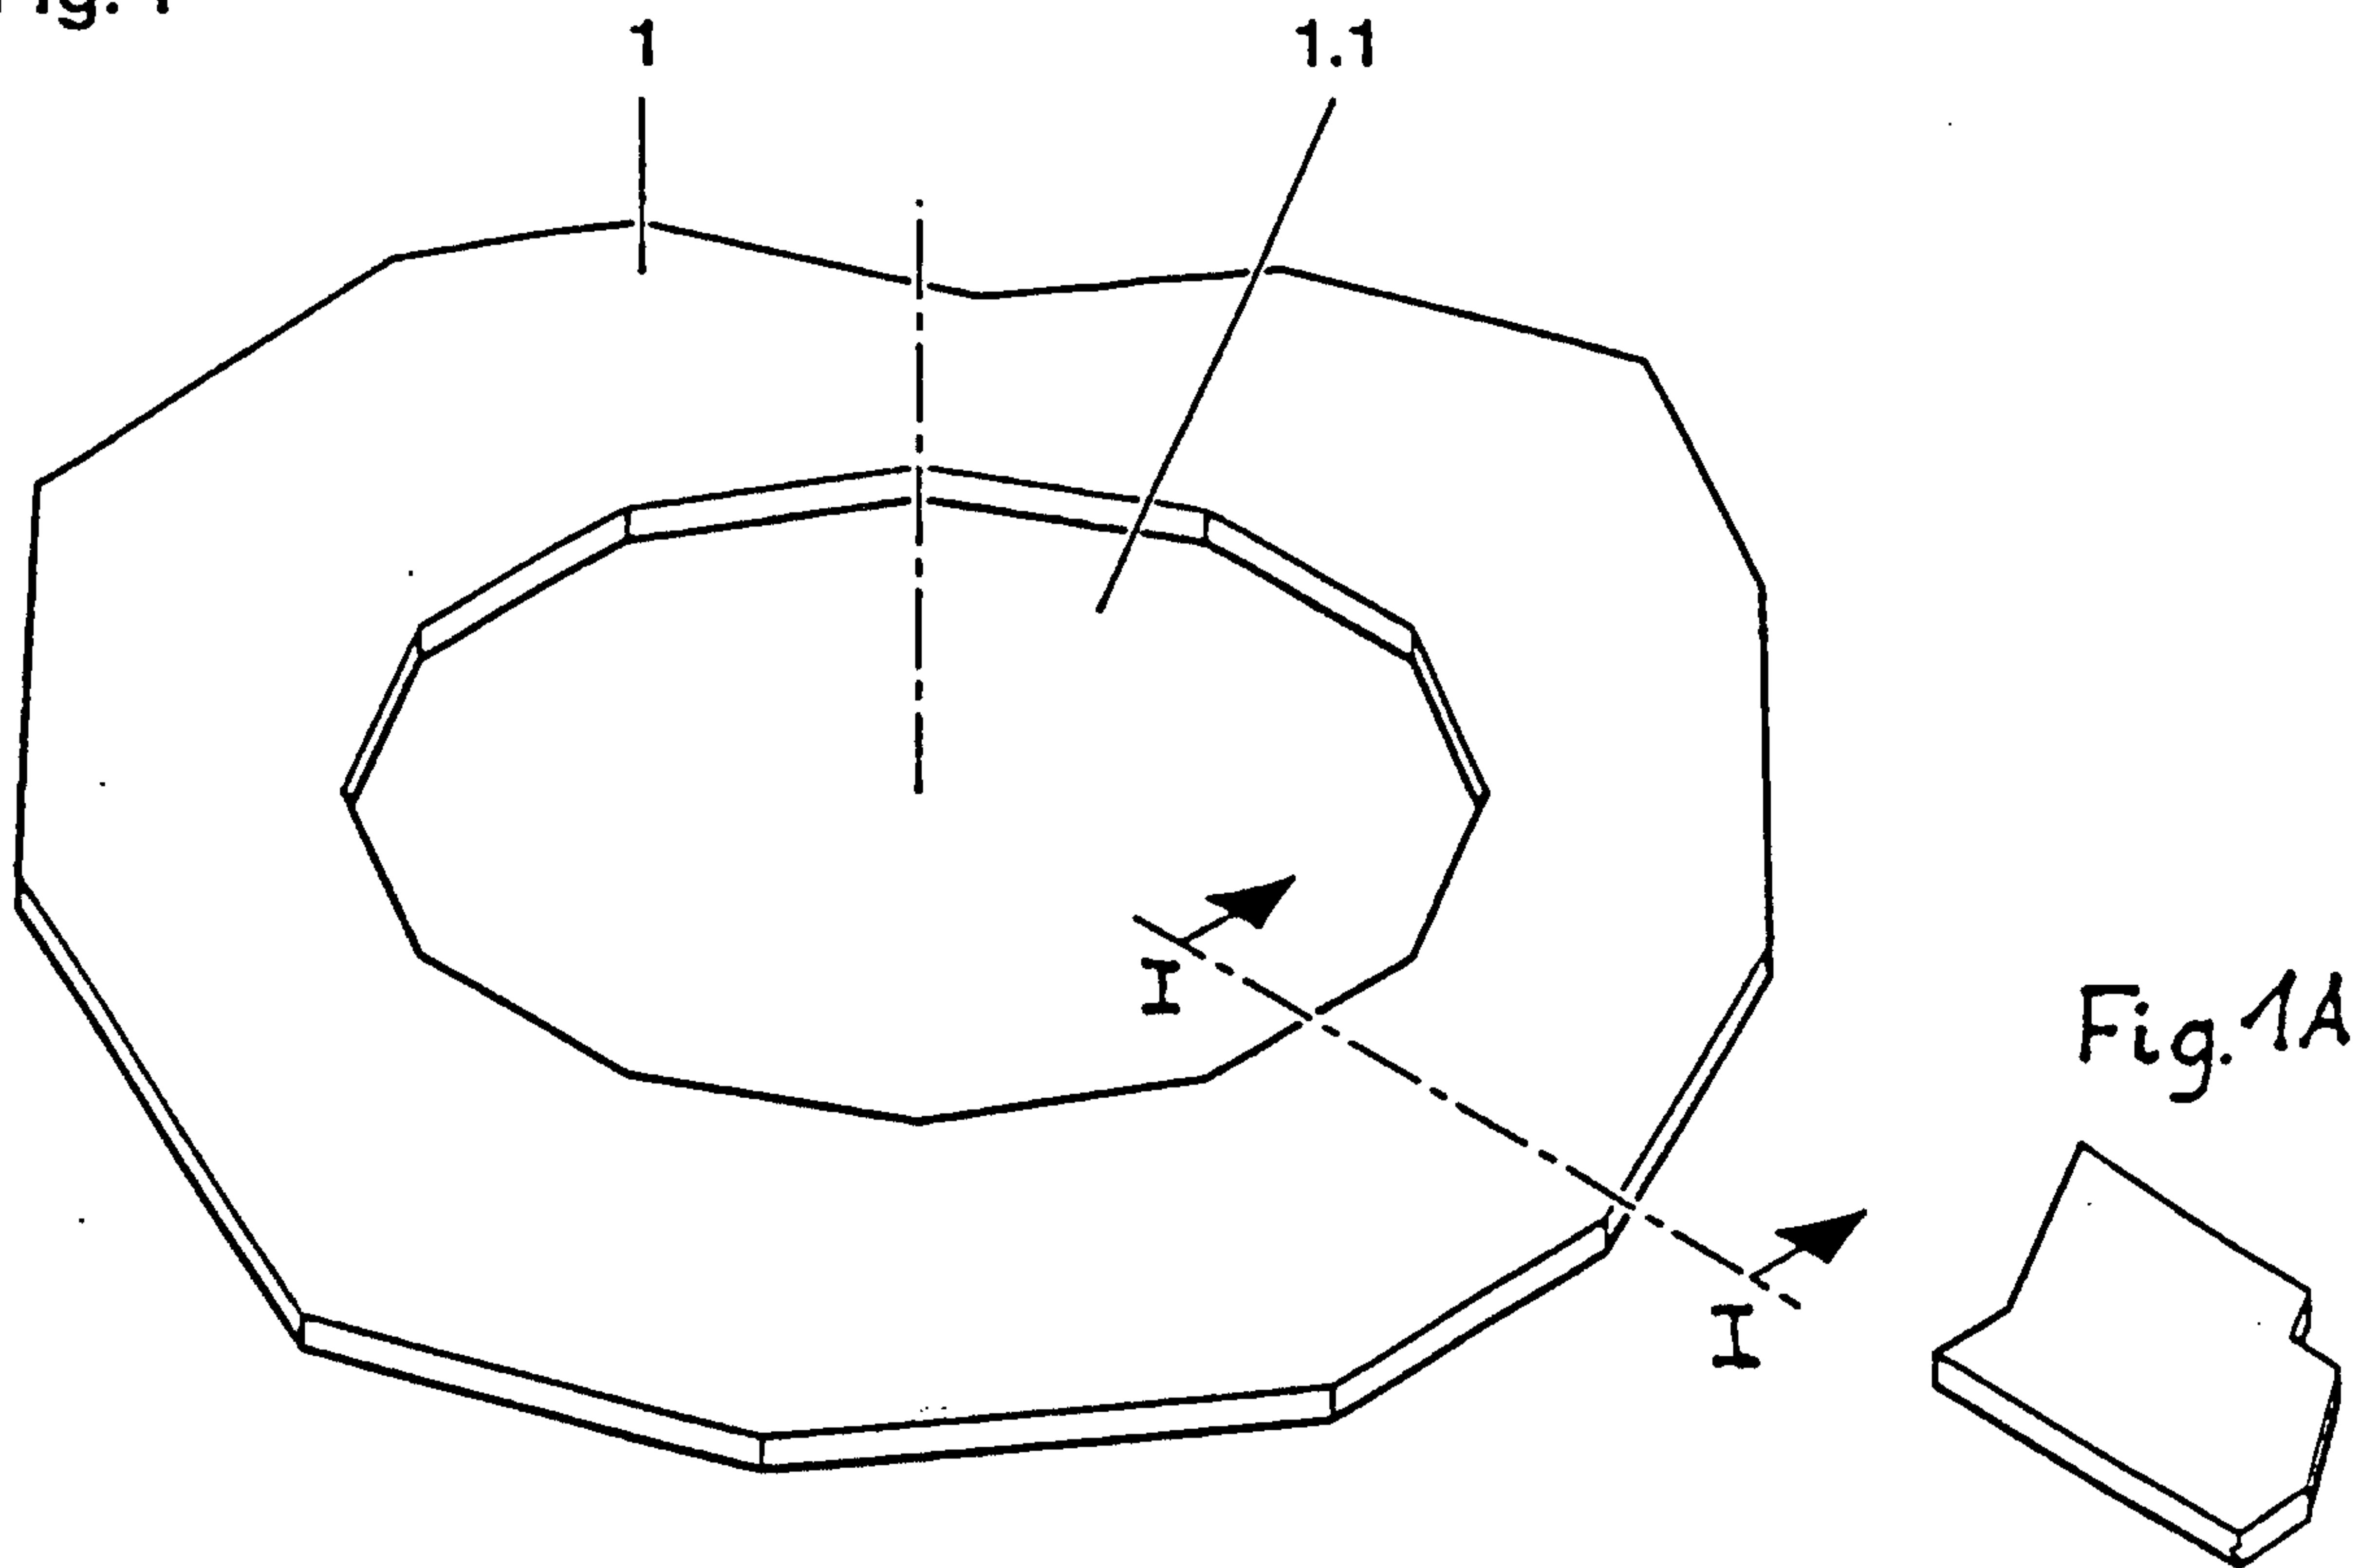


Fig. 2

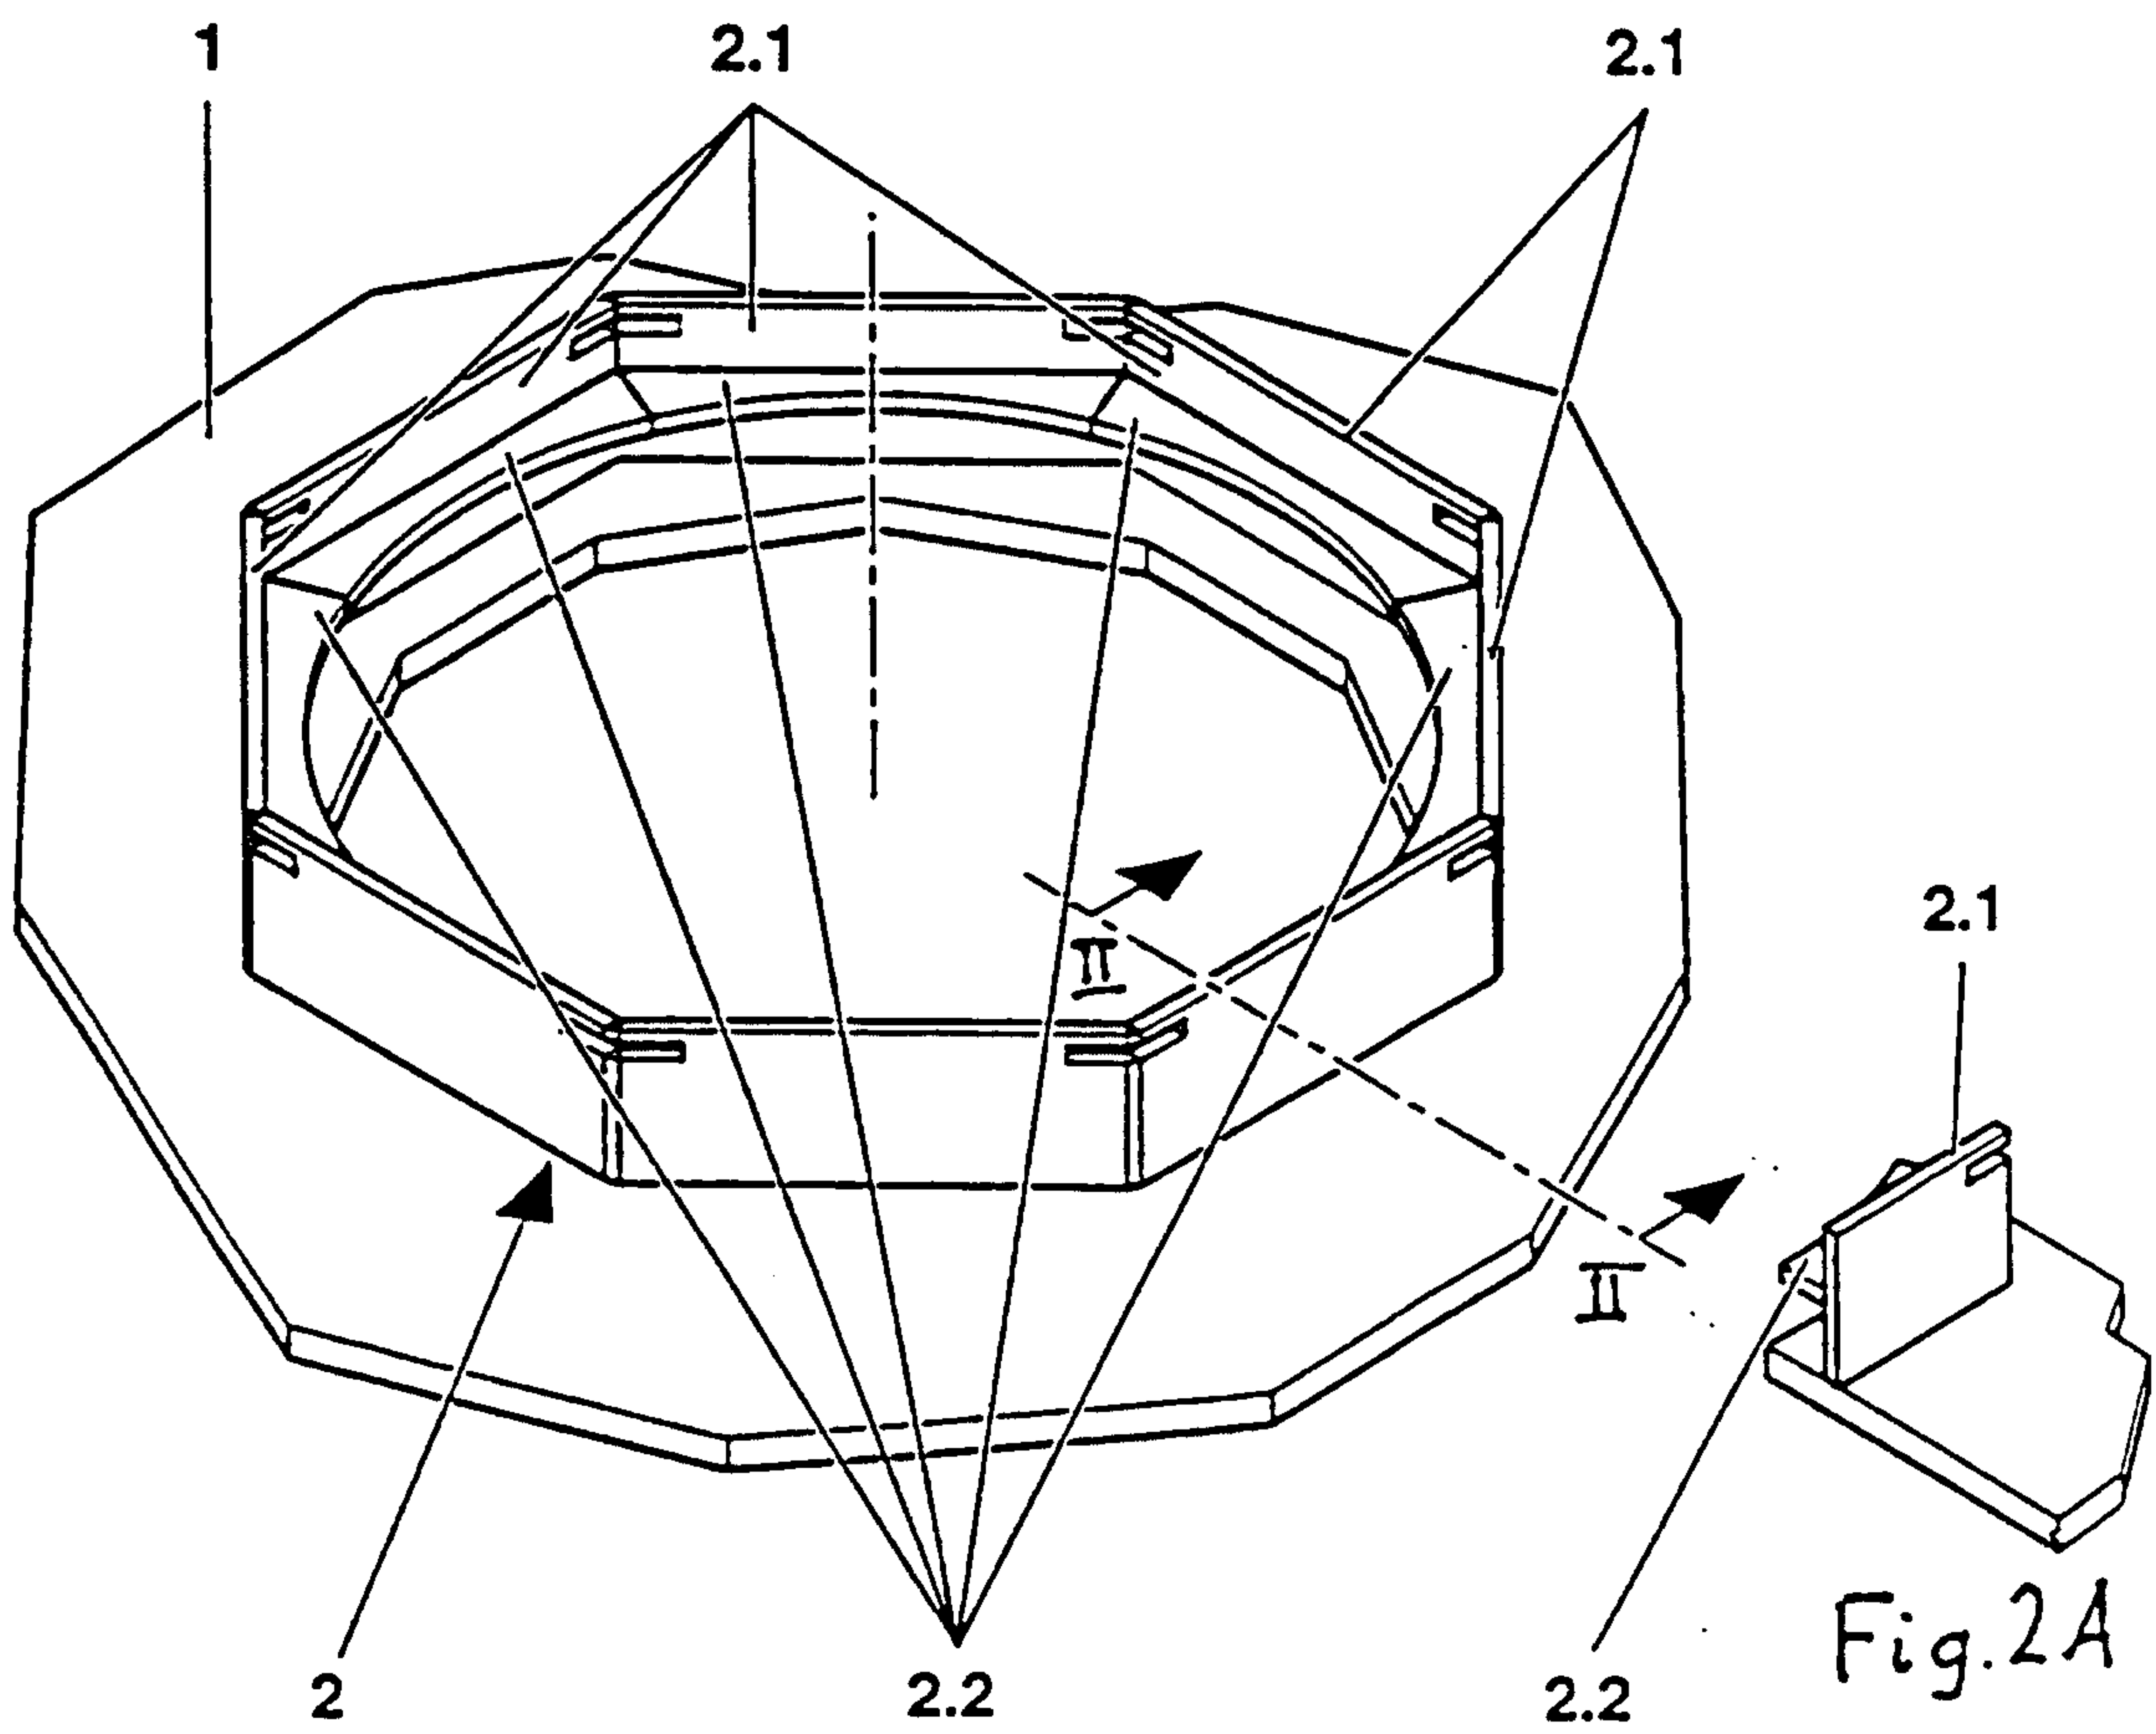


Fig. 3

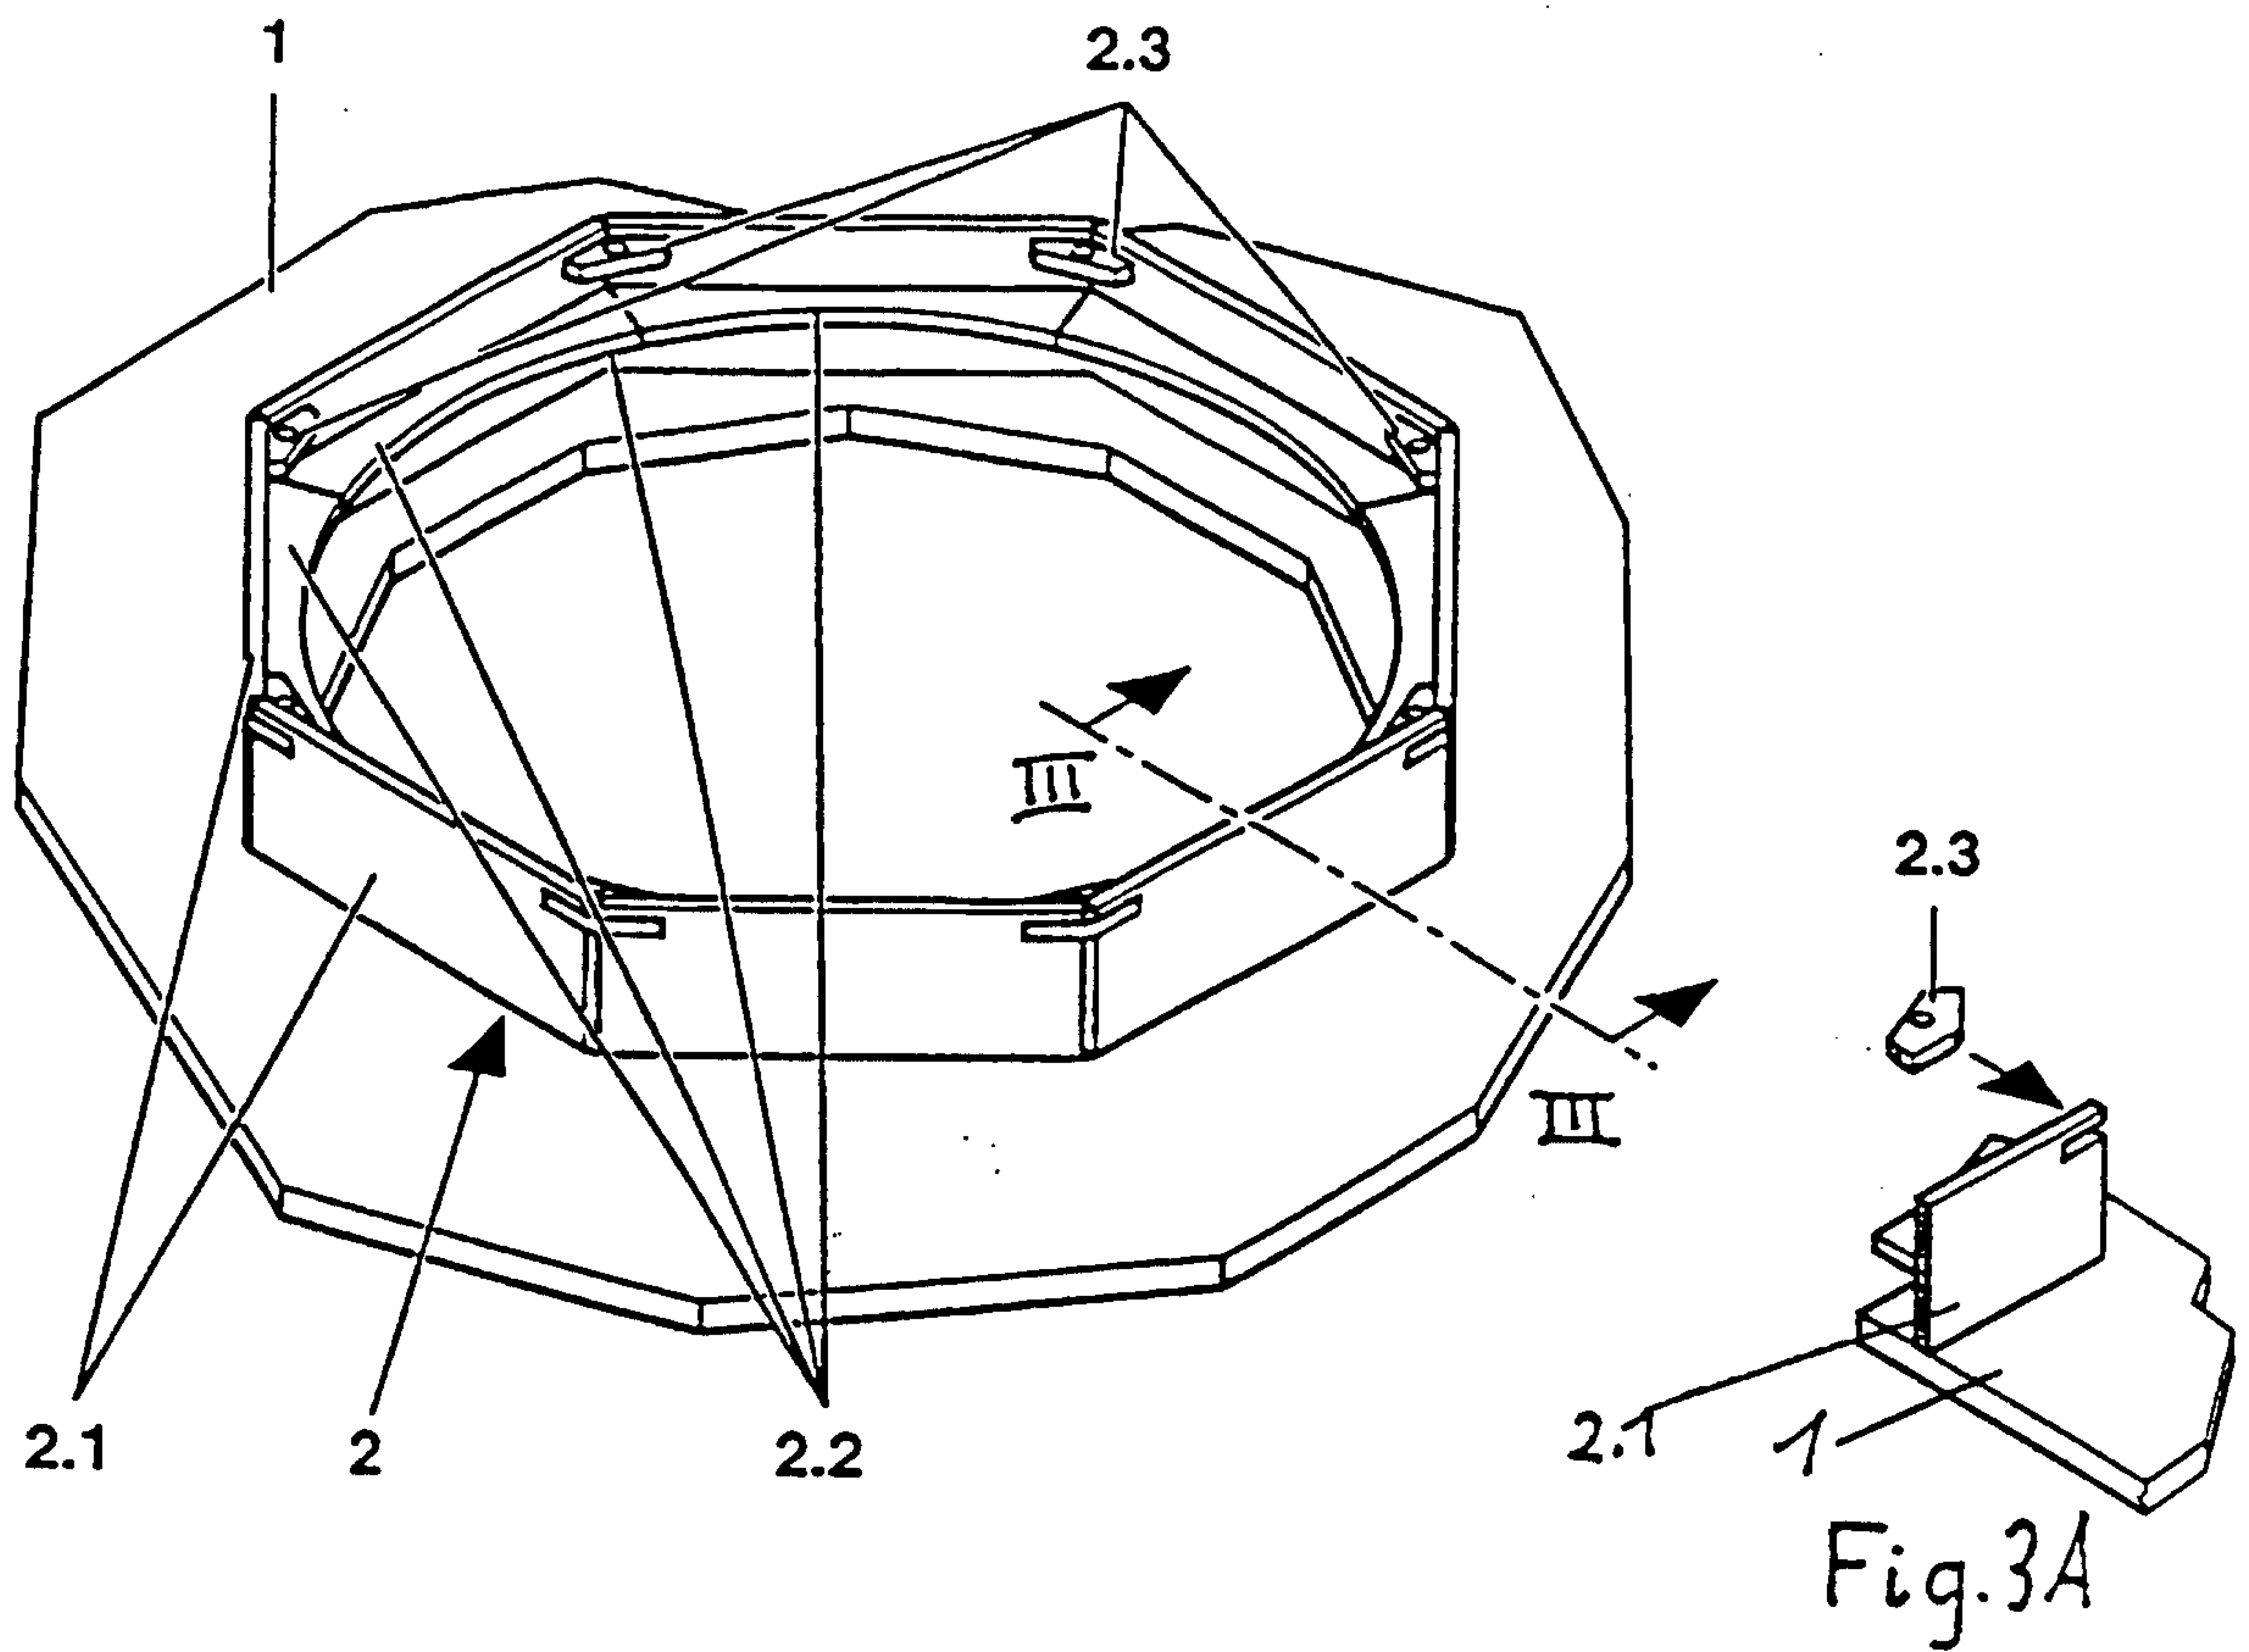
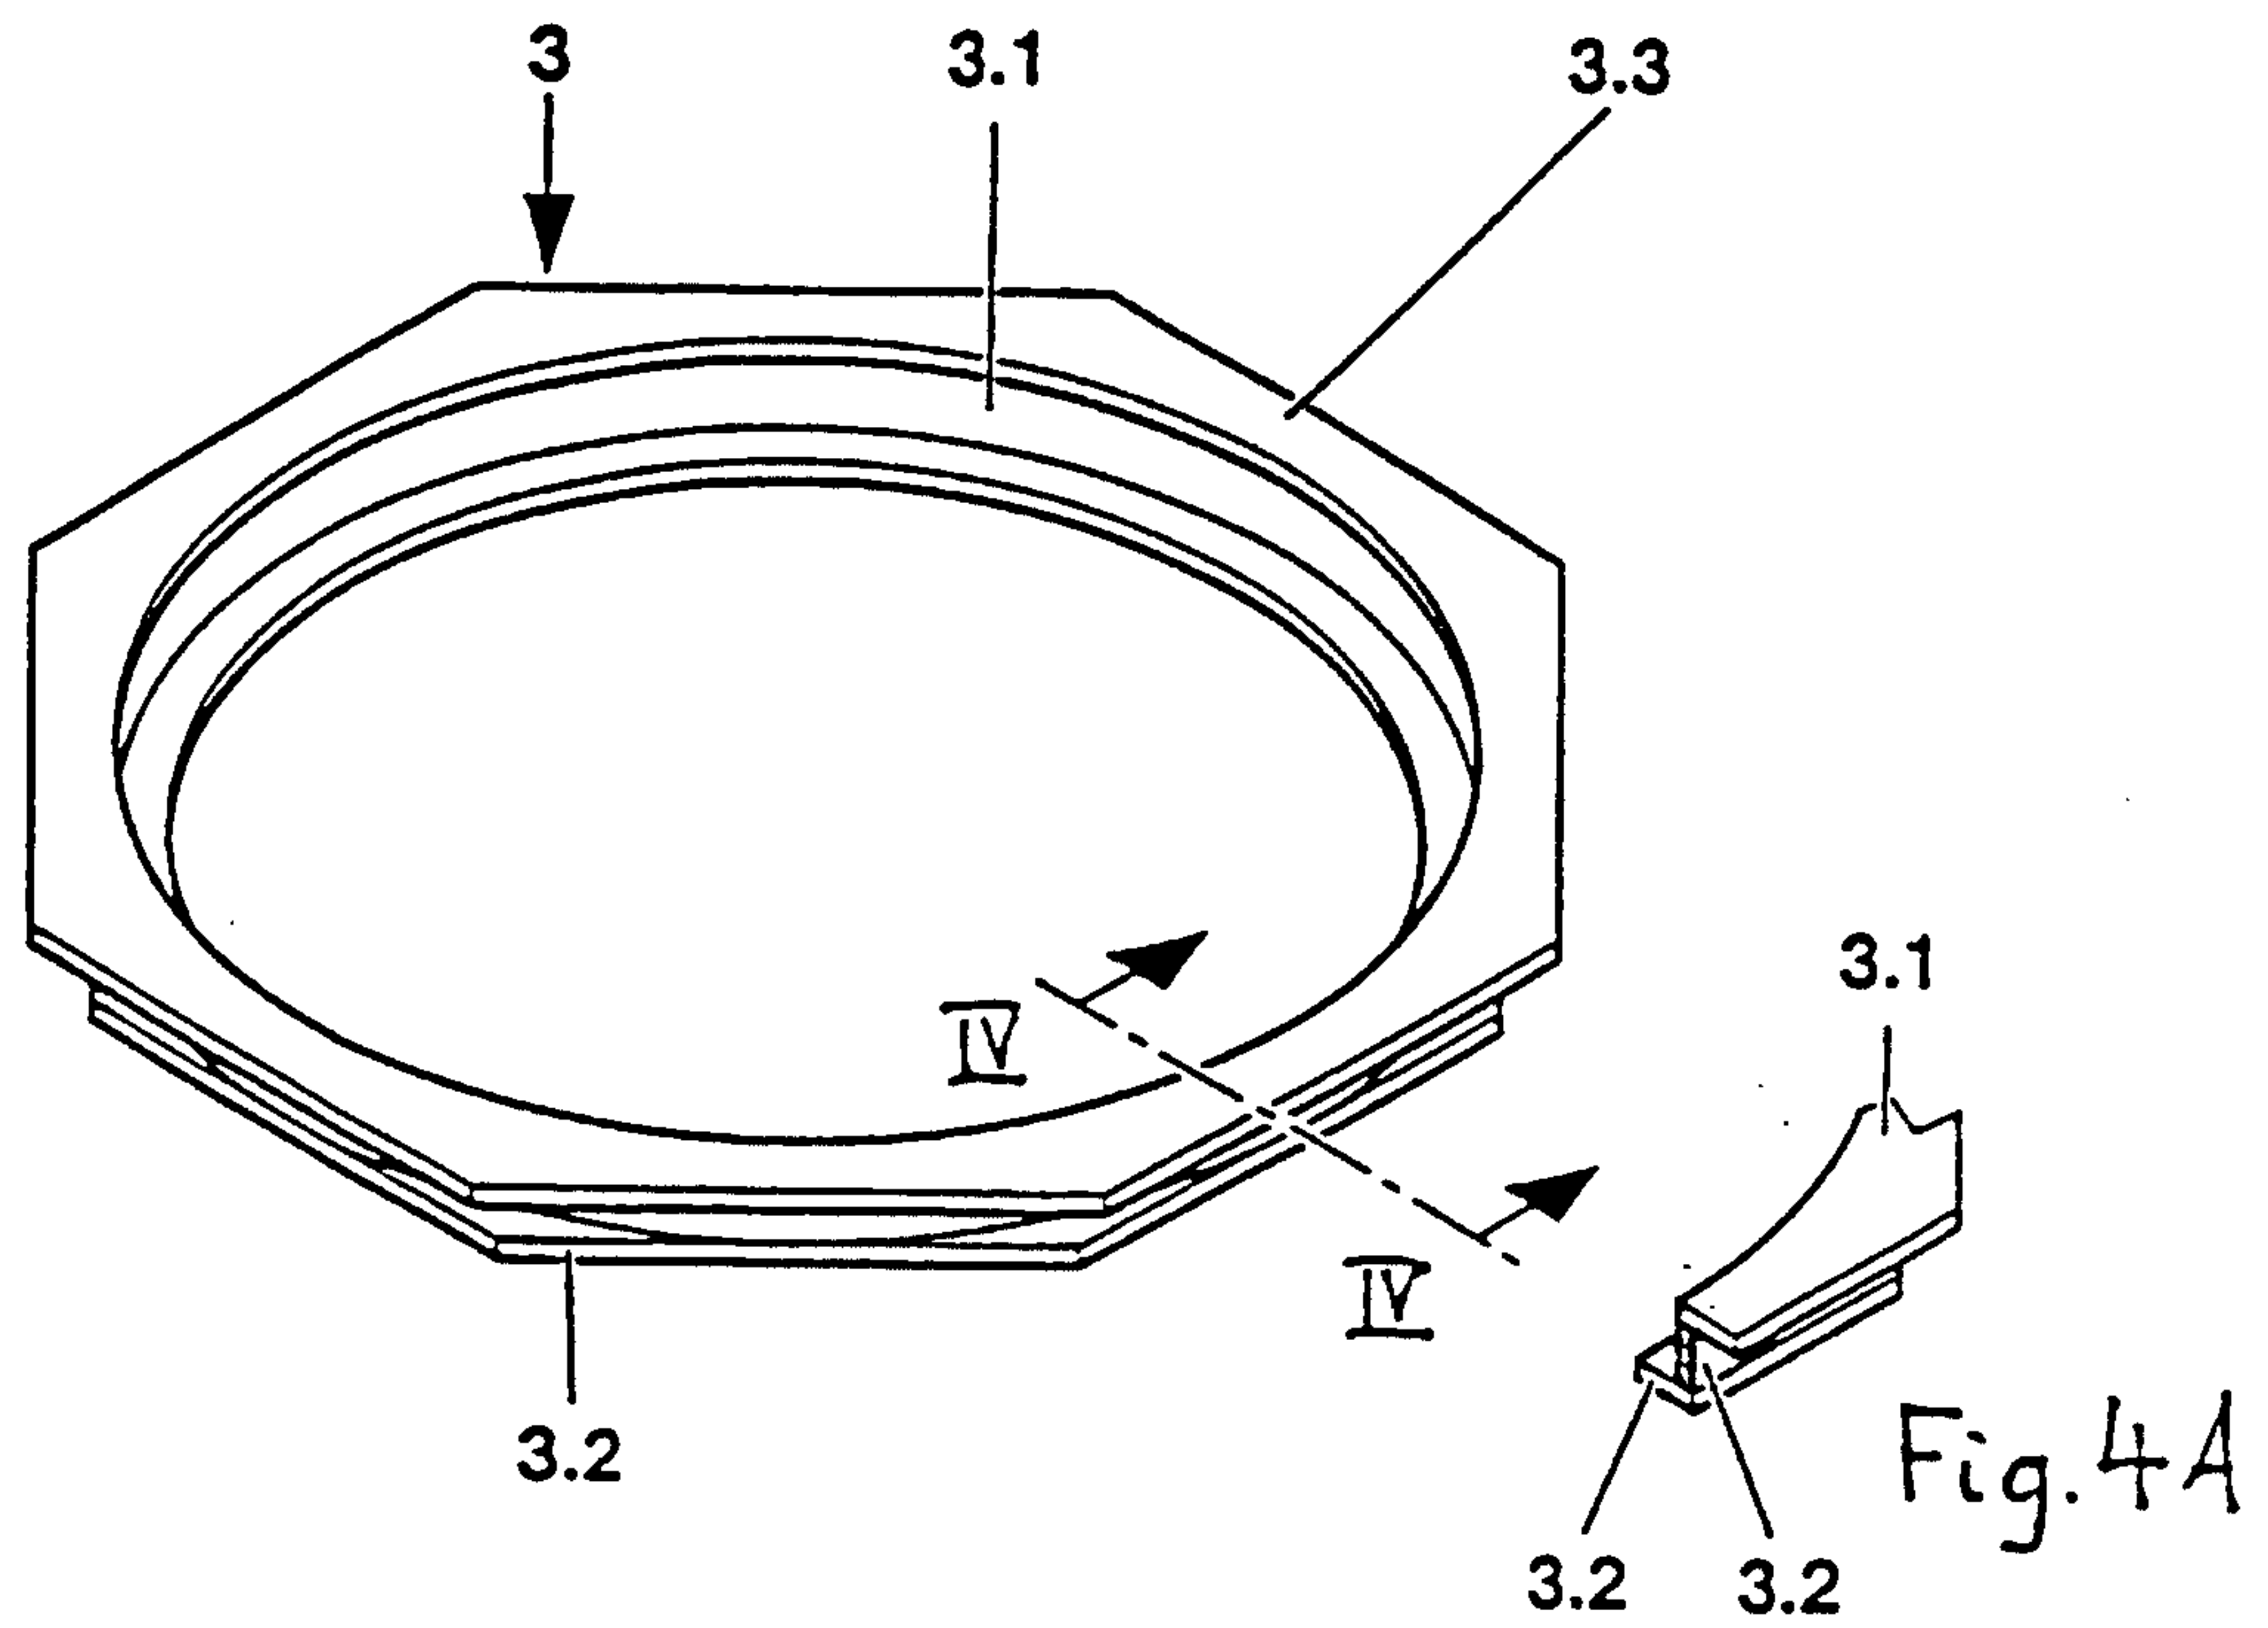


Fig. 4



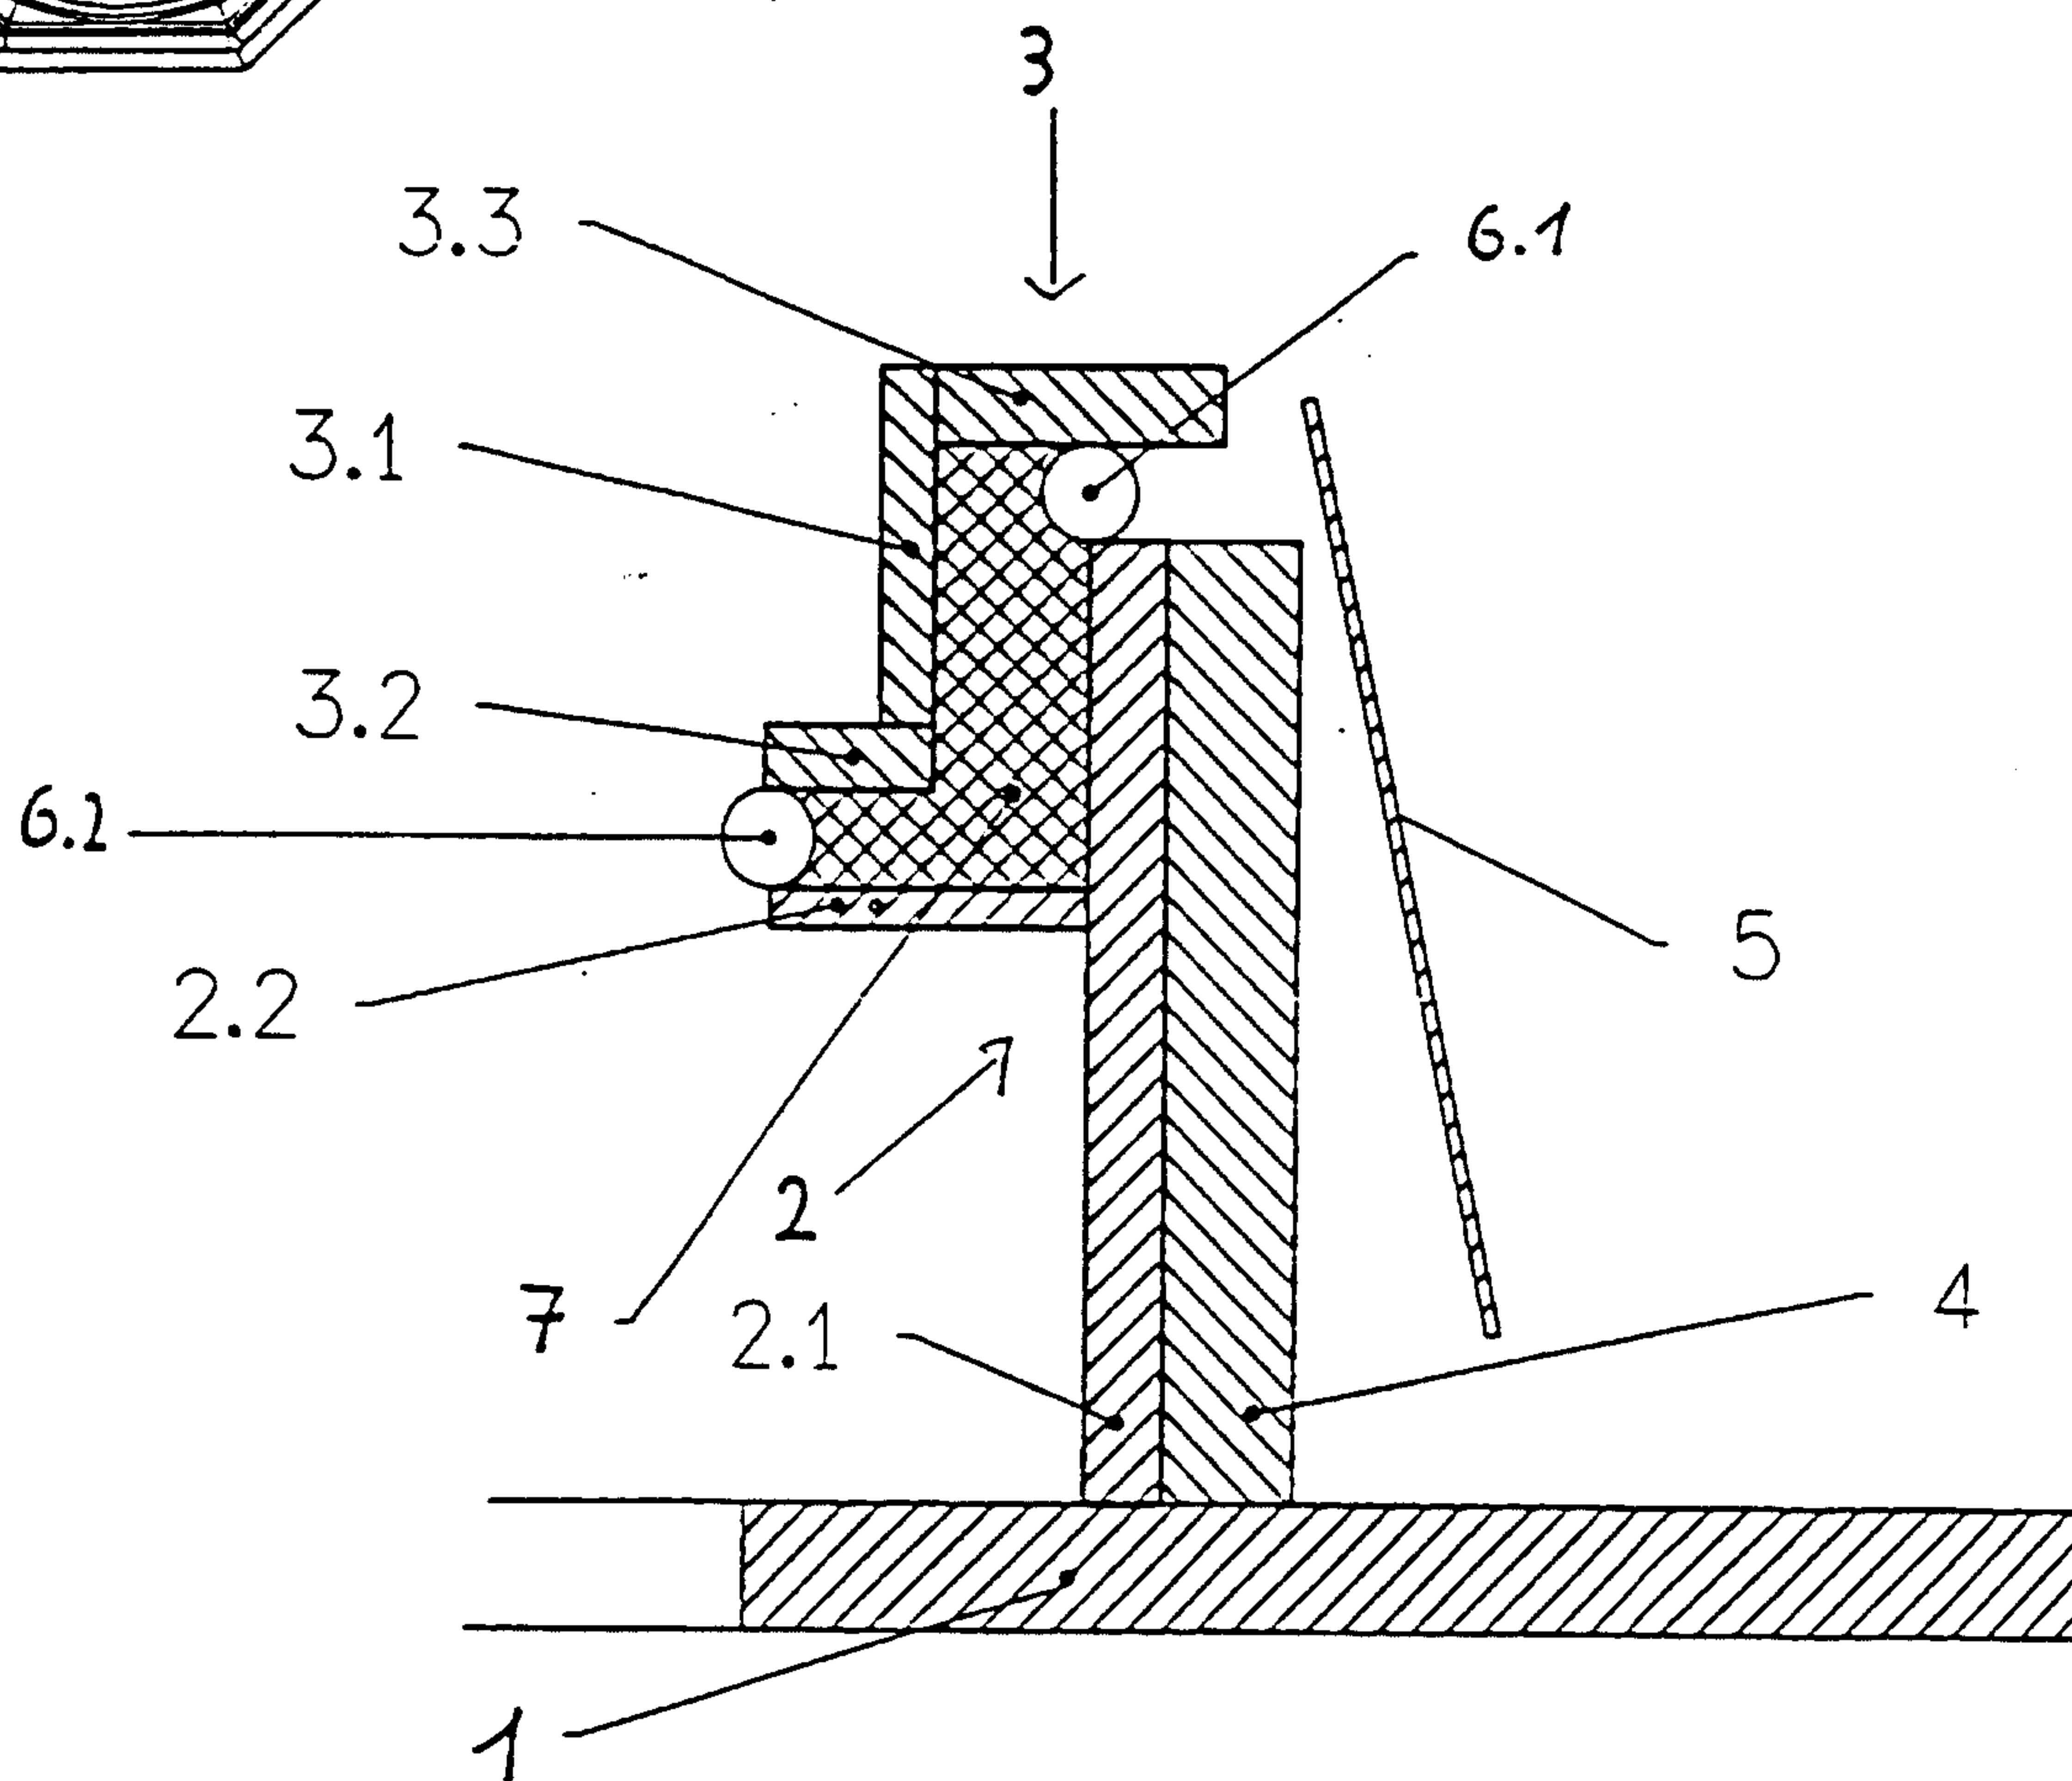
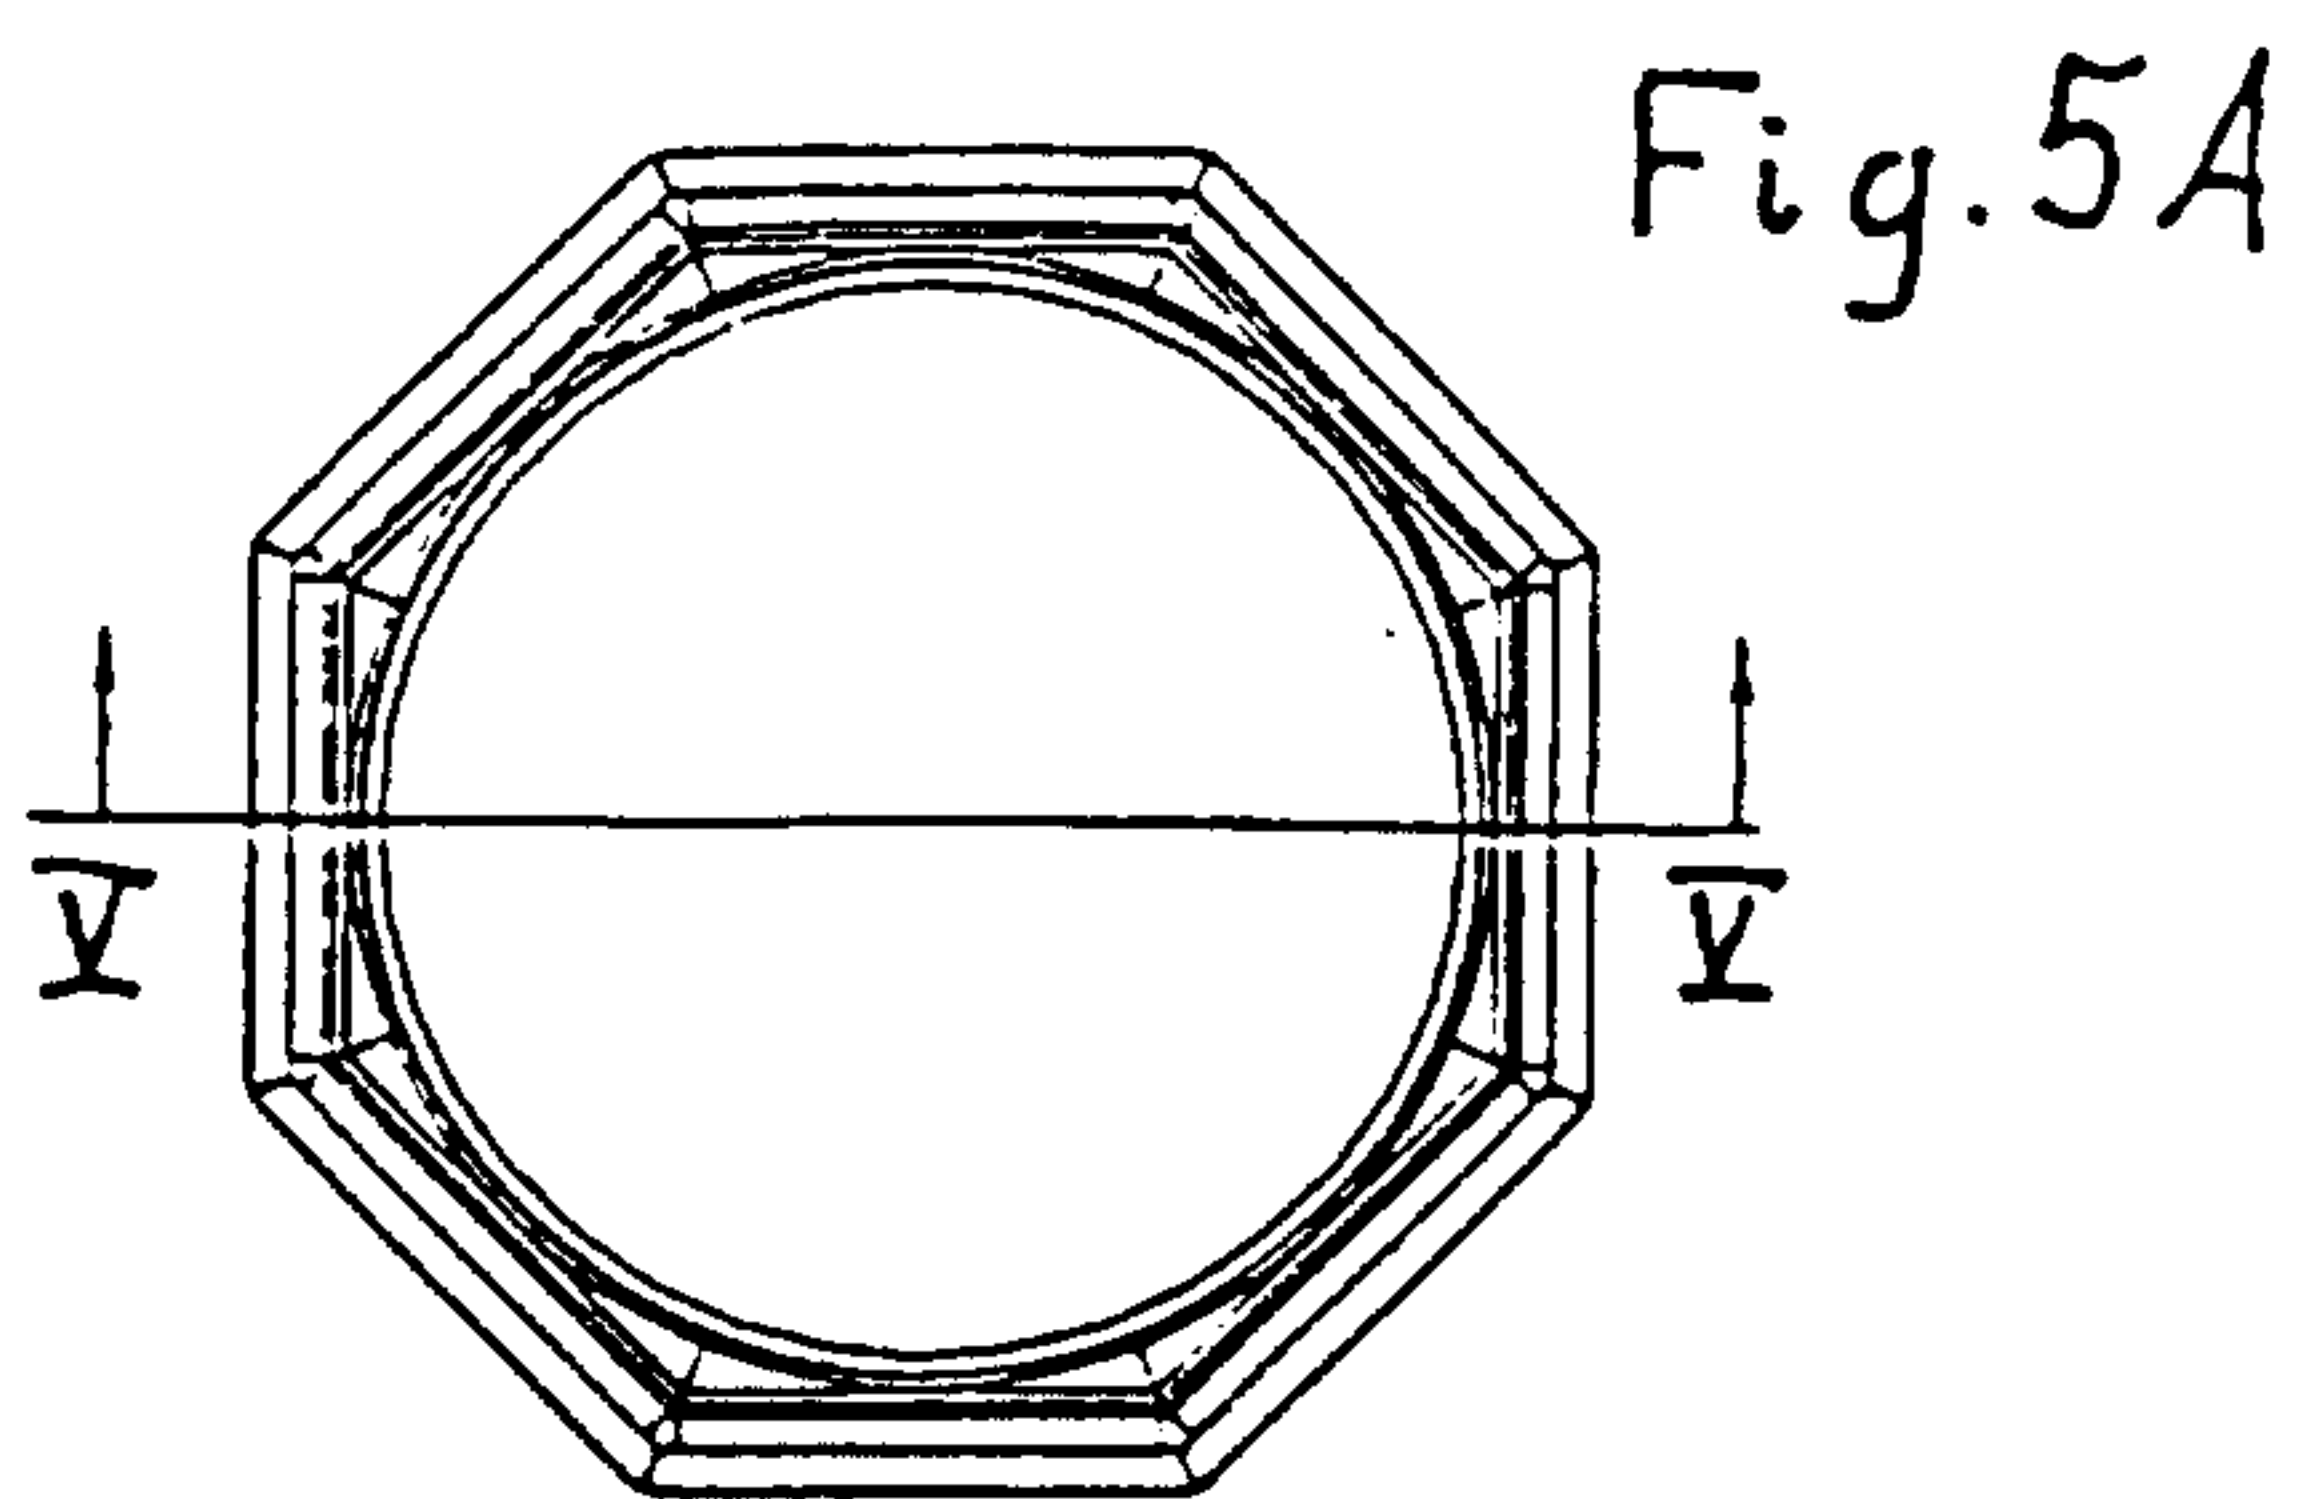


Fig. 5

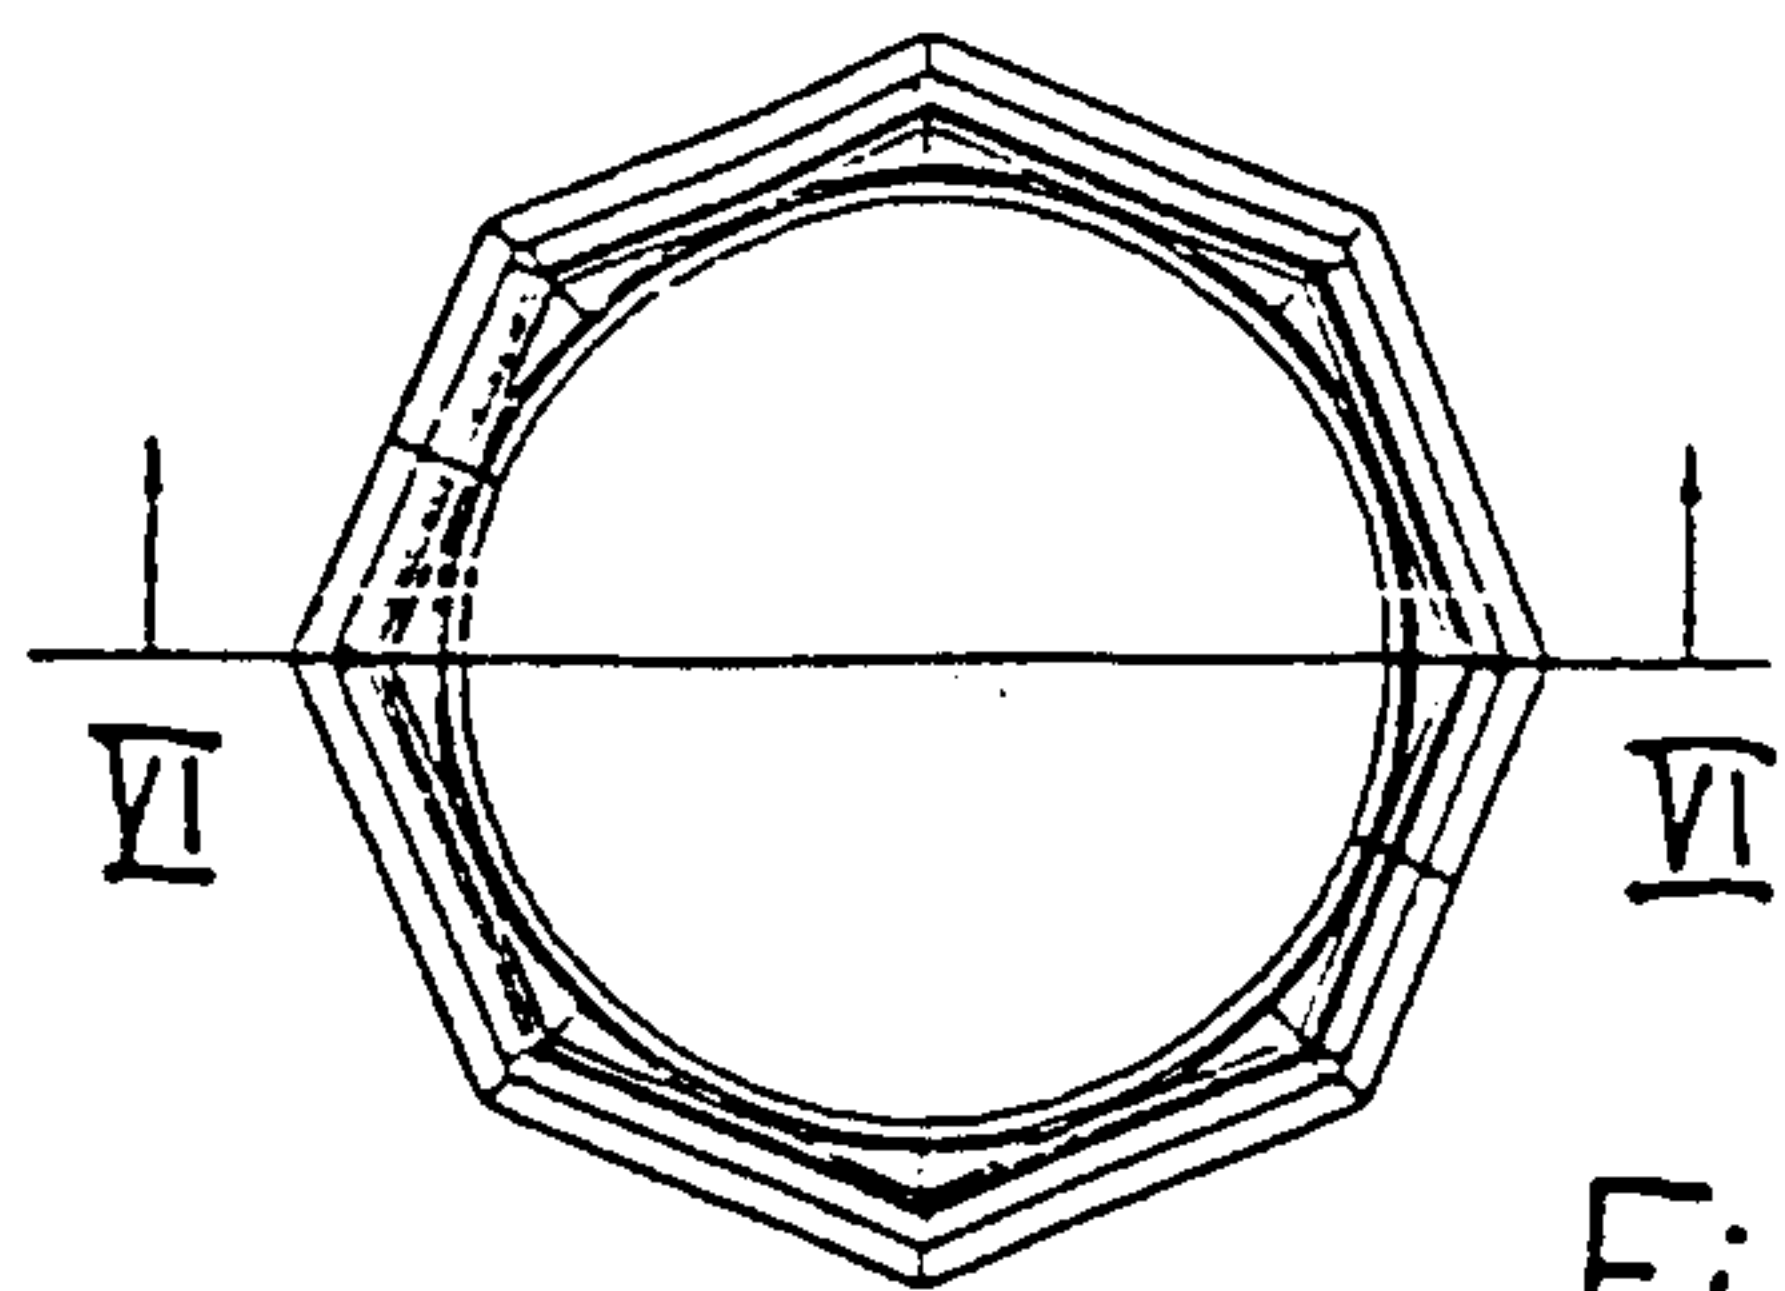


Fig. 6A

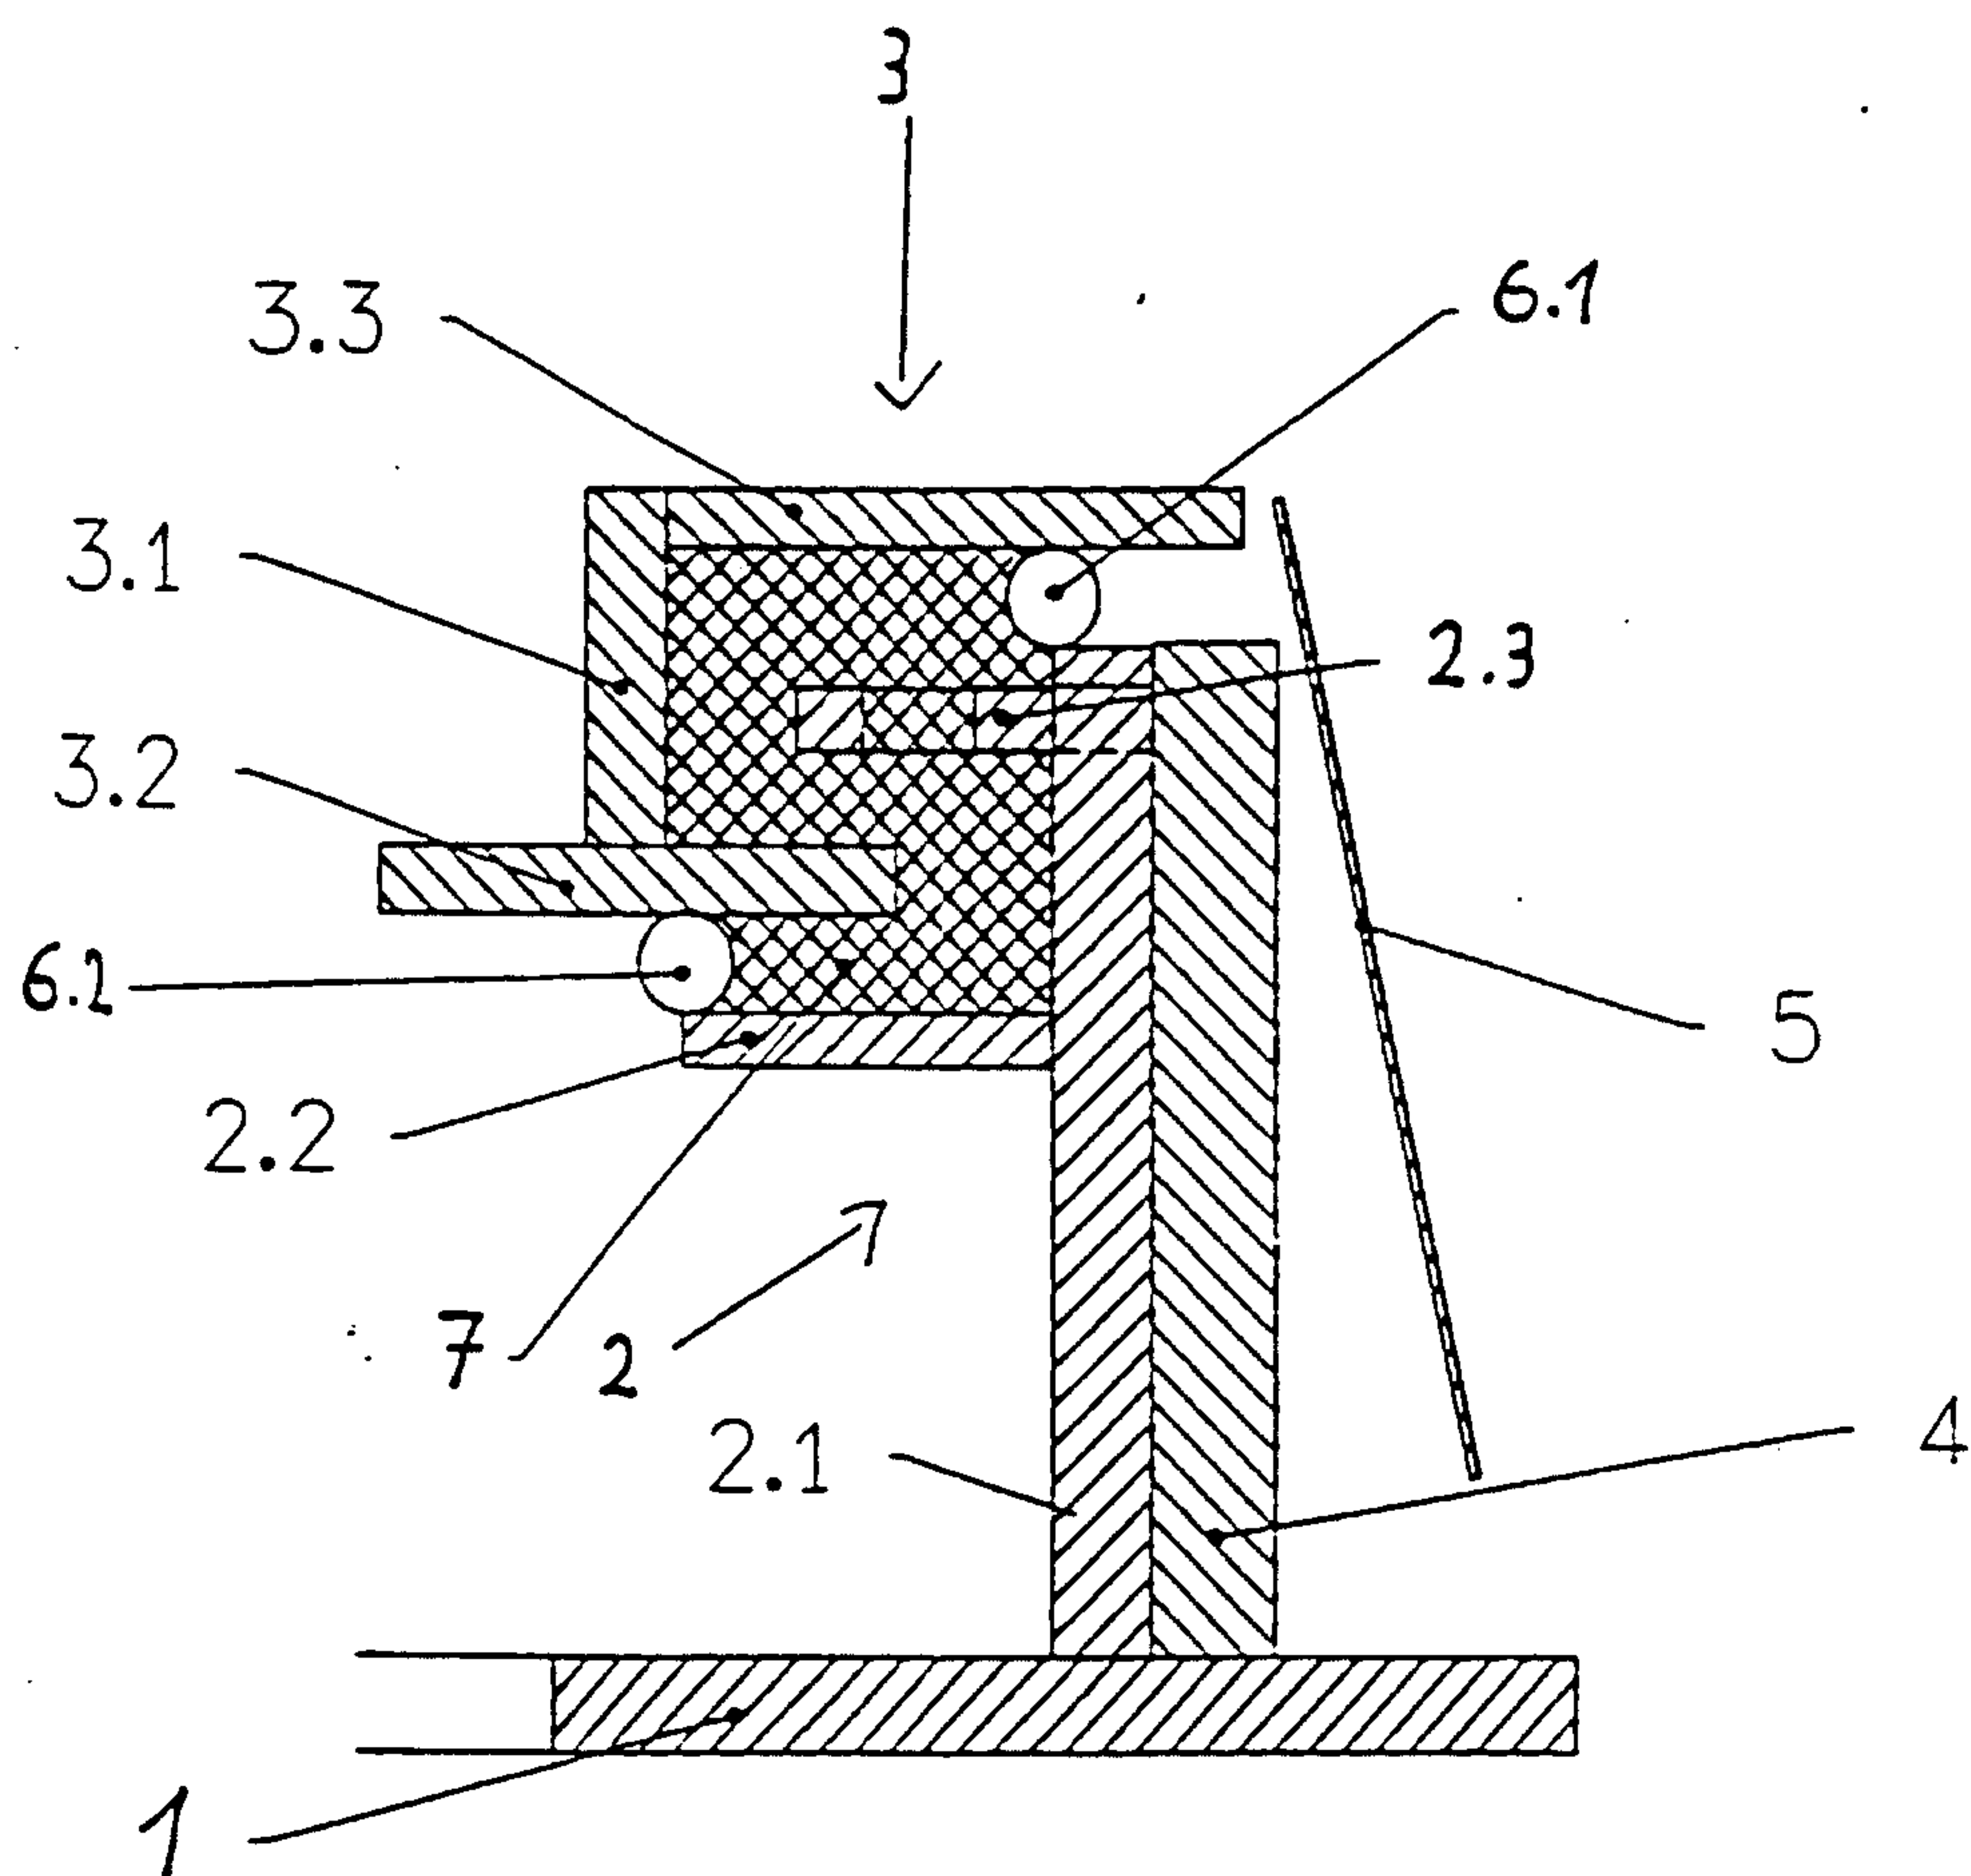


Fig. 6

