



(51) International Patent Classification:  
*A61M 31/00* (2006.01)

(21) International Application Number:  
PCT/US2011/024082

(22) International Filing Date:  
8 February 2011 (08.02.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
61/302,465 8 February 2010 (08.02.2010) US

(71) Applicant (for all designated States except US): **RE-SHAPE MEDICAL, INC.** [US/US]; 100 Calle Iglesia, San Clemente, CA 92672 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BOUASAYSY, Out-hit** [US/US]; 11547 Chadwick Rd, Corona, CA 92880 (US).

(74) Agents: **SPORER, Nicole, C.** et al.; Perkins Coie LLP, P.O. Box 1247, Seattle, WA 98111-1247 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MATERIALS AND METHODS FOR IMPROVED INTRAGASTRIC BALLOON DEVICES

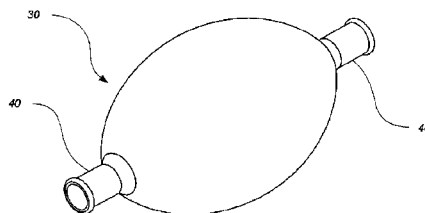


Fig. 1

(57) Abstract: Disclosed is a balloon of an intragastric device, comprising, in combination: a core of a first material and having an inner surface and an outer surface; and a coating of a second material on at least one of the inner surface of the core and the outer surface of the core. Disclosed is a method, comprising, in combination: creating a core of a balloon by a core in a first material; dipping at least one of an inner surface of the core and an outer surface of the core in a second material, whereby a coating is formed on at least one of the inner surface of the core and the outer surface of the core. The first material may be of a more dimensional consistency than the second material, have a greater elasticity than the second material, or be primarily of polydimethylsiloxane.



## MATERIALS AND METHODS FOR IMPROVED INTRAGASTRIC BALLOON DEVICES

### CROSS-REFERENCE TO RELATED APPLICATION

**[0001]** The present application claims priority under 35 U.S.C. § 119(e) of U.S. Provisional Application Serial No. 61/302,465, filed February 8, 2010, the disclosure of which is incorporated herein by reference in its entirety.

### RELATED REFERENCES

**[0002]** This application incorporates by reference: U.S. Pat. Pub. No. 2007/0100367, published May 3, 2007; U.S. Pat. Pub. No. 2007/0100368, published May 3, 2007; U.S. Pat. Pub. No. 2007/0100369, published May 3, 2007; U.S. Pat. Pub. No. 2007/0149994, published June 28, 2007; U.S. Pat. Pub. No. 2008/0243071, published October 2, 2008; U.S. Pat. Pub. No. 2008/0319471, published December 25, 2008; U.S. Pat. Pub. No. 2005/0159769, published July 21, 2005; U.S. Pat. Pub. No. 2009/0048624, published February 19, 2009; WIPO Pub. No. WO 2007/053556, published October 5, 2007; WIPO Pub. No. WO 2007/053707, published October 5, 2007; WIPO Pub. No. WO 2007/053706, published October 5, 2007; and WIPO Pub. No. WO 2007/075810, published May 7, 2007; each as if fully set forth herein in its entirety.

### BACKGROUND

**[0003]** This disclosure relates to implantable, expandable gastric devices. In particular, this disclosure relates to improved structures of balloons and methods of producing the same.

**[0004]** Many conventional implantable gastric devices have a balloon filled with a biocompatible fluid. Such gastric devices are generally inserted into the stomach when the balloon is deflated and then inflated in vivo. The gastric devices are often left in the stomach for an extended period of time to treat severe obesity or other conditions. The gastric devices are eventually removed after completing the treatment or for other reasons by deflating the balloon, grasping the gastric device with an extraction tool, and extracting the gastric device via the esophagus and

mouth. Conventional gastric devices are deflated by attempting to puncture the balloon and aspirate the biocompatible fluid through a needle.

**[0005]** One challenge of conventional devices is that the balloons are generally fairly large in a deflated state because of the limited elasticity and expansion of the materials that can withstand the harsh environment within the stomach rupture. Many existing balloons for intragastric devices are made from polydiphenylsiloxane (PDPS), which resists degradation by acids, fungal growth and other microbial growth, but it has limited expansion. As such, the cuffs of such a balloon must have a fairly large diameter so that the balloon can be removed from a mandrel during the manufacturing process.

**[0006]** Another challenge of conventional intragastric devices is the life span of the balloon. For example, fungi or other microbes can grow into the material of the balloon and effectively decrease the wall thickness. This can weaken the balloon wall to the point that it ruptures under the pressure of the fluid in the balloon.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0007]** Several embodiments of the present technology will become more apparent with reference to the following description taken in conjunction with the accompanying drawings wherein like reference numerals denote like elements and in which:

**[0008]** Figure 1 shows a perspective view of a balloon;

**[0009]** Figure 2 shows a perspective view of an intragastric device;

**[0010]** Figure 3 shows a side view of an intragastric device;

**[0011]** Figure 4 shows a top view of an intragastric device;

**[0012]** Figure 5 shows a sectional view of a balloon with a magnified view;

**[0013]** Figure 6 shows a sectional view of a balloon with a magnified view; and

**[0014]** Figure 7 shows a sectional view of a balloon with a magnified view.

#### DETAILED DESCRIPTION

**[0015]** Specific details of several embodiments of the present technology are described below with reference to an intragastric device with compound balloon.

Although many of the embodiments are described below with respect to a dual balloon intragastric device, other types of devices with only one balloon or more than two balloons may be within the scope of the technology. Moreover, several other embodiments of the technology can have different configurations, components, or procedures than those described in this section. A person of ordinary skill in the art, therefore, will accordingly understand that the technology may have other embodiments with additional elements, or the technology may have other embodiments without several of the features shown and described below with reference to Figures 1-7.

**[0016]** Several embodiments of the technology are directed to a balloon of an intragastric device comprising, in combination, a substrate or core of a first material that has having an inner surface and an outer surface, and a coating of a second material on at least one of the inner or outer surfaces. The substrate, for example, can be more elastic and/or have more expansion than the coating, and the coating can be more resistant to fungal or other microbial growth than the substrate.

**[0017]** Additional embodiments of the technology are directed to a method comprising, in combination, forming a core or substrate of a first material into a balloon and covering at least one of an inner surface and/or outer surface of the substrate with a second material. The second material can be a coating that is sprayed, painted or applied by dipping the substrate into the second material, to form a smoother surface finish, as compared to a surface finish of a molded core, having a roughness from about 0.1 to 0.7 micron. This further inhibits or otherwise impedes the formation of biofilm (e.g., candida) on the coated surface of the balloon. Also disclosed are products by processed disclosed herein.

**[0018]** The first material may be of a more dimensionally stable or consistent than the second material and/or have a greater elasticity than the second material. In one embodiment, the first material comprises polydimethylsiloxane (PDMS). The second material may have a higher resistance to acid, be more resistant to fungal or other microbial activity, and be less permeable than the first material. In one embodiment, the second material comprises PDPS.


**[0019]** In the specific embodiment shown in Figure 1, a balloon 30 can be one of several expandable, space filling components. In several embodiments, and as

shown in Figure 2, the balloon 30 may be a component of an intragastric device 10. For example, as further shown in Figure 2, the intragastric device 10 can have a shaft 20 and a plurality of the balloons 30 may be joined or otherwise carried by the shaft 20.


**[0020]** The balloon 30 may have many different geometries and shapes according to the specific anatomy in which the balloon 30 is implanted. As shown in Figures 1 and 3, the balloon 30 may have at least one cuff 40 for interfacing with the shaft 20 (Figure 2) such that the shaft 20 extends through the balloon 30. The balloon 30 may be an open or closed balloon, and the balloon 30 may have an inner surface and outer surface.

**[0021]** According to several embodiments of the technology, the intragastric device 10 may be configured for use as an implantable device within a gastric cavity. In many applications, the intragastric device 10 is implanted for several months in the stomach or other gastric cavity having high concentrations of acids and microbes that can deteriorate the balloon 30. The durability and longevity of the intragastric device 10 is accordingly defined, at least in part, by the ability of the balloon 30 to resist the harsh environment within the stomach. As such, the materials and manufacturing methods of the materials are key contributors as to balloon integrity and longevity.

**[0022]** According to embodiments, the balloon 30 may comprise a combination of two different silicone-containing materials. Two examples of such materials are PDMS and PDPS. PDMS may be represented as  $[\text{SiO}(\text{CH}_3)_2]_n$  or graphically as follows:



**[0023]** PDPS may be represented as  $[\text{SiO}(\text{C}_6\text{H}_5)_2]_n$  or graphically as follows:



**[0024]** According to several embodiments of the technology, at least one of PDMS and PDPS may form the substrate or core of at least a portion of the balloon 30. Other materials, structures, or compounds may be mixed or cross-linked with the based material.

**[0025]** According to several embodiments of the technology, a plasma etching or coating may be provided to at least a portion of the balloon 30. Plasma etching may involve a high-speed stream of glow discharge (plasma) of an appropriate gas mixture being shot (in pulses) at a sample. The plasma source can be either charged (ions) or neutral (atoms and radicals). During the process, the plasma will generate volatile etch products at room temperature from the chemical reactions between the elements of the material etched and the reactive species generated by the plasma. The atoms of the shot element embed themselves at or just below the surface of the target, thus modifying the physical properties of the balloon 30. Etching may facilitate better adherence between layers of the balloon 30.

**[0026]** According to several embodiments of the technology, various coatings (e.g., hydrophilic) may be applied to at least a portion of substrate or core of the balloon 30. For example, a hydrophilic coating may be provided where two surfaces of the balloon 30 resist flow of fluid there through.

**[0027]** The respective chemical structures of PDMS and PDPS have relatively disparate characteristics, which may be summarized as follows:

	Polydimethylsiloxane	Polydiphenylsiloxane
Manufacturing method:	Molding, extrusion	Dipping
Curing:	Heat	Heat
Consistency:	More dimensional (moldable)	Less dimensional (dipping)
Elasticity:	Higher	Lower
Tensile Strength:	Lower	Higher
Acid resistance :	Acceptable	Increased
Permeability:	Higher	Lower

In various applications and based on different aspects, each of PDMS and PDPS may be seen as providing certain advantages and disadvantages.

**[0028]** According to several embodiments of the technology, the dimensional stability or consistency and elasticity of PDMS materials and PDMS blends enable the balloon 30 to be formed using molding and extrusion processes instead of a dipping process. In particular, molding processes include molding the PDMS

material over a mandrel, and the higher elasticities of PDMS materials compared to PDPS materials reduce the stresses involved in removing the mandrel. For example, the balloon 30 may be formed using a mandrel that has a larger diameter at a central portion than at one or both ends (corresponding to cuffs 40). For example, the diameter at the middle of a mandrel may be up to 600% larger than at the end of the mandrel. The balloon 30 must sufficiently elastic to remove the mandrel through the cuff 40 without damaging the cuff 40.

**[0029]** According to several embodiments of the technology, the expansion ratio of the balloon 30 from an uninflated state (i.e., before and during implant) to an inflated state (i.e, after implant) may be significant. For example, the balloon 30 may have an outer diameter of about 1.9" in an uninflated state and about 4" in an inflated state (over 200% expansion). By further example, the balloon 30 may have a volume of about 80 cc in an uninflated state and about 450 cc in an inflated state (over 500% expansion). These factors are well-served by PDMS materials and PDMS blends. As such, PDMS and PDMS blends are well suited for the substrate or core of the balloon 30.

**[0030]** In accordance with several embodiments of the invention, the higher acid resistance and less permeability of PDPS materials and PDPS blends, compared to PDMS based materials, better limit the ingress or egress of materials across the walls of the balloon 30 and support longevity of the balloon 30. Generally, PDPS, as compared to PDMS, is less able to provide consistent wall thicknesses and is less capable of generating molding friendly features, but more capable of resisting acids and growth of fungi or bacteria.

**[0031]** In several specific embodiments of the technology, the balloon 30 has a multiple-material composition in which a plurality of disparate materials and material blends may be provide in layers forming walls of the balloon 30. For example, a wall of the balloon 30 may have a substrate or core with at least one coating on an inner or outer surface thereof.

**[0032]** Figures 5 and 6 illustrate specific embodiments of the technology. In the embodiment shown in Figure 5, the balloon can have a substrate or core 50 and outer coating 60a over an outer surface of the core 50. The outer coating 60a may be provided, for example, by a dipping process after core 50 is formed. In the

embodiment shown in Figure 6, the balloon 30 can have an inner coating 60b over an inner surface of the core 50. The inner coating 60b may be provided, for example, by a dipping process after core 50 is formed and the balloon inverted inside-out.

**[0033]** Figure 7 illustrates another embodiment in which the balloon has the substrate or core 50, the outer coating 60a over the outer surface of the core, and an inner coating 60b over the inner surface of the core 50. The outer coating 60a and inner coating 60b may be provided, for example, by a dipping process after core 50 is formed.

**[0034]** In selected embodiments, the substrate or core 50 can comprise PDMS or another material that is moldable and has a higher elasticity than PDPS. The inner and/or outer coatings 60a-b can comprise PDPS or another material that is less permeable and more acid resistant than PDMS. According to several embodiments, the balloon 30 having a layered, multiple-material composition may benefit from the advantages of each material while mitigating or minimizing the detriments of each.

**[0035]** The present technology is also directed to methods of making the balloon 30 as disclosed. In one embodiment, the substrate or core 50 may be molded of the first material, such as a liquid silicone rubber (LSR) grade material (e.g., such as PDMS). Those skilled in the art will recognize various molding and extrusion processes that may facilitate formation of core 50. The molding process can include injecting PDMS or a PDMS blend into a mold such that the molded material surrounds a mandrel or other form. After curing, the core 50 is removed from the mold, mandrel, or other device, and then the second material may be coated onto the inner and/or outer surface of the core 50. For example, the core 50 may be dipped in the second material to form at least one of the outer coating 60a and/or the inner coating 60b. Other embodiments of the method, the core 50 may be coated using other techniques, such as spraying, painting, coating, washing, etc. The second material can be PDPS or another suitable low-permeable, acid and fungal resistant material.

**[0036]** The core 50 may compose a substantial portion of the total sum of the balloon 30 or at least the walls thereof. For example, the thickness of core 50 may be about 0.001 inch to about 1.0 inch. By further example, the thickness of core 50



may be about 0.024 inch to about 0.030 inch. The core 50 can have other thicknesses based on the needs and applications of the desired product.

**[0037]** The outer coating 60a or the inner coating 60b may be a thin relative to the thickness of core 50. For example, the outer coating 60a or the inner coating 60b may have a thickness of about 1% to about 99% of the thickness of core 50. By further example, the outer coating 60a or the inner coating 60b may have a thickness of about 10% to about 20% of the thickness of core 50. The inner and outer coating 60a-b can have other thicknesses based on the needs and applications of the desired product. It should be noted that outer coating 60a or inner coating 60b comprising PDPS materials increase the stiffness of the balloon 30 and reduce elongation properties thereof.

**[0038]** In still additional embodiments of the technology, the core 50 and/or the coating 60 can include anti-microbial or other additives to impart additional therapeutic, durability, or other properties to the balloon 30. For example, such additives can be distributed homogeneously in the coating 60, or the additives can be a constituent of another coating applied directly to the core 50 or to the coating 60. When such an additional coating is applied directly to the core 50, the coating 60 can be applied onto the other coating. In several specific examples, the additives can comprise salt or silver-based anti-microbial materials that inhibit the growth of microbes on and/or into the core 50.

**[0039]** The multi-layered construction of first and second materials of several embodiments of the balloon may have a substantially consistent surface and retain elastic material properties, increased acid resistance, and lower permeability. For example, the first material of the core 50 can provide good elasticity enable molding processes that provide a controlled wall thickness, and the second material of the coating 60 can provide good resistance to acid, fungus, bacteria and other microbes. The second material of the coating 60 can also have a low permeability.

**[0040]** Although the method and agent have been described in terms of what are presently considered to be the most practical and preferred embodiments, it is to be understood that the disclosure need not be limited to the disclosed embodiments. It is intended to cover various modifications and similar arrangements included within the spirit and scope of the claims, the scope of which should be accorded the

broadest interpretation so as to encompass all such modifications and similar structures. The present disclosure includes any and all embodiments of the following claims.

**[0041]** It should also be understood that a variety of changes may be made without departing from the essence of the invention. Such changes are also implicitly included in the description. They still fall within the scope of this invention. It should be understood that this disclosure is intended to yield a patent covering numerous aspects of the invention both independently and as an overall system and in both method and apparatus modes.

**[0042]** Further, each of the various elements of the invention and claims may also be achieved in a variety of manners. This disclosure should be understood to encompass each such variation, be it a variation of an embodiment of any apparatus embodiment, a method or process embodiment, or even merely a variation of any element of these.

**[0043]** Particularly, it should be understood that as the disclosure relates to elements of the invention, the words for each element may be expressed by equivalent apparatus terms or method terms -- even if only the function or result is the same.

**[0044]** Such equivalent, broader, or even more generic terms should be considered to be encompassed in the description of each element or action. Such terms can be substituted where desired to make explicit the implicitly broad coverage to which this invention is entitled.

**[0045]** It should be understood that all actions may be expressed as a means for taking that action or as an element which causes that action.

**[0046]** Similarly, each physical element disclosed should be understood to encompass a disclosure of the action which that physical element facilitates.

**[0047]** Any patents, publications, or other references mentioned in this application for patent are hereby incorporated by reference. In addition, as to each term used it should be understood that unless its utilization in this application is inconsistent with such interpretation, common dictionary definitions should be understood as incorporated for each term and all definitions, alternative terms, and

synonyms such as contained in at least one of a standard technical dictionary recognized by artisans and the Random House Webster's Unabridged Dictionary, latest edition are hereby incorporated by reference.

**[0048]** Finally, all referenced listed in the Information Disclosure Statement or other information statement filed with the application are hereby appended and hereby incorporated by reference; however, as to each of the above, to the extent that such information or statements incorporated by reference might be considered inconsistent with the patenting of this/these invention(s), such statements are expressly not to be considered as made by the applicant(s).

**[0049]** In this regard it should be understood that for practical reasons and so as to avoid adding potentially hundreds of claims, the applicant has presented claims with initial dependencies only.

**[0050]** Support should be understood to exist to the degree required under new matter laws -- including but not limited to United States Patent Law 35 USC 132 or other such laws -- to permit the addition of any of the various dependencies or other elements presented under one independent claim or concept as dependencies or elements under any other independent claim or concept.

**[0051]** To the extent that insubstantial substitutes are made, to the extent that the applicant did not in fact draft any claim so as to literally encompass any particular embodiment, and to the extent otherwise applicable, the applicant should not be understood to have in any way intended to or actually relinquished such coverage as the applicant simply may not have been able to anticipate all eventualities; one skilled in the art, should not be reasonably expected to have drafted a claim that would have literally encompassed such alternative embodiments.

**[0052]** Further, the use of the transitional phrase "comprising" is used to maintain the "open-end" claims herein, according to traditional claim interpretation. Thus, unless the context requires otherwise, it should be understood that the term "comprise" or variations such as "comprises" or "comprising", are intended to imply the inclusion of a stated element or step or group of elements or steps but not the exclusion of any other element or step or group of elements or steps.

**[0053]** Such terms should be interpreted in their most expansive forms so as to afford the applicant the broadest coverage legally permissible.

## CLAIMS

1. An intragastric balloon, comprising, in combination:  
a core of a first material and having an inner surface and an outer surface;  
and  
a coating of a second material on at least one of the inner surface of the core  
and the outer surface of the core, wherein the first material is more  
elastic than the second material and the second material has a lower  
permeability than the first material.
2. The intragastric balloon of claim 1, further comprising two cuffs  
configured to receive a shaft extended through the intragastric balloon.
3. The intragastric balloon of claim 1, wherein the first material is of a  
more dimensional consistency than the second material.
4. The intragastric balloon of claim 1, wherein the first material has a  
viscosity suitable for molding processes.
5. The intragastric balloon of claim 1, wherein the first material is primarily  
of polydimethylsiloxane.
6. The intragastric balloon of claim 5, wherein the second material has  
higher acid resistance than the first material.
7. The intragastric balloon of claim 1, wherein the second material is less  
permeable than the first material.
8. The intragastric balloon of claim 1, wherein the second material is  
primarily of polydiphenylsiloxane.

9. The intragastric balloon of claim 1, wherein the intragastric balloon has an expansion ratio of at least about 200% by diameter and at least about 500% by volume.

10. An intragastric device, comprising, in combination:  
a shaft; and

at least a first balloon fixed to the shaft, the first balloon having a core of a first material and a coating of a second material, wherein the core has an inner surface and an outer surface, and the coating is on at least one of the inner surface of the core and the outer surface of the core.

11. The intragastric device of claim 10, wherein the first material is primarily of polydimethylsiloxane and the second material is primarily of polydiphenylsiloxane.

12. A method, comprising, in combination:  
creating a core of a balloon by molding a core of a first material;  
coating at least one of an inner surface of the core and an outer surface of the core with a second material, wherein the first material has a different elasticity than the second material.

13. The method of claim 12, further comprising fixing the balloon to a shaft of an intragastric device.

14. The method of claim 12, wherein the first material is more dimensional stable than the second material.

15. The method of claim 12, wherein the first material has a greater elasticity than the second material.

16. The method of claim 12, wherein the first material is primarily of polydimethylsiloxane.

17. The method of claim 16, wherein the second material has higher acid resistance than the first material.

18. The method of claim 16, wherein the second material is less permeable than the first material.

19. The method of claim 16, wherein the second material is primarily of polydiphenylsiloxane.

20. A product by the process of claim 12.

21. The method of claim 12 wherein coating at least one of the inner surface of the core and the outer surface of the core in a second material further comprises:

at least one of spraying, painting, and dipping at least one of the inner surface and the outer surface to form a smooth surface finish having a roughness from approximately 0.1 micron to approximately 0.7 micron.

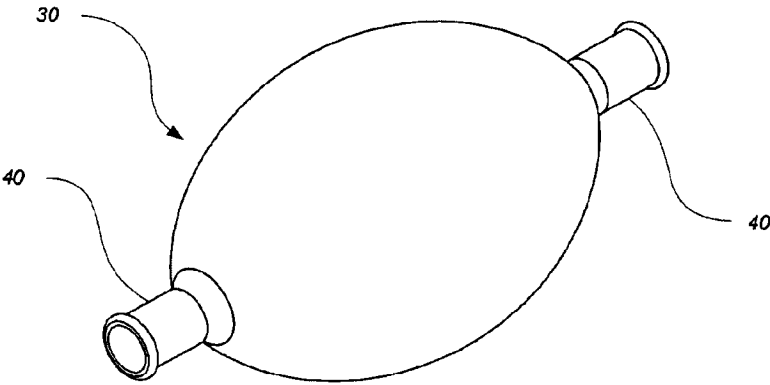


Fig. 1


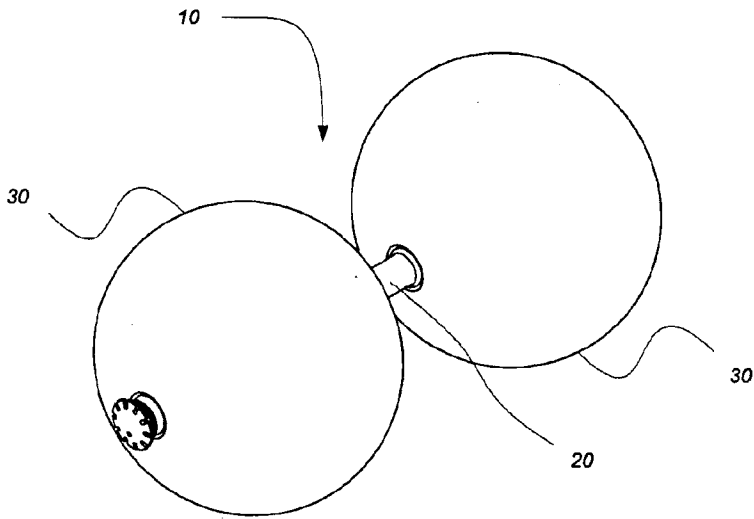



Fig. 2



2/5

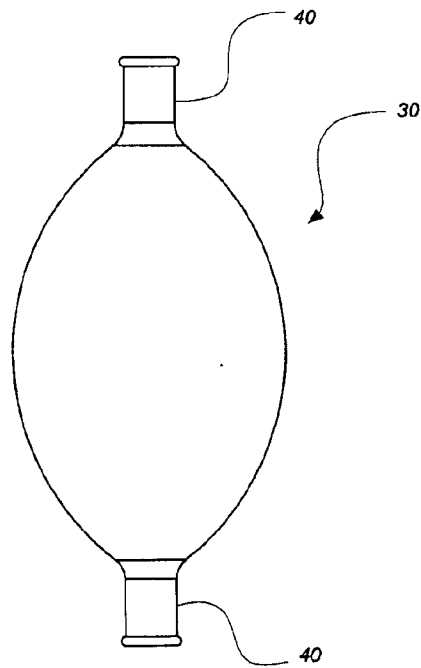


*Fig. 3*

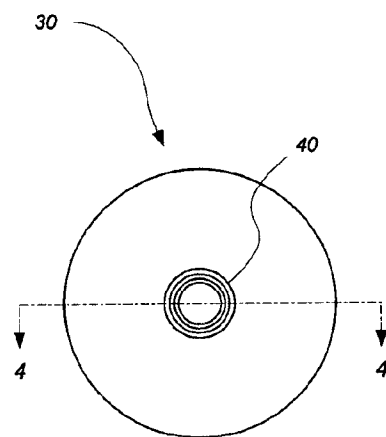


*Fig. 4*

3/5

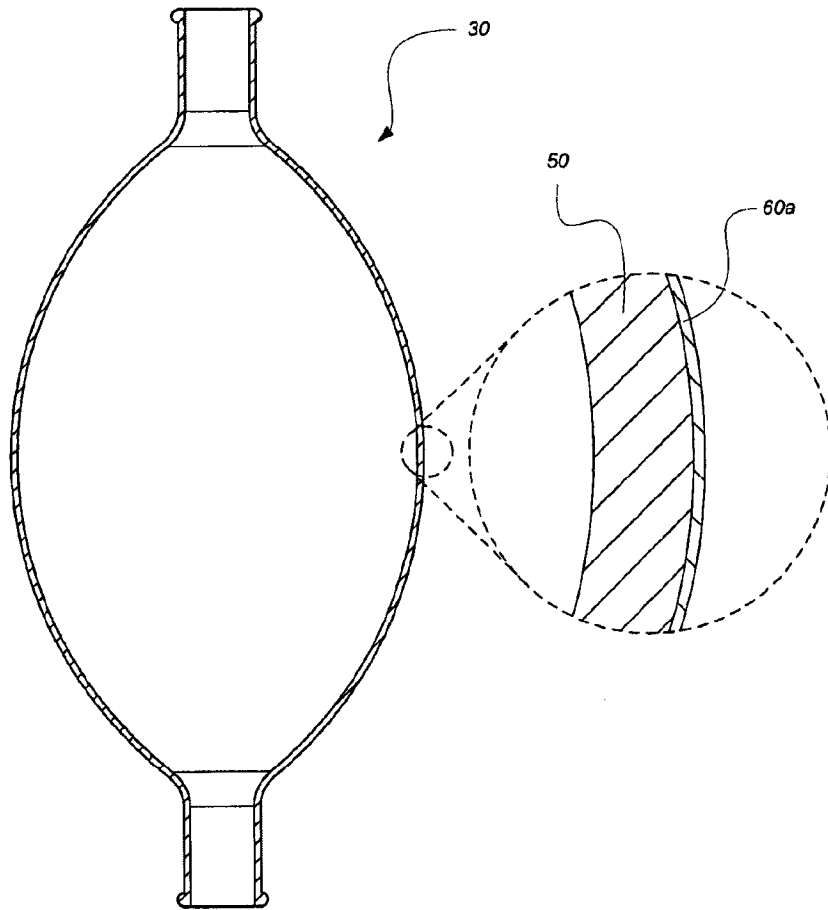

*Fig. 5*

4/5

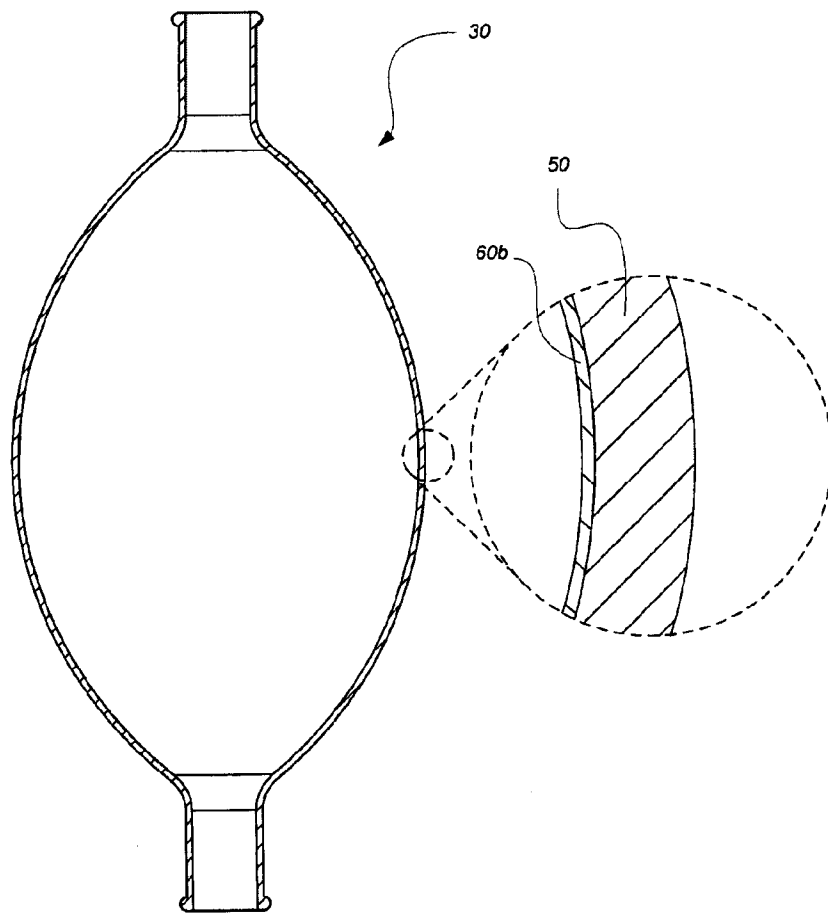

*Fig. 6*

5/5

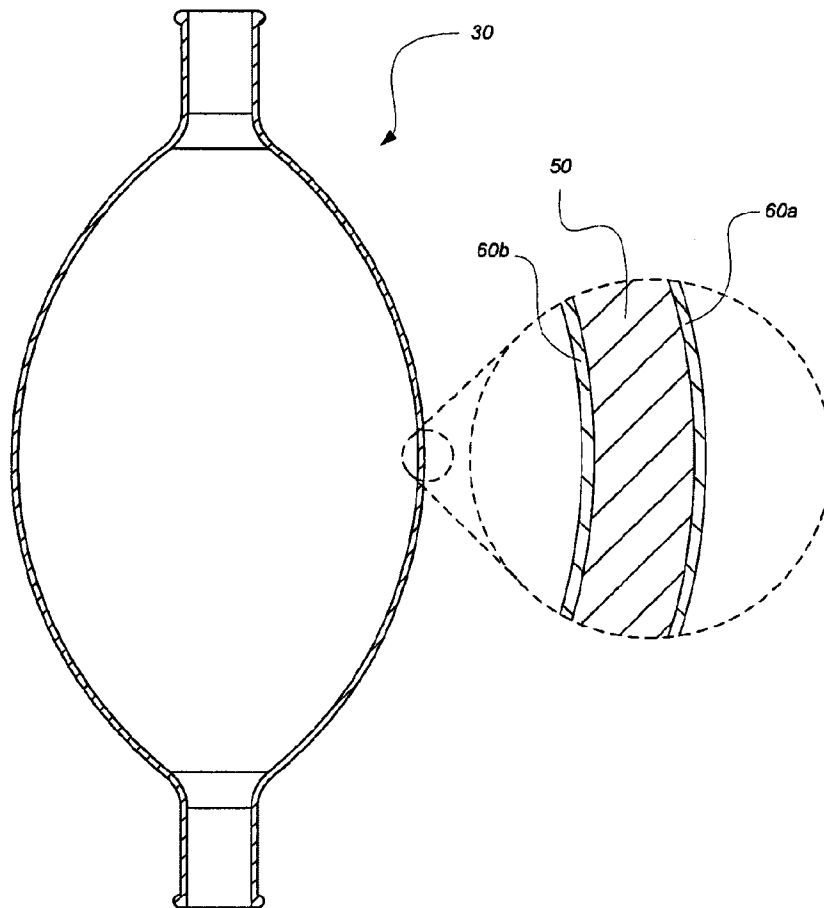


Fig. 7

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2011/024082

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61M 31/00 (2011.01)

USPC - 606/191

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - A61F 2/02; A61M 25/10, 29/02, 31/00 (2011.01)

USPC - 604/905; 606/153, 191, 192

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Orbit

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ---	WO 2009/112786 A2 (PAGANON et al) 17 September 2009 (17.09.2009) entire document	1, 3-4, 7-9, 12, 14-15, 20-21
Y		----- 2, 5-6, 10-11, 13, 16-19
Y	US 6,613,037 B2 (KHOSRAVI et al) 02 September 2003 (02.09.2003) entire document	2
Y	US 2008/0233167 A1 (LI et al) 25 September 2008 (25.09.2008) entire document	5-6, 11, 16-19
Y	US 2008/0319471 A1 (SOSNOWSKI et al) 25 December 2008 (25.12.2008) entire document	10-11, 13
A	FR 2 862 525 A1 (PAGANON et al) 27 May 2005 (27.05.2005) entire document	1-21

☐ Further documents are listed in the continuation of Box C.


## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 March 2011

Date of mailing of the international search report

06 APR 2011

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents  
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774