

12

EUROPEAN PATENT APPLICATION

21 Application number: 85305656.2

51 Int. Cl.⁴: **H 01 F 1/08**
H 01 F 1/22

22 Date of filing: 09.08.85

30 Priority: 14.09.84 US 650623

43 Date of publication of application:
19.03.86 Bulletin 86/12

84 Designated Contracting States:
DE FR GB IT NL SE

71 Applicant: **GENERAL MOTORS CORPORATION**
General Motors Building 3044 West Grand Boulevard
Detroit Michigan 48202(US)

72 Inventor: **Lee, Robert Weir**
3090 Myddleton Drive
Troy Michigan 48064(US)

72 Inventor: **Schaffel, Neal Andrew**
6215 Buttonwood Drive
Noblesville Indiana 46060(US)

74 Representative: **Haines, Arthur Donald et al,**
GM Patent Section Luton Office (F6) P.O. Box No. 3
Kimpton Road
Luton, Beds. LU2 0SY(GB)

54 **Hot pressed permanent magnet having high and low coercivity regions.**

57 In accordance with a preferred embodiment of the invention, an arcuate magnet (36) is formed by selectively hot-working a composition including iron, neodymium and or praseodymium, and boron so that an edge (40) of the arcuate magnet has greater apparent coercivity than a central region (38) and the central region (38) has a higher remanence than the edge (40).




Fig. 4(b)

HOT PRESSED PERMANENT MAGNET
HAVING HIGH AND LOW COERCIVITY REGIONS

This invention relates to hot worked unitary permanent magnets having at least two separate regions of different magnetic alignment. More particularly, this invention relates to iron, neodymium and/or praseodymium, and boron-containing permanent magnet bodies that have been hot worked so as to contain distinct regions of different alignment -- e.g., one of relatively high apparent coercivity and one of relatively high remanence.

10 Background

High energy product, high coercivity permanent magnet compositions comprising, for example, iron, neodymium and/or praseodymium, and boron and methods of making them are disclosed in European published patent applications EP-A-0 108 474 and EP-A-0 144 112. An illustrative composition, expressed in atomic proportions, is $\text{Nd}_{0.13}(\text{Fe}_{0.95}\text{B}_{0.05})_{0.87}$. It is a composition containing a specific stable intermetallic phase and that possesses high coercivity when formed as fine crystallites about 20 to 400 nanometers in largest dimension.

Melts of suitable iron-light rare earth metal-boron compositions can be very rapidly quenched, such as by melt-spinning, to produce a solid material, e.g., a thin ribbon. When the rate of cooling has been controlled to produce a suitable fine crystalline microstructure (20 nm to 400 nm), the material has excellent permanent magnet properties. On the other hand, faster cooling (overquenching) produces a material with smaller crystallites and lower coercivity. However, as disclosed, such overquenched material can be annealed to form the suitable crystal

size with the associated high coercivity and high energy product.

5 An interesting and useful property of this neodymium-iron-boron composition (for example) is that it is substantially magnetically isotropic. A fine grain, melt-spun ribbon can be broken up into flat particles. The particles can be pressed in a die at room temperature to form a unitary body of a density about 85% that of the material. Bonding agents can be
10 employed before or after the compaction. The making of such bonded magnets is disclosed in European published patent application EP-A-0 125 752. It was surprising to find that such bonded magnets displayed no preferred magnetic direction. Values of intrinsic coercivity
15 or maximum energy product were not dependent upon the direction of the applied magnetic field. There was no advantage in grinding the ribbon to very fine particles and magnetically aligning the particles before compaction.

20 Such magnetically isotropic materials are very useful because they can be easily pressed (without magnetic alignment) into bonded shapes. The shapes can be magnetized in the most convenient direction.

The iron, neodymium, boron type compositions
25 have also been processed by hot-pressing and hot-working so that at least a portion of the grains or crystallites was physically aligned producing at least partial magnetic alignment. As disclosed in European published patent application EP-A-0 133 758, such
30 hot-worked materials had a preferred direction of magnetization. In one form of the practice disclosed in that application, a molten material containing, in

terms of atomic proportions, $\text{Nd}_{0.13}(\text{Fe}_{0.95}\text{B}_{0.05})_{0.87}$ is cooled extremely rapidly, as by melt-spinning, to form a thin ribbon of solid material that did not have permanent magnet properties. The material was
5 amorphous in microstructure. The ribbon was broken into particles of convenient size for a hot-working operation. The particles were heated under argon to about 700°C or higher in a die and pressed with punches in the die under pressure of at least 68947.6 kPa
10 (10,000 psi). Such hot-working, hereafter termed hot-pressing, consolidated the particles into a fully dense body.

If the hot-working is stopped at the point at which the material is consolidated to full density, the
15 result is a slightly magnetically aligned magnet with the easy magnetization direction parallel to the press direction. The demagnetization curve (room temperature, second quadrant, $4\pi M$ versus H plot) of such a densified magnet is like that of curve A in Figure 1
20 of the accompanying drawings.

When the fully dense compact is re-pressed under like conditions of elevated temperature and pressure in a larger die cavity, the compact undergoes considerable plastic strain in the plane perpendicular
25 to the press direction. This second stage of hot-working is termed die-upsetting, and it produces substantial magnetic alignment with the easy direction of magnetization transverse to the plastic strain direction. The demagnetization curve for such a
30 die-upset body is like that of curve B in Figure 1 of the accompanying drawings. Examination of the demagnetization curves of Figure 1 shows that the

hot-pressed magnet (curve A) and the die-upset magnet (curve B) have substantially different degrees of magnetic alignment. The hot-pressed magnet has relatively higher coercivity and lower remanence in the press direction than the die-upset magnet. The die-upset magnet has a higher maximum energy product, but it is easier to demagnetize than the hot-pressed body of the same composition. There are applications for magnets in which it is desirable to incorporate both characteristics in a unitary magnet body.

It is an object of the present invention to provide a method of hot-working a permanent magnet body to produce at least two regions spaced along a surface dimension of the body and having different desired magnetic alignments. Generally speaking, one of the regions will have higher apparent coercivity but lower remanence than the other region. Application of the method to rapidly cooled compositions comprising iron, neodymium and/or praseodymium and boron is particularly contemplated.

It is another object of the invention to provide a unitary magnetic structure that has been selectively hot-worked so that it contains separate regions of differing magnetic alignment. An example of such a magnetic structure is an arcuate magnet for a permanent magnet motor. It is contemplated that one or both of the circumferential edges of the arc would be worked so as to have relatively high coercivity and the central portion of the arc would have a relatively higher remanence. Again, it is especially contemplated that the magnet would be of the above described iron-light rare earth metal-boron compositions.

Brief Summary

In accordance with a preferred embodiment of the invention, these and other objects and advantages are accomplished as follows.

5 The starting material is a rapidly-quenched composition comprising iron, neodymium and/or praseodymium, and boron. An example of a suitable composition is one consisting, in terms of atomic proportion, of $\text{Nd}_{0.13}(\text{Fe}_{0.95}\text{B}_{0.05})_{0.87}$. The starting
10 material is amorphous in microstructure or characterized by an extremely fine crystalline structure. It is preferred to start with such an amorphous or fine grained microstructure so that the hot-working can be carried out without loss of suitable
15 coercivity in the final product.

 Particles of melt-spun material are placed in the cavity of an open-ended die between two opposing punches. The particles are heated in the die to a temperature, suitably about 700°C or higher, and
20 compacted at a suitable pressure to form a fully densified body. Split-ram punches may be employed, as will be described, such that the consolidated body has a stepwise variation in thickness over its cross-section within the die. While still in the hot die,
25 the respective punch edges (of the split ram) may then be brought into alignment and moved in concert to subject a portion of the consolidated part to further hot-working. Such hot-working strains the thick portion of the irregular consolidated part differently
30 than the thin portion. The different strain over the cross-section produces two regions of generally different magnetic alignment. The region that is most

highly strained in the direction perpendicular to the press direction is more highly aligned and has a demagnetization curve like that of curve B in Figure 1. The region that was not deformed (or less deformed) by the second press operation has less magnetic alignment and displays magnetic properties like that of curve A in Figure 1.

This generally illustrates one practice of hot-working different regions of an iron, neodymium and/or praseodymium, and boron composition such that a unitary body is formed having regions intentionally produced of different magnetic alignment. A typical application for the invention is an arcuate motor magnet in which the leading edge of the arcuate magnet (in a motor that rotates in one direction only) is subjected to a higher demagnetization force than the rest of the arcuate magnet. In such application the leading edge of the arcuate magnet would be processed so as to have high apparent coercivity (measured radially with respect to the arcuate magnet) and the rest of the arcuate magnet would be hot-worked so as to have relatively high remanence and maximum energy product.

A better understanding of the invention will be gained from a detailed description thereof as follows. Reference will be had to the accompanying drawings, in which:

Figure 1 is a second quadrant, room temperature, $4\pi M$ versus H plot of a hot-pressed magnet (curve A) and a die-upset magnet (curve B);

Figures 2(a)-(c) are schematic drawings, partly in section, of two different die sets showing a

sequence of die operations for forming a hot-worked arcuate magnet;

Figures 3(a) and (b) are schematic representations, partly in section, showing a split-ram die in two different modes of operation;

Figures 4(a) and (b) are schematic cross-sections of a hot-pressed compact and a die-upset permanent magnet processed in accordance with the present invention;

Figure 5 illustrates in cross-section a hot-worked arcuate magnet containing adjacent regions of different magnetic alignment in accordance with the present invention;

Figures 6(a) and (b) are schematic representations illustrating the making of an arcuate magnet like that depicted in Figure 5 in accordance with an embodiment of the present invention; and

Figure 7 illustrates yet another die-forming practice of forming a permanent magnet having at least two regions of different magnetic alignment.

Detailed Description

The present invention is applicable to permanent magnet compositions that can be magnetically aligned by plastic deformation of the material at elevated temperatures. An example of a family of preferred compositions to which the method of the invention is applicable is the transition metal-rare earth metal-boron materials described in the above-identified patent applications. The invention is particularly applicable to compositions in which the transition metal component is iron or iron and (one or more of) cobalt, nickel, chromium or manganese.

Cobalt is interchangeable with iron up to about 40 atomic percent. Chromium, manganese and nickel are interchangeable in lower amounts, preferably less than 10 atomic percent. Zirconium and/or titanium in small amounts (up to 2 atomic percent of the iron) can be substituted for iron. Very small amounts of carbon and silicon can be tolerated where low carbon steel is the source of iron for the composition. The composition preferably comprises about 50 atomic percent to about 90 atomic percent transition metal component -- largely iron.

The composition also comprises from about 10 atomic percent to about 50 atomic percent rare earth component. Neodymium and/or praseodymium are the essential rare earth constituents. As indicated, they may be used interchangeably. Relatively small amounts of other rare earth elements, such as samarium, lanthanum, cerium, terbium and dysprosium, may be mixed with neodymium and praseodymium without substantial loss of the desirable magnetic properties. Preferably, they make up no more than about 40 atomic percent of the rare earth component. It is expected that there will be small amounts of impurity elements with the rare earth component.

The overquenched composition contains about 1 to 10 atomic percent boron.


The overall composition may be expressed by the formula $RE_{1-x}(TM_{1-y}B_y)_x$. The rare earth (RE) component makes up 10 to 50 atomic percent of the composition ($x = 0.5$ to 0.9), with at least 60 atomic percent of the rare earth component being neodymium and/or praseodymium. The transition metal (TM) as used

herein makes up about 50 to 90 atomic percent of the overall composition, with iron representing at least 60 atomic percent of the transition metal content. The other constituents, such as cobalt, nickel, chromium and manganese, are called "transition metals" insofar as the above empirical formula is concerned.

Boron is present in an amount of about 1 to 10 atomic percent (y = about 0.01 to 0.11) of the total composition.

For convenience, the compositions have been expressed in terms of atomic proportions. Obviously these specifications can be readily converted to weight proportions for preparing the composition mixtures.

For purposes of illustration, the invention will be described using compositions of approximately the following atomic proportions:



However, it is to be understood that the method of the invention is applicable to other compositions as described above. Depending on the rate of cooling, molten transition metal-rare earth-boron compositions can be solidified to have microstructures ranging from:

- (a) amorphous (glassy) and extremely fine grained microstructures (e.g., less than 20 nanometers in largest dimension) through
- (b) very fine (micro)-grained microstructures (e.g., 20 nm to about 400 nm) to
- (c) larger grained microstructures.

Thus far, large-grained microstructure materials with useful permanent magnet properties have not been

produced by rapid solidification from a melt. Fine-grain microstructures, where the grains have a maximum dimension of about 20 to 400 nanometers, have useful permanent magnet properties. Amorphous materials do not. However, some of the glassy microstructure materials can be annealed to convert them to fine-grain permanent magnets having isotropic magnetic properties. The present invention is particularly applicable to such overquenched, glassy materials. It is also applicable to "as-quenched" high coercivity, fine-grain materials provided the materials are exposed only for short times, e.g., less than five minutes, at high temperatures, over 700°C, during the hot-working.

Suitable overquenched compositions can be made by melt-spinning. Melt-spinning is described in the above applications and will not be repeated here. It is also practiced commercially to produce nonmagnetic or soft magnetic alloys. It is preferable to use melt-spun materials that have been cooled at such a rate that an amorphous or extremely fine crystal structure is produced. In the case of the iron-neodymium-boron compositions, it is preferable to start with a rapidly solidified structure having a grain size smaller than about 20 nanometers. The material is then heated and worked in a die at a temperature of about 700-750°C to consolidate particles of the material into a fully densified mass and then to selectively deform the consolidated material plastically to achieve regions of different magnetic alignment. Such processing is carried out fairly rapidly so that excessive grain growth does not occur and the permanent magnet characteristics lost.

Reference has already been made to Figure 1 which graphically depicts the demagnetization properties of a hot-pressed iron-neodymium-boron magnet (curve A) and a die-upset magnet (curve B) of the same composition. The hot-pressed magnet is only moderately magnetically aligned and possesses a relatively high degree of coercivity in the press direction. The die-upset magnet has been significantly plastically deformed. The material has attained a relatively high degree of alignment. Its coercivity in the press direction has thereby been decreased but its remanence increased.

In this work it has been observed that the hot-worked magnets display magnetic alignment in a direction perpendicular to the direction of plastic flow. When such plastic flow happens to be perpendicular to the press direction (the direction of movement of the punches), the magnetic alignment is parallel to the press direction. When the magnetic properties, e.g., coercivity and remanence, of such anisotropic magnets are measured, the values measured in the preferred (aligned) direction are detected and reported unless otherwise stated.

Reference is made to Figure 2 to illustrate the method of forming a die-upset magnetically aligned arcuate permanent magnet. Particles of melt-spun material are loaded into a cavity formed by open-ended die 10 and vertically aligned opposing punches 12 and 14 such as is shown in Figure 2(a). The die and its contacts are heated by an induction heater (not shown) to a temperature at or near 700°C. The punches 12 and 14 compact the particulate material under a pressure

of, for example, 103421.4 kPa (15,000 psi) to form a substantially fully densified body 16 depicted in the die cavity in Figure 2(a). The arrows within the outline of body 16 indicate that the densified compact is substantially unaligned. However, there is a slight alignment preference in the direction of compaction. The magnetic properties of this compact are like that depicted in curve A of Figure 1.

The compact 16 is then transferred to a larger die 18 with opposing punches 20 and 22 as shown in Figure 2(b). The cavity is likewise heated to maintain the compact 16 at a temperature at or near 700°C. The compact 16 is then plastically deformed by the punches 20 and 22 to form die-upset arcuate body 24. The material flows laterally, but the direction of alignment, and easy magnetization, is transverse to the plastic flow, i.e., generally in the direction of pressing as shown by the arrows in Figure 2(c). The resulting arcuate magnet 24 is wider and thinner than compact 16. Magnet 24 has a high degree of magnetic alignment which is substantially uniformly radial with respect to the centre of curvature. Magnet 24 is shown in section in Figure 2(c). In perspective view it would appear like the magnet 36 shown in Figure 4(b). Such arcuate magnet 24 could be produced by the practice described in the above cited European patent application EP-A-0 133 758.

In accordance with the present invention, an arcuate magnet or other permanent magnet structure is produced in which there are at least two regions in the unitary body having different magnetic alignment. In one embodiment of the invention, this is accomplished

by first making a densified hot-pressed compact having sections of different thickness. A convenient practice is to form a compact having abrupt or stepped differences in thickness. This can be accomplished
5 by using a split ram die as depicted in Figure 3. As shown, such a die uses a conventional die body 25, but both the upper 26 and lower 28 punches are split and the two portions (26', 26" and 28', 28") of each punch can either move in concert as shown in Figure 3(a) or
10 move separately as shown in Figure 3(b). Such a split punch or split ram die arrangement can be employed to hot-press and consolidate particulate melt-spun material to form a compact like that depicted in Figure 4(a).

15 The arcuate hot-pressed compact 30 of Figure 4(a) is of substantially uniform density and random magnetic alignment (or disalignment), but it has a stepwise change in thickness. The perspective view (Figure 4(a)) of arcuate compact 30 shows a relatively
20 thick portion 32 and adjacent thin section 34. The compact 30 has a chord length L . It can be produced in a split ram die in which the split punches are operated as shown in Figure 3(b). The formation of a hot-pressed, densified compact 30 of such a configuration
25 permits the making of a die-upset arcuate compact of uniform thickness but having regions of different magnetic alignment. The compact of Figure 4(a) is pressed in a wider section die cavity, heated to a temperature of about 700°C and hot-worked into a
30 longer (chord length $L' > L$ as seen in Figure 4) but thinner arcuate magnet 36 such as depicted in Figure 4(b). Since section 32 of the Figure 4(a) compact 30

was thicker than section 34, it undergoes more plastic deformation and flow. Therefore, this portion 32 of compact 30 undergoes considerable lateral strain to form arcuate region 38 of die upset magnet 36 in Figure 4(b). Thus, region 38 of the final arcuate magnet 36 is highly magnetically aligned as illustrated in Figure 4(b). Conversely, region 34 of compact 30 undergoes relatively little deformation and thus region 40 of magnet 36 is substantially unaligned. Region 40 has magnetization characteristics like that of curve A of Figure 1, and region 38 has magnetic characteristics like that of curve B. Thus, the right circumferential edge portion 40, as seen in Figure 4(b), of the arcuate magnet 36 has a higher coercivity than the rest of the one-piece magnet. This characteristic is particularly useful in arcuate pole pieces of a DC motor where the demagnetization forces act most severely on the leading edge of the magnet.

Figure 5 is an end view of a two-region magnet 42 illustrating a general principle of the present invention. One (or both) arcuate edge (region 46) of magnet 42 has a magnetic orientation as schematically illustrated by the direction of the arrows of the Figure that are oriented at an angle θ ($\theta \neq 0$) with respect to the radial direction of the arc. The remaining portion 44 of the magnet has been worked so that it is magnetically oriented radially with respect to the centre of curvature, as shown by the arrows in region 44. Thus, both regions 44 and 46 are highly aligned and have relatively high remanence in the alignment direction. However, edge region 46 is more difficult to

demagnetize by the reverse field generated by a motor armature. Such a two-part magnet is another embodiment of the present invention. A two-part magnet like that depicted in Figure 5 can be produced by a practice
5 illustrated in Figures 6(a) and (b). A die-upset permanent magnet 48 of the warped configuration depicted in Figure 6(a) is produced. A hot-pressed compact is first made and then die-upset into the Figure 6(a) configuration with strain occurring in
10 the direction indicated. Although the die-upset magnet 48 is warped, the magnetic orientation is parallel across the entire end section. While still warm, the warped body 48 is bent in a die 50 between opposed punches 52 and 54 into an arcuate permanent magnet
15 like 42 in Figure 5. The reversed bending of the warped starting magnet produces an arcuate magnet (like 42) having regions (like 44 and 46) of different magnetic alignment as illustrated in Figure 5.

Figure 7 illustrates yet another
20 die-forming practice of producing a two-part permanent magnet in accordance with the present invention. A hot-pressed uncurved compact 56 of stepwise difference in thickness is first produced. The compact 56 has a relatively thick portion 58 and a thin portion 60.
25 This is accomplished in die 62 using split punches 64 and 66 operated in stepped relationship. The punches are then slightly withdrawn and employed in concert to produce thinning of the thick portion 58 of the compact and thickening of the thin portion 60 of the compact
30 56. The result in this instance is a flat body 68 (dashed lines) having regions of different magnetic alignment resulting from regions of different plastic

flow. In Figure 7 the arrows depict strain direction rather than magnetization direction. The latter would be perpendicular to the strain as previously stated.

Thus in accordance with the present
5 invention, a unitary body of magnetic material is produced that has two or more regions of different magnetic alignment. It is preferred that the regions be separated along a surface direction rather than one region being contained within another. This separation
10 of regions along a surface dimension is illustrated by regions 38 and 40 in arcuate magnet 36 and regions 44 and 46 in arcuate magnet 42. In both cases the regions are separated in the circumferential direction of the arc. The regions of different magnetic alignment are
15 produced by selectively hot-working different parts of the body of magnetic material in different ways. Different portions of the body are caused to undergo different degrees of strain at elevated temperature or the strain is induced in different directions. This
20 can be accomplished, for example, by starting with a densified compact of varying thickness and die-upsetting it to produce a product of uniform thickness. In another embodiment, a body of magnetic material of uniformly parallel alignment may be bent at elevated
25 temperature (as illustrated in Figure 6) to produce the two-part magnet structure.

The invention can also be practiced by using a previously hot-pressed compact in combination with particles of melt-spun ribbon. By hot-working the
30 compact and particles in different regions of the same die, the compact may be die-upset (for example) and the particles hot-pressed to full density (or nearly full

density) with it to form a unitary body having regions of different alignment. In this embodiment one may employ different compositions for the initial compact and for the added particles.

5 The present invention is particularly useful in making transition metal-rare earth-boron magnets of the type described above. However, it may also be utilized with other magnetic compositions that can be magnetically aligned by plastic deformation at a
10 suitable elevated temperature.

 The terms "permanent magnet" or "hard magnet" as used herein mean a material having a significant intrinsic coercivity at room temperature, e.g., greater than 1000 oersted.

Claims:

1. A permanent magnet body having first and second regions thereof with differing magnetic properties characterised in that the body (36;42;68) comprises one or more compositions comprising iron, neodymium and/or praseodymium, and boron, and said body (36;42;68) has been hot-worked so that said first and second regions (38;40;44;46;58;60), are spaced along a surface dimension of the body (36;42;68) and differ from one another in magnetic alignment.
2. A permanent magnet body according to claim 1, in which said body is an arcuate body (36;42), characterised in that the body (36;42) has been hot-worked so that it comprises said first region at one end (40;46) of the arcuate body (36;42) and said second region (38;44) centrally placed along the arcuate body (36;42) the first region having greater coercivity measured radially of the arcuate body (36;42) than the second region.
3. A permanent magnet body according to claim 1, shaped as an arcuate pole magnet for an electric motor, characterised in that the body (36;42) has been non-uniformly hot-worked so that it comprises said first region at one end (40;46) of the arcuate pole magnet and said second region (38;44) centrally placed along the arcuate pole magnet, the first region (40;46) having a greater magnetic coercivity measured in the direction of the radius of the arcuate pole magnet than the second region (38;44), and the second region (38;44) having a greater magnetic remanence, measured in said radial direction, than the first region (40;46).

4. A method of producing a permanent magnet body (36;42;68) according to claim 1, characterised in that the method comprises hot-pressing particles of a composition comprising iron, neodymium and/or
5 praseodymium, and boron and having an intrinsic room temperature coercivity greater than about 1000 oersted to form a substantially fully densified body (30;48;56) of the composition, and then hot-working the body (30;48;56) non-uniformly to produce at least said two
10 regions (38;40;44;46;58,60) in the body (36;42;68) spaced along a surface dimension of it that differ in magnetic alignment from one another.

5. A method of producing a permanent magnet body (36;68) according to claim 4, characterised in
15 that the substantially fully densified body (30;56) has a section having at least two portions (32,34;58,60) of different thickness, and the body (30;56) is hot-worked to reduce the thickness of the thicker (32;58) of the portions and to produce at least said two regions
20 (38,40;58,60) in the hot-worked body (36;68) spaced along a surface dimension of it that differ in magnetic alignment from one another.

6. A method of producing a permanent magnet body according to claim 4, characterised in that the
25 substantially fully densified body is introduced into a die along with particles of a composition comprising iron, neodymium and/or praseodymium, and boron and having an intrinsic room temperature coercivity greater than about 1000 oersted, and the
30 particles are hot-pressed and the body is hot-worked so as to form a unitary body having said first and second regions differing in magnetic alignment from one another.

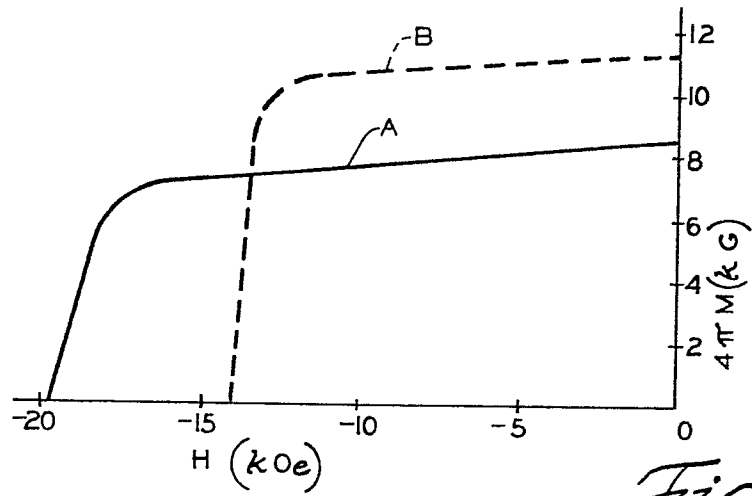


Fig. 1

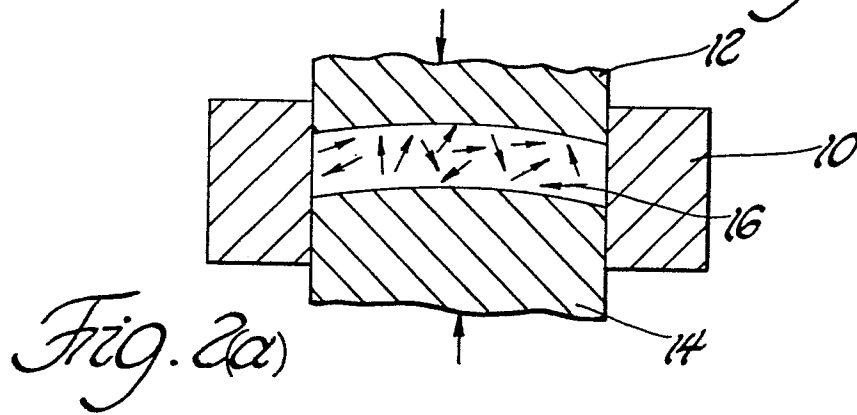


Fig. 2(a)

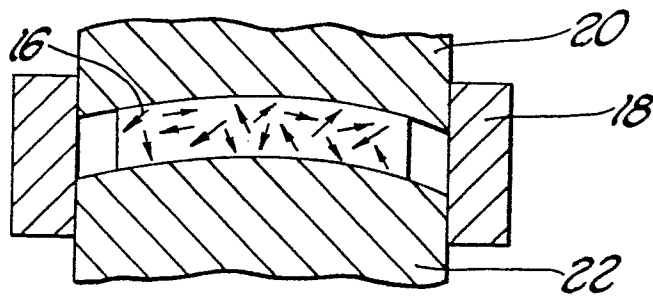


Fig. 2(b)

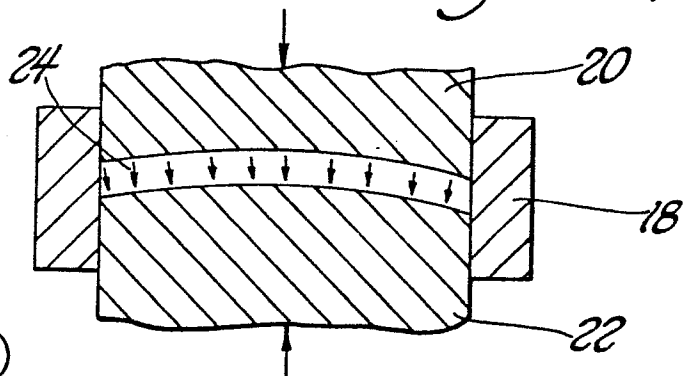


Fig. 2(c)

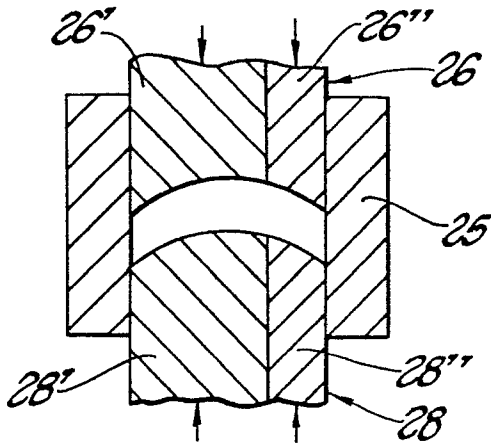


Fig. 3(a)

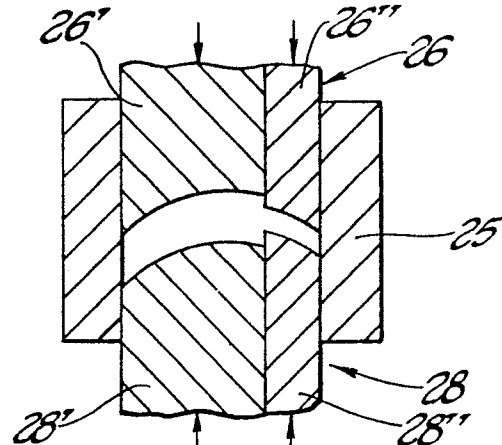


Fig. 3(b)

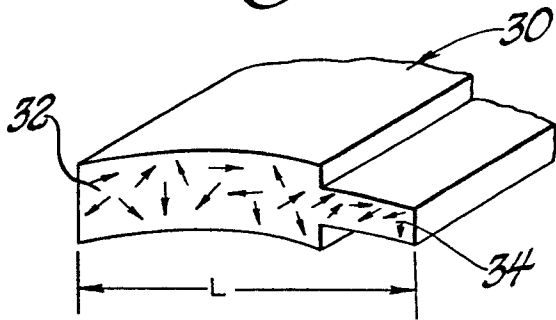


Fig. 4(a)

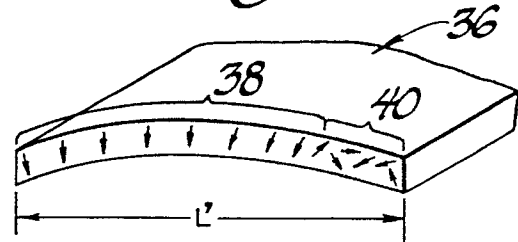


Fig. 4(b)

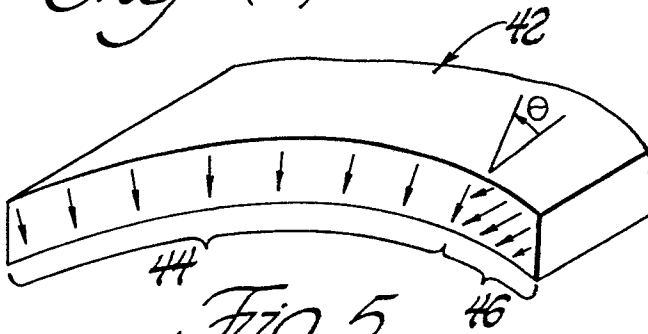


Fig. 5

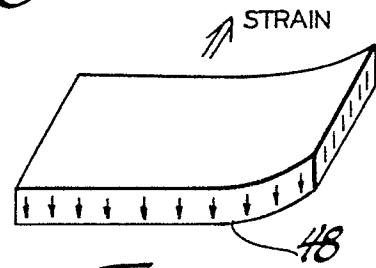


Fig. 6(a)

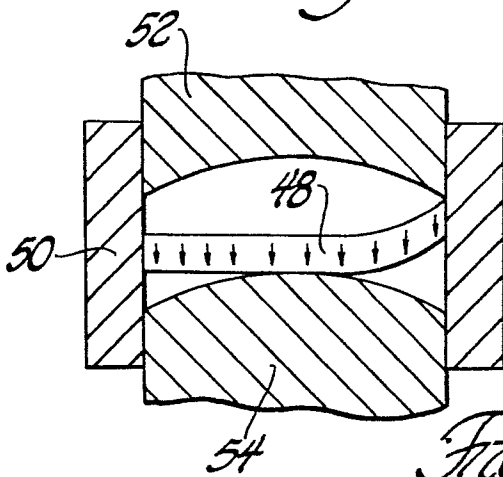


Fig. 6(b)

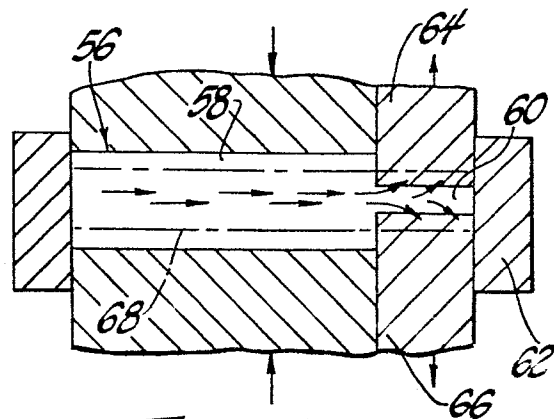


Fig. 7