



(86) Date de dépôt PCT/PCT Filing Date: 2003/05/20

(87) Date publication PCT/PCT Publication Date: 2003/12/11

(85) Entrée phase nationale/National Entry: 2004/11/09

(86) N° demande PCT/PCT Application No.: IL 2003/000410

(87) N° publication PCT/PCT Publication No.: 2003/101648

(30) Priorité/Priority: 2002/06/04 (150014) IL

(51) Cl.Int.⁷/Int.Cl.⁷ B22F 5/10, B23C 5/28, B23B 27/10,
B23B 51/06, B22F 5/06, B23C 5/06


(71) Demandeur/Applicant:
ISCAR LTD., IL

(72) Inventeur/Inventor:
HECHT, GIL, IL

(74) Agent: DIMOCK STRATTON LLP

(54) Titre : PROCEDE DESTINE A PRODUIRE UN COMPRI ME DE METAL EN POWDRE

(54) Title: METHOD FOR MAKING A POWDERED METAL COMPACT

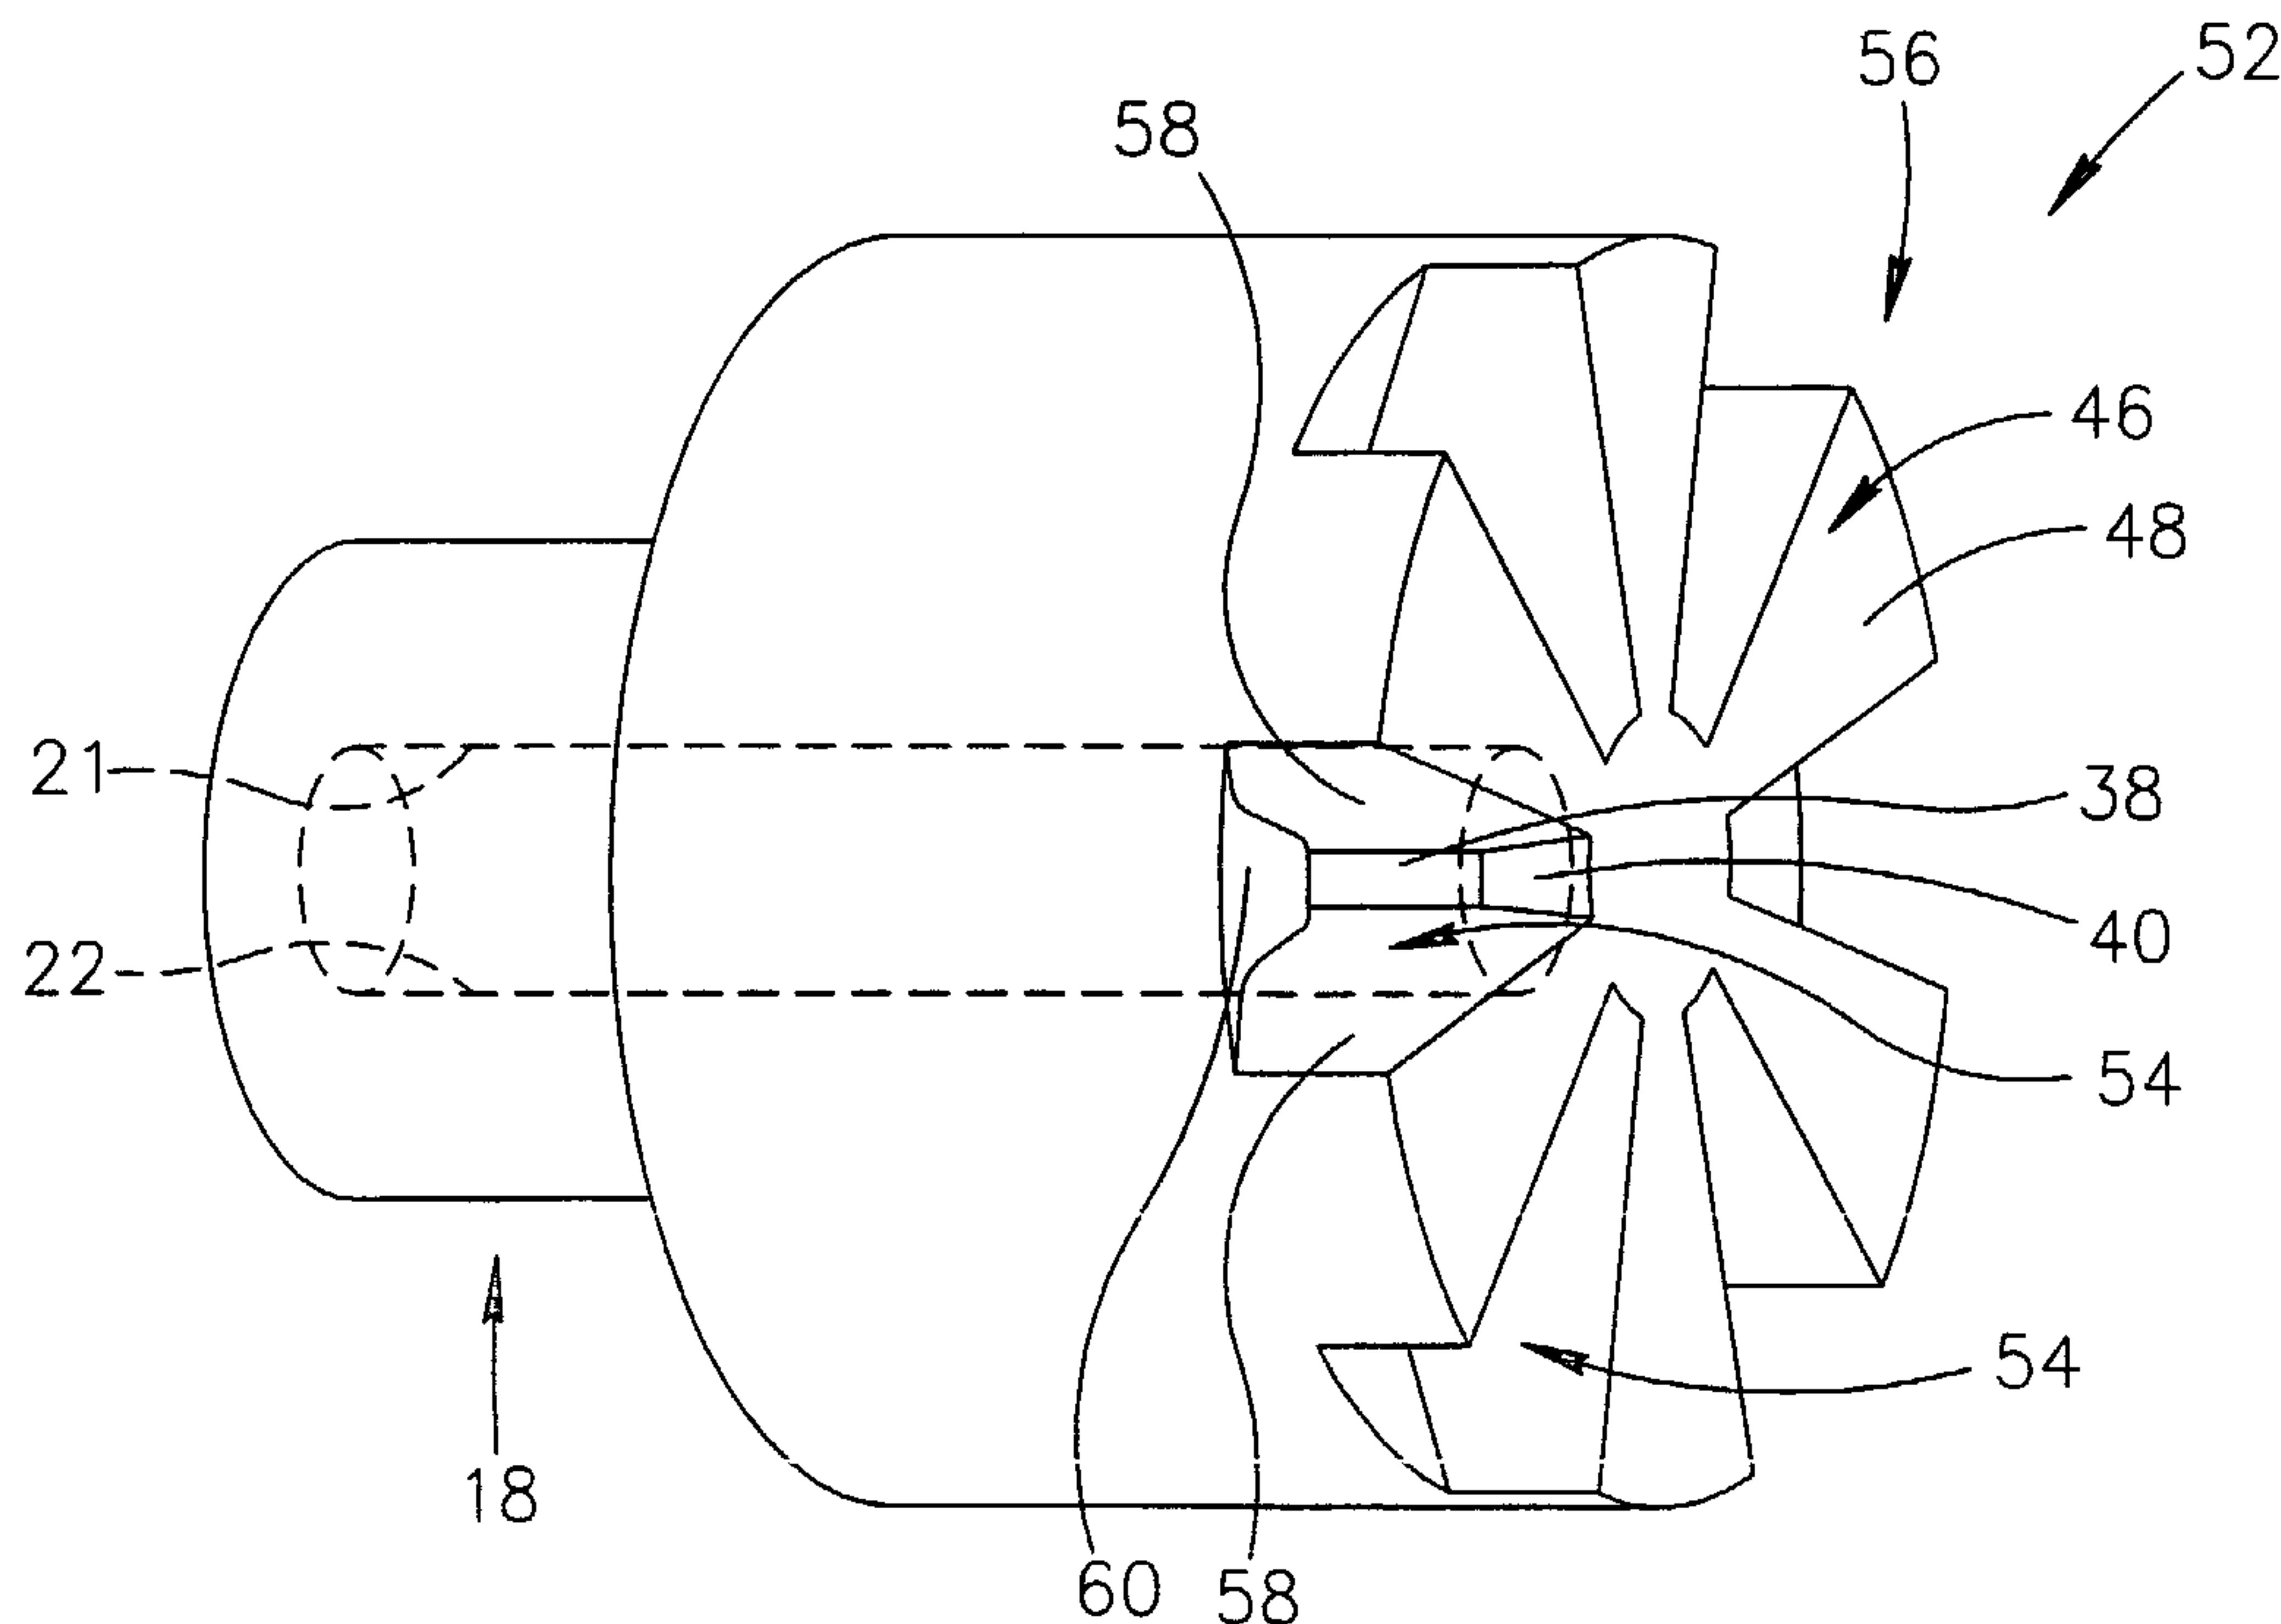

(57) **Abrégé/Abstract:**

The present invention provides a method for producing a powdered metal compact for a cutting head to be used in a metal cutting tool. The powdered metal compact is produced in a punch and die assembly and has apertures communicating between a coolant channel and recesses.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/101648 A1

(51) International Patent Classification⁷: **B22F 5/10**, 5/06,
B23B 51/06, 27/10, B23C 5/28, 5/06

(21) International Application Number: PCT/IL03/00410

(22) International Filing Date: 20 May 2003 (20.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
150014 4 June 2002 (04.06.2002) IL

(71) Applicant (for all designated States except US): **ISCAR LTD.** [IL/IL]; P.O. Box 11, 24959 Tefen (IL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HECHT, Gil** [IL/IL];
30/18 Ahad Ha'am Street, 22443 Nahariya (IL).


(74) Agent: **ISCAR LTD., PATENT DEPARTMENT**; P.O.
Box 11, 24959 Tefen (IL).

Published:


— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR MAKING A POWDERED METAL COMPACT

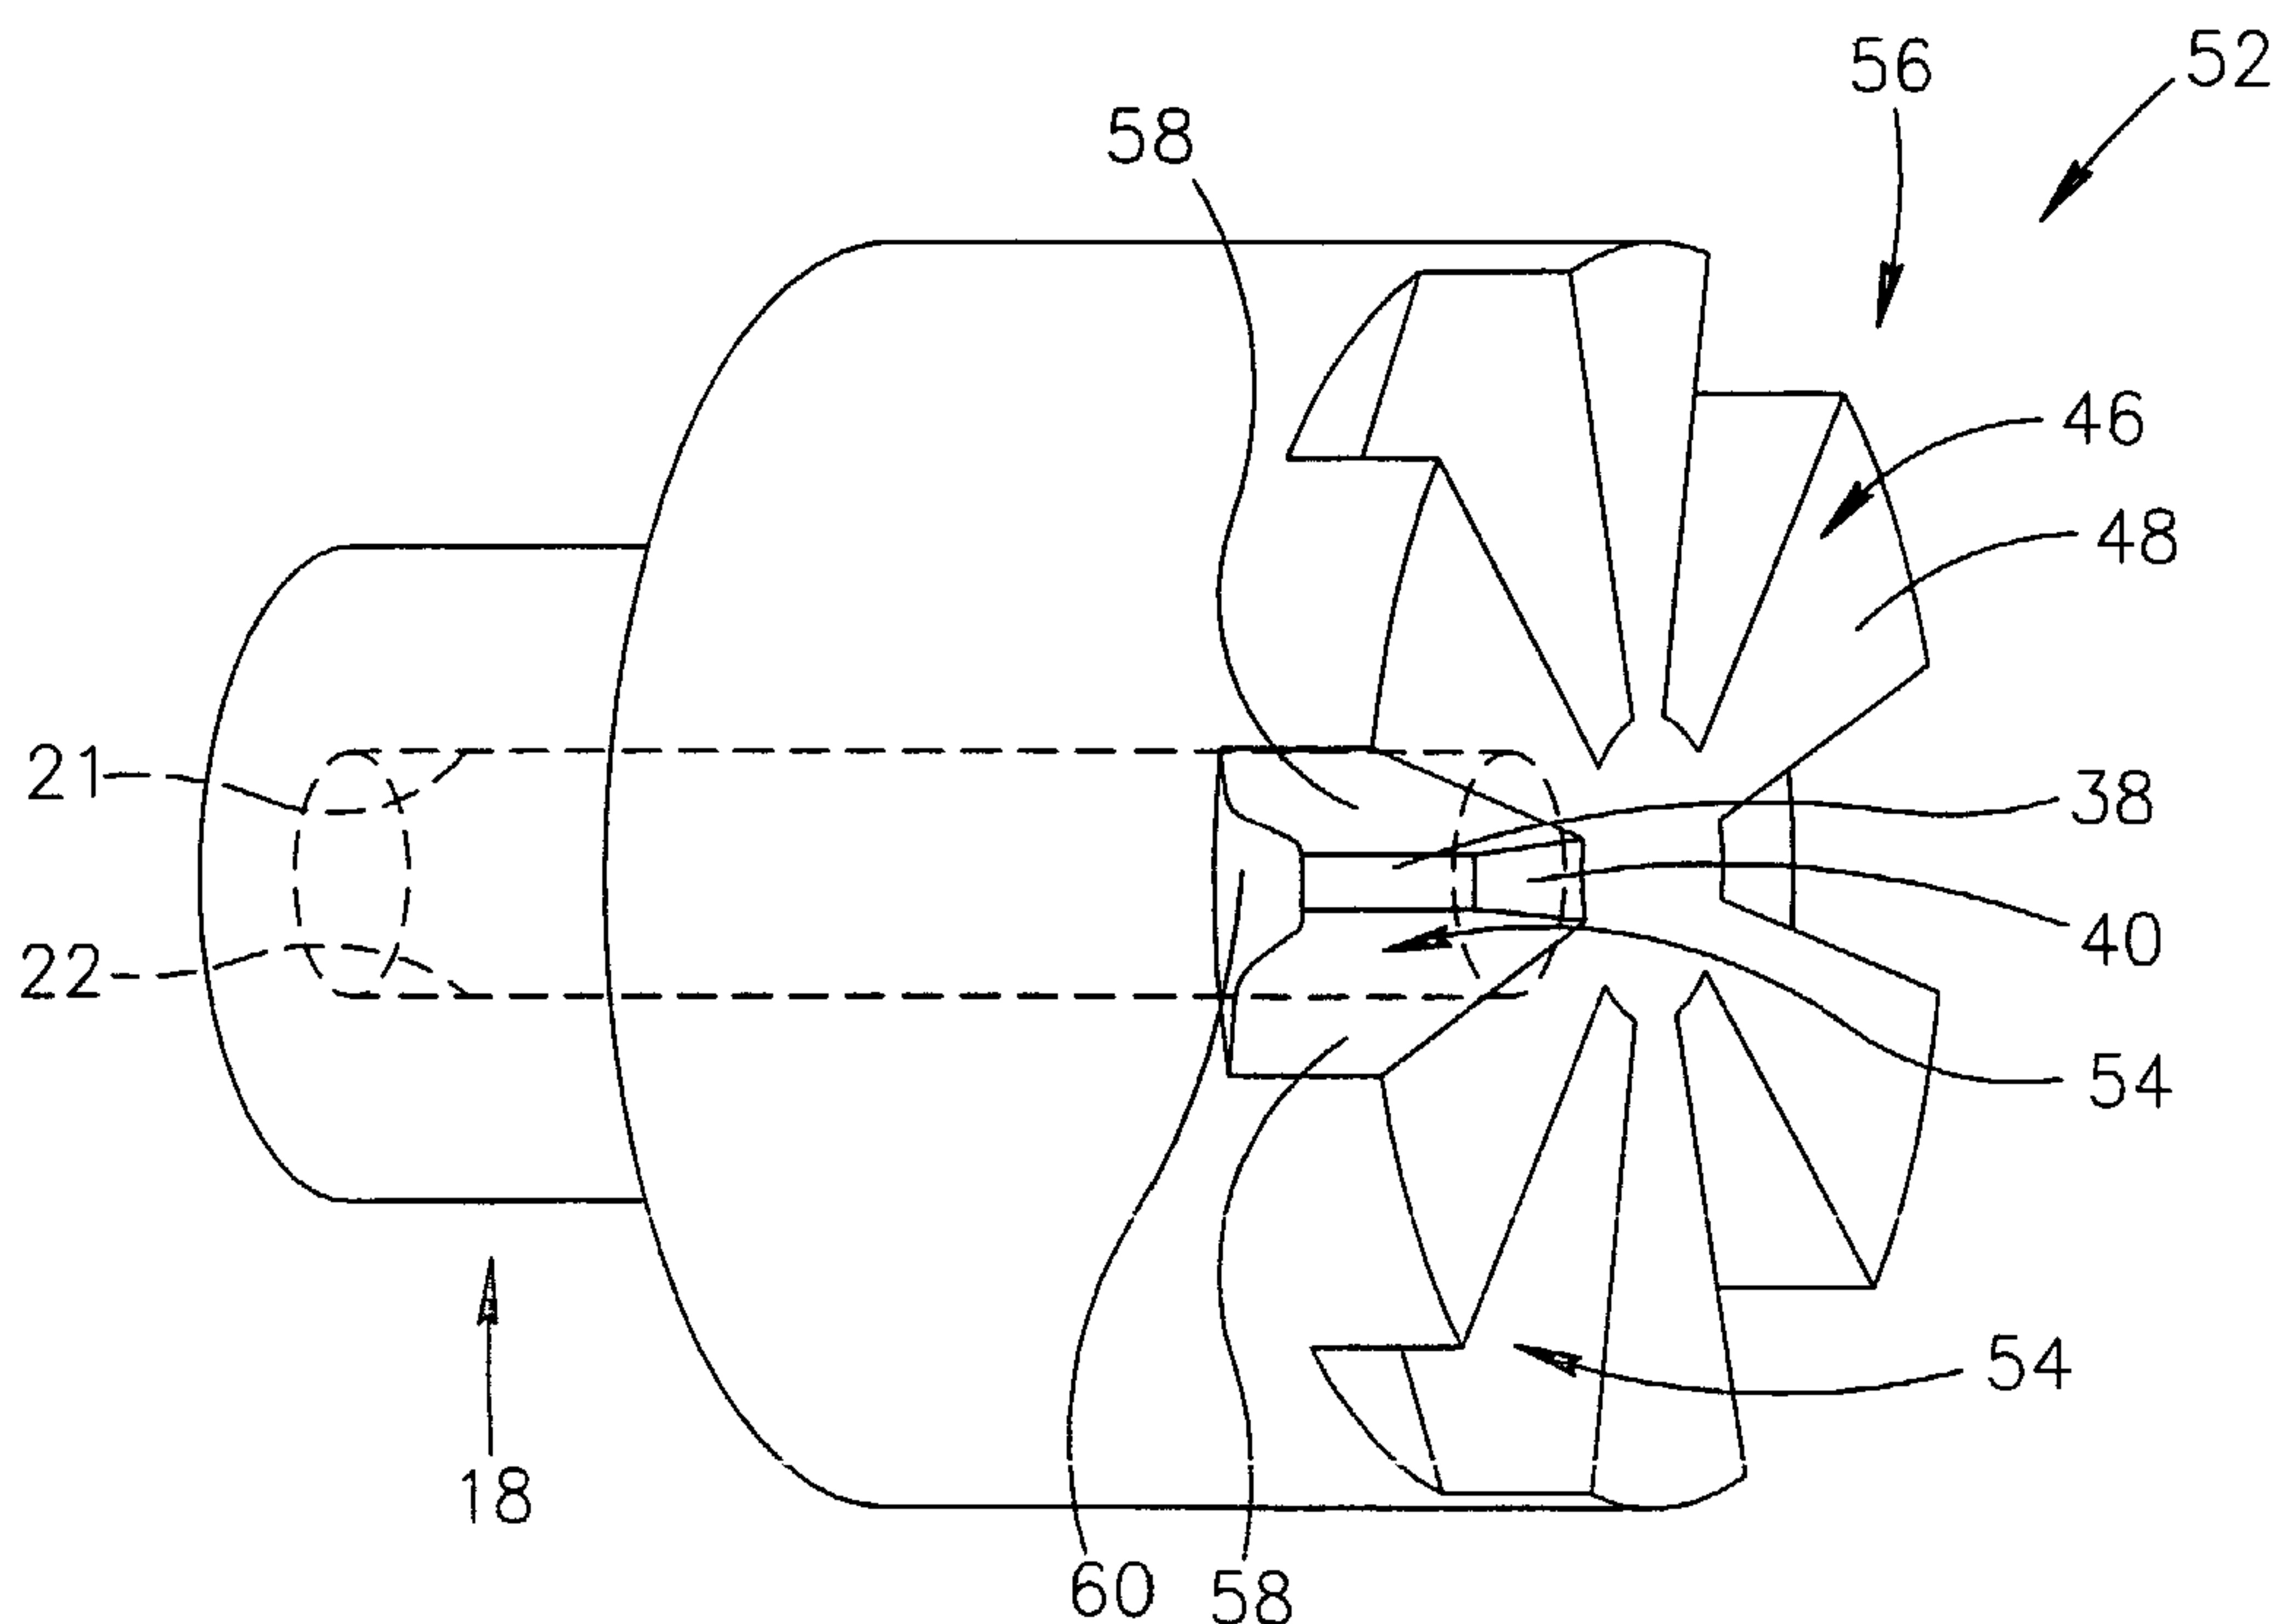

(57) Abstract: The present invention provides a method for producing a powdered metal compact for a cutting head to be used in a metal cutting tool. The powdered metal compact is produced in a punch and die assembly and has apertures communicating between a coolant channel and recesses.



WO 03/101648 A1

METHOD FOR MAKING A POWDERED METAL COMPACT

FIELD OF THE INVENTION

This invention relates to cutting tools having internal coolant channels and particularly to cutting tools, or detachable cutting heads for cutting tools, made by form pressing and sintering carbide powders.

5

BACKGROUND OF THE INVENTION

In many metal working chip forming operations it is desirable to deliver a coolant directly to the working edge. The purpose of the coolant is not only to cool the working edge but also to assist in chip removal. The most straightforward and easiest to manufacture coolant channels are axially directed. This can be done by simply drilling a central bore, or two parallel axially directed bores in the tool. In drills, twisted or helical channels are also used. In drills with replaceable cutting inserts spaced at different radial distances from the axis of rotation it is desirable to direct the exit opening towards the cutting inserts. U.S. Pat. No. 5,676,499 there is described a process wherein straight holes are drilled at different radial distances in a cylindrical blank. The middle portion of the blank is then heated and twisted giving rise to spirally formed channels. At the end of the process exit channels are drilled at an angle to the centerline of the drill resulting in exit openings that are spaced at different radial distances from the centerline, in the vicinity of the cutting

10

15

- 2 -

inserts.

Another method for obtaining complex shaped coolant channels is to use a core such as copper or wax in a powder body and then sinter. The core can be of any desired shape. During the sintering operation, the core disappears into
5 the pores of the powdered body by infiltration leaving a cavity of configuration corresponding to the shape of the core.

All the prior art method involve multistage processes which are both time consuming and costly.

It is therefore an object of the present invention to provide a method for
10 manufacturing cutting tools with coolant channels by form pressing and sintering carbide powders, whilst overcoming the above mentioned disadvantages.

It is also an object of the present invention to provide a cutting tool which is manufactured by the method of the present invention.

15 SUMMARY OF THE INVENTION

In accordance with the present invention there is provided a method for producing a powdered metal compact in a punch and die assembly, the powdered metal compact having a bore, at least one recess and at least one aperture communicating between the bore and the at least one recess, the method
20 comprising the steps of:

- (i) providing a top punch having a forward end with at least one first protruding member;
- (ii) providing a bottom punch having forward end with at least one second protruding member;
- 25 (iii) positioning the top and bottom punches in a die with the forward end of the top punch facing the forward end of the bottom punch and with a metal powder therebetween;
- (iv) compacting the metal powder by pressing the top and bottom punches towards each other until the at least one first protruding member abuts the least one

- 3 -

second protruding member at at least one region of contact, wherein the bore is formed by a volume of space delimited by the at least one second protruding member between the top and bottom punches and the at least one aperture is formed at the at least one region of contact; and

- 5 (v) removing the top punch and ejecting the metal powder compact from the die.

In accordance with a preferred embodiment, the metal powder comprises a cemented carbide and a binder.

Typically, the cemented carbide is tungsten carbide and the binder is cobalt.

- 10 If desired, the method comprises an additional step of sintering the metal powder compact.

In accordance with a specific application, the second protruding member is cylindrical, in the form of a rod.

- 15 Further if desired, the method comprises a further additional step of grinding the sintered metal powder compact.

Preferably, the further additional step of grinding produces cutting edges on a cutting portion of the metal powder compact.

If desired, the further additional step of grinding also produces an external screw thread on a mounting portion of the metal powder compact

- 20 The is also provided in accordance with the present invention a cutting head for a metal cutting tool comprising a metal powder compact, produced in accordance with the above method.

BRIEF DESCRIPTION OF THE DRAWINGS

- 25 For a better understanding the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Fig. 1 is a perspective view of a cutting head for a metal cutting tool, produced from a powdered metal compact in accordance with the present invention;

- 4 -

Fig. 2 is a perspective view of a powdered metal compact produced in a punch and die assembly in accordance with the present invention;

Fig. 3 is a side perspective cross sectional view of a bottom punch in accordance with the present invention;

5 **Fig. 4** is a perspective view of a top punch in accordance with the present invention; and

Fig. 5 is a side cross sectional view of a punch and die assembly in accordance with the present invention.

10 **DETAILED DESCRIPTION OF THE INVENTION**

Attention is first drawn to Fig. 1 shows a cutting head **10** for a metal cutting tool. Typically, the cutting tool comprises a tool shank (not shown) to which the cutting head **10** is secured. The cutting head has front and rear ends **12**, **14** and a longitudinal axis **A** passing there through. The cutting head **10** comprises
15 a cutting portion **16** formed integrally with a mounting portion **18**. The mounting portion **18** is provided with an external screw thread **20**. An axially directed bore **22**, having a bore surface **24**, extends from adjacent the front end **12** to the rear end **14**, opening out at the rear end **14** to a bore opening **26**. The cutting portion **16** is provided with six cutting edges **28**. Each cutting edge **28** is formed at the
20 intersection of rake surface **30** and a relief surface **32**. Adjacent each rake surface is a chip gullet **34**. Adjacent the front end **12** of the cutting head **10** there is associated with each chip gullet **34** a wedge-like cutting head recess **36** opening out into the chip gullet **34** and into the front end **12** of the cutting head **10**. At a radially innermost part of each cutting head recess **36** there is an aperture **38**. The aperture
25 **38** is adjacent to, but axially rearwardly displaced from, the front end **12** of the cutting head **10**. Each aperture **38** communicates between the cutting head recess **36** and the bore **22** and geometrically coincides with the bore surface **24**. The bore **22** forms a coolant channel and therefore coolant fluid entering the bore **22** from the bore opening **26** will traverse the bore **22** axially and exit the bore **22** through

- 5 -

the apertures 38. Hence the apertures 38 form exit openings of the bore 22 for distributing coolant fluid to the vicinity of the cutting edges 28.

Each wedge-like cutting head recess 36 comprises an inner wall 40, two side walls 42 and a rear wall 44. The inner wall 40 extends from the aperture 38 to the front end 12 of the cutting head 10 and is flush with the aperture 38. The rear wall 44 extends between the two side walls 42 and also extends radially outwardly from the aperture 38. The side walls 42 extend axially from the rear wall 44 to the front end of the cutting head 10, and radially outwardly from the aperture 38 and the inner wall 40. The six wedge-like cutting head recess 36 divide the front end 12 of the cutting head 10 into a symmetrical structure having six identical wedge-like cutting head protrusions 46, with a wedge-like cutting head recess 36 between each pair of adjacent cutting head protrusions 46. Each cutting head protrusion 46 has a front surface 48 coinciding with the front end 12 of the cutting head 10. Since for each cutting head recess the aperture 38 geometrically coincides with the bore surface 24 and since the inner wall 40 extends from the aperture 38 to the front end 12 of the cutting head 10 and is flush with the aperture 38, therefore a circular region 50 is formed at the center of the front end of the cutting head 12. The circular region 50 has a diameter equal to the diameter of the bore 22.

In accordance with the present invention the cutting head 10 is produced as an integral body from a powdered metal compact 52 by form pressing and sintering a metal powder. Attention is now drawn to Fig. 2, showing the powdered metal compact 52 obtained by form pressing and sintering a cemented carbide and a binder. Typically, the cemented carbide is tungsten carbide and the binder is cobalt. The cutting head 10 is obtained from the powdered metal compact 52 by suitably grinding the powdered metal compact 52 to produce the chip gullets 34, cutting edges 28 and associated features on the cutting portion 16 and the screw thread 20 on the mounting portion 18.

The powdered metal compact 52 is produced with enlarged recesses 54, relative to the size of the cutting head recesses 36, at its front end 56. Each

- 6 -

enlarged recess **54** comprises the inner wall **40** and aperture **38**, identical to those of the cutting head recess **36** and enlarged side walls **58** and an enlarged rear wall **60** similar to the side and rear walls **42**, **44** of cutting head recess **36**, the only difference being that the enlarged side and rear walls **58**, **60** extend radially further than the side and rear walls **42**, **44** of cutting head recess **36**. Each aperture **38** communicates between a given enlarged recess **54** and the bore **22**. It will be appreciated by comparing Figs. 1 and 2 that due to the grinding of the chip gullets **34**, a radially outer section of the enlarged recesses **54** will be removed, whereby the cutting head recesses **36** will be obtained.

Attention is now drawn to Figs. 3 to 5. A punch and die assembly **62** comprises a top punch **64** and a bottom punch **66** located in a die **68**. The bottom punch **66** has a forward end **70** comprising a central cylindrical rod **72** emanating from a cylindrical base **74** both of which are concentric with a cylindrical shell **76**. The cylindrical shell **76** surrounds and abuts the cylindrical base **74** and overlaps a lower part of the rod **72**. The region of overlap **78** between the cylindrical shell **76** and the rod **72** defines the geometry of the mounting portion **18**, before grinding. The top punch **64** has a forward end **80** comprising six spaced apart wedge like top punch protrusions **82** separated by top punch recesses **84**. The top punch protrusions **82** and the rod **72** form, respectively, first and second protruding members. The geometry of the forward end **80** of the top punch **64** is the negative of the geometry of the front end **56** of the powdered metal compact **52**. Hence, when pressing a metal powder between the top and bottom punches, the top punch protrusions **82** will form in the powdered metal compact **52** the enlarged recesses **54**, the top punch recesses **84** will form in the powdered metal compact **52** the wedge-like cutting head protrusions **46**. A central circular recess **86** in the top punch **64** together with the rod **72** will form the circular region **50** at the center of the front end **12** of the powdered metal compact **52**. As shown in Fig. 5, the rod **72** is located in the central circular recess **86** in the top punch during the pressing of the metal powder. The diameter of the rod **72** is only slightly smaller than the

- 7 -

diameter of the central circular recess **86** by generally less than one hundredth of a millimeter and preferably less than about five thousandths of a millimeter. This ensures, on the one hand that the rod **72** can enter the central circular recess **86** and on the other that the top punch protrusions **82** will abut the rod **72**. In Fig. 4, a line **88** has been drawn on an inner surface **90** of the top punch protrusions **82** to mark the depth of penetration of the rod **72** into the central circular recess **86**. If the depth of penetration is **h** and the total depth of the central circular recess **86** is **H**, then the axial height of the aperture **38** will be **h** and the axial thickness of the circular region **50** at the enter of the front end of the powdered metal compact **52** will be **H-h**. The region of contact **92** between the rod **72** and the inner surface **90** of a given top punch protrusion **82** is the region between the marked line **88** and the forward end **80** of the top punch **64**. The regions of contact **92** define and create the apertures **38** and the volume of space delimited by the rod **72** between the top and bottom punches **64**, **66** defines and creates the bore **22**. It will be apparent that one or both of the contacting surfaces may be concave in the region of contact. In such a case, instead of a region of contact there will be an equivalent closed line of contact, that will define the aperture.

A straightforward method for producing a cutting head **10** for a cutting tool has been described. The method involves using a bottom punch **66** having a protruding rod **72** that creates the bore (coolant channel) **22**. A typical aperture (exit opening for the coolant channel) **38** is formed by designing the pressing process in such a way that when the metal powder is compacted a region of contact is created between the rod **72** and the top punch **60**. This region of contact will be the typical aperture **38**. In other words, a cutting head **10** for a cutting tool can be produced with a coolant channel **22** with exit openings **38** by simply form pressing a metal powder without the use of any ancillary means.

It will be noted that the top punch **64** comprises a first top punch member **64'** and a second top punch member **64''**. The second top punch member **64''** is connected to a push rod **64'''** which can move freely through a central region

- 8 -

of the first top punch member **64'**. This is for convenience in order to remove any compacted powder that by chance becomes lodged in the top punch recesses **84**.

Although the present invention has been described to a certain degree of particularity, it should be understood that various alterations and modifications can
5 be made without departing from the spirit or scope of the invention as hereinafter claimed.

- 9 -

CLAIMS:

1. A method for producing a powdered metal compact (52) in a punch and die assembly (62), the powdered metal compact (52) having a bore (22), at least one recess (54) and at least one aperture (38) communicating between the bore (22) and the at least one recess (54), the method comprising the steps of:
- 5 (i) providing a top punch (64) having a forward end (80) with at least one first protruding member (82);
- (ii) providing a bottom punch (66) having forward end (70) with at least one second protruding member (72);
- 10 (iii) positioning the top and bottom punches (64, 66) in a die (68) with the forward end (80) of the top punch (64) facing the forward end (70) of the bottom punch (66) and with a metal powder therebetween;
- (iv) compacting the metal powder by pressing the top and bottom punches (64, 66) towards each other until the at least one first protruding member (82) abuts the
- 15 least one second protruding member (72) at at least one region of contact (92), wherein the bore (22) is formed by a volume of space delimited by the at least one second protruding member (72) between the top and bottom punches (64, 66) and the at least one aperture (38) is formed at the at least one region of contact (92); and
- (v) removing the top punch (64) and ejecting the metal powder compact from the
- 20 die (68).
2. The method according to claim 1, wherein the metal powder comprises a cemented carbide and a binder.
3. The method according to claim 2, wherein the cemented carbide is tungsten carbide and the binder is cobalt.
- 25 4. The method according to claim 1, wherein the second protruding member (72) is cylindrical, in the form of a rod.
5. The method according to claim 1, comprising an additional step of sintering the metal powder compact.
6. The method according to claim 5, comprising a further additional step
- 30 of grinding the sintered metal powder compact.

-10-

7. The method according to claim 6, wherein the further additional step of grinding produces cutting edges (28) on a cutting portion (16) of the metal powder compact.

8. The method according to claim 7, wherein the further additional step of grinding also produces an external screw thread (20) on a mounting portion (18) of the metal powder compact



9. A cutting head (10) for a metal cutting tool comprising a metal powder compact, produced in accordance with any one of the above claims;

characterized in that



10 the cutting head (10) has at least one wedge-like cutting head recess (36) comprising an inner wall (40) flush with the aperture (38), two side walls (42) and a rear wall (44), the inner wall (40) extending from the aperture (38) to a front end (12) of the cutting head (10), the rear wall (44) extending between the two side walls (42) and also extending radially outwardly from the aperture (38), and the side walls (42) extending axially from the rear wall (44) to the front end (12) of the cutting head (10) and radially outwardly from the aperture (38) and the inner wall (40).

AMENDED SHEET

1/3

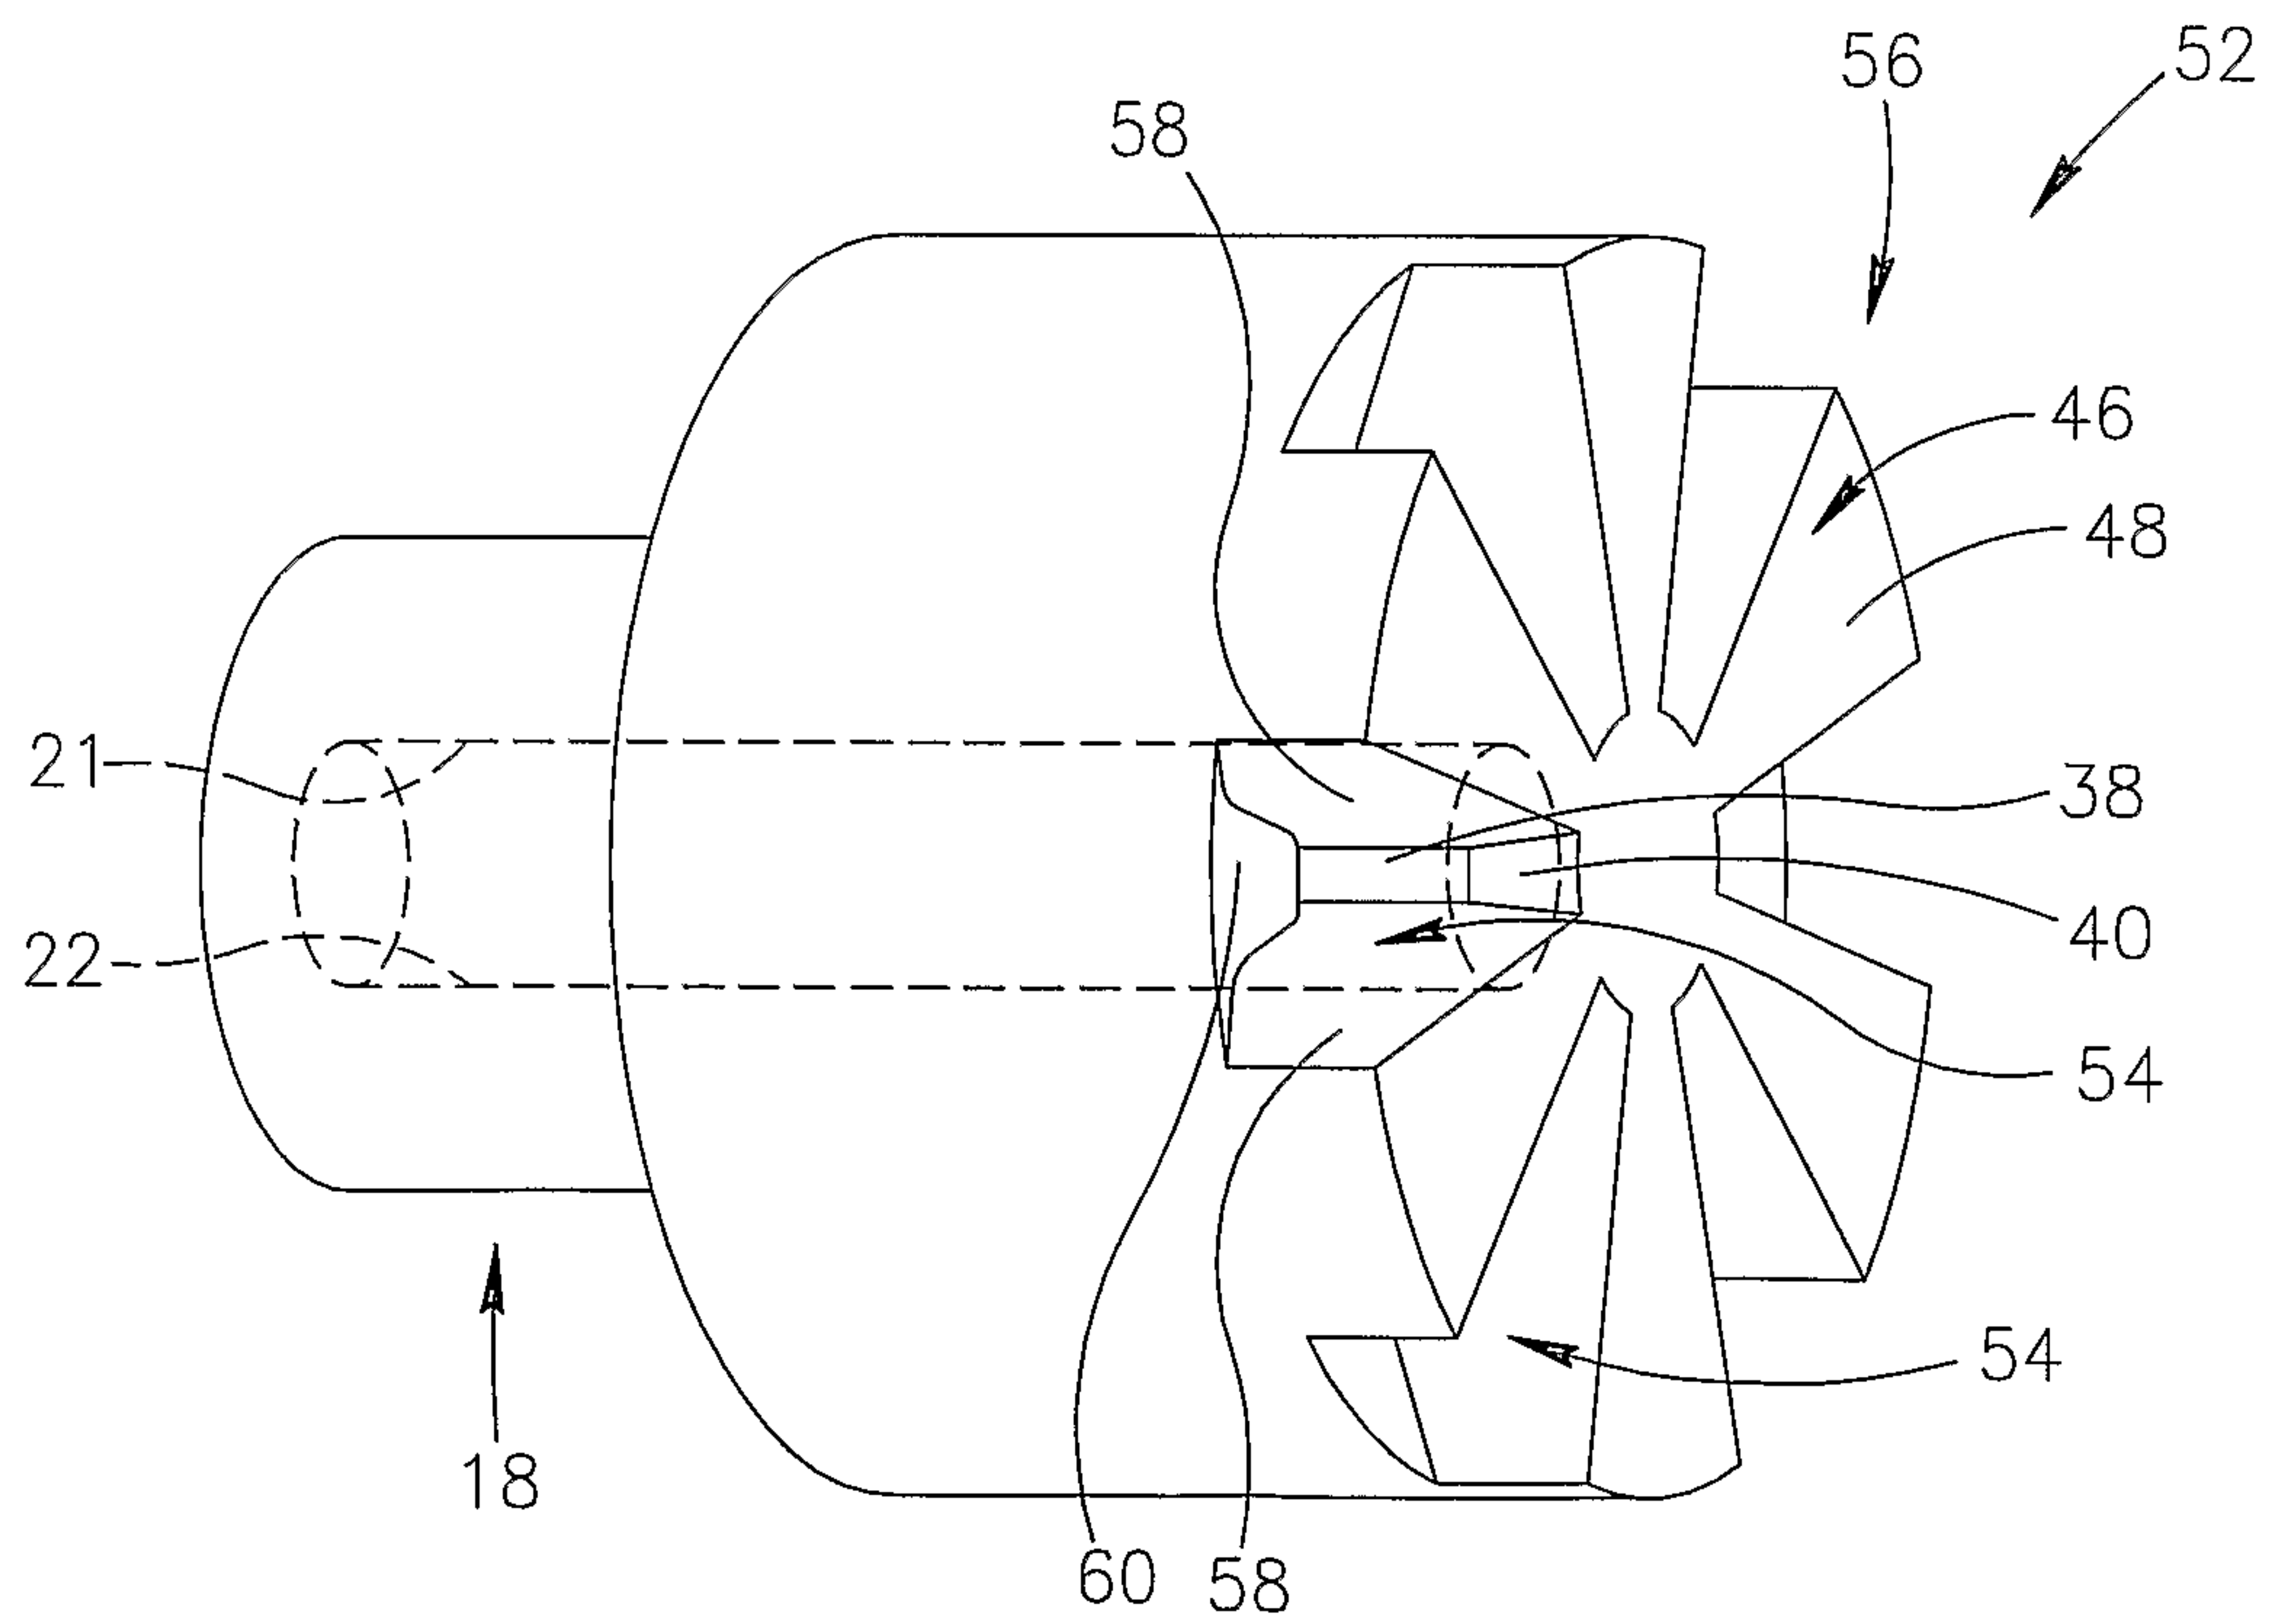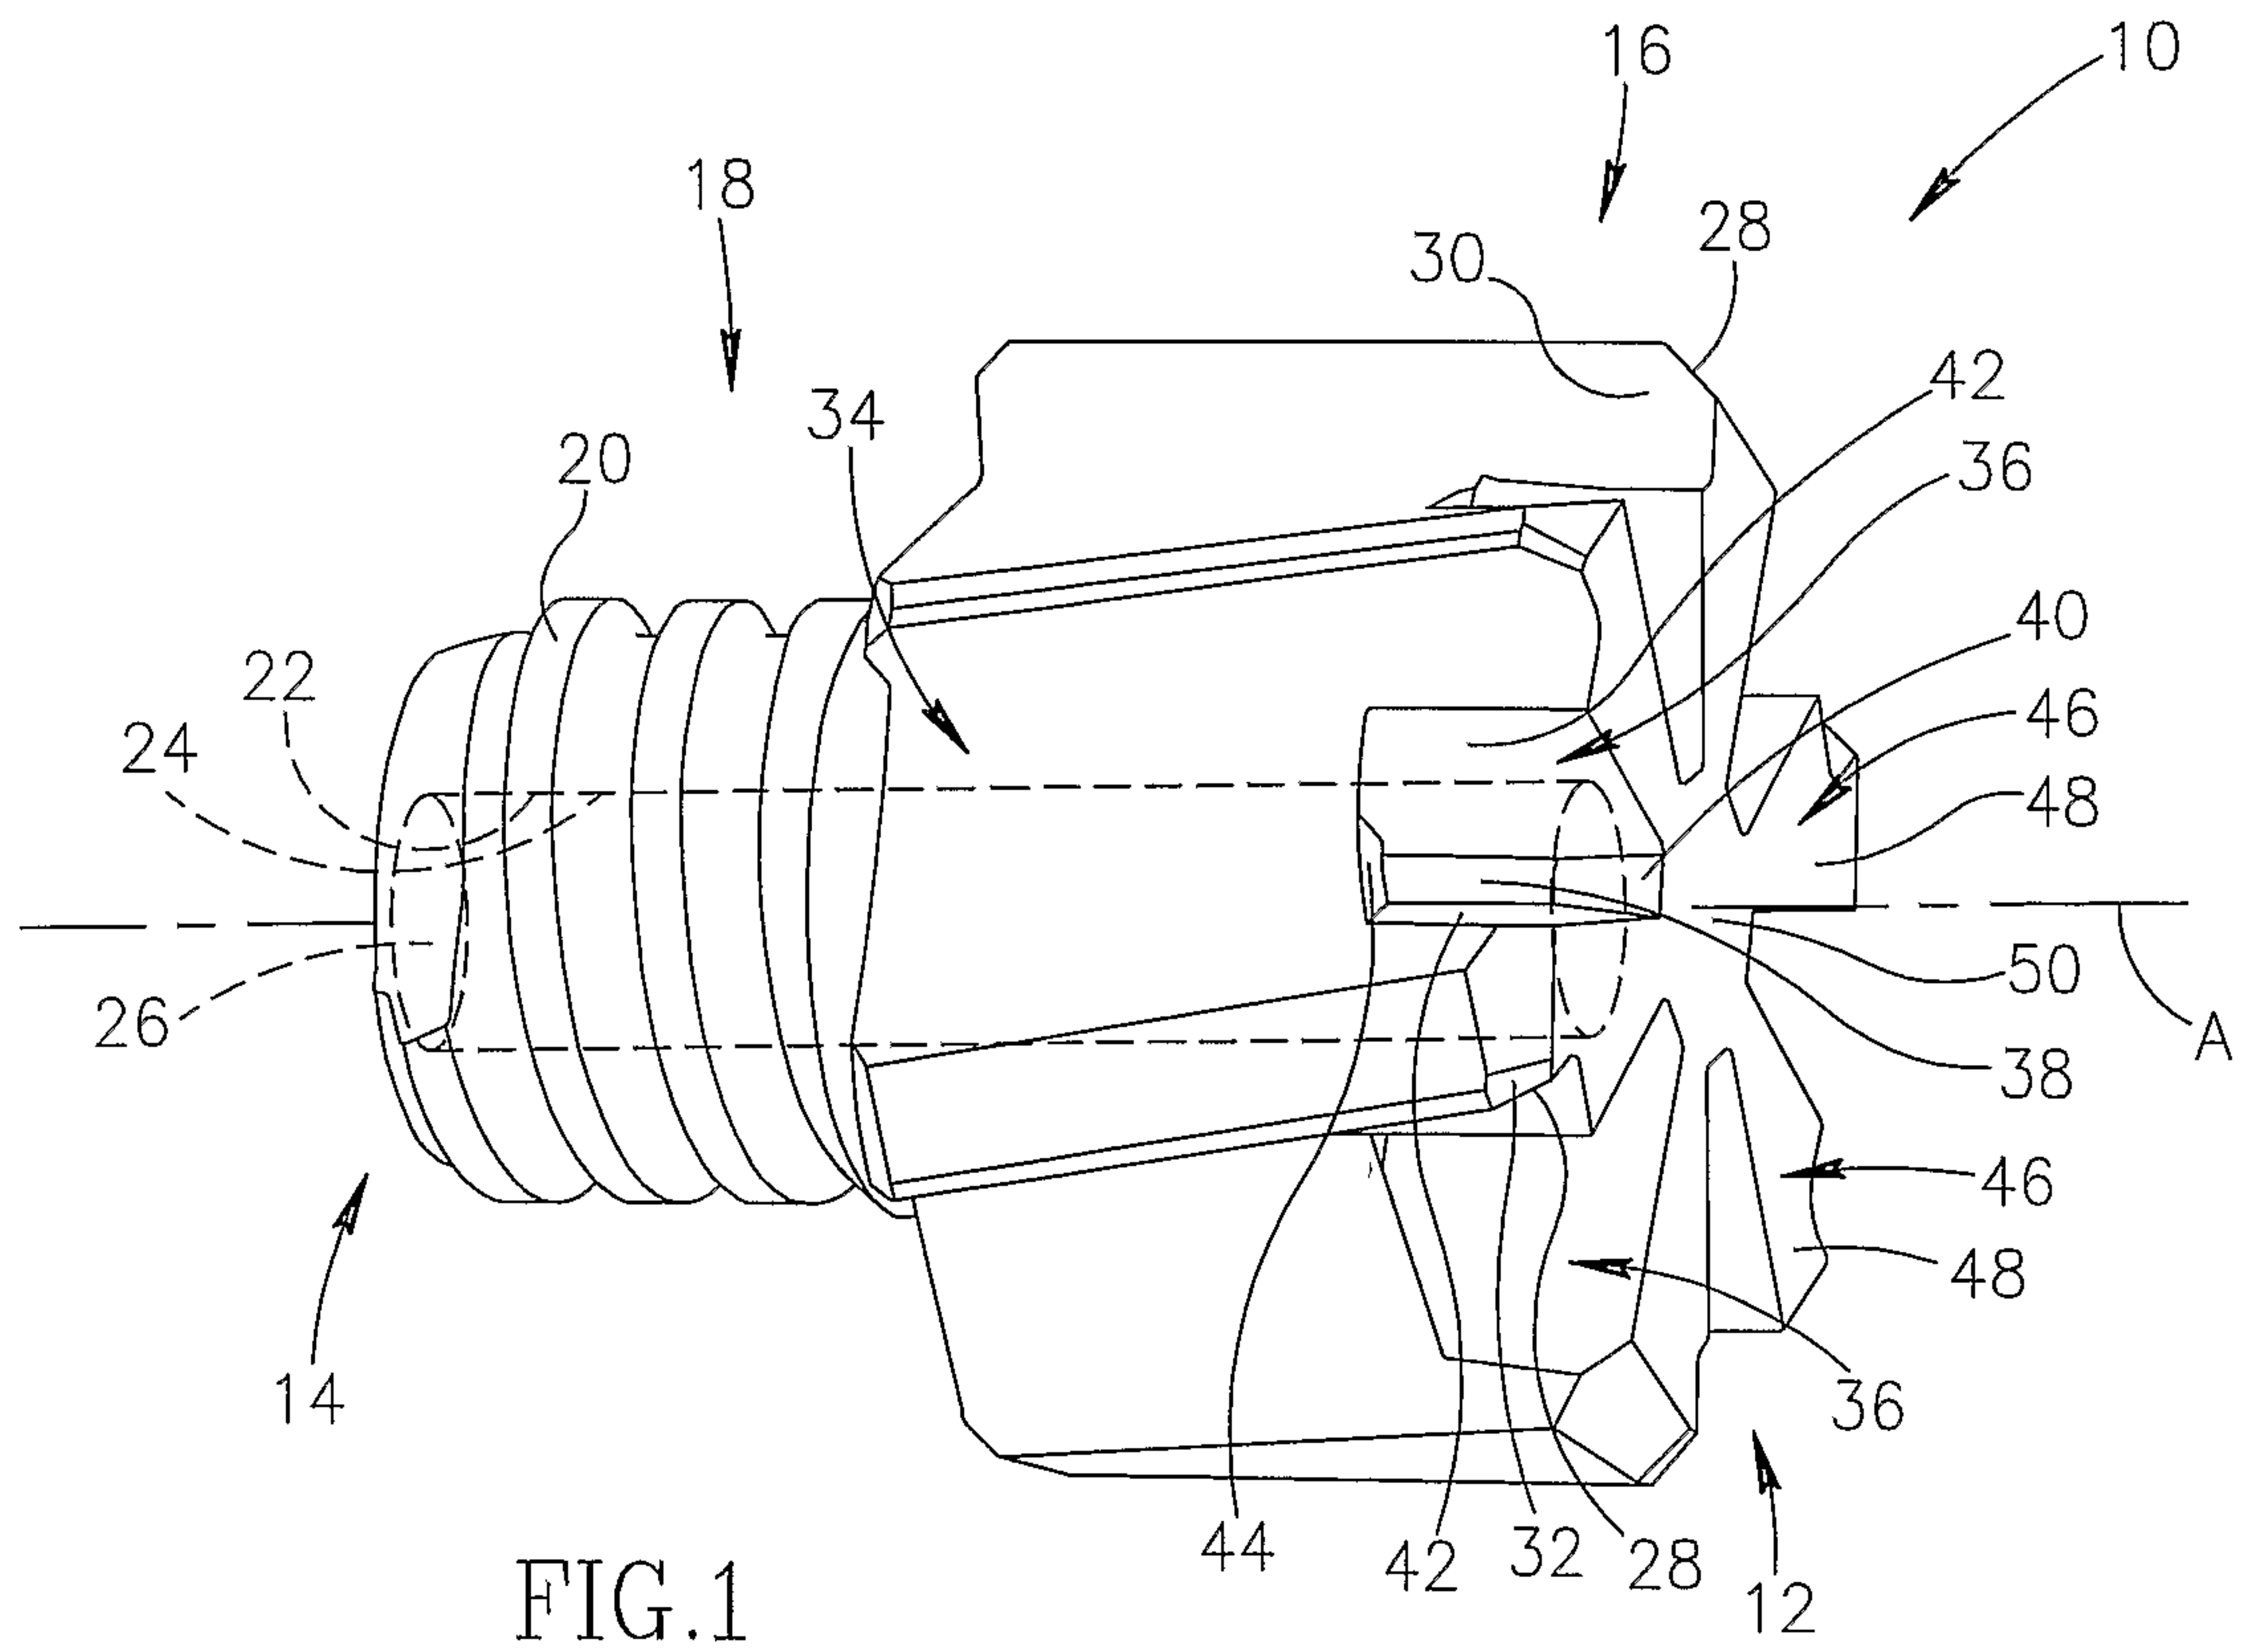

2/3

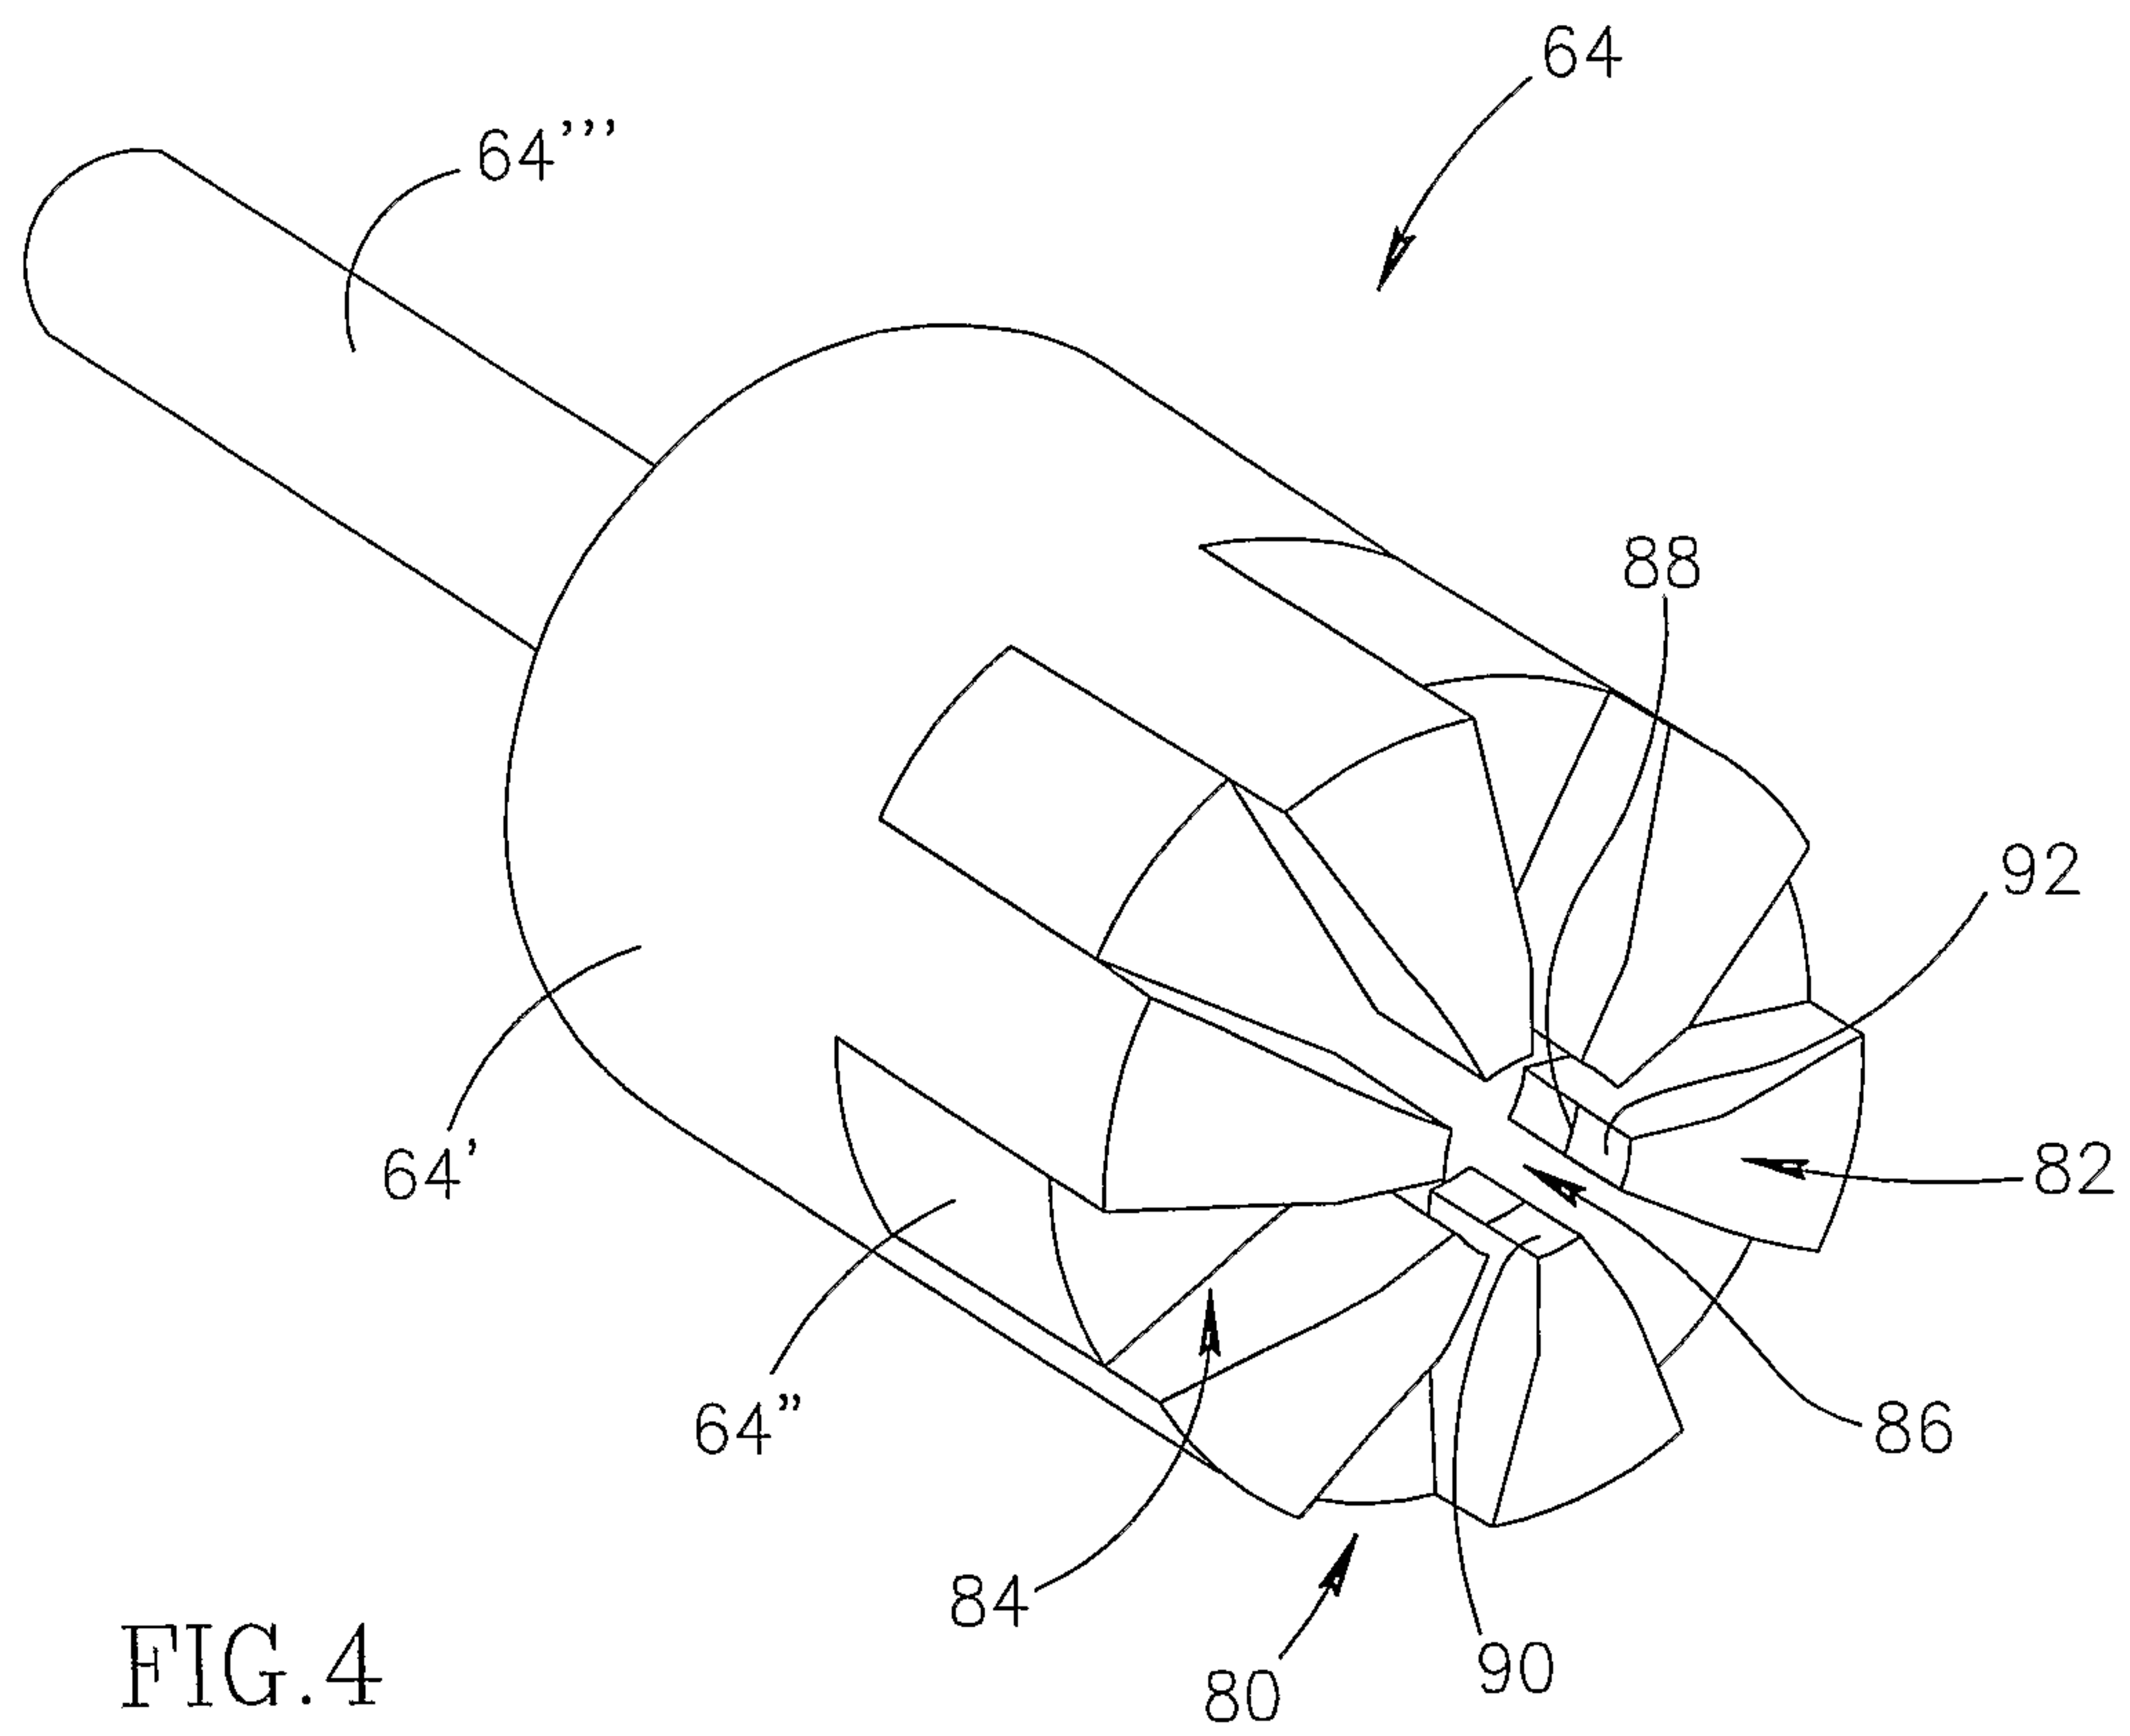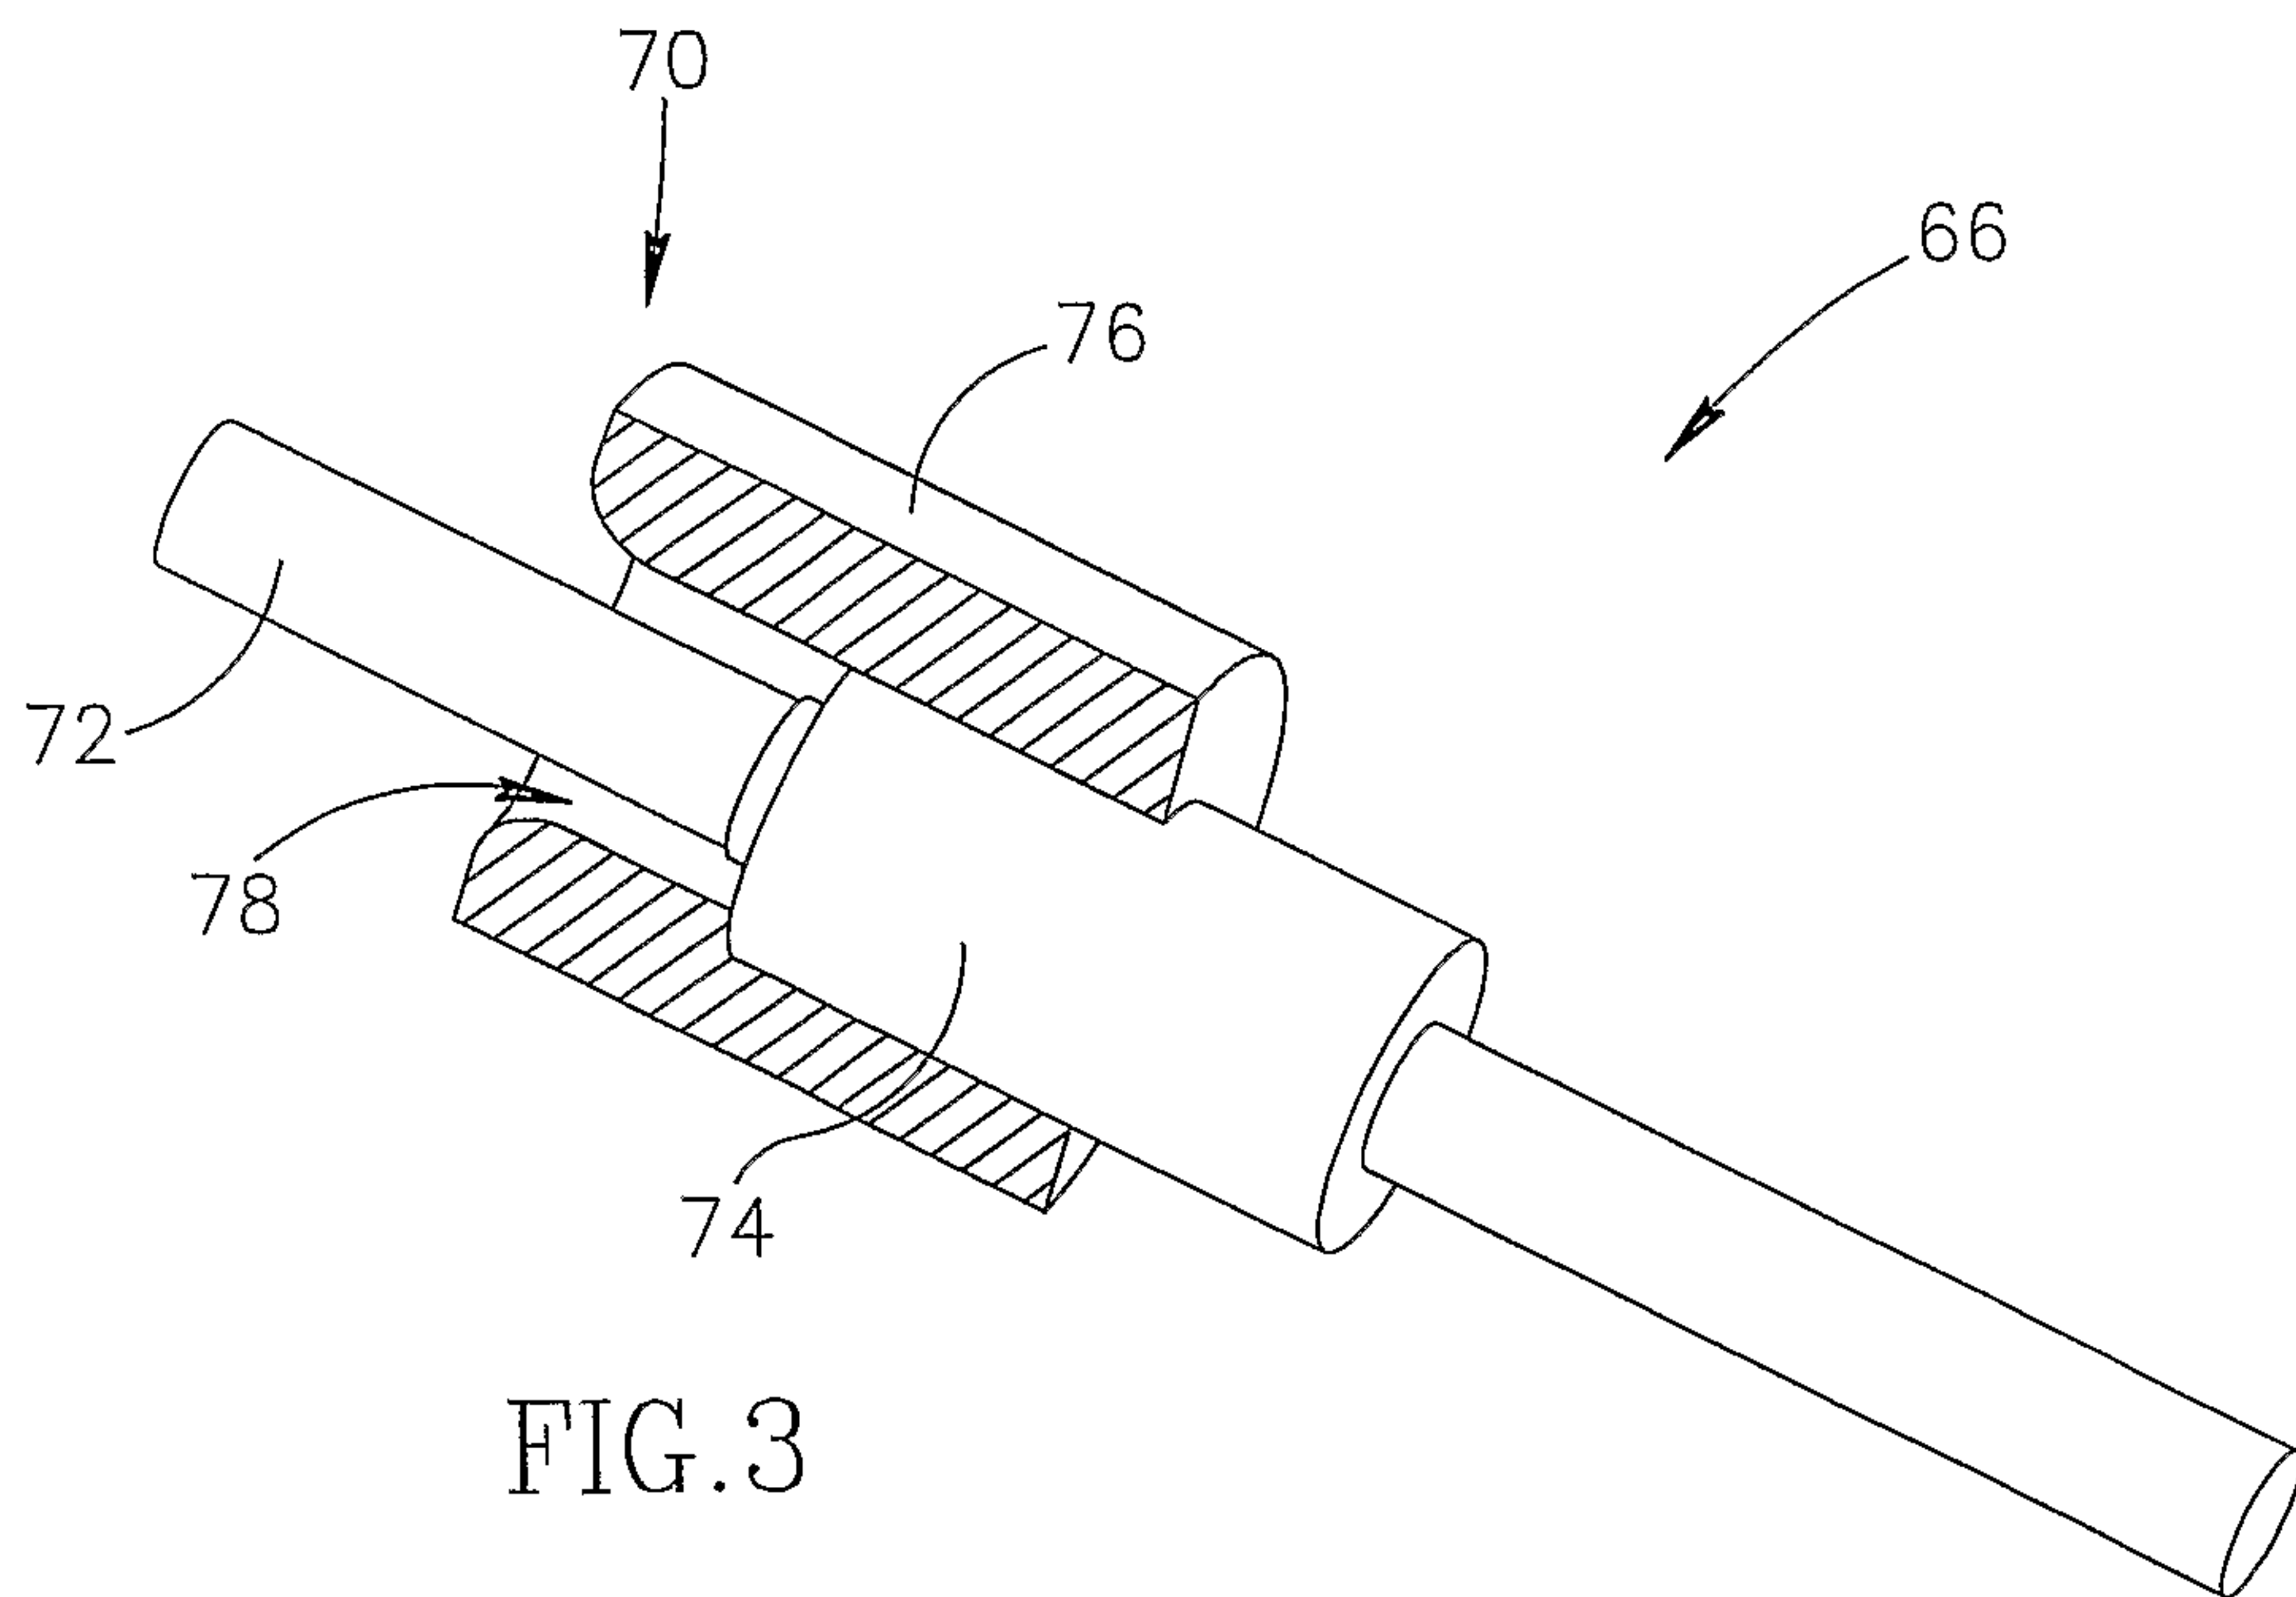

3/3

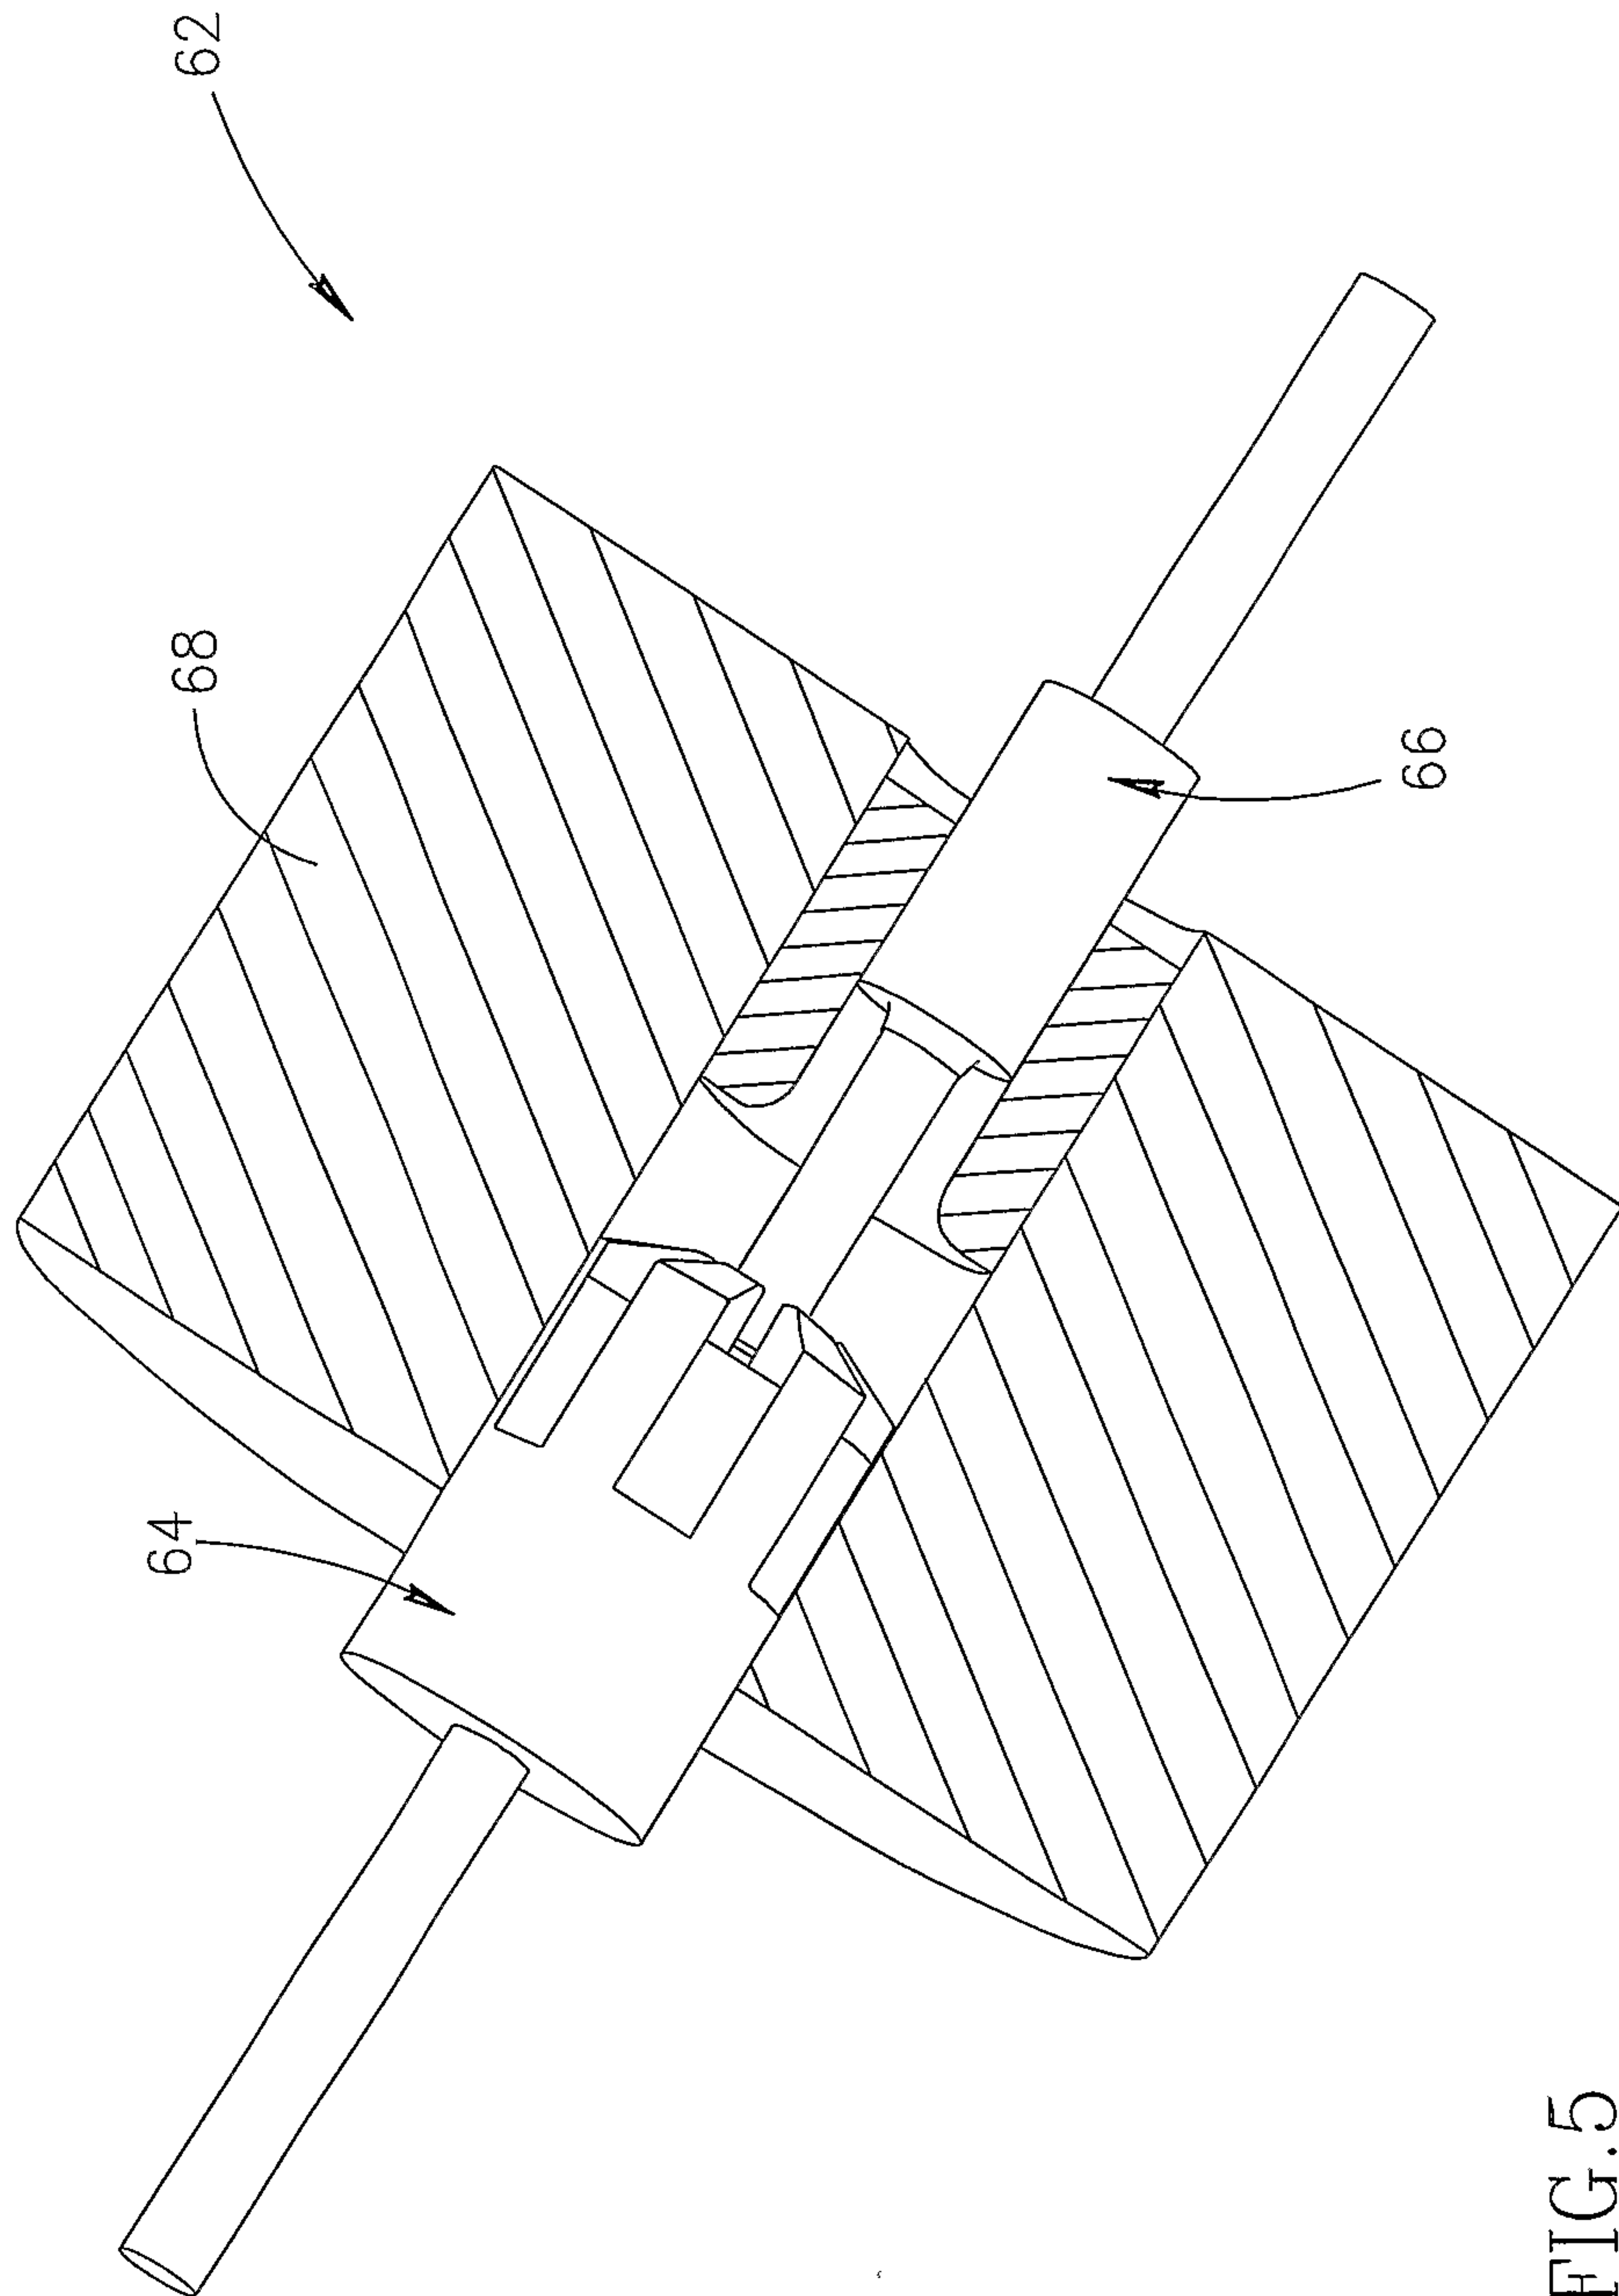


FIG. 5

