



(19) **United States**

(12) **Patent Application Publication**  
**Hansen**

(10) **Pub. No.: US 2012/0269133 A1**

(43) **Pub. Date: Oct. 25, 2012**

(54) **METHOD AND SYSTEM FOR HIGH SPEED WIRELESS DATA TRANSMISSION BETWEEN COMMUNICATION DEVICES**

(52) **U.S. Cl. .... 370/328**

(75) **Inventor: Christopher James Hansen, Los Altos, CA (US)**

(57) **ABSTRACT**

(73) **Assignee: BROADCOM CORPORATION, Irvine, CA (US)**

(21) **Appl. No.: 13/536,967**

(22) **Filed: Jun. 28, 2012**



**Related U.S. Application Data**

(63) Continuation of application No. 11/584,213, filed on Oct. 20, 2006, now Pat. No. 8,233,565.

**Publication Classification**

(51) **Int. Cl. H04W 4/00 (2009.01)**

Herein described are at least a method and a system for transmitting high speed wireless data from a first communication device to a second communication device. The method comprises using a first physical layer for transmitting management data or control signals between the first and second devices. In one embodiment, the management data may be used to authenticate and assign an appropriate wireless communication channel between the first and second device. The wireless communication channel is established by implementing a second physical layer in each of the first and second devices. The wireless communication channel may be used to transmit the high speed wireless data. The system comprises a first communication device and a second communication device wherein each of the first communication device and the second communication device utilizes a first physical layer and a second physical layer.

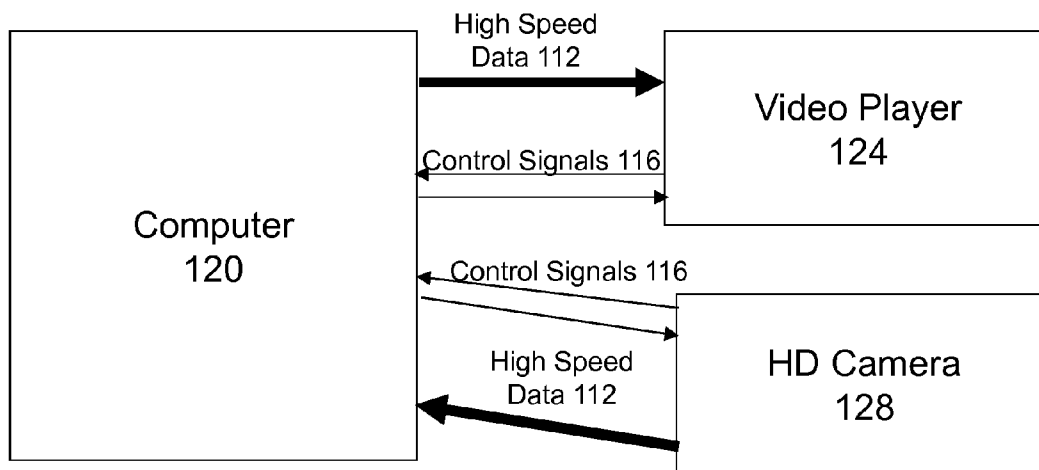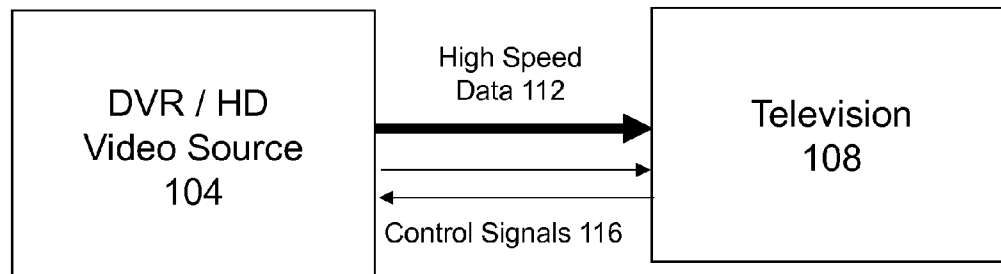

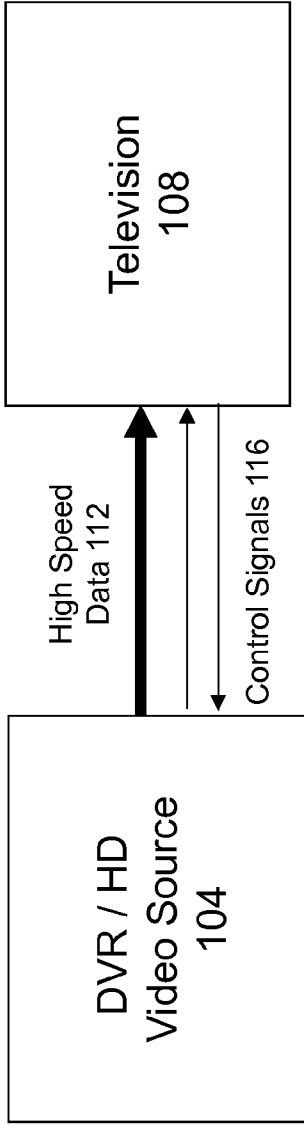


Figure 1A

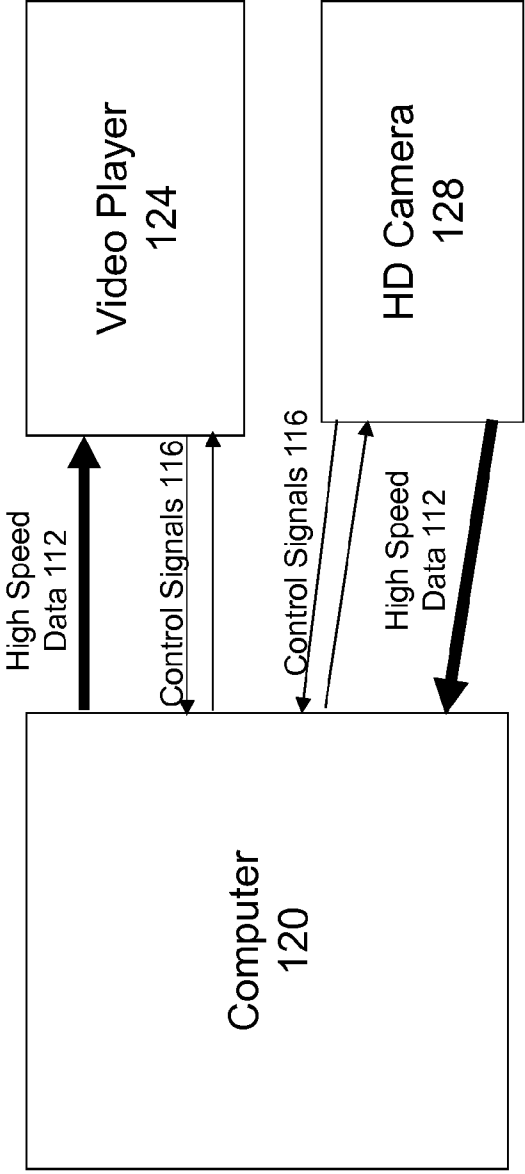


Figure 1B

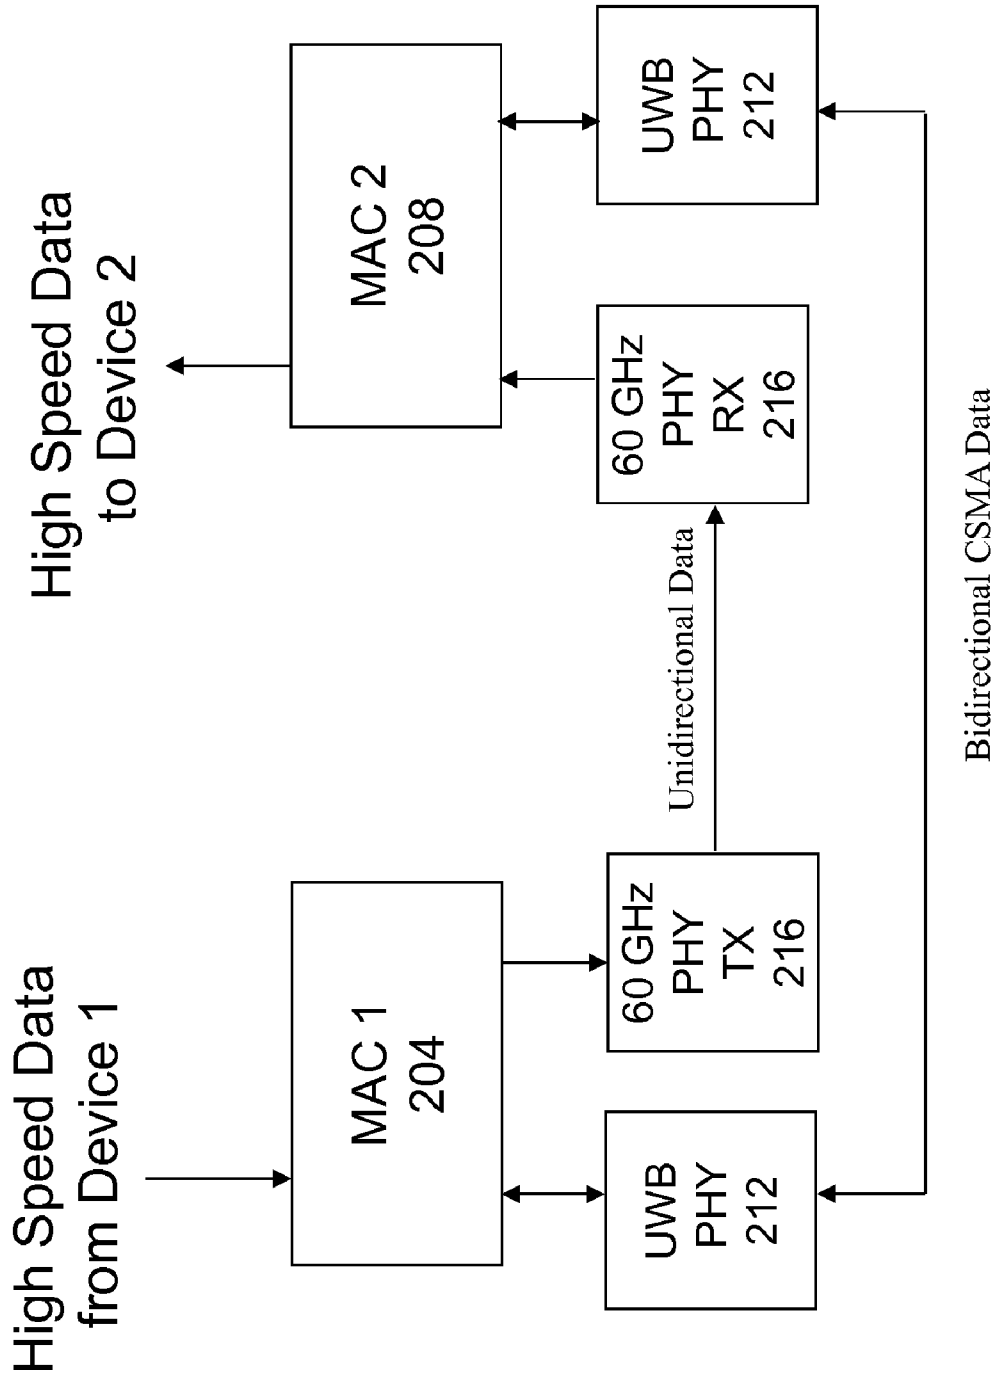


Figure 2

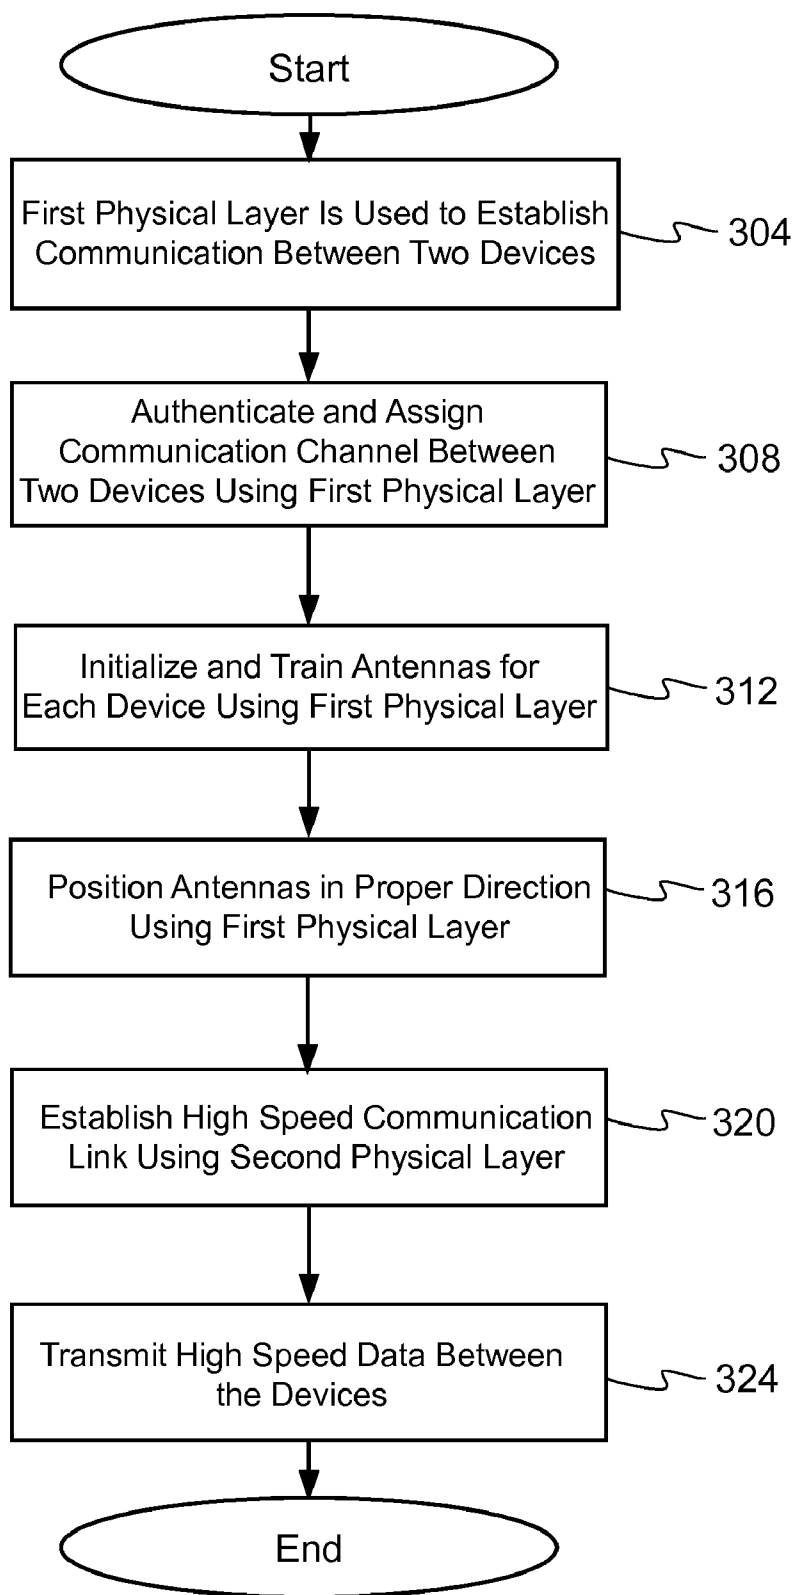


FIGURE 3

**METHOD AND SYSTEM FOR HIGH SPEED WIRELESS DATA TRANSMISSION BETWEEN COMMUNICATION DEVICES**

**CROSS REFERENCES TO RELATED APPLICATION**

**[0001]** The present U.S. Utility Patent Application claims priority under 35 U.S.C. §120, as a continuation of U.S. Utility Patent Application No. 11/584,213, filed Oct. 20, 2006, which is incorporated herein by reference in its entirety for all purposes.

**FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT**

- [0002]** [Not Applicable]
- [0003]** [MICROFICHE/COPYRIGHT REFERENCE]
- [0004]** [Not Applicable]

**BACKGROUND OF THE INVENTION**

**[0005]** Existing wireless networking standards, such as 802.11, 802.15, and Wimedia utilize CSMA (carrier sense multiple access) protocols to transmit data using omni-directional antennas. However, when data rates increase, the use of such standards becomes impractical. For example, the use of the CSMA protocol is inefficient, since each data packet header comprises a higher percentage of overhead compared to the transmitted data, as the data rate increases. Furthermore, the required transmit power using an omni-directional antenna is not practical when the data is transmitted at higher rates. In addition, introduction of faster versions of these wireless networking standards require that their corresponding protocol be backward compatible to each of the previously existing versions. As a consequence, a new version of such a wireless networking standard may be burdened with additional software constraints and/or requirements.

**[0006]** The limitations and disadvantages of conventional and traditional approaches will become apparent to one of skill in the art, through comparison of such systems with some aspects of the present invention as set forth in the remainder of the present application with reference to the drawings.

**BRIEF SUMMARY OF THE INVENTION**

**[0007]** The present invention is directed to apparatus and methods of operation that are further described in the following Brief Description of the Drawings, the Detailed Description of the Invention, and the Claims.

**[0008]** Other features and advantages of the present invention will become apparent from the following detailed description of the invention made with reference to the accompanying drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

**[0009]** FIG. 1A is a block diagram illustrating two exemplary devices that transmit control signals over a first physical connection and a high speed data signal over a second physical connection, in accordance with an embodiment of the invention.

**[0010]** FIG. 1B is a block diagram illustrating exemplary devices that transmit control signals over a first physical

connection and a high speed data over a second physical connection, in accordance with an embodiment of the invention.

**[0011]** FIG. 2 is a block diagram illustrating a single media access control address and two physical layers, used by each of two devices, in accordance with an embodiment of the invention.

**[0012]** FIG. 3 is an operational flow diagram illustrating a method by which high speed wireless data is transmitted between two devices, in accordance with an embodiment of the invention.

**DETAILED DESCRIPTION OF THE INVENTION**

**[0013]** Various aspects of the invention can be found in a method and a system for wirelessly transmitting high speed data between two devices. Each of the two devices may comprise any type of wireless communication device. For example, the wireless communication device may comprise a computer, multimedia or video player, or a high definition (HD) digital camera. Various aspects of the invention utilize a first physical layer (i.e., physical connection or PHY) to bidirectionally transmit one or more control signals that manage the transmission of the high speed data between a first device and a second device. The various aspects of the invention may utilize a second physical layer to transmit high speed wireless data between the first device and the second device. In a representative embodiment, the high speed data is transmitted unidirectionally from one device to another device. Furthermore, the various aspects of the invention utilize a first bandwidth to bidirectionally transmit one or more control signals that manage the transmission of the high speed wireless data. In a representative embodiment, the first physical layer may operate in burst mode while the second physical layer may operate in non-burst mode.

**[0014]** A first bandwidth may be used in association with the first physical layer while a second bandwidth may be used in association with the second physical layer. For example, two devices that communicate using the IEEE 802.11 standard may adapt the various aspects of the invention. The computing devices may utilize IEEE 802.11, for example, for transmitting the one or more control signals over the first bandwidth through each device's first physical layer. Further, these two devices may be adapted to utilize the second bandwidth for transmitting the high speed wireless data through each device's second physical layer. In a representative embodiment, the high speed data may be transmitted or received in a particular direction by way of using a directional antenna on a transmitting or receiving device. For example, the direction of an antenna's beam may be determined by way of using the one or more control signals to manage the rotation or movement of the directional antenna. The one or more control signals may be used to obtain and communicate various handshaking and/or device management data between the first and second devices. The rotation or movement of the directional antenna of the first device or the second device may be based on the position or location of the first device relative to the second device, for example.

**[0015]** FIG. 1A is a block diagram illustrating two exemplary devices that transmit control signals **116** over a first physical connection (i.e., PHY or physical layer) and high speed data **112** over a second physical connection (i.e., PHY or physical layer), in accordance with an embodiment of the invention. As shown, bidirectional control signals **116** are transmitted between a digital video recorder (DVR)/high

definition (HD) video source **104** and a television **108** while high speed data **112** is transmitted unidirectionally from the DVR/HD video source **104** to the television **108**. The control signals **116** may be used for setup, initialization, and configuration management of the DVR/HD video source **104** and the television **108** such that the high speed data **112** is properly transmitted and received between the video source **104** and the television **108**. The control signals **116** may be used to perform “handshaking” between two devices, prior to the transmission of high speed data. Additionally, the control signals **116** may perform “traffic management” of the high speed data **112** that is transmitted from the DVR/HD video source **104** and the television **108**. The DVR/HD video source **104** may be used to transmit a movie to the television **108**, for example. In a representative embodiment, the control signals **116** may be transmitted over a low bandwidth connection while the high speed data **112** may be transmitted over a high bandwidth connection. In a representative embodiment, the low bandwidth connection may conform to IEEE 802.11, IEEE 802.15, or ECMA-368/369 (Wimedia UWB) communication standards. Details of the IEEE 802.11 and IEEE 802.15 standards may be readily obtained from the Institute of Electrical and Electronics Engineers while the details of the ECMA-368/369 standards may be obtained from ECMA International (an industry standards organization). The high bandwidth connection may be associated with a point to point wireless communication channel for transmitting the high speed data **112**. The high speed data transmission may utilize any available spectrum. In a representative embodiment, the high speed data **112** is transmitted over an available spectrum between 59-66 GHz. The high speed data may be transmitted at a speed up to approximately 10 Gbps, for example.

[0016] FIG. 1B is a block diagram illustrating exemplary devices that transmit control signals **116** over a first physical connection (i.e., PHY or physical layer) and a high speed data **112** over a second physical connection, in accordance with an embodiment of the invention. Bidirectional control signals **116** may be transmitted between a computer **120** and a video player **124** and between the computer **120** and a high definition (HD) camera **128**, for example. The bidirectional control signals **116** may be transmitted using a low bandwidth connection while the high speed data **112** may be transmitted over a high bandwidth connection. The video player **124** may comprise a video IPOD, for example. The computer **120** may be used to stream the high speed data **112**, such as a high definition (HD) video, to the video player **124**, for example. In this fashion, a viewer may conveniently watch a HD movie using his video IPOD, for example. In the representative embodiment of FIG. 1B, the HD camera **128** may be used to stream a high definition (HD) video or photograph to the computer **120**. When using either the video player **124** or the HD camera **128** with the computer **120**, bidirectional control signals **116** may be used to configure, initiate, setup, and tear-down any high speed data **112** that is transmitted. In a representative embodiment, an antenna positioned within each device (i.e., computer **120**, video player **124**, or HD camera **128**) may be controlled by way of the control signals **116**. The antenna may be used for receiving and/or transmitting the high speed data **112**. For example, an antenna may position its beam in a particular direction by way of using these control signals **116**. The antenna may be positioned to maximize transmission gain in a particular direction, such that a high speed data transmission may be efficiently received, for example. In a representative embodiment, the

directional antenna operates by using a beamwidth of approximately 6.4 to 64 degrees.

[0017] FIG. 2 is a block diagram illustrating a single media access control (MAC) address and two physical layers, used by each of two devices, in accordance with an embodiment of the invention. The first of the two devices utilizes a first MAC address **204** and two physical layers **212**, **216** (i.e., two physical connections or “PHYs”). The first physical layer **212** may comprise a physical layer that supports Ultrawideband (UWB) Wimedia transmission while the second physical layer **216** may support high speed transmission at a bandwidth centered at approximately 60 GHz. Likewise, the second of the two devices utilizes a second MAC address **208** and the two physical layers **212**, **216**. For example, the first physical layer **212** may conform to the Ultrawideband (UWB) Wimedia physical layer (as specified in the ECMA-368/369 standard) while the second physical layer **216** may comprise any physical layer that supports a high speed unidirectional data transmission over a bandwidth centered at approximately 60 GHz. The first physical layer **212** may conform to any wireless standard that utilizes a CSMA protocol in its physical layer. The first physical layer **212** may conform to IEEE 802.11 or IEEE 802.15, or ECMA-368/369, for example. As shown in FIG. 2, the second physical layer **216** may be configured for transmission in only one direction as a means for providing uninterrupted unidirectional data transmission from one device to the other. However, the first physical layer **212** may be used for providing one or more bidirectional control signals between the two devices. The bidirectional control signals may carry device management data such as configuration, timing, and/or control data. The one or more control signals may facilitate authentication and association of devices, assignment of a communication channel for transmitting high speed data between the two devices, and may also facilitate antenna training and setup for the two devices. The communication channel is implemented using the second physical layer **216** provided in the two devices. The second physical layer **216** may be used to carry the high speed data that is transmitted unidirectionally from the first device to the second device. The second physical layer **216** may transmit the high speed data using a frequency division multiple access (FDMA) or a time division multiple access (TDMA) protocol. In a representative embodiment, the high speed data may be transmitted at rates of up to approximately 10 Gbps.

[0018] FIG. 3 is an operational flow diagram illustrating a method by which high speed wireless data is transmitted between two devices, in accordance with an embodiment of the invention. At step **304**, a first physical layer is used to establish communication between a first device and a second device. The first physical layer may conform to a CSMA protocol. For example, the first physical layer may conform to IEEE 802.11, 802.15, or ECMA-368/369. In a representative embodiment, the first or second device may transmit a beacon for communicating its presence and availability by using the CSMA protocol. The first or second device may transmit one or more control signals for managing the transmission of the high speed wireless data. The beacon and/or one or more control signals may be transmitted over a first bandwidth. The first or second device may transmit the beacon omnidirectionally. Next, at step **308**, the first physical layer may be used for authenticating and assigning a communication channel between the first and second devices, for example. The communication channel may be used by a second physical layer to

transmit the high speed wireless data. Thereafter, at step **312**, each of the directional antennas associated with the first and second devices is initialized and trained, in preparation for positioning each directional antenna for optimal transmission and reception of the high speed wireless data. At step **316**, the directional antennas are optimally positioned to provide effective transmission of the high speed wireless data between the first device and the second device. Next, at step **320**, a high speed communication channel is properly established using a second physical layer in the first and second devices. The second physical layer may transmit the high speed wireless data over a second bandwidth (that is distinct from the first bandwidth). Finally, at step **324**, the high speed wireless data is transmitted between the first and the second devices. The high speed wireless data may comprise any type of data and may comprise multimedia, video, audio, and/or voice data. In a representative embodiment, the high speed wireless data is transmitted unidirectionally, for example, from the first device to the second device. In a representative embodiment, the transmitted power may range from +5 to +10 dBm, the transmitter and/or receiver gain may range from +10 to +30 dB, the RF bandwidth may be approximately 2 GHz, while the system noise figure may range from 8 to 20 dB.

[0019] While the invention has been described with reference to certain embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from its scope. Therefore, it is intended that the invention not be limited to the particular embodiments disclosed, but that the invention will include all embodiments falling within the scope of the appended claims.

What is claimed is:

1. A method comprising:  
communicating between a first wireless device and a second wireless device to wirelessly transfer control signals between the first wireless device and the second wireless device over a first bandwidth, wherein the control signals include an antenna training signal to directionally position an antenna of the first wireless device and an antenna of the second wireless device to establish a directional communication path between the two wireless devices; and  
using the directional communication path to transfer high speed data wirelessly from the first wireless device to the second wireless device over a second bandwidth.
2. The method of claim 1, wherein the second bandwidth is higher in frequency that the first bandwidth.
3. The method of claim 2, wherein the first bandwidth utilizes a protocol that conforms with Ultrawideband Wimedia or an ECMA-368/369 standard.
4. The method of claim 2, wherein the second bandwidth is centered approximately around 60 GHz.
5. The method of claim 2, wherein the second bandwidth is in the range of approximately 59-66 GHz.
6. The method of claim 2, wherein the directional communication path is used to transmit video data.

7. The method of claim 6, wherein the directional communication path that is used to transmit video data transmits the video data to the second wireless device, which is a television display.

8. The method of claim 6, wherein the directional communication path that is used to transmit video data transmits the video data to the second wireless device, which is a video player.

9. The method of claim 2, wherein the directional communication path is used to transmit multimedia data.

10. A method comprising:

communicating between a first wireless device and a second wireless device to wirelessly transfer control signals bidirectionally between the first wireless device and the second wireless device over a first bandwidth, wherein the control signals include an antenna training signal to directionally position an antenna of the first wireless device and an antenna of the second wireless device to establish a directional communication high-speed channel between the two wireless devices; and

using the directional communication high-speed channel to transfer high-speed data wirelessly from the first wireless device to the second wireless device over a second bandwidth, in which the second bandwidth is higher in frequency than the first bandwidth.

11. The method of claim 10, wherein the second bandwidth is approximately around 60 GHz.

12. The method of claim 10, wherein the directional communication high-speed channel is used to transmit video data.

13. The method of claim 12, wherein the second wireless device is a television display.

14. The method of claim 12, wherein the second wireless device is a video player.

15. The method of claim 10, wherein the directional communication high-speed channel is used to transmit multimedia data.

16. An apparatus comprising:

a first physical layer of the apparatus to wirelessly transfer control signals between the apparatus and another wireless device over a first bandwidth, wherein the control signals to include an antenna training signal to directionally position an antenna of the apparatus and an antenna of the other wireless device to establish a directional communication path between the apparatus and the other wireless device; and

a second physical layer of the apparatus to transmit high-speed data wirelessly to the other wireless device by use of the directionally positioned antennas over the established directional communication path, in which the high-speed data is transmitted over a second bandwidth, in which the second bandwidth is higher in frequency than the first bandwidth.

17. The apparatus of claim 16, wherein the second bandwidth is approximately around 60 GHz.

18. The apparatus of claim 16, wherein the directional communication path is used to transmit video data.

19. The apparatus of claim 16, wherein the apparatus is a computer.

20. The apparatus of claim 16, wherein the apparatus is a video source for generating video to a video display.

\* \* \* \* \*