



(22) Date de dépôt/Filing Date: 2006/10/25

(41) Mise à la disp. pub./Open to Public Insp.: 2007/05/04

(45) Date de délivrance/Issue Date: 2014/06/17

(30) Priorité/Priority: 2005/11/04 (EP05110389.3)

(51) Cl.Int./Int.Cl. *G06F 17/00* (2006.01),
H04L 12/16 (2006.01)


(72) Inventeurs/Inventors:
ADAMS, NEIL, CA;
VANDER VEEN, RAYMOND, CA

(73) Propriétaire/Owner:
BLACKBERRY LIMITED, CA

(74) Agent: DIMOCK STRATTON LLP

(54) Titre : METHODE ET SYSTEME POUR METTRE A JOUR DES FILS DE MESSAGES

(54) Title: METHOD AND SYSTEM FOR UPDATING MESSAGE THREADS

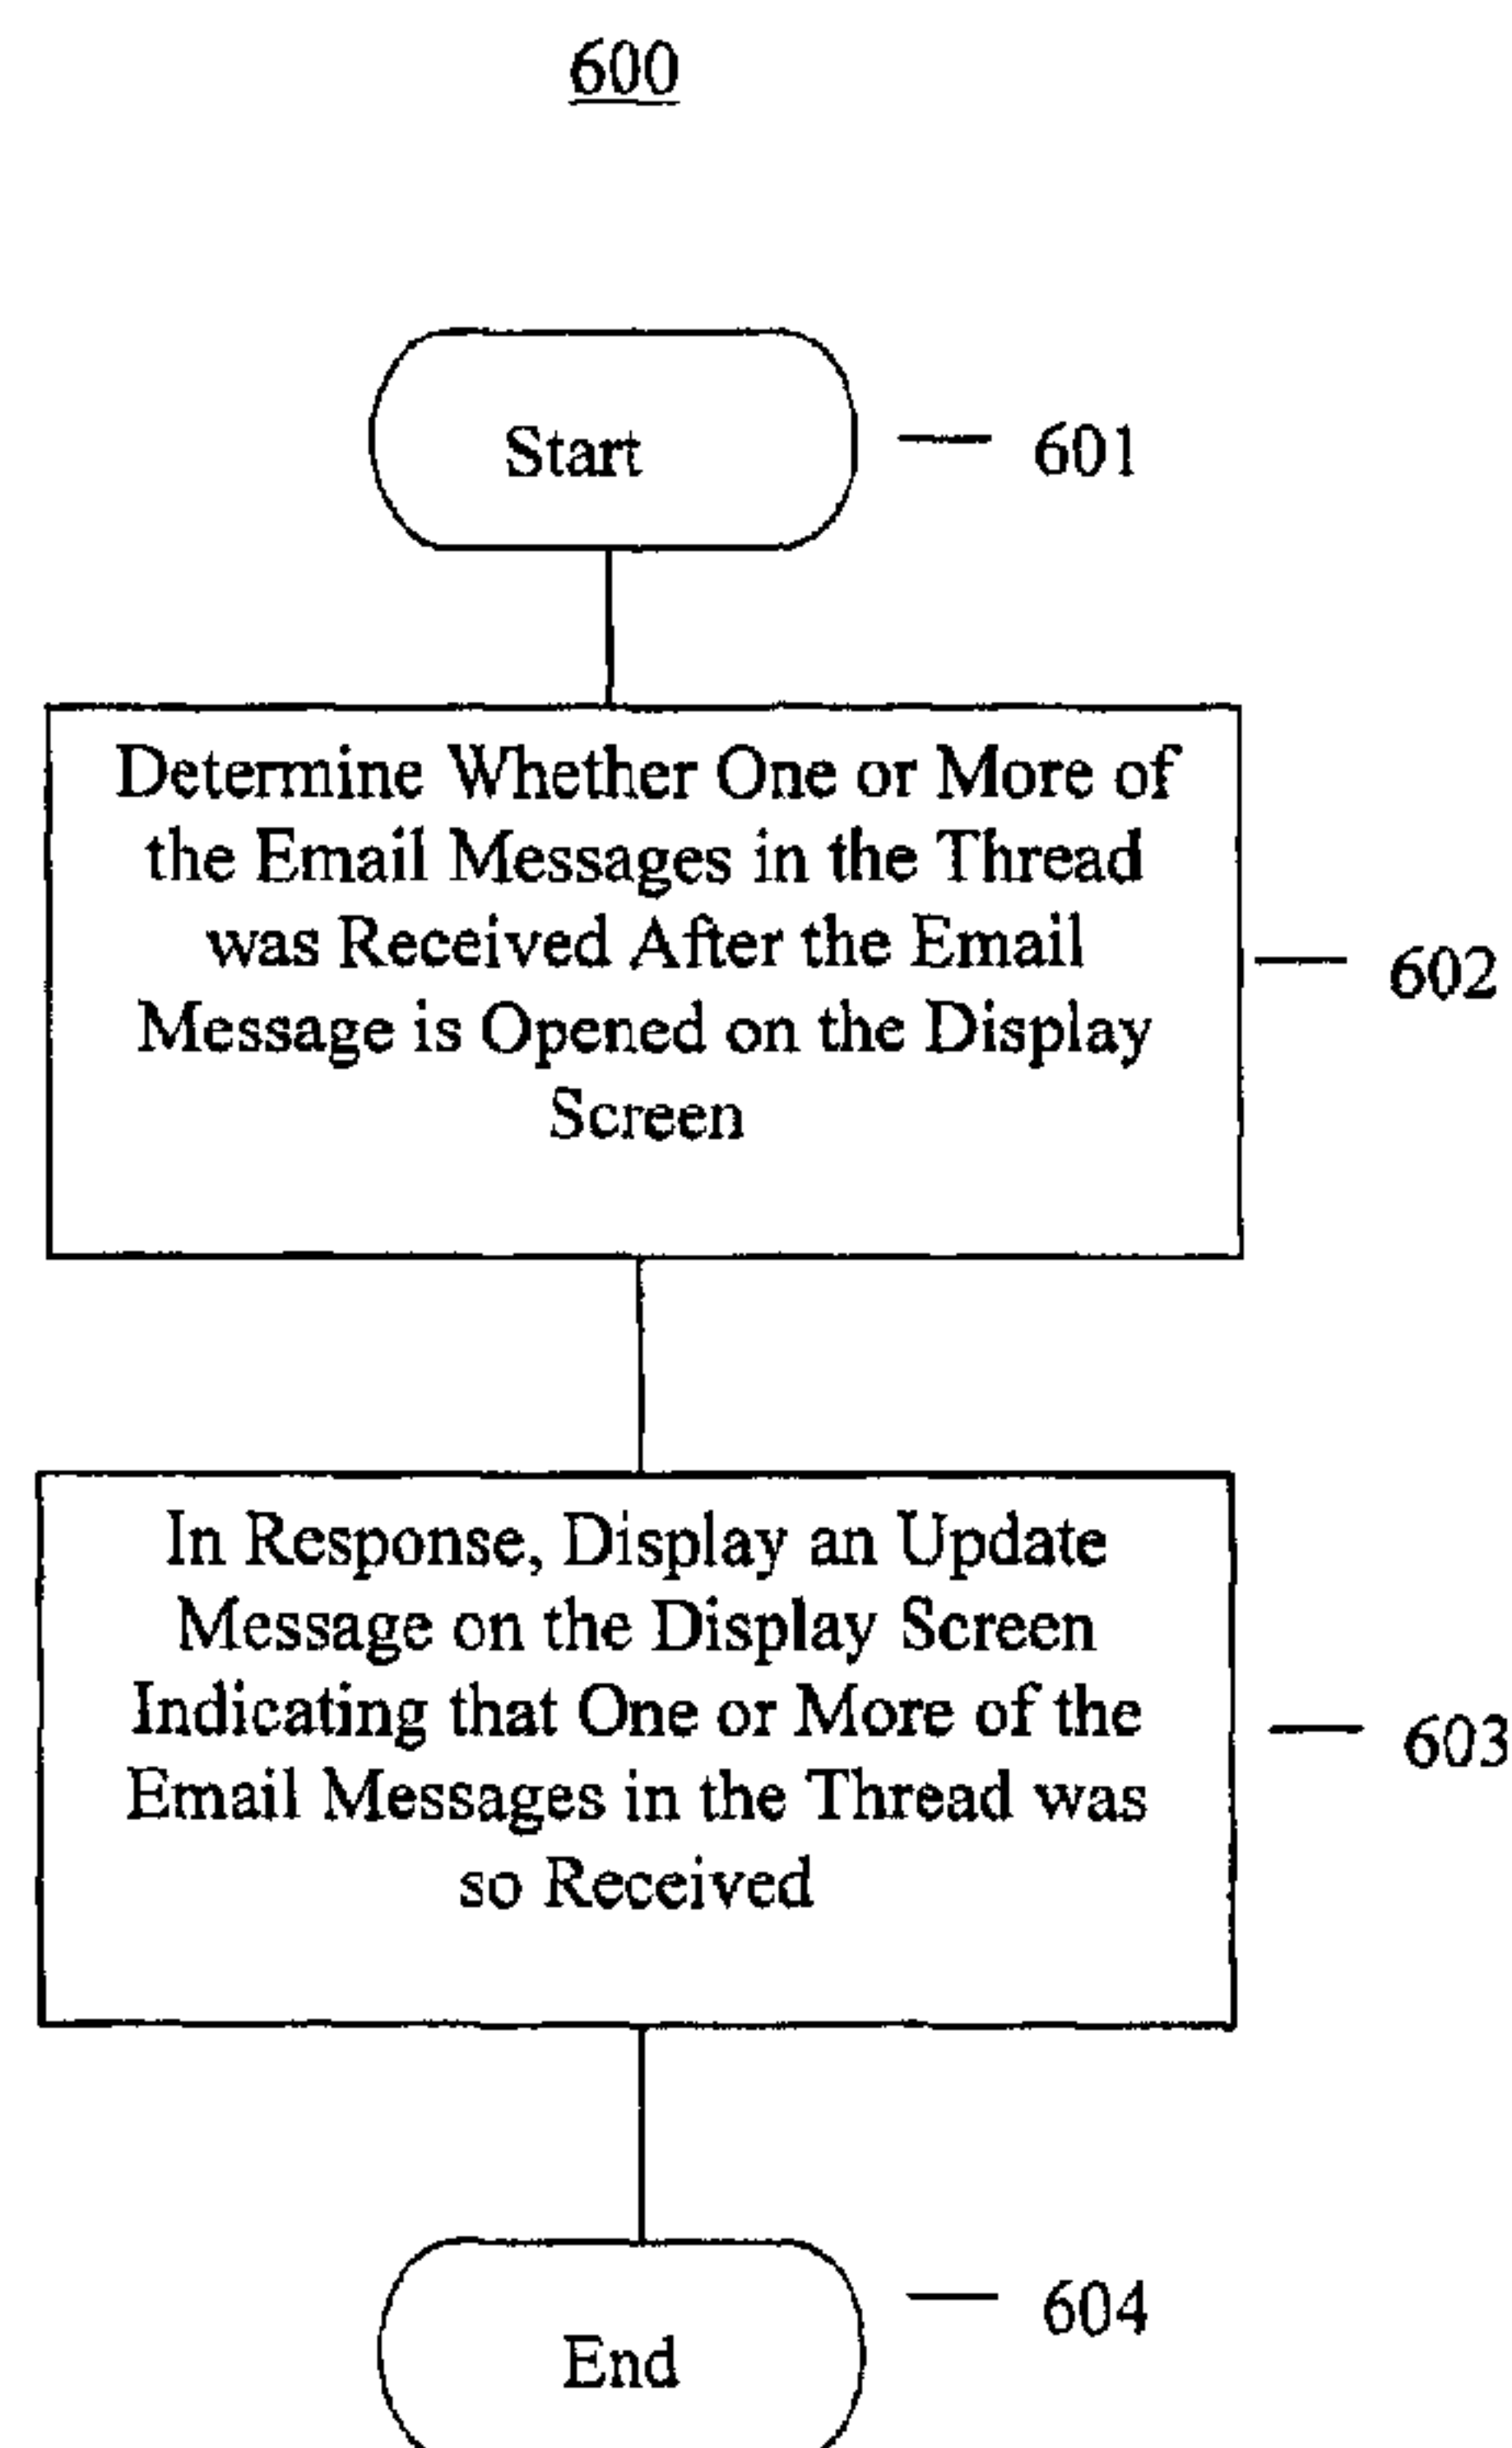

(57) Abrégé/Abstract:

A method for updating an electronic mail ("email") message presented to a user on a display screen of a data processing system, the email message belonging to a thread of email messages received by the data processing system, the method comprising: determining whether one or more of the email messages in the thread was received after the email message is opened on the display screen; and, if so, displaying an update message on the display screen indicating that one or more of the email messages in the thread was so received.



ABSTRACT

A method for updating an electronic mail (“email”) message presented to a user on a display screen of a data processing system, the email message belonging to a thread of email messages received by the data processing system, the method comprising: determining whether one or more of the email messages in the thread was received after the email message is opened on the display screen; and, if so, displaying an update message on the display screen indicating that one or more of the email messages in the thread was so received.

METHOD AND SYSTEM FOR UPDATING MESSAGE THREADS

TECHNICAL FIELD

[0001] The present application relates to the field of electronic mail (“email”) messages, and more specifically, to updating message threads for email messages in wireless and other devices.

BACKGROUND

[0002] Current wireless mobile communication devices include microprocessors, memory, soundcards, and run one or more software applications. Examples of software applications used in these wireless devices include micro-browsers, address books, email clients, instant messaging (“IM”) clients, and wavetable instruments. Additionally, wireless devices have access to a plurality of services via the Internet. A wireless device may, for example, be used to browse web sites on the Internet, to transmit and receive graphics, and to execute streaming audio and/or video applications. The transfer of Internet content to and from wireless device is typically facilitated by the Wireless Application Protocol (“WAP”), which integrates the Internet and other networks with wireless network platforms.

[0003] With respect to email messages, a typical message list for a user may have many threads of messages. A message thread is a sequence of messages relating to the same topic. A simple message thread includes messages that switch back and forth between two recipients much like a conversation. Typically, each message in the thread contains the message text from the body of the message that the user is replying to. The longer the thread goes on, the longer the text of the message is (and the more memory space each reply uses).

[0004] Now, consider the following scenario. A user of a wireless device receives one or more messages from an email thread while the device is holstered. The wireless device vibrates to indicate to the user that a message has arrived. When the user removes the wireless device from its holster and observes the wireless device’s display screen, the

user is presented with the message. The content of the message displayed to the user depends on the timing of receipt of the message. If several other users are responding to the thread, the user may not be shown the most recent message text in the thread for the message displayed. If new messages for the thread are received while the user is reading or responding to one of the earlier messages, it will not be clear to the user that another message for that thread has arrived. In other words, the message thread will not be updated.

[0005] One problem caused by the lack of message thread updating is that when a first user responds to a message, the content of the first user's response may have already been sent in a response to the message from a second user. This wastes the time of the first user, who may have composed a message with similar content to that of the second user, as well as the time of other recipients of the messages from the first and second users who must now read the two similar messages.

[0006] Therefore, one shortcoming of present wireless and other devices is their inability to effectively update email message threads. Furthermore, the need to effectively update email message threads is increasing in importance with the increase in the number of email related applications being run on wireless and other devices.

[0007] A need therefore exists for an improved method and system of updating email message threads in wireless and other devices. Accordingly, a solution that addresses, at least in part, the above and other shortcomings is desired.

SUMMARY

[0008] According to one embodiment of the application, there is provided a method for updating an electronic mail ("email") message presented to a user on a display screen of a data processing system, the email message belonging to a thread of email messages received by the data processing system, the method comprising: determining whether one or more of the email messages in the thread was received after the email message is opened on the display screen; and, if so, displaying an update message on the display screen indicating that one or more of the email messages in the thread was so received.

[0009] Preferably, the method further includes determining whether the email message belongs to the thread by comparing subject line text of the email message to subject line text of one or more of the email messages in the thread. Preferably, the determining further includes comparing a time and date of receipt for the email message with times and dates of receipt for one or more of the email messages in the thread. Preferably, the method further includes determining a number of email messages in the thread for including in the update message. Preferably, the method further includes determining an order for the email messages in the thread from the comparing for including in the update message. Preferably, the method further includes: determining whether one or more of the email messages in the thread has been opened by the user from a message read flag associated with each of the email messages in the thread; and, determining with the order at least one of a number of email messages in the thread that were received before the email message and that have not been opened and a number of email messages in the thread that were received after the email message and that have not been opened for including in the update message. Preferably, the method further includes: determining by comparison whether text entered by the user for responding to the email message and text contained in one or more of the email messages in the thread have a similarity; and, if so, including a warning message in the update message indicating the similarity. Preferably, the method further includes displaying the update message in a non-scrolling field within the email message opened on the display screen. Preferably, the update message is at least one of a text message and an icon. Preferably, the data processing system is a wireless device having a clickable thumbwheel. Preferably, the method further includes opening the email message on the display screen when the email message is selected from a list of email messages by the user with the clickable thumbwheel.

[0010] In accordance with further embodiments of the present application, there is provided an apparatus such as a data processing system, a method for adapting this system, as well as articles of manufacture such as a computer readable medium having program instructions recorded thereon for practising the method of the application.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Further features and advantages of the embodiments of the present application will become apparent from the following detailed description, taken in combination with the appended drawings, in which:

[0012] FIG. 1 is a block diagram illustrating a data processing system adapted for implementing an embodiment of the application;

[0013] FIG. 2 is a block diagram illustrating a wireless device and a wireless communications system adapted for implementing an embodiment of the application;

[0014] FIG. 3 is a block diagram illustrating a memory of the wireless device of FIG. 2;

[0015] FIG. 4 is a chart illustrating the content of an exemplary email message thread in accordance with an embodiment of the application;

[0016] FIG. 5 is a partial screen capture illustrating a graphical user interface (“GUI”) for updating a message thread for an opened email message in accordance with an embodiment of the application; and

[0017] FIG. 6 is a flow chart illustrating operations of modules for updating an electronic mail (“email”) message presented to a user on a display screen of a data processing system, the email message belonging to a thread of email messages received by the data processing system, in accordance with an embodiment of the application.

[0018] It will be noted that throughout the appended drawings, like features are identified by like reference numerals.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0019] The following detailed description of the embodiments of the present application does not limit the implementation of the application to any particular computer programming language. The present application may be implemented in any computer programming language provided that the operating system ("OS") provides the facilities that may support the requirements of the present application. A preferred embodiment is implemented in the JAVA™ computer programming language (or other computer programming languages such as C or C++). (JAVA and all JAVA-based trademarks are the trademarks of Sun Microsystems Corporation.) Any limitations presented would be a result of a particular type of operating system or computer programming language and would not be a limitation of the present application.

[0020] FIG. 1 is a block diagram illustrating a data processing system **100** adapted for implementing an embodiment of the application. The data processing system **100** includes an input device **110**, a central processing unit or CPU **120**, memory **130**, a display **140**, and an interface **150**. The input device **110** may include a keyboard, mouse, trackball, remote control, or similar device. The CPU **120** may include dedicated coprocessors and memory devices. The memory **130** may include RAM, ROM, or disk devices. The display **140** may include a computer screen, terminal device, or a hardcopy producing output device such as a printer or plotter. And, the interface **150** may include a network connection including an Internet connection and a wireless network **220** connection (see FIG. 2). The data processing system **100** is adapted for communicating with wireless devices **210** over a wireless network **220**.

[0021] The data processing system **100** may be a server system or a personal computer ("PC") system. The CPU **120** of the system **100** is operatively coupled to memory **130** which stores an operating system (not shown), such as IBM Corporation's OS/2™, UNIX, etc., for general management of the system **100**. The interface **150** may be used for communicating to external data processing systems (not shown) through a network (such as the Internet) or wireless network **220** (see FIG. 2). Examples of suitable platforms for the system **100** include iSeries™ servers and ThinkCentre™ personal

computers available from IBM Corporation. The system **100** may include application server software (not shown), such as WebLogic® Server available from BEA Systems, Inc., for developing and managing distributed applications.

[0022] The data processing system **100** may include a database system **160** for storing and accessing programming information. The database system **160** may include a database management system ("DBMS") and a database and is stored in the memory **130** of the data processing system **100**.

[0023] The data processing system **100** includes computer executable programmed instructions for directing the system **100** to implement the embodiments of the present application. The programmed instructions may be embodied in one or more software modules **170** resident in the memory **130** of the data processing system **100**. Alternatively, the programmed instructions may be embodied on a computer readable medium (such as a CD disk or floppy disk) which may be used for transporting the programmed instructions to the memory **130** of the data processing system **100**. Alternatively, the programmed instructions may be embedded in a computer-readable, signal-bearing medium that is uploaded to a network by a vendor or supplier of the programmed instructions, and this signal-bearing medium may be downloaded through the interface **150** to the data processing system **100** from the network by end users or potential buyers.

[0024] The CPU **120** of the system **100** is typically coupled to one or more devices **110** for receiving user commands or queries and for displaying the results of these commands or queries to the user on a display **140**. As mentioned, the memory **130** may include a variety of storage devices including internal memory and external mass storage typically arranged in a hierarchy of storage as understood to those skilled in the art.

[0025] A user may interact with the data processing system **100** and its software modules **170** using a graphical user interface ("GUI") **180**. The GUI **180** may be web-based and may be used for monitoring, managing, and accessing the data processing system **100**. GUIs are supported by common operating systems and provide a display

format which enables a user to choose commands, execute application programs, manage computer files, and perform other functions by selecting pictorial representations known as icons, or items from a menu through use of an input or pointing device such as a mouse **110**. In general, a GUI is used to convey information to and receive commands from users and generally includes a variety of GUI objects or controls, including icons, toolbars, drop-down menus, text, dialog boxes, buttons, and the like. A user typically interacts with a GUI **180** presented on a display **140** by using an input or pointing device (e.g., a mouse) **110** to position a pointer or cursor **190** over an object **191** and by "clicking" on the object **191**.

[0026] Typically, a GUI based system presents application, system status, and other information to the user in "windows" appearing on the display **140**. A window **192** is a more or less rectangular area within the display **140** in which a user may view an application or a document. Such a window **192** may be open, closed, displayed full screen, reduced to an icon, increased or reduced in size, or moved to different areas of the display **140**. Multiple windows may be displayed simultaneously, such as: windows included within other windows, windows overlapping other windows, or windows tiled within the display area.

[0027] FIG. 2 is a block diagram illustrating a wireless device **210** and a wireless network **220** adapted for implementing an embodiment of the application. The wireless network **220** includes antenna, base stations, and supporting radio equipment, known to those of ordinary skill in the art, for supporting wireless communications between the wireless device **210** and the data processing system **100**. The wireless network **220** may be coupled to a wireless network gateway (not shown) and to a wide area network (not shown) to which the data processing system **100** may be coupled through its interface **150**.

[0028] The wireless device **210** is a two-way communication device having at least voice and advanced data communication capabilities, including the capability to communicate with other computer systems **100**. Depending on the functionality provided

by the device **210**, it may be referred to as a data messaging device, a two-way pager, a cellular telephone with data messaging capabilities, a wireless Internet appliance, or a data communication device (with or without telephony capabilities). The device **210** may communicate with any one of a plurality of fixed transceiver stations **220** within its geographic coverage area.

[0029] The wireless device **210** will normally incorporate a communication subsystem **111**, which includes a RF receiver, a RF transmitter, and associated components, such as one or more (preferably embedded or internal) antenna elements, local oscillators (“LOs”), and a processing module such as a digital signal processor (“DSP”) (all not shown). As will be apparent to those skilled in the field of communications, the particular design of the communication subsystem **111** depends on the communication network **220** in which the device **210** is intended to operate.

[0030] Network access is associated with a subscriber or user of the device **210** and therefore the device **210** requires a Subscriber Identity Module (or “SIM” card) **162** to be inserted in a SIM interface (“IF”) **164** in order to operate in the network. The device **210** is a battery-powered device so it also includes a battery IF **154** for receiving one or more rechargeable batteries **156**. Such a battery **156** provides electrical power to most if not all electrical circuitry in the device **210**, and the battery IF **154** provides for a mechanical and electrical connection for it. The battery IF **154** is coupled to a regulator (not shown) which provides power to the circuitry of the device **210**.

[0031] The wireless device **210** includes a microprocessor **138** which controls overall operation of the device **210**. Communication functions, including at least data and voice communications, are performed through the communication subsystem **111**. The microprocessor **138** also interacts with additional device subsystems such as a display **122**, a flash memory **124** or other persistent store, a random access memory (“RAM”) **126**, auxiliary input/output (“I/O”) subsystems **128**, a serial port **131**, a keyboard **132**, a clickable thumbwheel **230**, a speaker **134**, a microphone **136**, a short-range communications subsystem **141**, and any other device subsystems generally designated at **142**. Some of the subsystems shown in FIG. 2 perform communication-related functions,

whereas other subsystems may provide “resident” or on-device functions. Notably, some subsystems, such as the keyboard **132**, display **122**, and clickable thumbwheel **230**, for example, may be used for both communication-related functions, such as entering a text message for transmission over a communication network, and device-resident functions such as a calculator or task list. Operating system software used by the microprocessor **138** is preferably stored in a persistent store such as the flash memory **124**, which may alternatively be a read-only memory (“ROM”) or similar storage element (not shown). Those skilled in the art will appreciate that the operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile store such as RAM **126**.

[0032] The microprocessor **138**, in addition to its operating system functions, preferably enables execution of software applications on the device **210**. A predetermined set of applications which control basic device operations, including at least data and voice communication applications, will normally be installed on the device **210** during its manufacture. A preferred application that may be loaded onto the device **210** may be a personal information manager (“PIM”) application having the ability to organize and manage data items relating to the user such as, but not limited to, instant messaging (“IM”), email, calendar events, voice mails, appointments, and task items. Naturally, one or more memory stores are available on the device **210** and SIM **162** to facilitate storage of PIM data items and other information.

[0033] The PIM application preferably has the ability to send and receive data items via the wireless network **220**. In a preferred embodiment, PIM data items are seamlessly integrated, synchronized, and updated via the wireless network, with the wireless device user’s corresponding data items stored and/or associated with a host computer system such as the data processing system **100** thereby creating a mirrored host computer on the device **210** with respect to such items. This is especially advantageous where the host computer system is the wireless device user’s office computer system. Additional applications may also be loaded onto the device **210** through the network **220**, the auxiliary I/O subsystem **128**, the serial port **131**, the short-range communications

subsystem **141**, or any other suitable subsystem **142**, and installed by a user in RAM **126** or preferably in a non-volatile store (not shown) for execution by the microprocessor **138**. Such flexibility in application installation increases the functionality of the device **210** and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using the wireless device **210**.

[0034] In a data communication mode, a received signal such as a text message, an email message, or web page download will be processed by the communication subsystem **111** and input to the microprocessor **138**. The microprocessor **138** will preferably further process the signal for output to the display **122** and/or to the auxiliary I/O device **128**. A user of the wireless device **210** may also compose data items, such as email messages, for example, using the keyboard **132** in conjunction with the display **122**, the clickable thumbwheel **230**, and possibly the auxiliary I/O device **128**. The keyboard **132** is preferably a complete alphanumeric keyboard and/or a telephone-type keypad. The keyboard **132** may also be a reduced key alphanumeric keyboard. These composed items may be transmitted over a communication network **220** through the communication subsystem **111** or the short range communication subsystem **141**.

[0035] For voice communications, the overall operation of the wireless device **210** is substantially similar, except that the received signals would be output to the speaker **134** and signals for transmission would be generated by the microphone **136**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on the device **210**. Although voice or audio signal output is preferably accomplished primarily through the speaker **134**, the display **122** may also be used to provide, for example, an indication of the identity of a calling party, duration of a voice call, or other voice call related information.

[0036] The serial port **131** shown in FIG. 2 is normally implemented in a personal digital assistant ("PDA")-type communication device for which synchronization with a user's desktop computer is a desirable, albeit optional, component. The serial port **131**

enables a user to set preferences through an external device or software application and extends the capabilities of the device **210** by providing for information or software downloads to the device **210** other than through a wireless communication network **220**. The alternate download path may, for example, be used to load an encryption key onto the device **210** through a direct and thus reliable and trusted connection to thereby provide secure device communication.

[0037] The short-range communications subsystem **141** shown in FIG. 2 is an additional optional component which provides for communication between the device **210** and different systems or devices, which need not necessarily be similar devices. For example, the subsystem **141** may include an infrared device and associated circuits and components, or a Bluetooth™ communication module to provide for communication with similarly-enabled systems and devices. (Bluetooth™ is a registered trademark of Bluetooth SIG, Inc.)

[0038] FIG. 3 is a block diagram illustrating a memory **201** of the wireless device **210** of FIG. 2 in accordance with an embodiment of the application. The memory **201** has various software components for controlling the device **210** and may include flash memory **124**, RAM **126**, or ROM (not shown), for example. In accordance with an embodiment of the application, the wireless device **210** is intended to be a multi-tasking wireless communications device configured for sending and receiving data items and for making and receiving voice calls. To provide a user-friendly environment to control the operation of the device **210**, an operating system (“O/S”) **202** resident on the device **210** provides a basic set of operations for supporting various applications typically operable through a graphical user interface (“GUI”) **204**. For example, the O/S **202** provides basic input/output system features to obtain input from the auxiliary I/O **128**, the keyboard **132**, the clickable thumbwheel **230**, and the like, and for facilitating output to the user. In accordance with an embodiment of the application, there are provided software modules **206** for updating message threads as will be described below. Though not shown, one or more applications for managing communications or for providing personal digital assistant like functions may also be included.

[0039] Thus, the wireless device **210** includes computer executable programmed instructions for directing the device **210** to implement the embodiments of the present application. The programmed instructions may be embodied in one or more software modules **206** resident in the memory **201** of the wireless device **210**. Alternatively, the programmed instructions may be embodied on a computer readable medium (such as a CD disk or floppy disk) which may be used for transporting the programmed instructions to the memory of the wireless device **210**. Alternatively, the programmed instructions may be embedded in a computer-readable, signal-bearing medium that is uploaded to a network by a vendor or supplier of the programmed instructions, and this signal-bearing medium may be downloaded through an interface **111**, **131**, **141** to the wireless device **210** from the network by end users or potential buyers.

[0040] FIG. 4 is a chart illustrating the content of an exemplary email message thread **400** in accordance with an embodiment of the application. A first user Neil sends a first email message **410** containing message text **411** to a second user Harry and a third user Raymond. In response, Harry sends a responding second email message **420** containing message text **421** to Neil. The second email message **420** includes the text **411** of the first email message **410**. Similarly, Neil may send a third email message **430** containing message text **431** in response to Harry's message **420**. The third email message **430** includes the text **411**, **421** of first and second messages **410**, **420**. The linked message text in an email message may be referred to as message thread text **401**, **402**, **403**. In the third message **430**, for example, the message thread text **403** includes message text **411**, **421**, **431** from the first, second, and third messages **410**, **420**, **430**.

[0041] Now, recall the scenario described above. A first user of a wireless device **210** receives one or more messages **410**, **420**, **430** from an email message thread **400** while the device **210** is in its holster. The wireless device **210** vibrates to indicate to the first user that messages **410**, **420**, **430** have arrived. When the first user removes the wireless device **210** from its holster and observes the wireless device's display screen **122**, the first user is presented with the message thread text **402** of a message **420**. The message

420 displayed to the user depends on the timing of receipt of the messages **410**, **420**, **430**. If several other users are responding to the message thread **400**, the first user may not be shown the most recent message text **431** in the thread **400**. If one or more messages **430** for the thread **400** are received while the first user is reading or responding to one of the earlier messages **410**, **420**, it will not be clear to the first user that a new message **430** for that thread **400** has arrived. In other words, the message thread text **402** in the message **420** that the first user may be responding to may not be the up-to-date message thread text **403**.

[0042] As mentioned, one problem caused by the lack of message thread updating is that when a first user responds to a message, the content of the first user's response may have already been sent in a response to the message from a second user. This wastes the time of the first user, who may have composed a message with similar content to that of the second user, as well as the time of other recipients of the messages from the first and second users who must now read the two similar messages. Therefore, one shortcoming of present wireless and other devices is their inability to effectively update email message threads. In general, the present application provides information to users about the messages they receive to reduce responses to these messages that have content that has already been added to the message thread.

[0043] FIG. 5 is a partial screen capture **500** illustrating a graphical user interface ("GUI") **510** for updating an opened email message **420** of a message thread **400** in accordance with an embodiment of the application. The GUI **510** is displayed on the display screen **122**, **140** of the wireless device **210** or data processing system **100** and may be incorporated in the GUI **180**, **204** associated with email applications **170**, **206** running on the wireless device **210** or data processing system **100**.

[0044] The GUI **510** has an indicator line **520** that is presented within an open email message **420** that provides information such as an update message **530** about the thread **400** to a user thus providing an update to the currently displayed message thread text **402**. The indicator line **520** may also be presented in an open email message that is being composed by a user in response to a received email **420**. As will be described below, the

indicator line **520** may present several items of information to the user to update the message thread text **402**.

[0045] According to one embodiment, an update message **530** such as "Response Received" is presented on the indicator line **520** when a new response is received by the user's wireless device **210** or data processing system **100** after the currently displayed message **420** and if the new response has not yet been read or opened by the user. Of course, rather than a text message, a suitable icon (not shown) representing a response received message could be displayed in the GUI **510**.

[0046] According to another embodiment, an update message **530** such as "X Response(s) Received" is presented on the indicator line **520** for the currently displayed message **420**. The "X" variable in the message indicates the number of other users that have replied to the currently displayed message **420**. The variable "X" is updated automatically as new messages are received. This information allows the user to determine if there are other replies to the thread **400** that the user should read before replying to the message **420**.

[0047] For example if there are three messages in the message thread **400** and the user is presently viewing the second received message **420**, the message **530** presented on the indicator line **520** would be "2 Message(s) Received". If another message arrives, the message **530** presented on the indicator line **520** would be updated to "3 Message(s) Received".

[0048] According to another embodiment, an update message **530** such as "Message Y of X" is presented on the indicator line **520** for the currently displayed message **420**. Here, the variable "X" is the total number of messages received relating to the currently displayed thread text **402** and the variable "Y" is the number or order of the currently displayed message **420** within the message thread **400**. This information allows the user to determine if there are other replies to the thread text **402** that the user should read before replying to the message **420** as well as which message this is within the thread.

[0049] For example if there are three messages in the message thread **400** and the user is presently viewing the second received message **420**, the message **530** presented on the indicator line **520** would be "Message 2 of 3". If another message arrives, the message **530** presented on the indicator line **520** would be updated to "Message 2 of 4".

[0050] According to another embodiment, an update message **530** such as "Message Y of X, M/N New" is presented on the indicator line **520** for the currently displayed message **420**. Here, the variable "X" is the total number of messages received relating to the currently displayed thread text **402**, the variable "Y" is the number or order of the currently displayed message **420** within the message thread **400**, the variable "M" is the number of unopened messages in the message thread **400** before the currently displayed message **420**, and the variable "N" is the number of unopened messages in the message thread **400** after the currently displayed message **420**. This information allows the user to determine the number of unopened replies to the thread text **402** that the user should open or read before replying to the message **420** as well as which message this is within the thread. This message **530** provides the user with the most information about the current message **420** in relation to other messages **410**, **420** in the message thread **400**. With this information, the user can ensure that they have read all messages before responding to the current message.

[0051] For example if there are three messages in the message thread **400**, the user is presently viewing the second received message **420**, and the user has not yet opened the first or third received messages **410**, **420**, then the message **530** presented on the indicator line **520** would be "Message 2 of 3, 1/1 New". If another message arrives, the message **530** presented on the indicator line **520** would be updated to "Message 2 of 4, 1/2 New".

[0052] According to another embodiment, the GUI **510** with its indicator line **520** is presented as a non-scrolling field on the display screen **122**, **140**. In this way, the indicator line **520** is always presented to the user no matter where the user is currently positioned in the currently displayed message **420**. This allows the user to view updates to the message thread text **402** in the indicator line **520** without having to scroll to the top

of the message text **421**, **411**. The indicator line **520** may also be presented on the email compose screen while the user is entering a reply to the message thread **400**.

[0053] According to another embodiment, a warning message is presented on the indicator line **520** if the user is entering a response to a message that is similar to another response that has already be received. This warning message is generated, for example, upon comparing the text entered in the response being composed by the user with the message text **411**, **421**, **431** contained in other messages **410**, **430** of the thread **400**. For example, if five or more words are found to be common among the user's response and the message text contained in other messages of the thread, then the warning message may be presented to the user to inform the user that the response that is being entered is similar to a response that has already been received.

[0054] In operation, when a user opens a message **420** in the message thread **400**, software modules **206**, **170** within the wireless device **210** or data processing system **100** perform operations to search for messages **410**, **420**, **430** belonging to the message thread **400**. To determine if messages **410**, **420**, **430** belong to the thread **400**, the content of the subject line **501**, **502**, **503** of each message **410**, **420**, **430** (e.g., Lunch?, Re: Lunch?, Re: Re: Lunch?) in the user's email inbox is compared after first stripping prefix text (i.e., "Re:", "Fw:", etc.). Next, the "message read" flag for each message is accessed to determine if the message has been read (i.e., opened) or not. Finally, the "received date" information for each message is accessed to determine the order of the message within the message thread. The foregoing information is then used to generate a message such as "Message Y of X, M/N New" **530** for presentation on the indicator line **520**.

[0055] The above described method may be summarized with the aid of a flowchart. FIG. 6 is a flow chart illustrating operations **600** of modules **170** for updating an electronic mail ("email") message **420** presented to a user on a display screen **140** of a data processing system, the email message **402**, **420** belonging to a thread of email messages **400** received by the data processing system **100**, in accordance with an embodiment of the application.

[0056] At step 601, the operations 600 start.

[0057] At step 602, a determination is made as to whether one or more 410, 430 of the email messages in the thread 400 was received after the email message 420 is opened on the display screen 140.

[0058] At step 603, if so, an update message 530 is displayed on the display screen 140 indicating that one or more 410, 430 of the email messages in the thread 400 was so received (e.g., "Response Received").

[0059] At step 604, the operations 600 end.

Preferably, the method further includes determining whether the email message 420 belongs to the thread 400 by comparing subject line text 502 of the email message 420 to subject line text 501, 503 of one or more of the email messages 410, 430 in the thread 400. Preferably, the determining further includes comparing a time and date of receipt for the email message 420 with times and dates of receipt for one or more 410, 430 of the email messages in the thread 400. Preferably, the method further includes determining a number of email messages in the thread (e.g., "X") for including in the update message 530 (e.g., "X Response(s) Received"). Preferably, the method further includes determining an order for the email messages in the thread (e.g., "Y") from the comparing for including in the update message 530 (e.g., "Message Y of X"). Preferably, the method further includes: determining whether one or more 410, 430 of the email messages in the thread 400 has been opened by the user from a message read flag associated with each of the email messages in the thread; and, determining with the order (e.g., "Y") at least one of a number of the email messages in the thread that were received before the email message and that have not been opened (e.g., "M") and a number of the email messages in the thread that were received after the email message and that have not been opened (e.g., "N") for including in the update message 530 (e.g., "Message Y of X, M/N New"). Preferably, the method further includes: determining by comparison whether text entered by the user for responding to the email message 420 and text 411, 421, 431 contained in one or more of the email messages 410, 420, 430 in the thread 400 have a

similarity; and, if so, including a warning message in the update message **530** indicating the similarity. Preferably, the method further includes displaying the update message **530** in a non-scrolling field **510**, **520** within the email message **420** opened on the display screen **140**. Preferably, the update message **530** is at least one of a text message and an icon. Preferably, the data processing system **100** is a wireless device **210** having a clickable thumbwheel **230**. Preferably, the method further includes opening the email message **420** on the display screen **140** when the email message **420** is selected from a list of email messages (not shown) by the user with the clickable thumbwheel **230**.

[0061] The above described method for updating message threads is generally performed by the data processing system **100**. However, according to an alternate embodiment of the application, the method can be performed by the wireless device **210**.

[0062] While this application is primarily discussed as a method, a person of ordinary skill in the art will understand that the apparatus discussed above with reference to a wireless device **210** and a data processing system **100**, may be programmed to enable the practice of the method of the application. Moreover, an article of manufacture for use with a wireless device **210** or data processing system **100**, such as a pre-recorded storage device or other similar computer readable medium including program instructions recorded thereon, may direct the wireless device **210** or data processing system **100** to facilitate the practice of the method of the application. It is understood that such apparatus and articles of manufacture also come within the scope of the application.

[0063] The embodiments of the present disclosure described above are intended to be examples only. Those of skill in the art may effect alterations, modifications and variations to the particular embodiments without departing from the scope of the present disclosure. In particular, selected features from one or more of the above-described embodiments may be combined to create alternative embodiments not explicitly described, features suitable for such combinations being readily apparent to persons skilled in the art. The subject matter described herein in the recited claims intends to cover and embrace all suitable changes in technology.

CLAIMS:

1. A method for displaying an email compose screen, the method comprising:

displaying, on a display of a device, an email compose screen for composition of a reply email message belonging to an email message thread;

receiving a new email message; and

while the email compose screen is displayed, in response to a determination that the received new email message belongs to the email message thread, displaying in the email compose screen an indication that the new email message was received.
2. The method of claim 1, wherein the indication comprises an express indication of a relationship between the new email message and the email message thread.
3. The method of either claim 1 or 2, wherein the indication comprises at least one of an indication of a number of received messages in the email message thread and a number of unopened messages in the email message thread.
4. The method of any one of claims 1 to 3, wherein the indication comprises an icon.
5. The method of any one of claims 1 to 4, wherein the determination is carried out by comparing subject line text of the new email message to subject line text of one or more email messages in the email message thread.
6. The method of any one of claims 1 to 5, wherein the indication is displayed in a non-scrolling indicator field.
7. The method of claim 6, wherein the non-scrolling indicator field is displayed in the reply message.

8. The method of claim 6, wherein the non-scrolling indicator field is separate from the email message thread.
9. The method of claim 6, wherein the non-scrolling indicator field is separate from the reply message.
10. The method of any one of claims 6 to 9, wherein the non-scrolling indicator field is an interactable object.
11. The method of any one of claims 1 to 10, wherein the new email message is received at the device while the email compose screen is displayed.
12. The method of any one of claims 1 to 11, wherein the displaying on the email compose screen of the indication occurs during receipt of message text at the email compose screen for the reply message.
13. The method of claim 12, further comprising:
 - determining that the received message text is similar to another received email in the email message thread; and
 - in response to the determining, displaying on the device a warning message indicative of the similarity.
14. The method of any one of claims 1 to 13, further comprising:
 - receiving a second new email message while the email compose screen is displayed;
 - in response to determining that the second new email message belongs to the email message thread, updating the displayed indication to indicate that the second new email message was received; and

in response to determining that the second new email message does not belong to the email message thread, refraining from updating the displayed indication.

15. The method of any one of claims 1 to 14, wherein the email compose screen is displayed in a full screen mode.

16. The method of any one of claims 1 to 15, wherein the determining is carried out at the device.

17. The method of any one of claims 1 to 16, wherein the device comprises a wireless device.

18. The method of any one of claims 1 to 15, wherein the determining is carried out at a server.

19. The method of any one of claims 1 to 18, wherein displaying the indication occurs prior to receipt of an instruction to send the reply email message.

20. The method of any one of claims 1 to 19, wherein the reply email message includes message text of an email message from the email message thread for which the reply email message is a reply.

21. The method of any one of claims 1 to 20, wherein displaying the indication occurs prior to display of the new email message.

22. A communication device adapted to display an email compose screen, the communication device comprising:

a processor configured to:

enable display, on a display of the communication device, an email compose screen for composition of a reply email message belonging to an email message thread;

enable receipt of a new email message; and

while the email compose screen is displayed, in response to a determination that the received new email message belongs to the email message thread, enable display in the email compose screen of an indication that the new email message was received.

23. The communication device of claim 22, wherein the indication comprises an express indication of a relationship between the new email message and the email message thread.

24. The communication device of either claim 22 or 23, wherein the indication comprises at least one of an indication of a number of received messages in the email message thread and a number of unopened messages in the email message thread.

25. The communication device of any one of claims 22 to 24, wherein the indication comprises an icon.

26. The communication device of any one of claims 22 to 25, wherein the processor is configured to determine that the new email message belongs to the email thread by comparing subject line text of the new email message to subject line text of one or more email messages in the email message thread.

27. The communication device of any one of claims 22 to 26, wherein the indication is displayed in a non-scrolling indicator field.

28. The communication device of claim 27, wherein the non-scrolling indicator field is displayed in the reply message.

29. The communication device of claim 27, wherein the non-scrolling indicator field is separate from the email message thread.

30. The communication device of claim 27, wherein the non-scrolling indicator field is separate from the reply message.

31. The communication device of any one of claims 27 to 30, wherein the non-scrolling indicator field is an interactable object.

32. The communication device of any one of claims 22 to 31, wherein the new email message is received at the communication device while the email compose screen is displayed.

33. The communication device of any one of claims 22 to 32, wherein the indication is displayed on the email compose screen during receipt of message text at the email compose screen for the reply message.

34. The communication device of claim 33, wherein the processor is further configured to:

determine that the received message text is similar to another received email in the email message thread; and

in response to the determination, enable display on the device of a warning message indicative of the similarity.

35. The communication device of any one of claims 22 to 34, wherein the processor is further configured to:

enable receipt of a second new email message while the email compose screen is displayed;

in response to determining that the second new email message belongs to the email message thread, update the displayed indication to indicate that the second new email message was received; and

in response to determining that the second new email message does not belong to the email message thread, refrain from updating the displayed indication.

36. The communication device of any one of claims 22 to 35, wherein the email compose screen is displayed in a full screen mode.

37. The communication device of any one of claims 22 to 36, wherein the communication device comprises a wireless device.

38. The communication device of any one of claims 22 to 37, further comprising a wireless communication subsystem, and wherein the processor is further configured to receive the new email message using the wireless communication subsystem.


39. The communication device of any one of claims 22 to 36, wherein the device comprises a server.

40. The communication device of any one of claims 22 to 39, wherein the indication is displayed prior to receipt by the communication device of an instruction to send the reply email message.

41. The communication device of any one of claims 22 to 40, wherein the reply email message includes message text of an email message from the email message thread for which the reply email message is a reply.

42. The communication device of any one of claims 22 to 41, wherein the indication is displayed prior to display of the new email message.

43. A computer program product comprising a computer readable medium storing instructions which, when executed by a communication device, causes the device to implement the method of any one of claims 1 to 21.

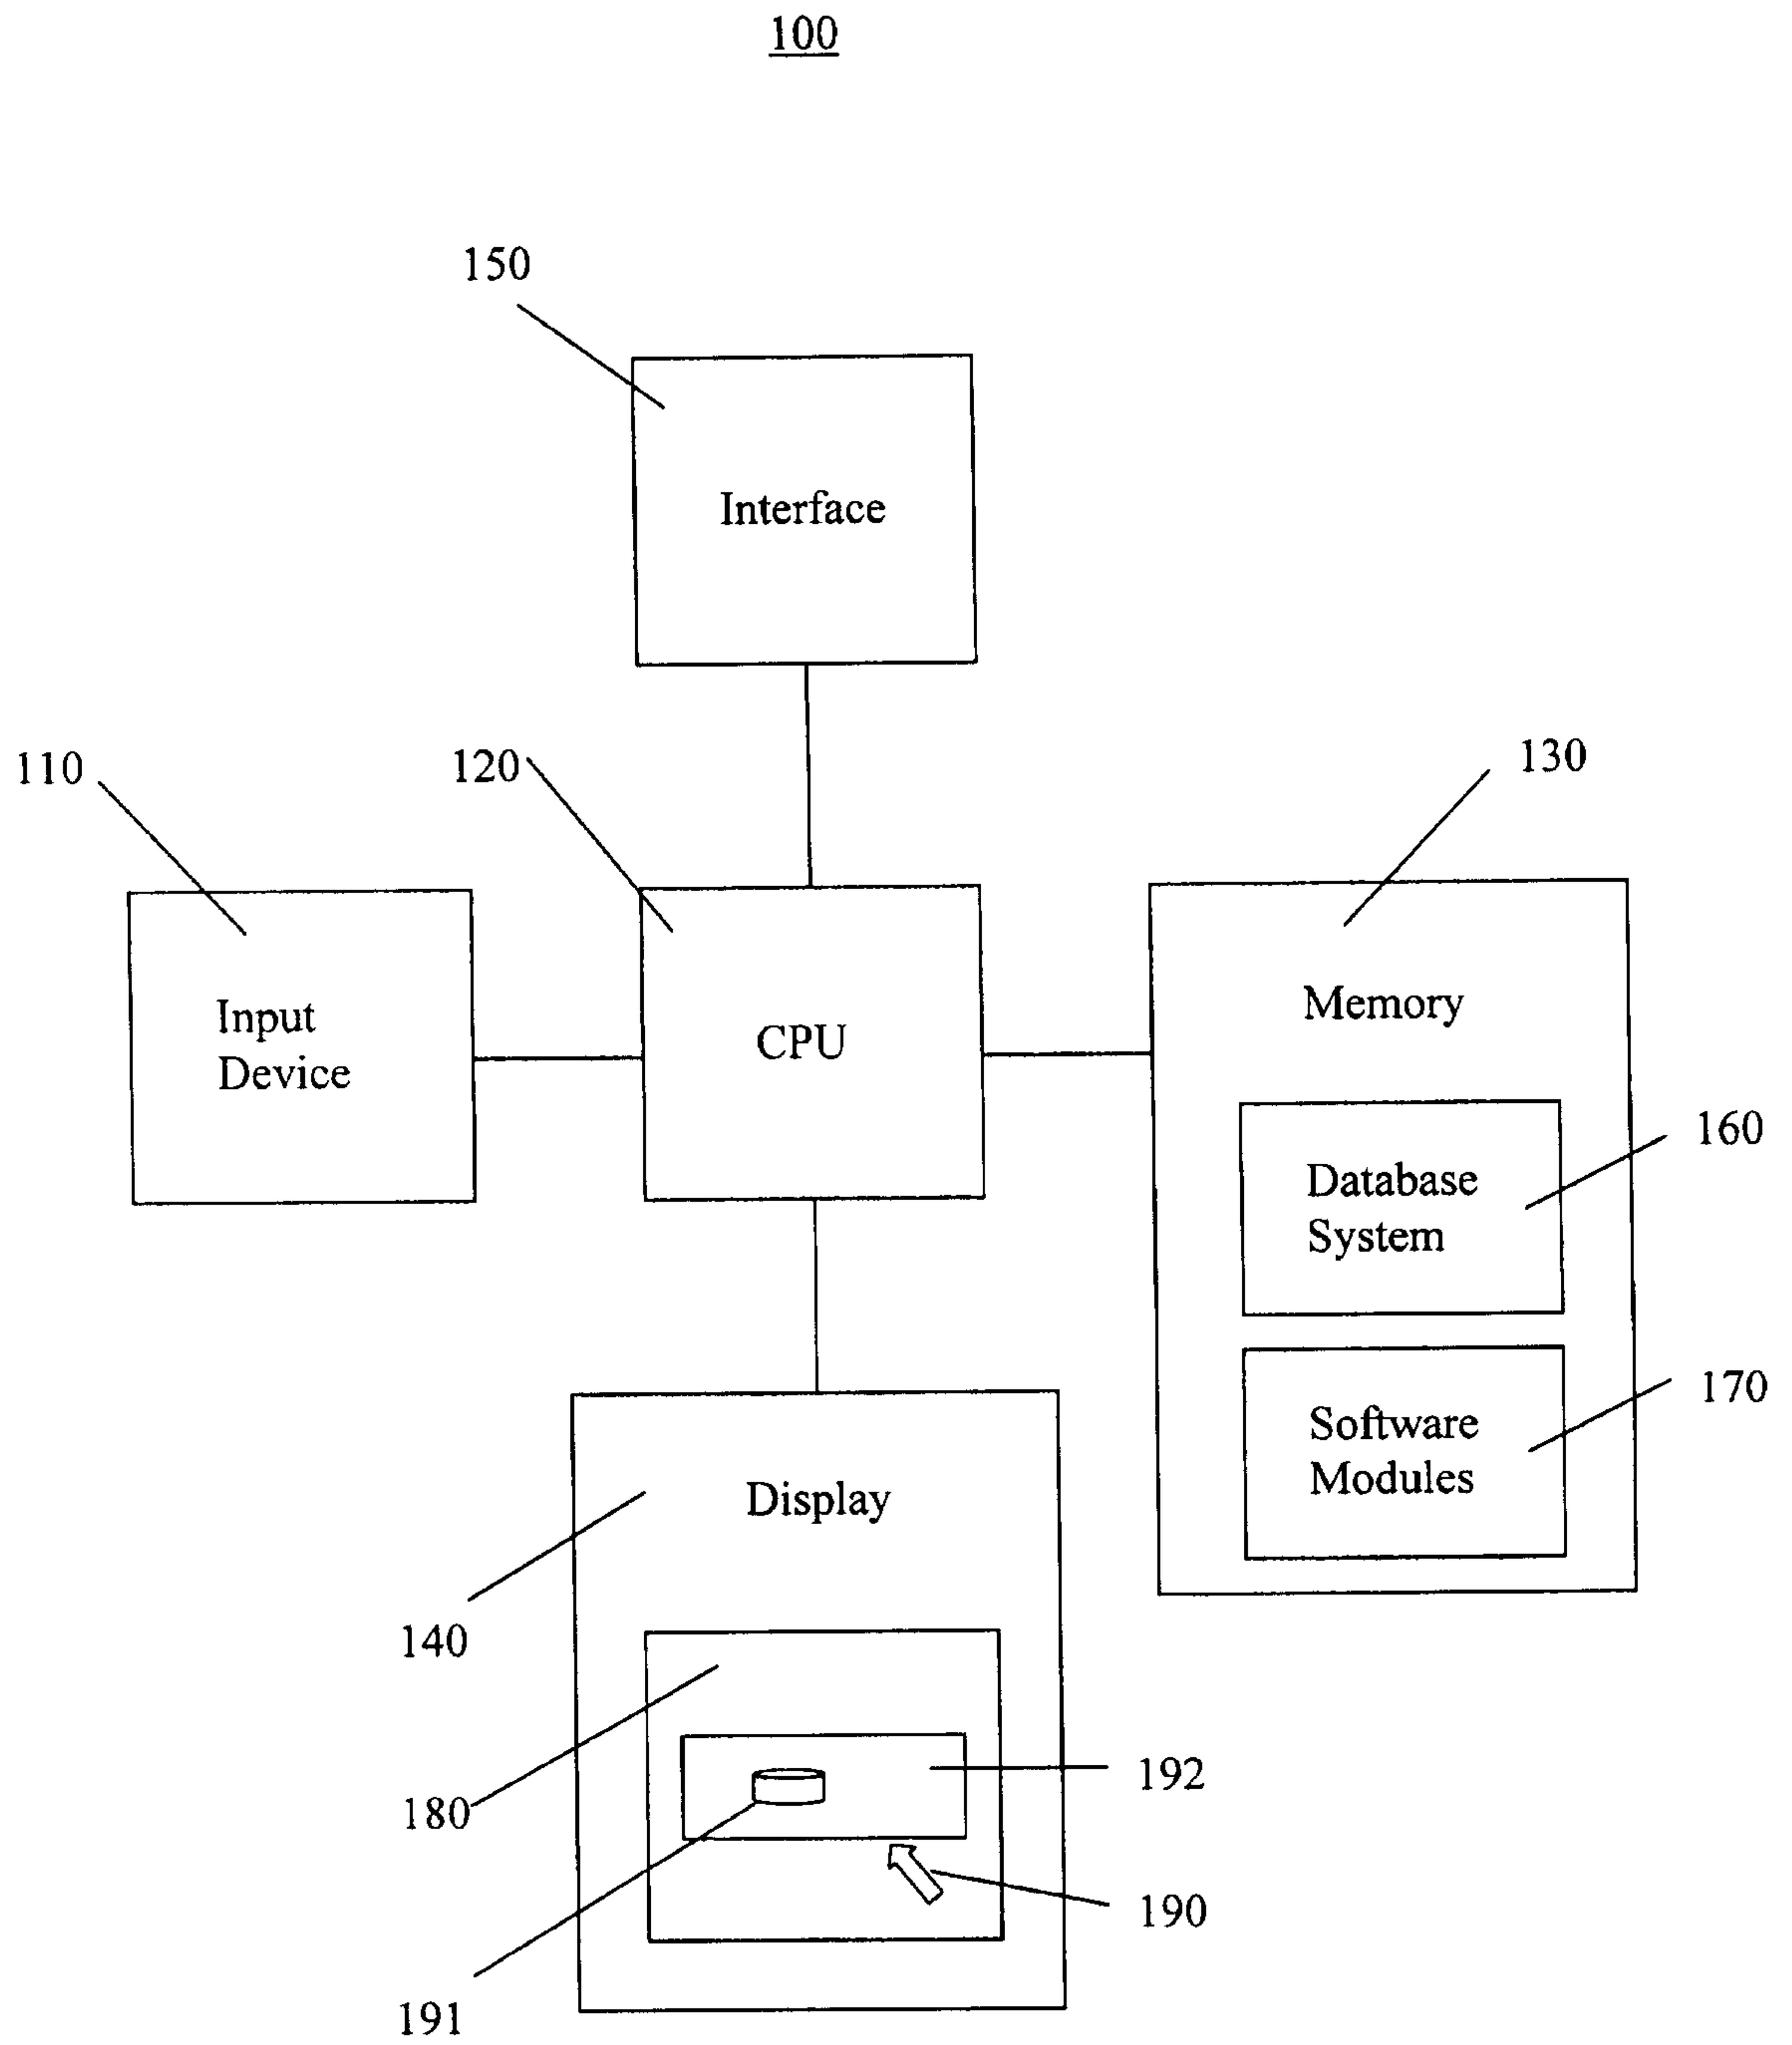**FIG. 1**

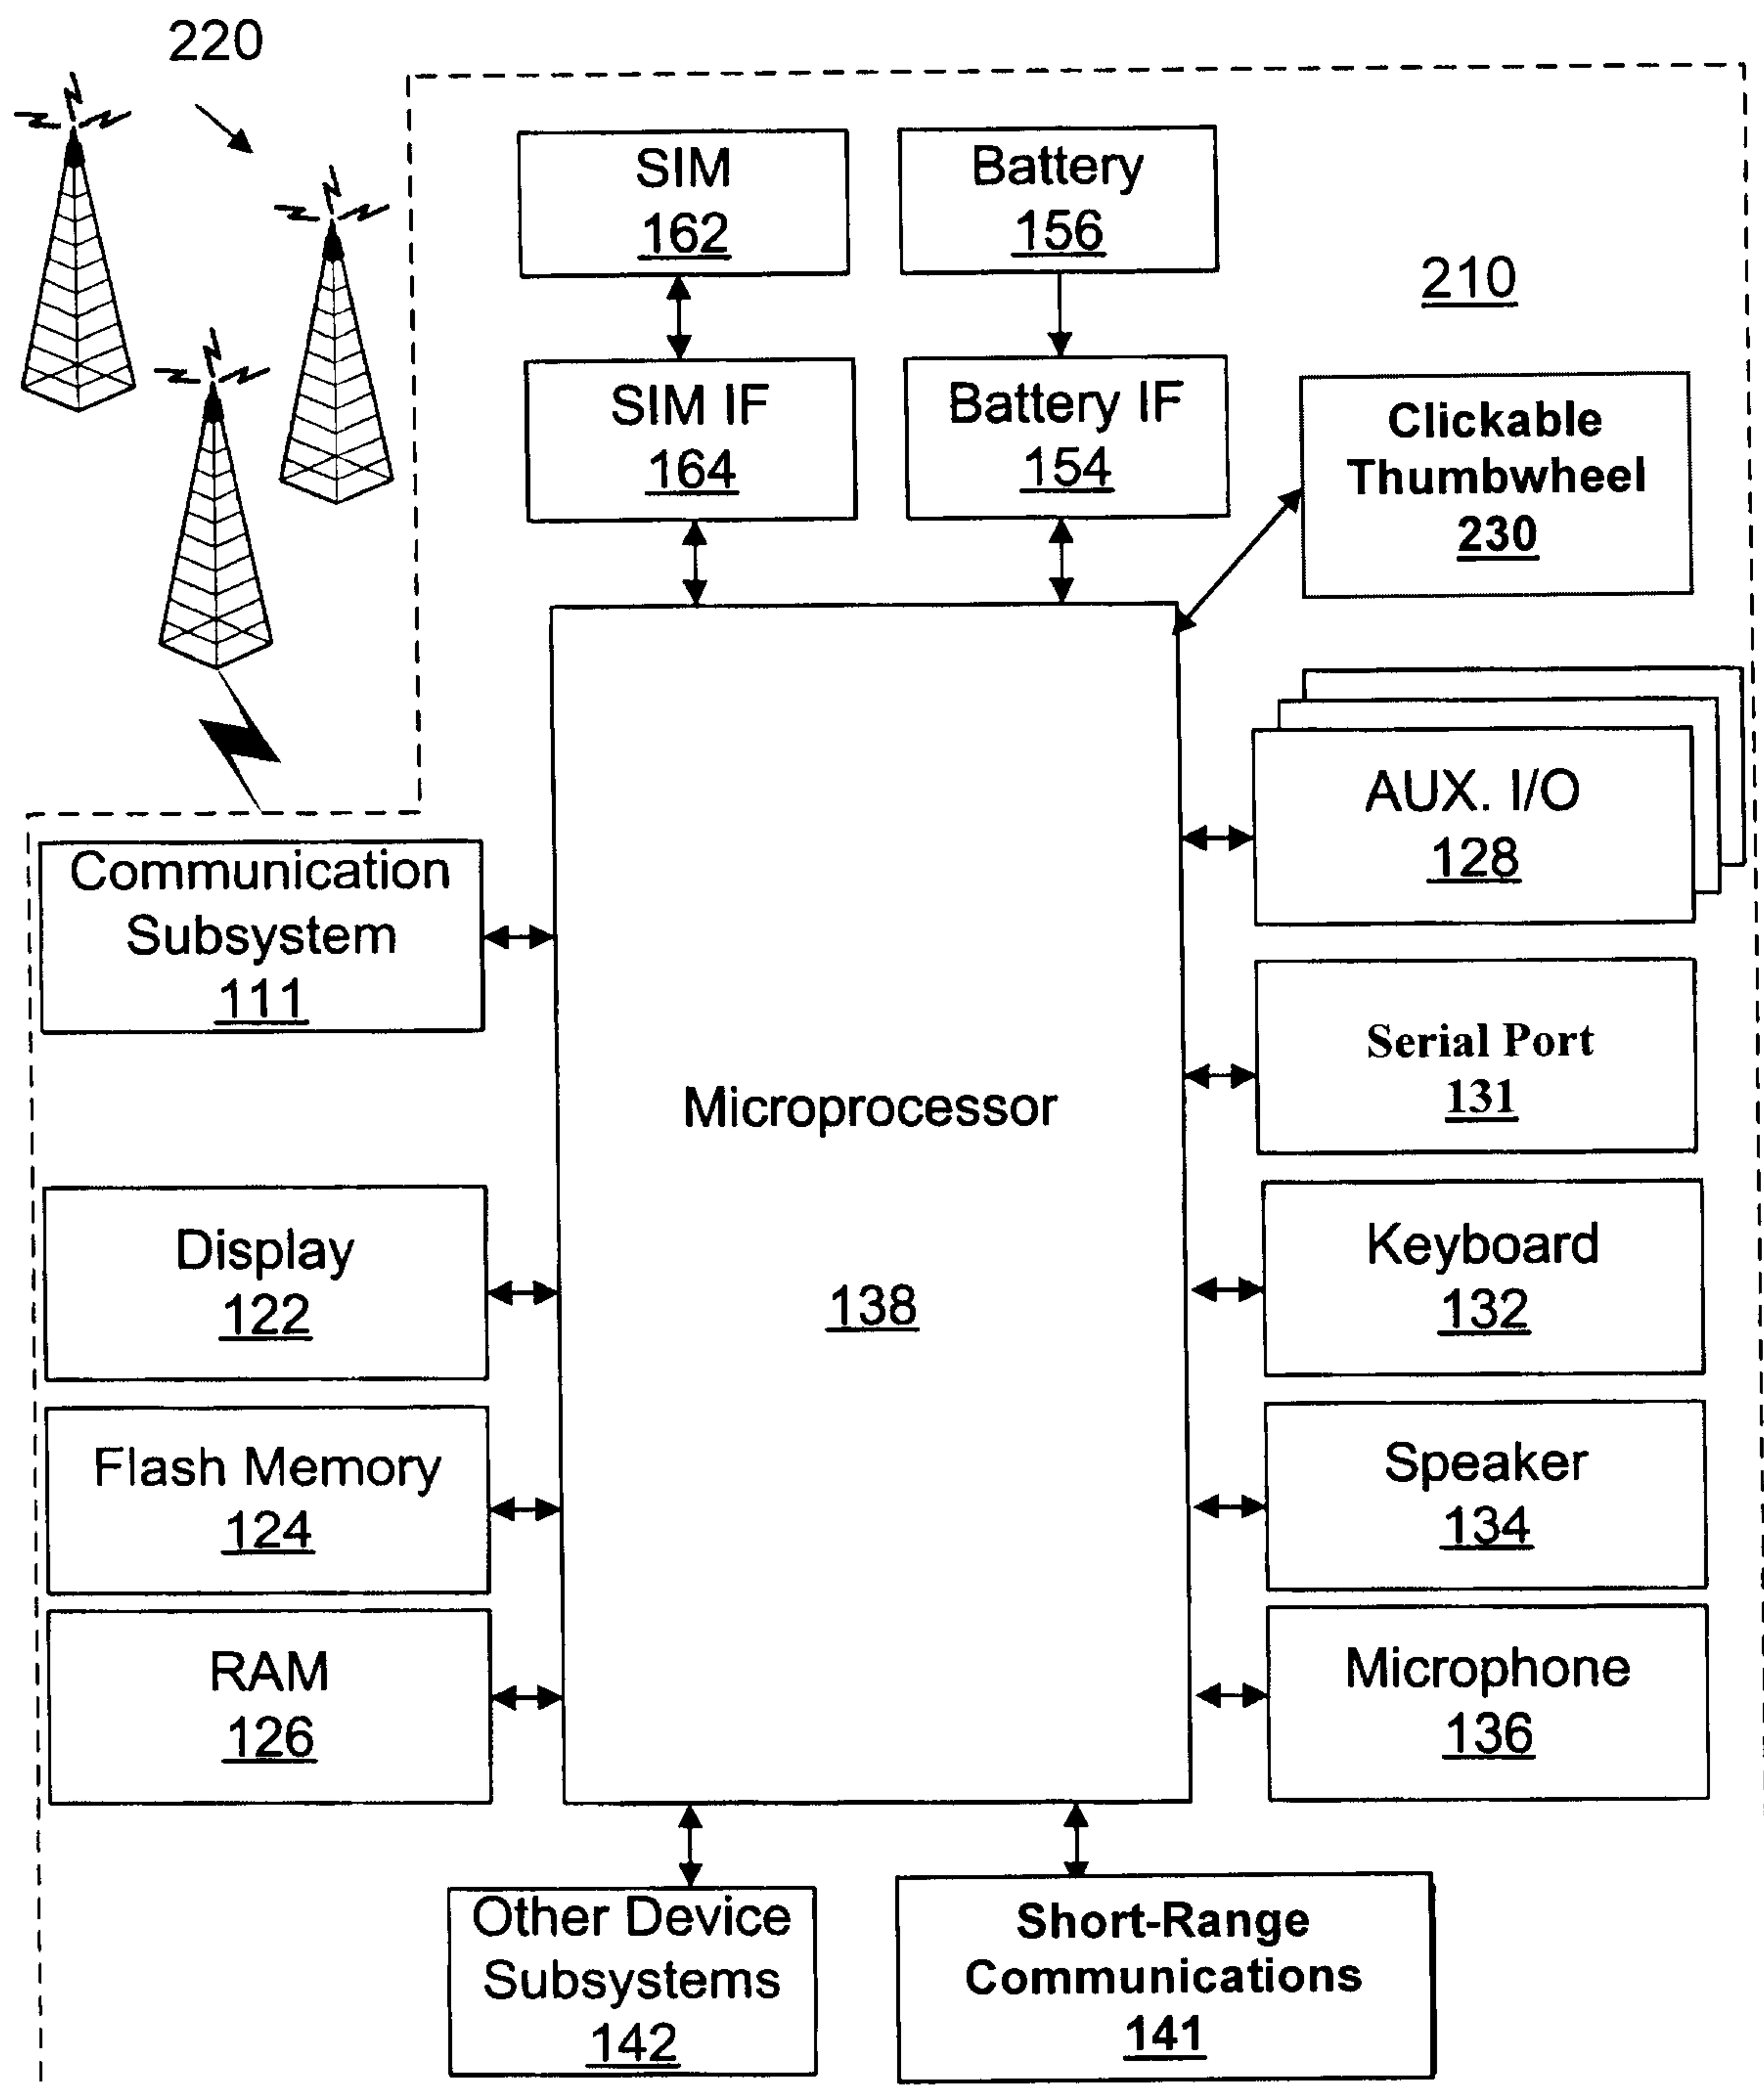


FIG. 2

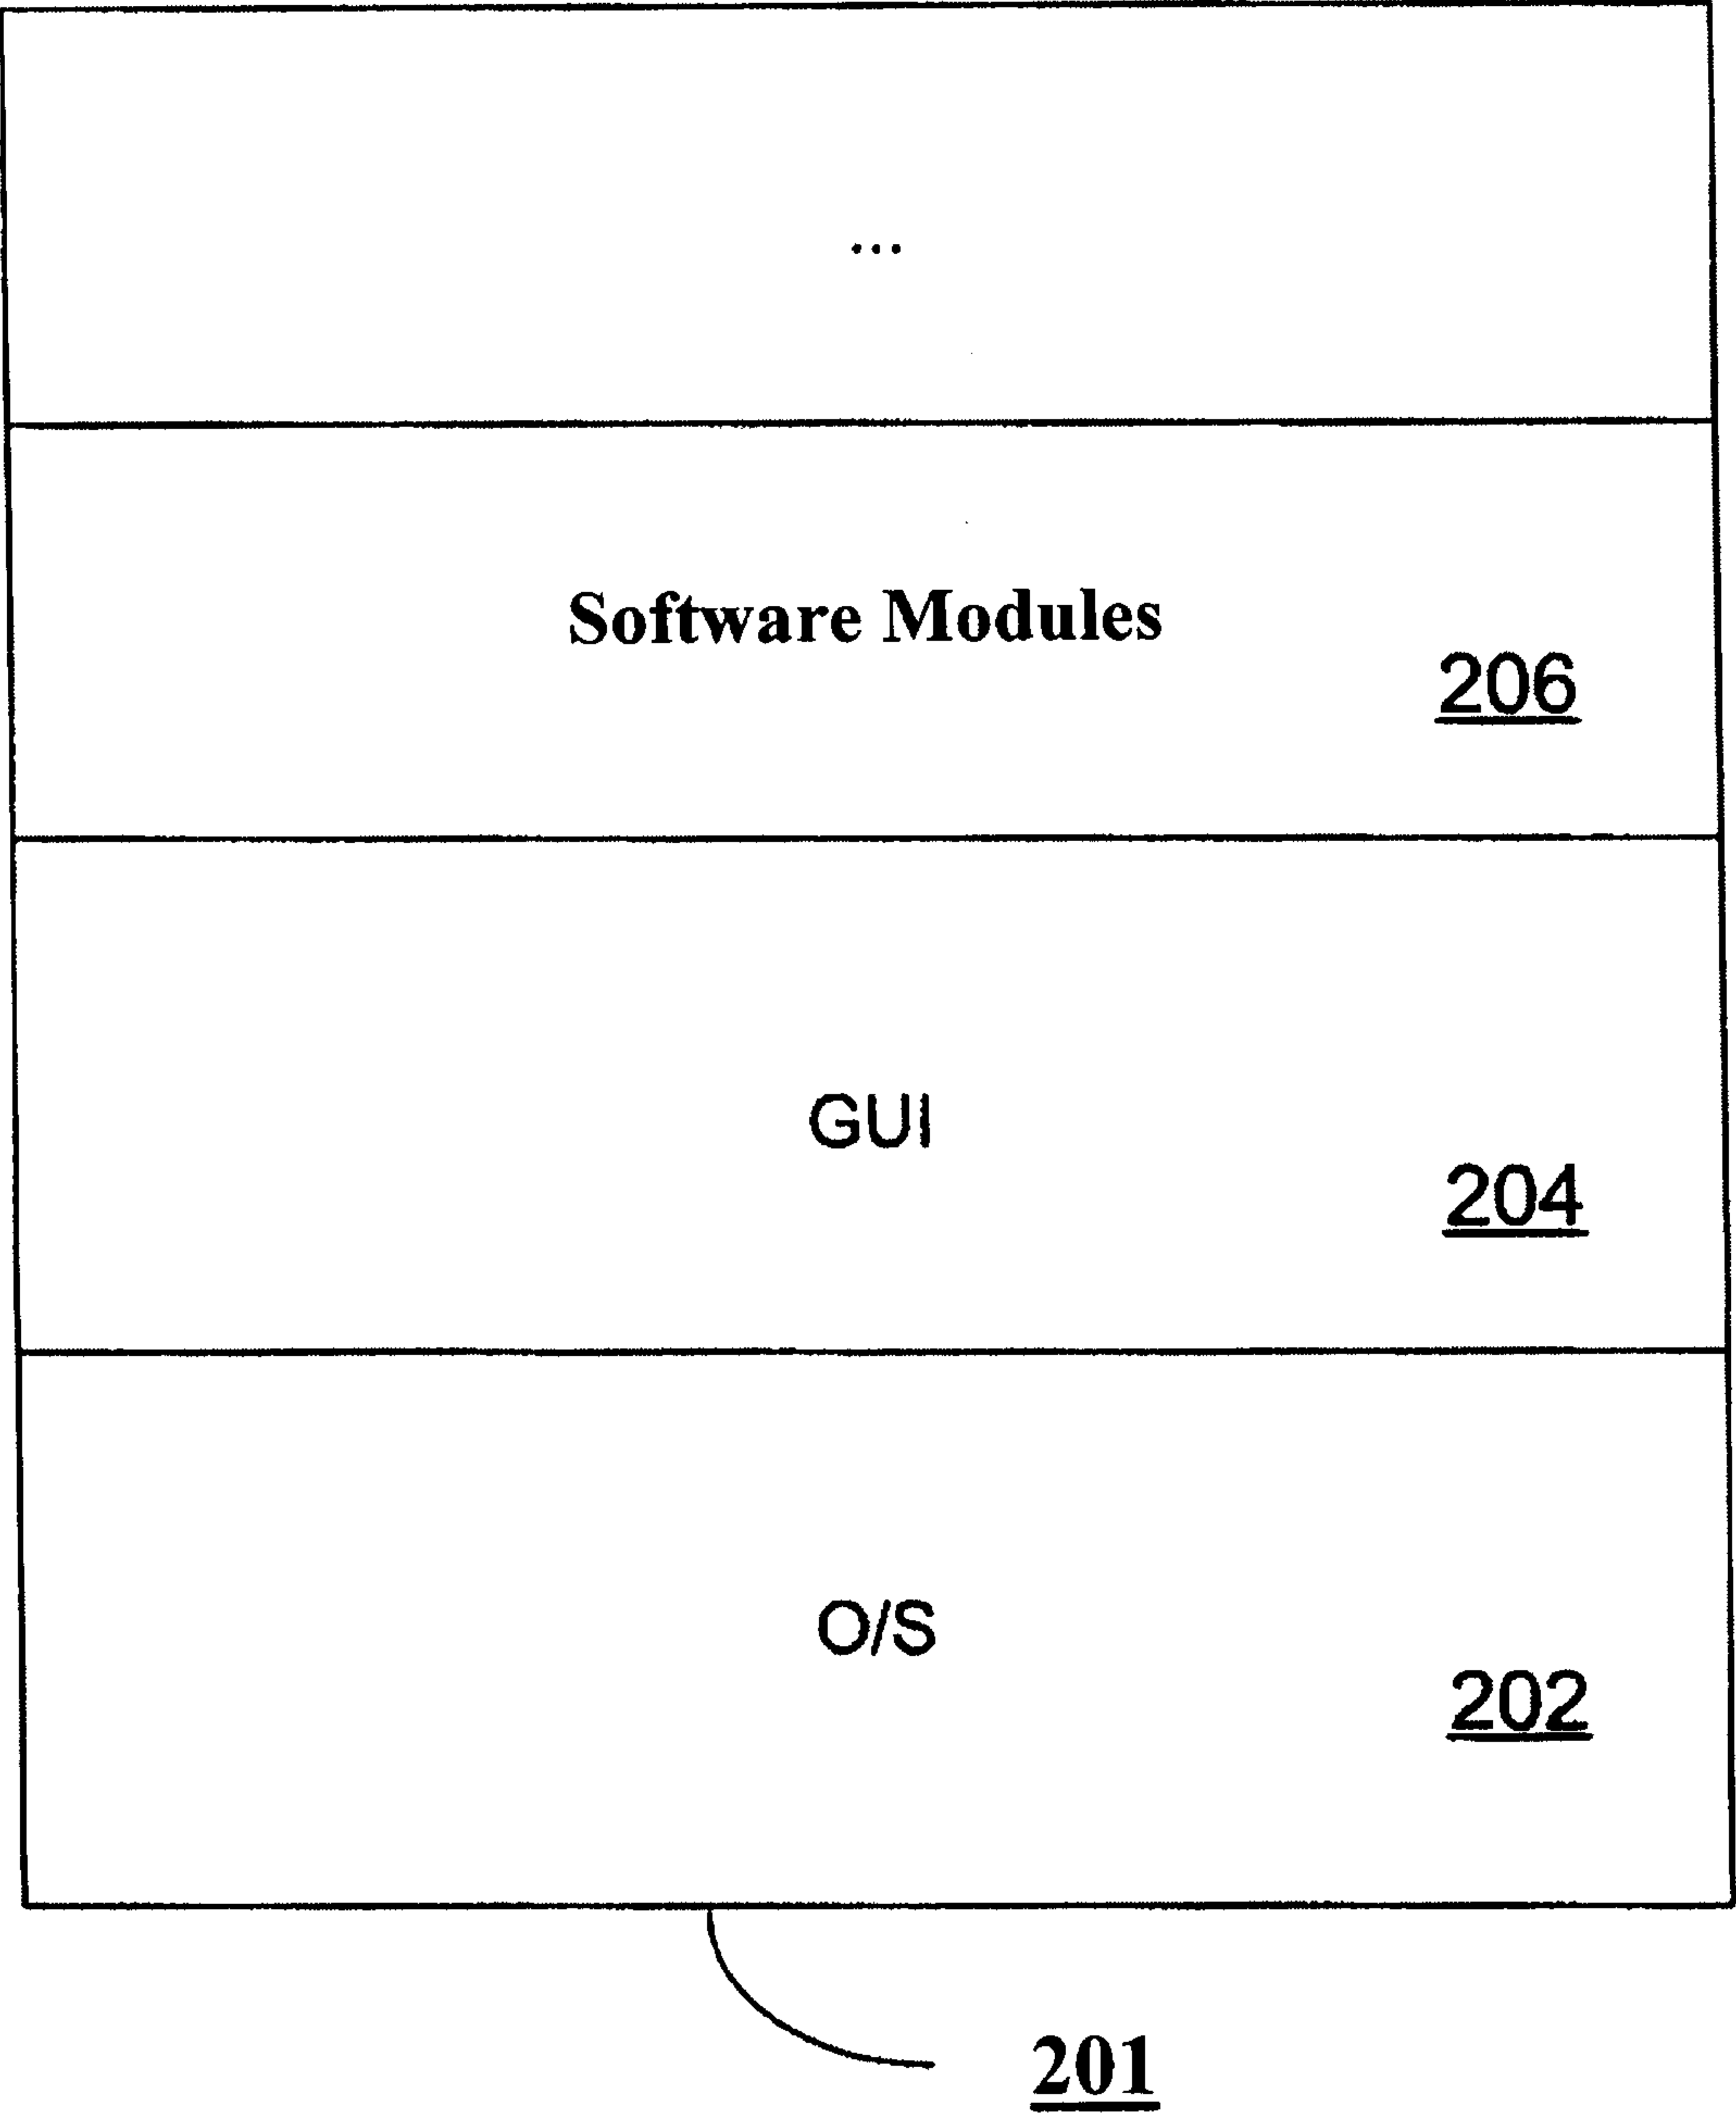
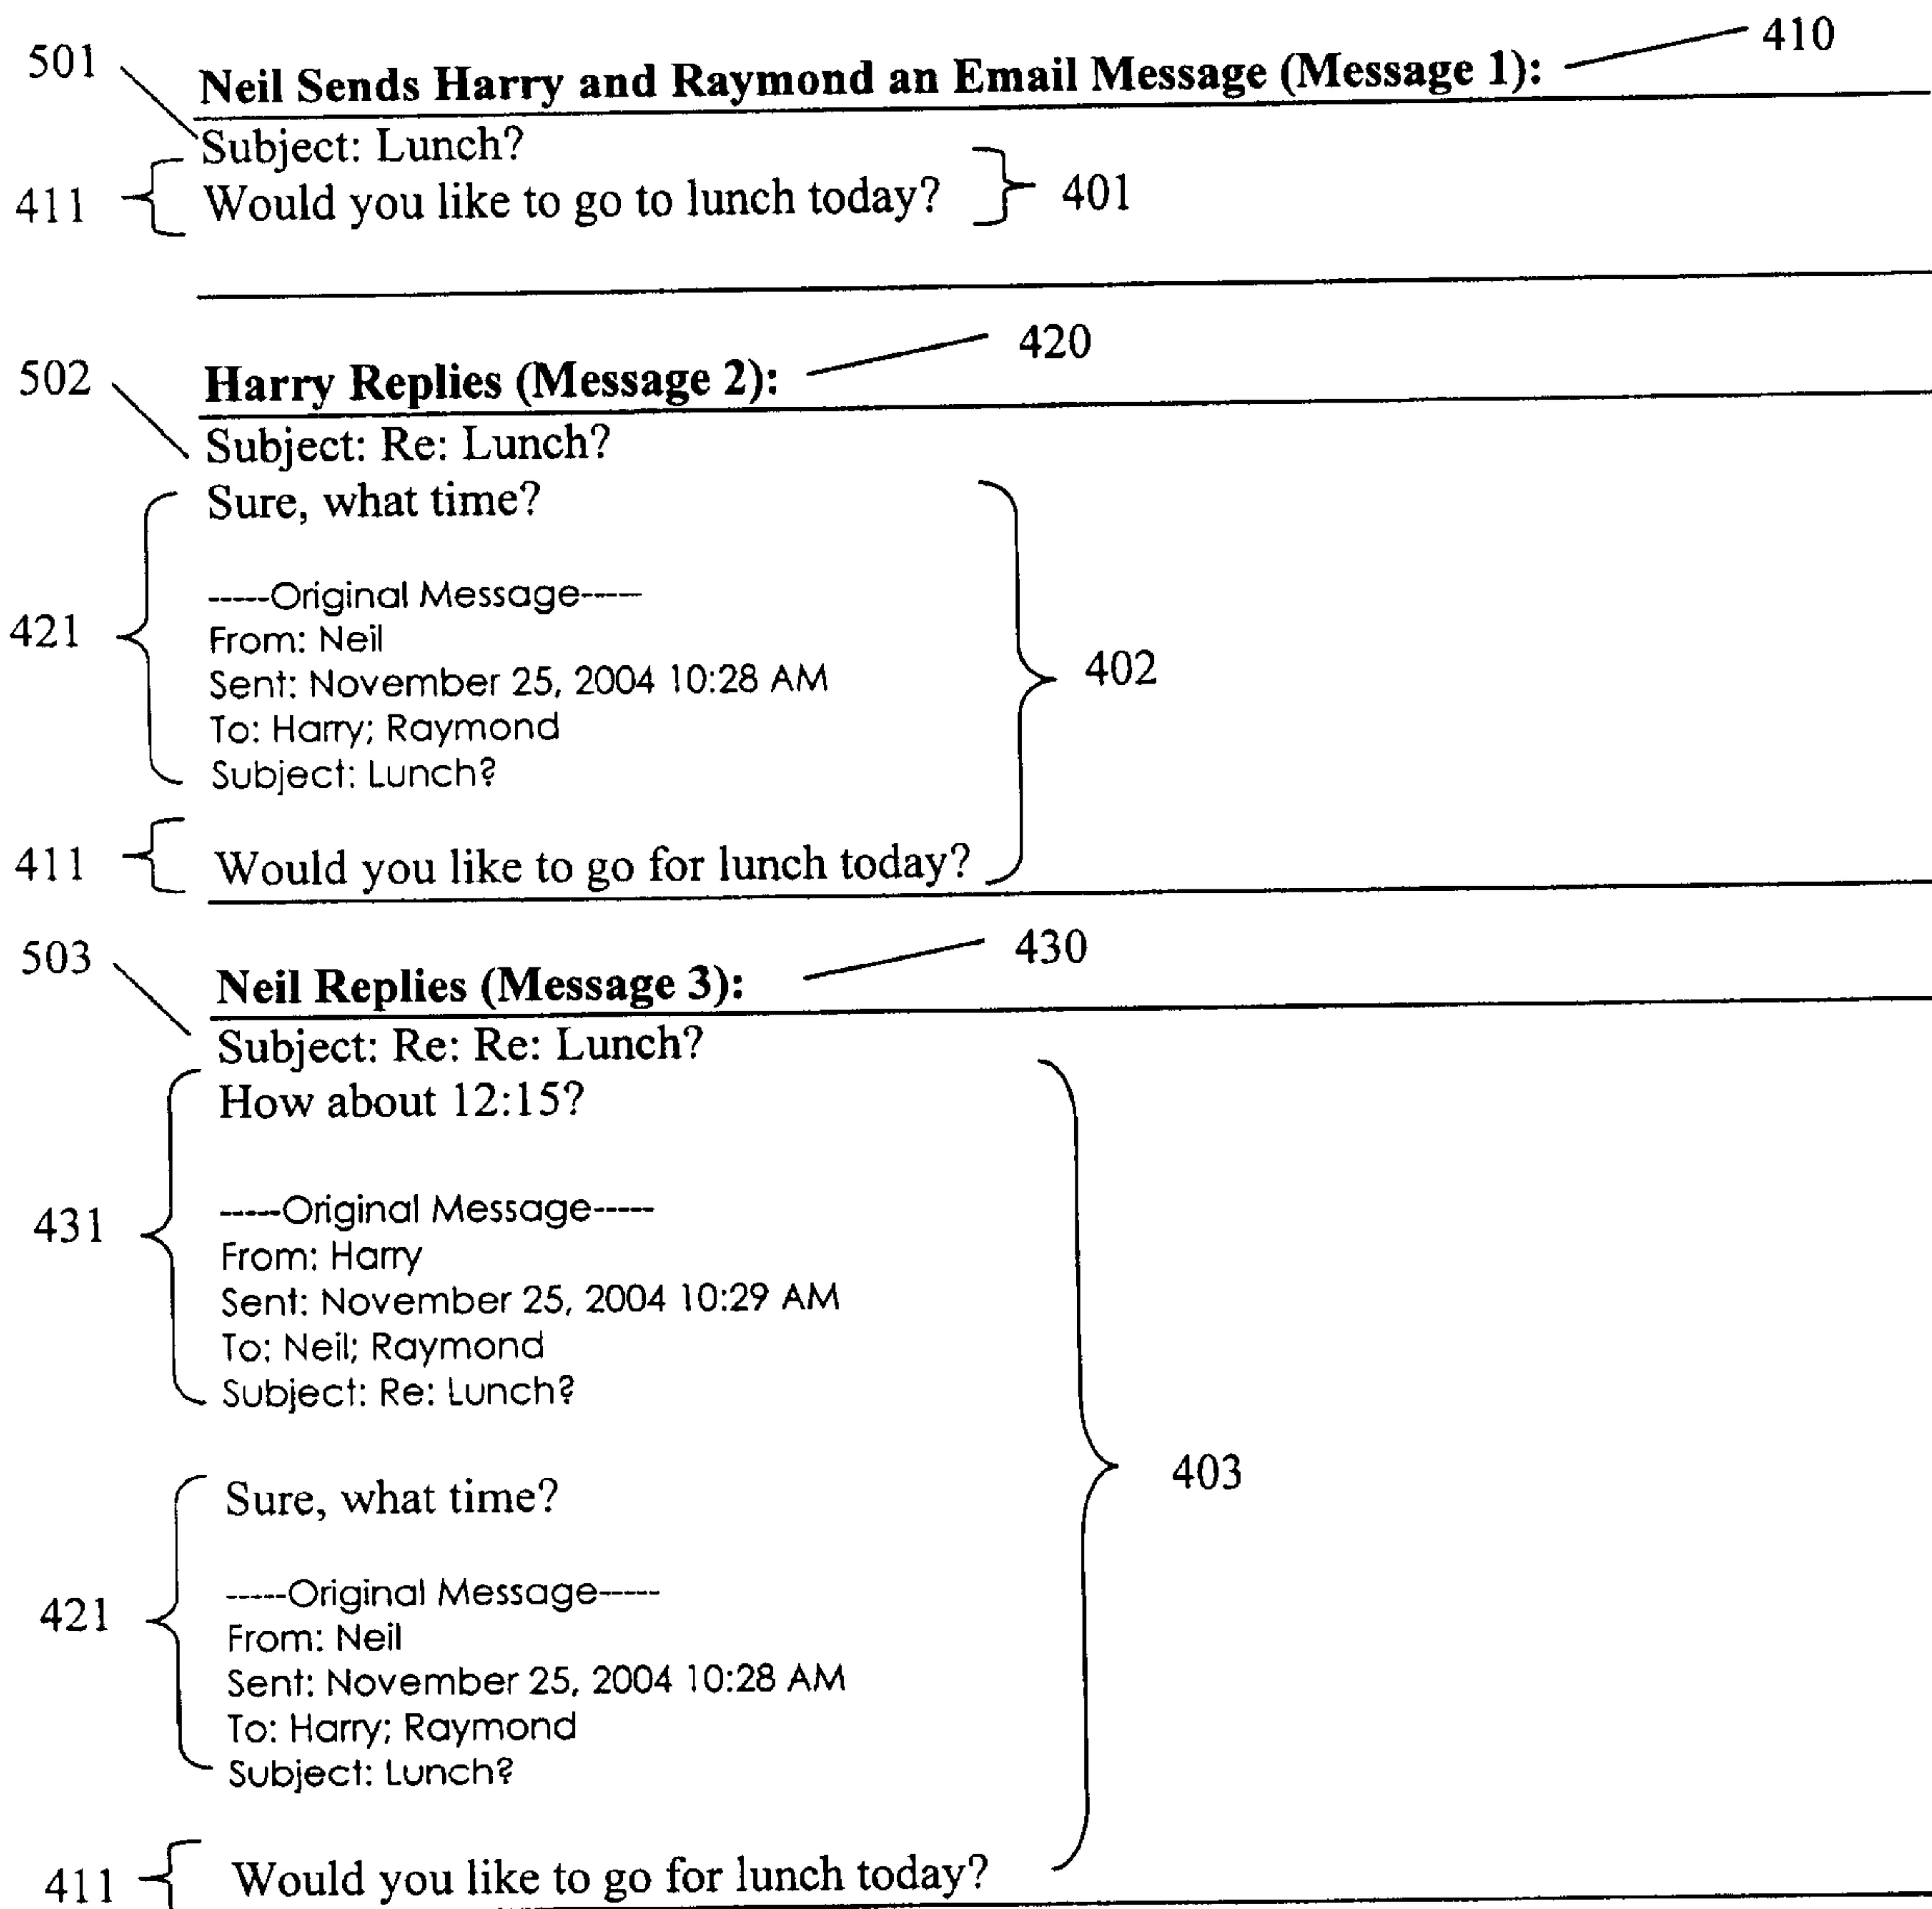
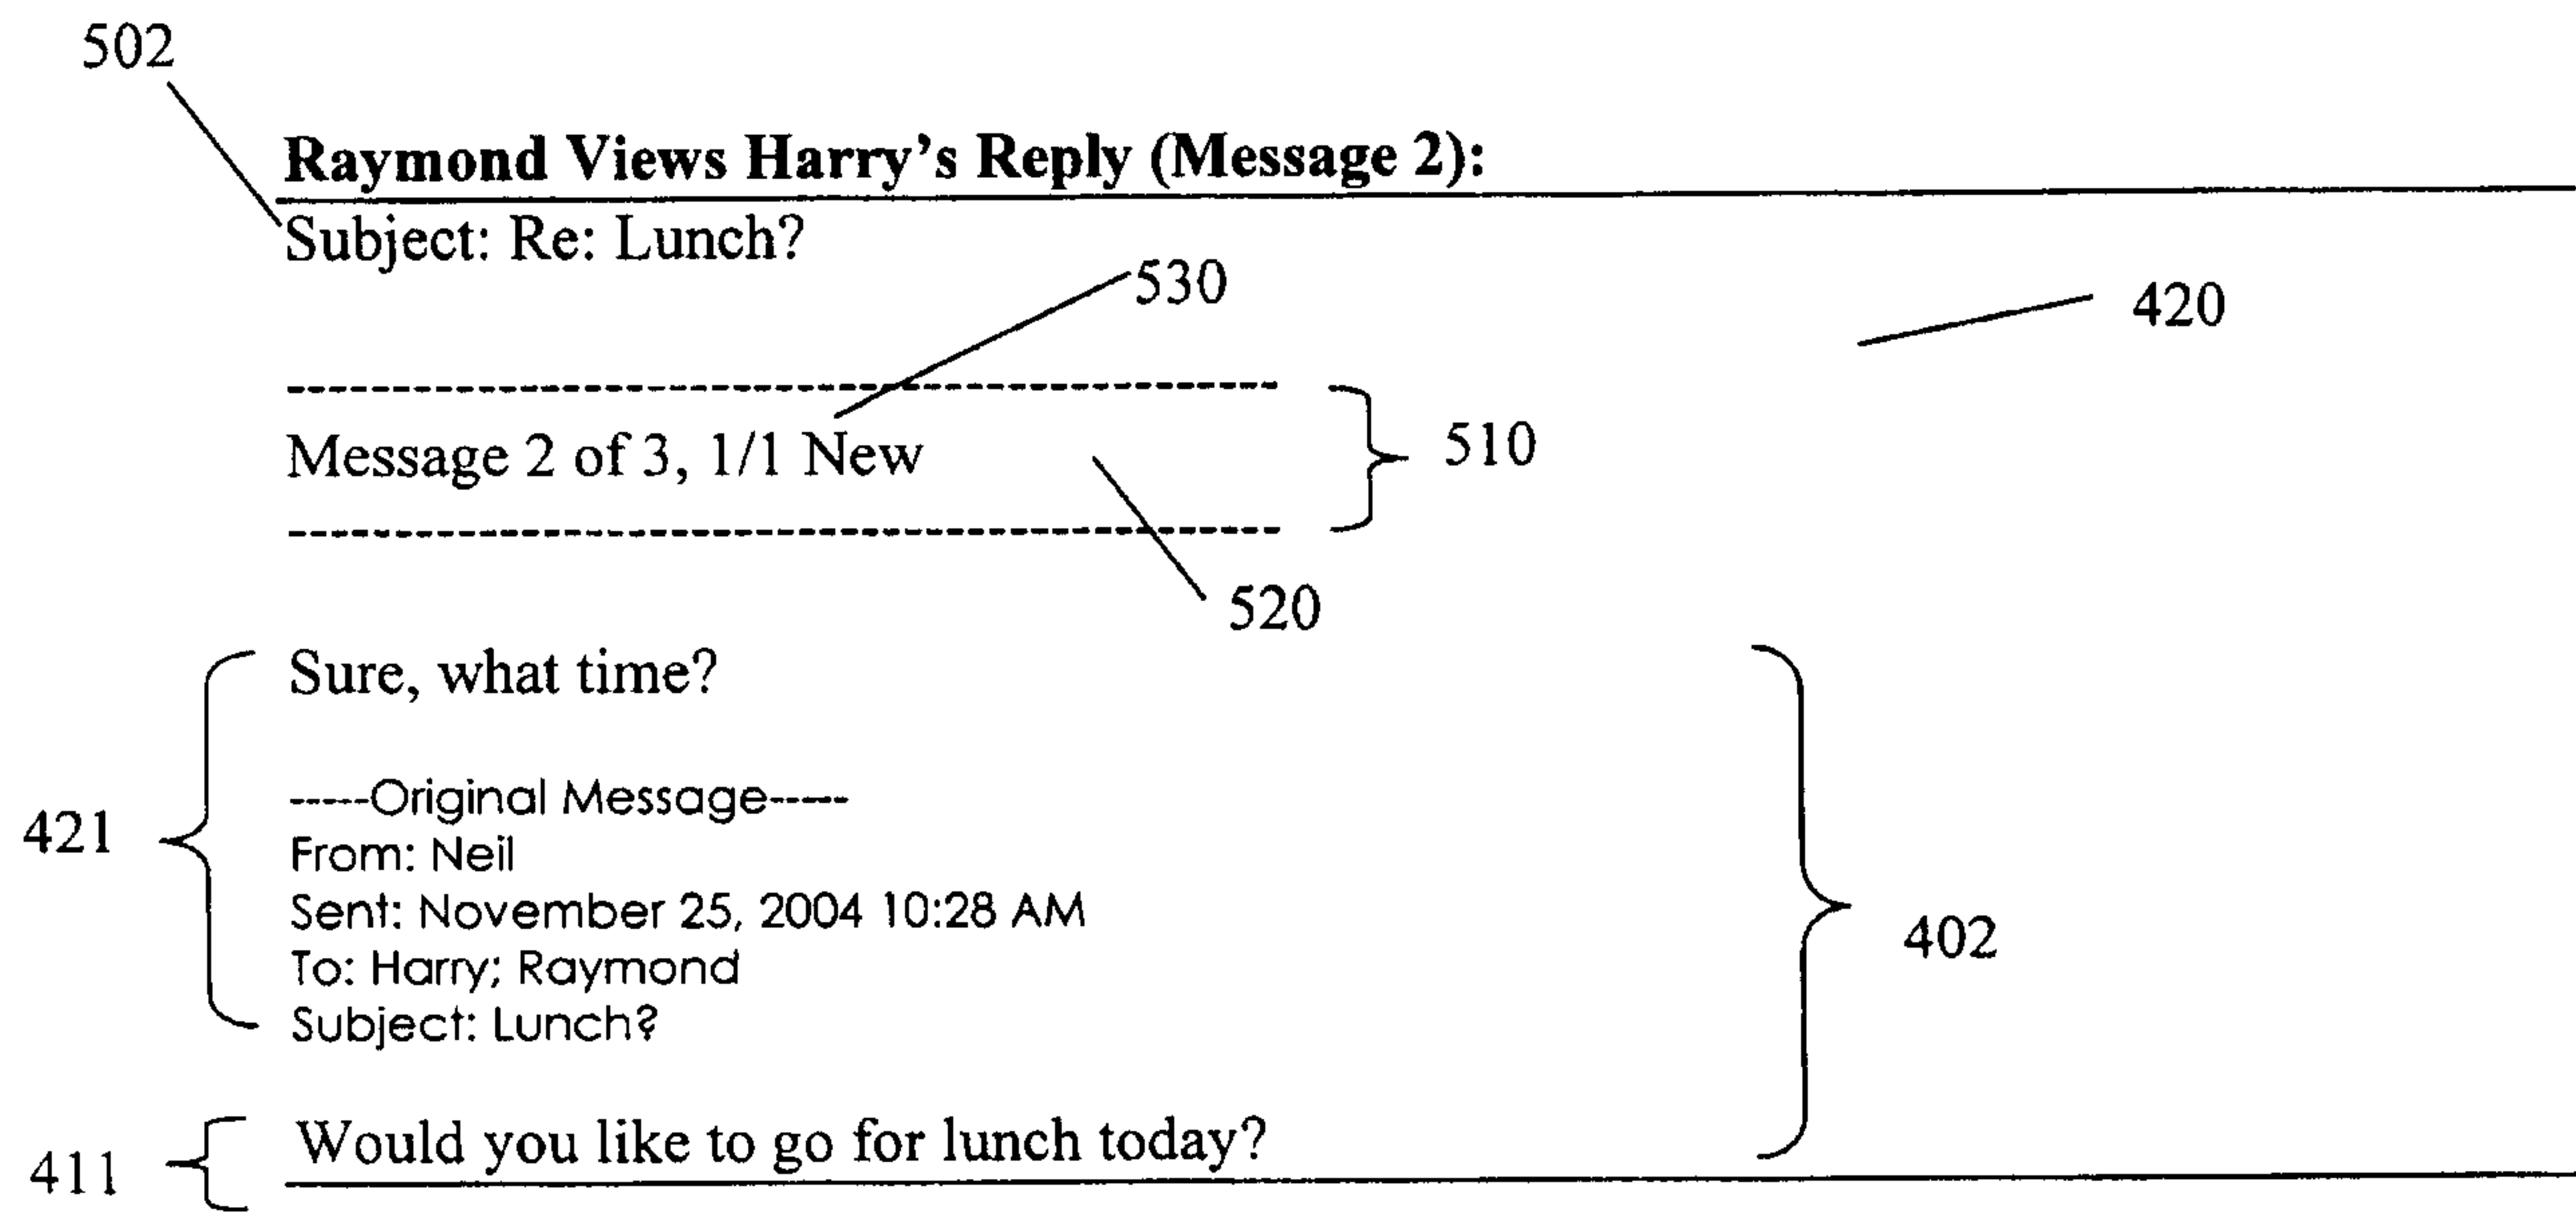
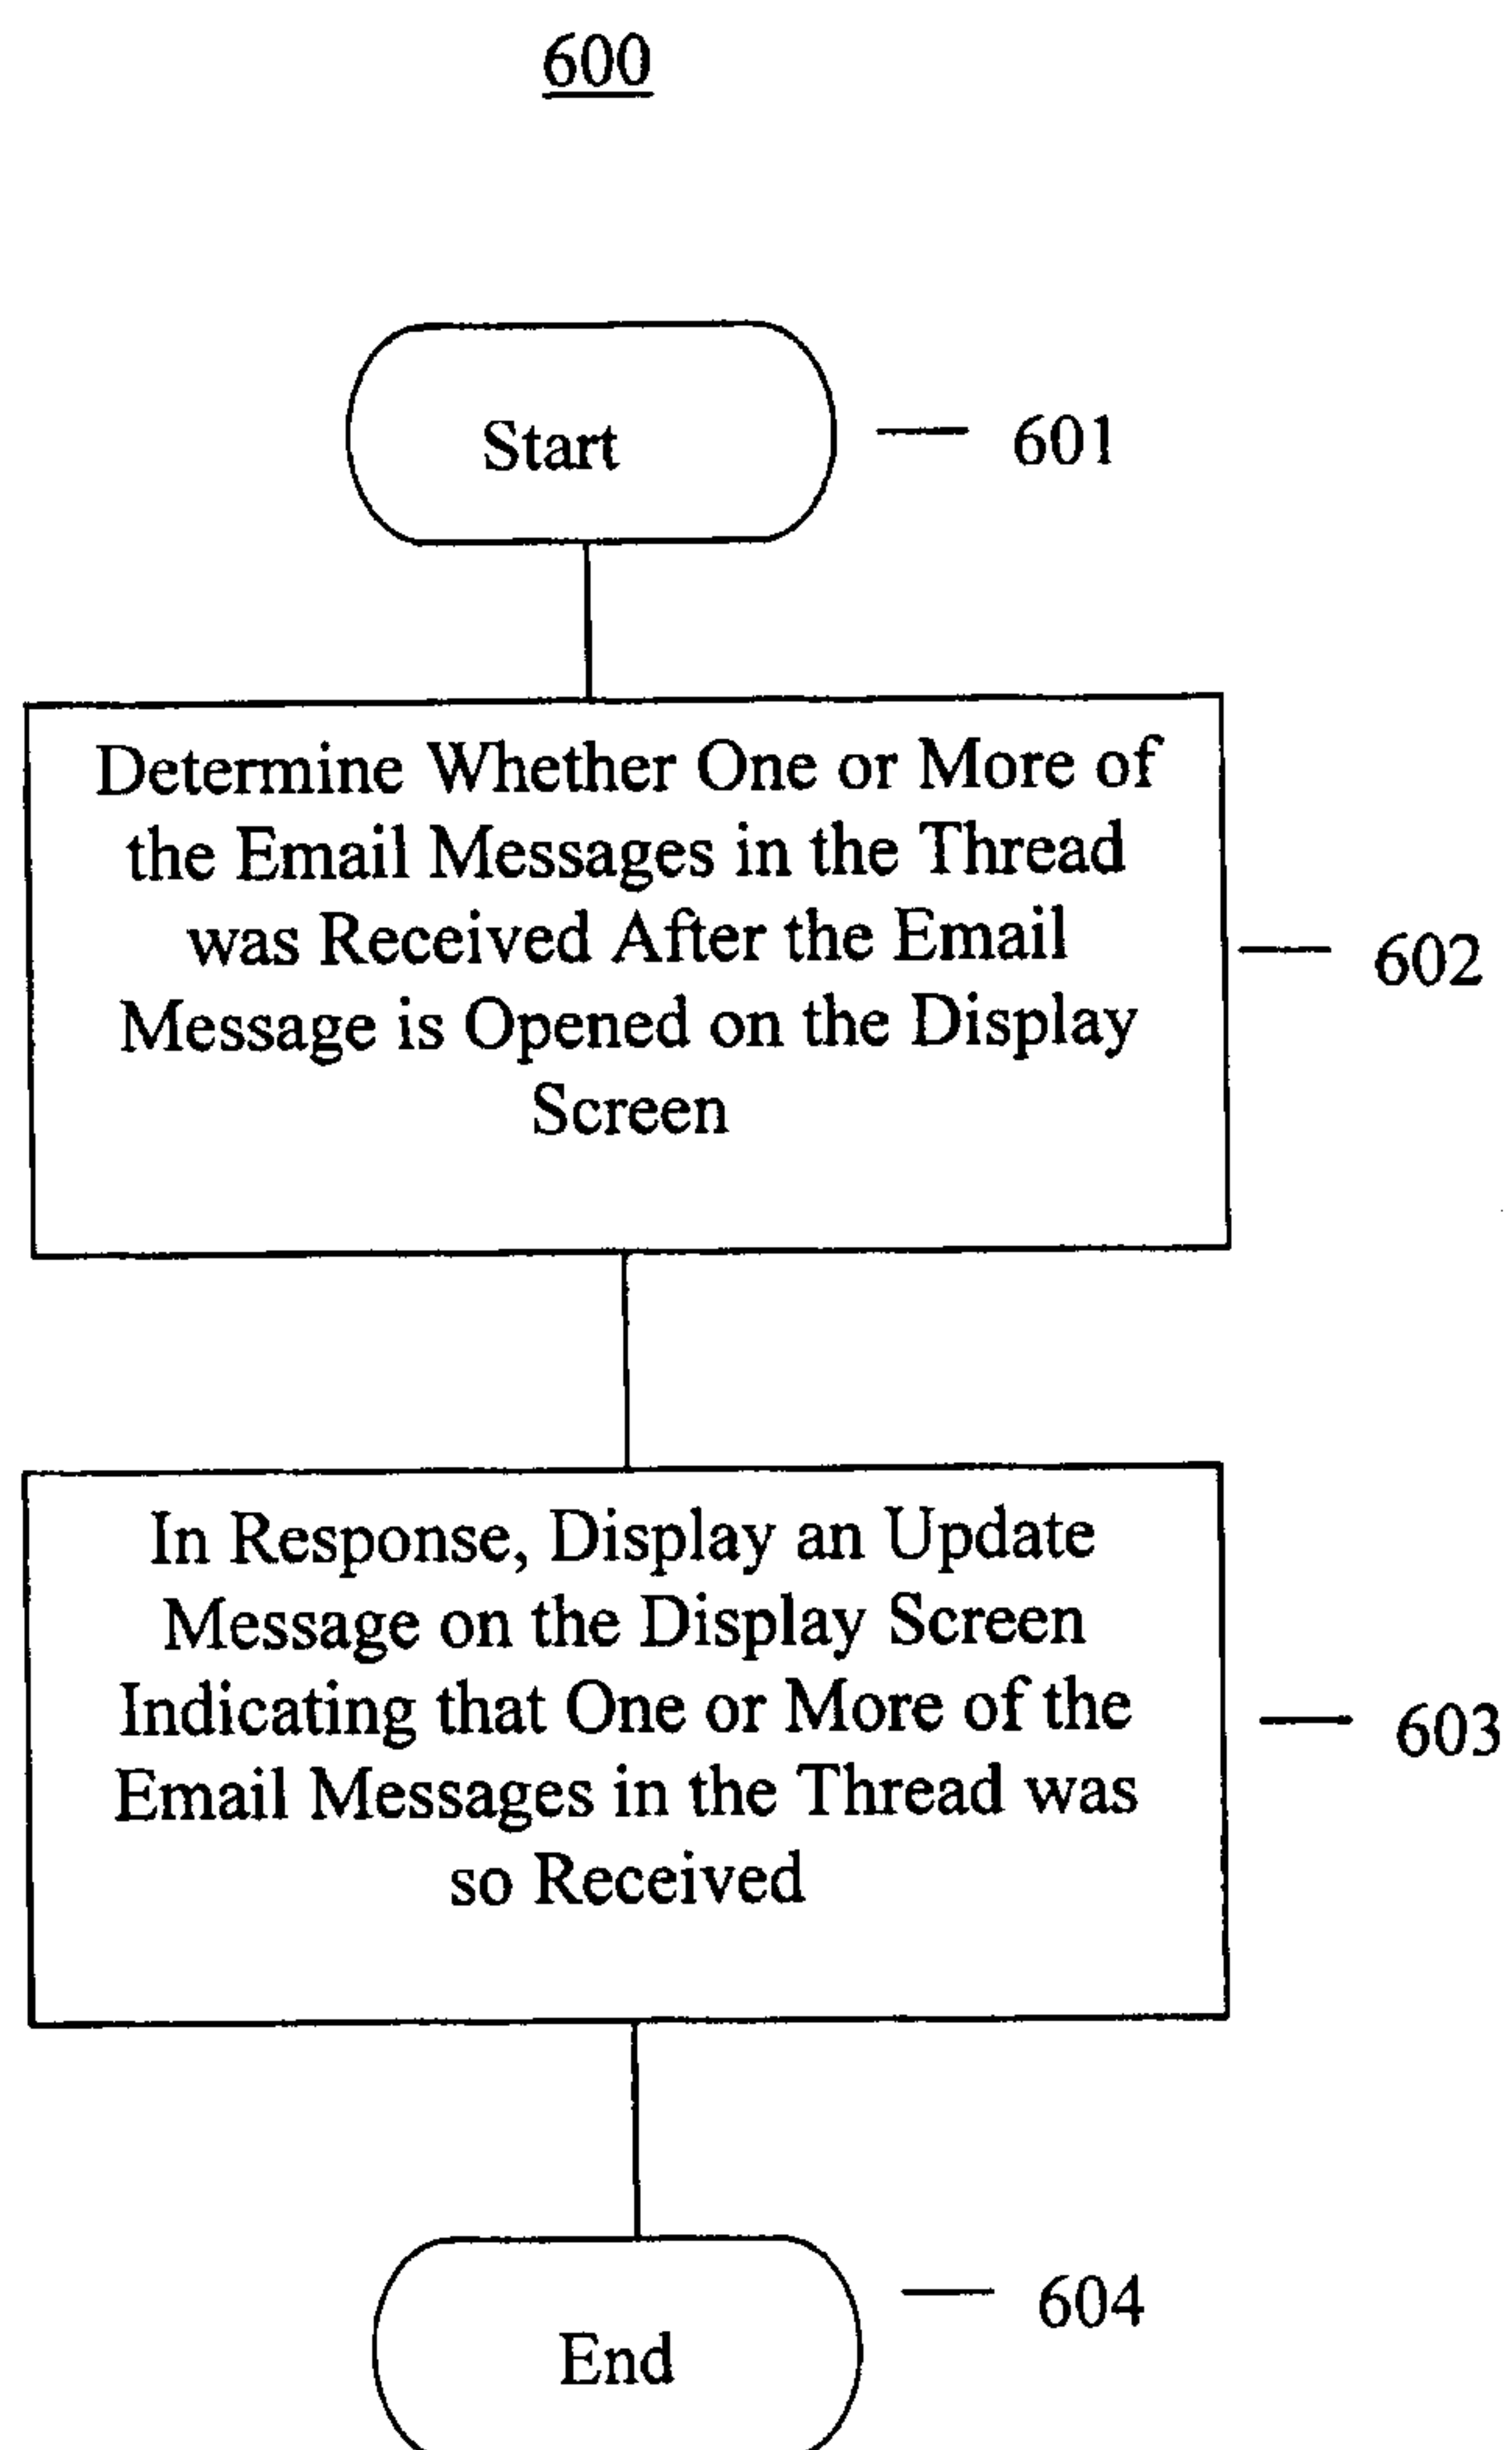


FIG. 3

400**FIG. 4**

500**FIG. 5**

**FIG. 6**

600

