




(86) Date de dépôt PCT/PCT Filing Date: 2007/03/28
(87) Date publication PCT/PCT Publication Date: 2007/10/11
(45) Date de délivrance/Issue Date: 2011/01/04
(85) Entrée phase nationale/National Entry: 2008/09/16
(86) N° demande PCT/PCT Application No.: JP 2007/056679
(87) N° publication PCT/PCT Publication No.: 2007/114176
(30) Priorité/Priority: 2006/03/28 (JP2006-088487)

(51) Cl.Int./Int.Cl. *B21D 3/14* (2006.01),
B21D 41/02 (2006.01)
(72) Inventeurs/Inventors:
OKUI, TATSUYA, JP;
KURODA, KOUICHI, JP;
AKIYAMA, MASAYOSHI, JP
(73) Propriétaire/Owner:
SUMITOMO METAL INDUSTRIES, LTD., JP
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : DISPOSITIF ET METHODE DE CALIBRAGE D'EXTREMITÉ DE TUYAU
(54) Title: APPARATUS FOR PIPE END SIZING AND METHOD FOR PIPE END SIZING

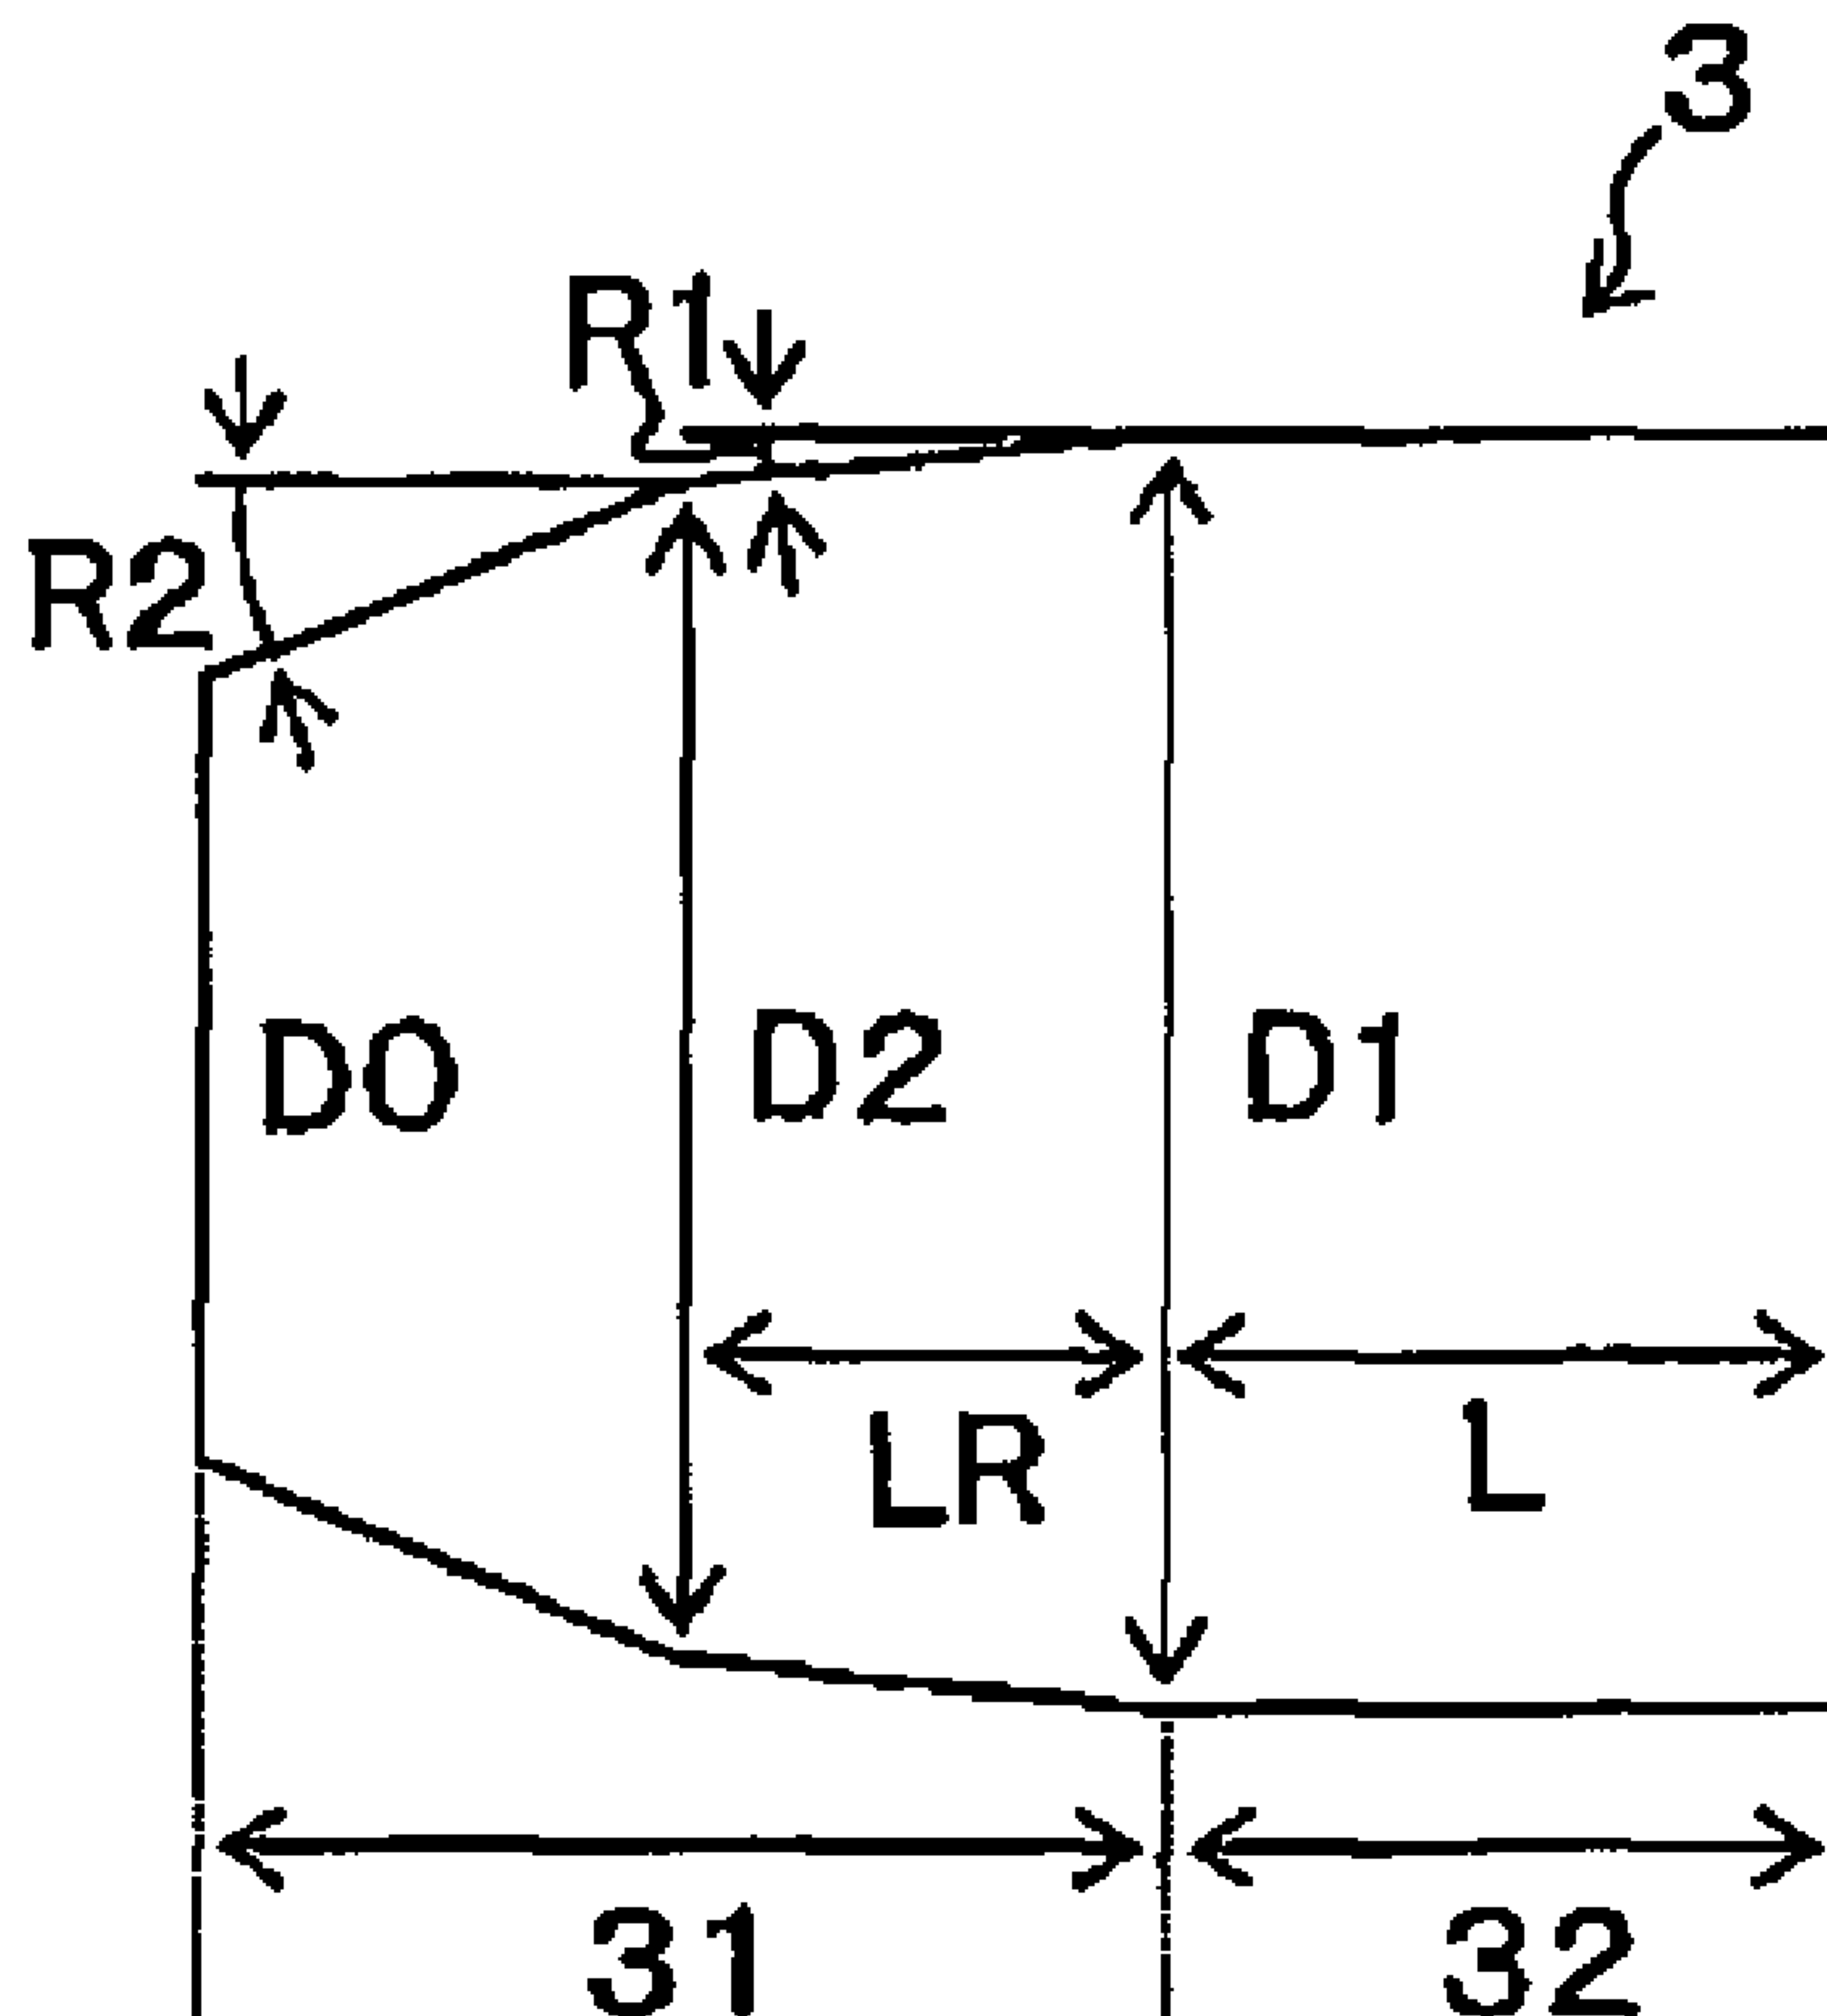

(57) Abrégé/Abstract:

A metal tube end correcting apparatus comprises a plug (3) for enlarging the end of a metal tube (1), a chuck (2) for fixing the metal tube (1), and a movement means for moving the position of the plug (3) and/or the chuck (2). The plug (3) has a circular

(57) **Abrégé(suite)/Abstract(continued):**

cross section, and has a tapered part (31) and a equal-diameter part (32) continuously formed in this order from its end. The outer diameter of the tapered part (31) is gradually increased from the front end to the rear end. The plug meets the following expressions (1) and (2). The chuck (2) can change the fixed position of the metal tube (1). The apparatus can correct the inner diameter of the metal tube end with an excellent dimensional accuracy. $22 \leq LR/(D1 \times 0.01/2) \leq 115$... (1) $R2 \geq R1$... (2)

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局(43) 国際公開日
2007 年 10 月 11 日 (11.10.2007)

PCT

(10) 国際公開番号
WO 2007/114176 A1(51) 国際特許分類:
B21D 3/14 (2006.01) *B21D 41/02* (2006.01)(74) 代理人: 杉岡 幹二, 外(SUGIOKA, Kanji et al.); 〒
6600892 兵庫県尼崎市東難波町五丁目 1 7 番 2 3 号
尼崎ビル 杉岡特許事務所 Hyogo (JP).

(21) 国際出願番号: PCT/JP2007/056679

(22) 国際出願日: 2007 年 3 月 28 日 (28.03.2007)

(25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ:
特願 2006-088487 2006 年 3 月 28 日 (28.03.2006) JP

(81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(71) 出願人 (米国を除く全ての指定国について): 住友金属工業株式会社 (SUMITOMO METAL INDUSTRIES, LTD.) [JP/JP]; 〒5410041 大阪府大阪市中央区北浜四丁目 5 番 3 3 号 Osaka (JP).

(84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) 発明者; および


(75) 発明者/出願人 (米国についてのみ): 奥井 達也 (OKUI, Tatsuya) [JP/JP]; 〒5410041 大阪府大阪市中央区北浜四丁目 5 番 3 3 号 住友金属工業株式会社内 Osaka (JP). 黒田 浩一 (KURODA, Kouichi) [JP/JP]; 〒5410041 大阪府大阪市中央区北浜四丁目 5 番 3 3 号 住友金属工業株式会社内 Osaka (JP). 秋山 雅義 (AKIYAMA, Masayoshi) [JP/JP]; 〒5410041 大阪府大阪市中央区北浜四丁目 5 番 3 3 号 住友金属工業株式会社内 Osaka (JP).

添付公開書類:
— 国際調査報告書

2 文字コード及び他の略語については、定期発行される各 PCT ガゼットの巻頭に掲載されている「コードと略語のガイダンスノート」を参照。

(54) Title: METAL TUBE END CORRECTING APPARATUS AND METAL TUBE END CORRECTING METHOD

(54) 発明の名称: 金属管端矯正設備および金属管端矯正方法

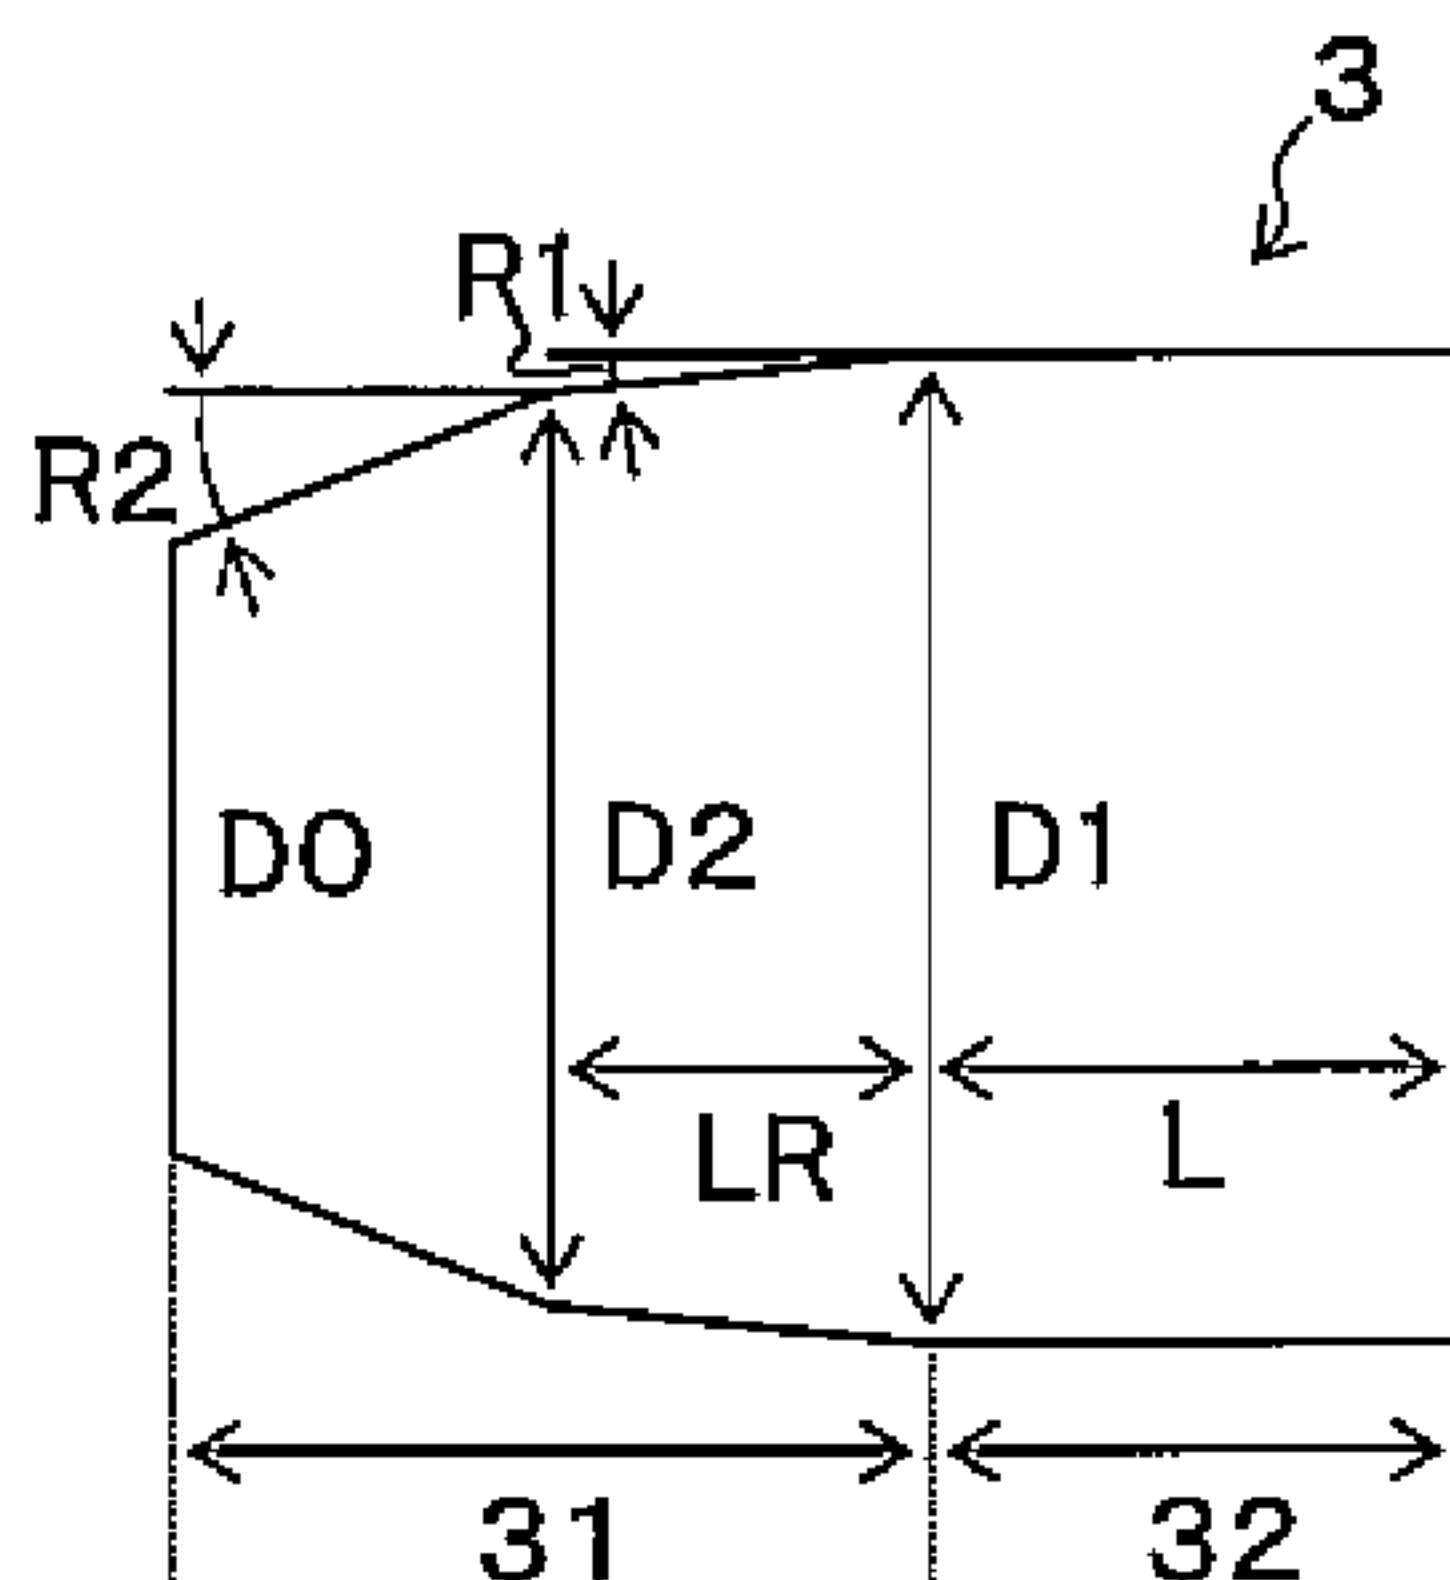(57) Abstract: A metal tube end correcting apparatus comprises a plug (3) for enlarging the end of a metal tube (1), a chuck (2) for fixing the metal tube (1), and a movement means for moving the position of the plug (3) and/or the chuck (2). The plug (3) has a circular cross section, and has a tapered part (31) and a equal-diameter part (32) continuously formed in this order from its end. The outer diameter of the tapered part (31) is gradually increased from the front end to the rear end. The plug meets the following expressions (1) and (2). The chuck (2) can change the fixed position of the metal tube (1). The apparatus can correct the inner diameter of the metal tube end with an excellent dimensional accuracy. $22 \leq LR/(D1 \times 0.01/2) \leq 115 \dots (1)$ $R2 \geq R1 \dots (2)$

(57) 要約: 金属管 1 の端部を拡管加工するプラグ 3 と、金属管 1 を固定するチャック 2 と、プラグ 3 および/またはチャック 2 の位置を移動させる移動手段とを備え、プラグ 3 は、その横断面が円であり、先端から順にテーパ部 31 と等径部 32 とで連続的に形成され、テーパ部 31 の外径が先端から後端に向かって徐々に大きくなり、且つ下

記の (1) 式および (2) 式を満足するものであり、チャック 2 は金属管 1 を固定する位置の変更が可能である金属管端矯正設備。この設備は、優れた寸法精度で金属管端部の内径を矯正する。 $22 \leq LR/(D1 \times 0.01/2) \leq 115 \dots (1)$ $R2 \geq R1 \dots (2)$

WO 2007/114176 A1

SPECIFICATION

APPARATUS FOR PIPE END SIZING AND METHOD FOR PIPE END SIZING

Technical Field

[0001]

The present invention relates to an apparatus used for sizing the inner diameter of the end of a pipe such as a seamless pipe or a welded pipe, and a sizing method thereof.

Background Art

[0002]

Normally, line pipes are welded and connected to one after another on the site; therefore, the pipe needs to be superior in dimensional precision in its pipe end, in particular, in its inner diameter. Moreover, normally, oil pipes are subjected to thread cutting processes in the end thereof, and these are joined to one another by tightening the ends. In this case also, the pipe needs to be superior in dimensional precision in its pipe end.

[0003]

A known method for improving the inner diameter precision of a pipe end is that the pipe end is being expanded and sized by using an expanding apparatus.

[0004]

Fig. 4 is a schematic drawing that explains a sizing method for the pipe

end by using a conventional expanding apparatus. In the conventional method sizing for the pipe end, first, as shown in Fig. 4(a), with a pipe 1 to be sized being clamped by a chuck 2, a plug 5, connected to a cylinder 4, is moved in a direction indicated by an arrow in the Figure. Next, as shown in Fig. 4(b), the plug 5 is shoved to a predetermined position into the end of the pipe 1 so that the inner diameter of the pipe end is sized. Thereafter, as shown in Fig. 4(c), the plug 5 is moved in a direction indicated by another arrow in the Figure, and drawn from the pipe 1.

[0005]

In this case, the plug to be used in the conventional expanding apparatus has a circular cross section, and is constituted by a taper portion and a diameter equivalent portion. The taper portion is a portion whose diameter gradually expands from the tip of the plug in the axial direction toward the rear end (from the left end to the right end in the Figure), and the diameter equivalent portion is a portion whose diameter is not varied. Here, the taper angle of the taper portion is kept constant.

[0006]

Patent Document 1: JP2001-113329A

Disclosure of the Invention

Problems to be solved by the Invention

[0007]

The pipe obtained by the above-mentioned conventional pipe end sizing

method tends to have variability in its inner diameter in a circumferential direction or an axis direction. The reason for this is explained below.

[0008]

Fig. 5 is a schematic drawing that explains problems with the conventional pipe end sizing method. As shown in Fig. 5, the pipe 1 is expanded in its diameter by the plug 5 so that the inner diameter becomes from D_{in} to D_{10} . At this time, a phenomenon (hereinafter, referred to as “overshoot”) occurs in that the inner diameter D_{10} of the pipe 1 becomes larger than the outer diameter D_1 of the diameter equivalent portion 52.

[0009]

If overshoot occurs, no force (repulsive force) is applied thereto from the diameter equivalent portion 52 since the inner face of the pipe 1 is not made in contact with the diameter equivalent portion 52. For this reason, variability occurs in the inner diameter of the pipe 1, failing to form a completely circular cross section. Moreover, the inner diameter of the pipe becomes irregular in the axial direction as well.

[0010]

In an attempt to prevent variability in the inner diameter of the pipe, the overshoot is made to occur before the inner diameter of the pipe end has been expanded by the plug to the target inner diameter, and is then completed.

[0011]

The inventors of the present invention proposed a plug as shown in Figs. 1 to 3 in Japan Patent Application No. 2004-273836 in order to solve the above-mentioned problems.

[0012]

A plug 3, shown in Fig. 1, has a circular cross section, and is constituted by a taper portion 31 and a diameter equivalent portion 3 that are continuously formed from the tip of the plug in succession, and the outer diameter of the taper portion 31 expands from the tip toward the rear end while satisfying the following formulas (1) and (2).

$$22 \leq LR / (D1 \times 0.01/2) \leq 115 \quad \dots (1)$$

$$R2 \geq R1 \quad \dots (2)$$

[0013]

Where the meanings of the respective symbols in the formulas are shown below:

D1: the outer diameter of the rear end of the taper portion, which also corresponds to the outer diameter (mm) of the diameter equivalent portion.

LR: the distance (mm) in the axial direction from the rear end of the taper portion to a position at which the outer diameter of the taper portion is represented by $D1 \times 0.99$.

R1: the taper angle ($^{\circ}$) at the rear end of the taper portion.

R2: the taper angle ($^{\circ}$) at the position in which the outer diameter of the taper portion is represented by $D1 \times 0.99$.

[0014]

As shown in Fig. 2, upon sizing the inner diameter of the pipe 1 end by using this plug 3, first, as shown in Fig. 2(a), the plug 3 connected to the cylinder 4 is moved in a direction indicated by an arrow in the Figure, with the pipe 1 being clamped by a chuck 2. Moreover, as shown in Fig. 2(b), the plug 3 is shoved into the pipe 1 end to a predetermined position so as to size

the inner diameter of the pipe end. Thereafter, as shown in Fig. 2(c), the plug 3 is moved in a direction indicated by another arrow in the Figure to be drawn from the pipe 1.

[0015]

If the inner diameter is sized by diameter-expanding the pipe 1 by the use of this plug 3, as shown in Fig. 3, since the overshoot of the pipe 1, generated at the taper portion 31, is completed inside the taper portion 31, the inner face of the pipe 1 is made in contact with the diameter equivalent portion 32. For this reason, variability in the inner diameter is reduced smaller so that the inner diameter of the pipe 1 end can be sized, with its true circle state being maintained.

[0016]

By using this plug, the inner face of the pipe is made in contact not only with the taper portion, but also with the diameter equivalent portion so that the contact area increases, resulting in an increase in a load to be used for sizing the inner diameter of the pipe end. Consequently, the clamping force by the chuck 2 needs to be increased. In the case of a pipe with a certain measure of thickness, no adverse effects are given to the shape or the like of the pipe, even when the clamping force increases; however, in the case of a thin material that is insufficient in rigidity (with the ratio (t/D) of the thickness t and the outer diameter D of the pipe being 0.04 or less), the pipe is deformed by the clamping force. The resulting deformation causes degradation in the dimensional precision in the inner diameter of the end (that is, the end to be diameter-expanded) of the pipe. Therefore, the clamping position needs to be appropriately set depending on the dimension

of the pipe.

[0017]

The present invention has been devised from these points of view, and its objective is to provide a pipe end sizing apparatus and a pipe end sizing method that produces a pipe that is superior in the dimensional precision in the inner diameter of the pipe end.

Means for solving the Problems

[0018]

The present invention relates to a pipe end sizing apparatus shown in the following (A) and a pipe end sizing method shown in the following (B) and (C).

[0019]

(A) An apparatus for sizing a pipe end comprising:

- a plug for sizing the pipe end;
- a chuck for clamping the pipe; and
- shifting means for shifting the position of the plug and/or the chuck,

characterized by

the plug has a circular cross section, and is constituted by a taper portion and a diameter equivalent portion continuously formed from the tip of the plug in succession,

an outer diameter of the taper portion gradually expands from the tip toward the rear end while satisfying the following formulas (1) and (2)

the chuck is capable of changing a clamping position of the pipe:

$$22 \leq LR / (D1 \times 0.01/2) \leq 115 \quad \dots (1)$$

$$R2 \geq R1 \quad \dots (2)$$

where the meanings of the respective symbols in the formulas are shown below:

D1: the outer diameter of the rear end of the taper portion, which also corresponds to the outer diameter (mm) of the diameter equivalent portion.

LR: the distance (mm) in the axial direction from the rear end of the taper portion to a position at which the outer diameter of the taper portion is represented by $D1 \times 0.99$.

R1: the taper angle ($^{\circ}$) at the rear end of the taper portion.

R2: the taper angle ($^{\circ}$) at the position in which the outer diameter of the taper portion is represented by $D1 \times 0.99$.

[0020]

(B) A method for sizing a pipe end by using a plug, characterized by:

using the plug having a circular cross section and being constituted by a taper portion and a diameter equivalent portion continuously formed from a tip of the plug in succession;

an outer diameter of the taper portion gradually expands from the tip toward a rear end while satisfying the following formulas (1) and (2); and

setting the clamping position of the pipe by the chuck in accordance with a value of a ratio (t/D) of the thickness t and the outer diameter D of the pipe:

$$22 \leq LR / (D1 \times 0.01/2) \leq 115 \quad \dots (1)$$

$$R2 \geq R1 \quad \dots (2)$$

where the meanings of the respective symbols in the formulas are shown below:

D1: the outer diameter of the rear end of the taper portion, which also corresponds to the outer diameter (mm) of the diameter equivalent portion.

LR: the distance (mm) in the axial direction from the rear end of the taper portion to a position at which the outer diameter of the taper portion is represented by $D1 \times 0.99$.

R1: the taper angle (°) at the rear end of the taper portion.

R2: the taper angle (°) at the position in which the outer diameter of the taper portion is represented by $D1 \times 0.99$.

[0021]

(C) The method for sizing the pipe end according to (B) characterized by,

the pipe is clamped at a position in which the following formula is satisfied, when the ratio (t/D) of the thickness t and the outer diameter D of the pipe is 0.04 or less:

$$L/D > -21.8 \times (t/D) + 1.7 \quad \dots (3)$$

where the meanings of the respective symbols in the formula are shown below:

t : Thickness of element pipe (mm)

D : Outer diameter of element pipe (mm)

L : Distance from the pipe end of the pipe on the side from which the plug is inserted to the clamped position by the chuck (mm)

Effect of the Invention

[0022]

In accordance with the present invention, the inner diameter of the pipe end can be sized with superior dimensional precision.

Best Mode for Carrying Out the Invention

[0023]

As shown in Fig. 2, a pipe end sizing apparatus in accordance with the present invention is provided with, for example, a plug 3 inserted into the pipe 1 end, a chuck 2 used for clamping a pipe and a shifting means (not shown) for shifting the plug 3 and/or the chuck 2. As shown in Fig. 1, the plug 3 to be used in the pipe end sizing apparatus of the present invention has a circular cross section, and is constituted by a taper portion 31 and a diameter equivalent portion 32 continuously formed from the tip of the plug in succession, with the outer diameter of the taper portion 31 gradually expanding from the tip toward the rear end while satisfying the following formulas (1) and (2).

$$22 \leq LR / (D1 \times 0.01/2) \leq 115 \quad \dots (1)$$

$$R2 \geq R1 \quad \dots (2)$$

Where the meanings of the respective symbols in the formulas are shown below:

D1: the outer diameter of the rear end of the taper portion, which also

corresponds to the outer diameter (mm) of the diameter equivalent portion.

LR: the distance (mm) in the axial direction from the rear end of the taper portion to a position at which the outer diameter of the taper portion is represented by $D1 \times 0.99$.

R1: the taper angle ($^{\circ}$) at the rear end of the taper portion.

R2: the taper angle ($^{\circ}$) at the position in which the outer diameter of the taper portion is represented by $D1 \times 0.99$.

[0024]

As shown in Fig. 3, in the case when the plug 3 is inserted into the pipe 1, since the overshoot of the pipe 1 occurred in the taper portion 31 is completed within the taper portion 31, the inner face of the pipe 1 is made in contact with the diameter equivalent portion 32. That is, since the taper angle R2 at the position in which the outer diameter of the taper portion 31 is represented by $D1 \times 0.99$ (hereinafter, referred to as "D2") is greater than the taper angle R1 at the rear end of the taper portion 31, and since the distance LR in the axial direction from the rear end of the taper portion to the position at which the outer diameter is represented by D2 satisfies the above-mentioned formula (1), the pipe 1 is hardly subjected to a bending process on the rear end side from the position at which the outer diameter of the taper portion 31 is represented by D2.

[0025]

For this reason, the overshoot occurs on the rear end side from the position at which the outer diameter of the taper portion 31 is represented by D2, with the result that it is completed before reaching the diameter equivalent portion 32. Thus, the pipe 1 end can be sized in its inner

diameter, with variations in the inner diameter being kept small and with its true circle state being maintained.

[0026]

As shown in Fig. 2(a), the apparatus for the pipe end sizing in accordance with the present invention is characterized in that the position in which the pipe 1 is clamped by the chuck 2, that is, the distance from the pipe end of the pipe 1 on the side from which the plug 3 is inserted to the clamped position by the chuck 2 can be altered. Here, the clamped position refers to the portion of the chuck closest to the pipe end.

[0027]

When a core deviation occurs between the axis centers of the element pipe and the plug, it is not possible to carry out a sizing process on the inner diameter with high precision, and a problem sometimes also arises in that the material is buckled. In order to prevent the core deviation, it is preferable to carry out the clamping process at such a position as close to the pipe end as possible. However, in the case of a thin material, that is, more specifically, in the case of $t/D \leq 0.04$ (t : wall thickness, D : outer diameter), the clamping tends to cause a deformation; consequently, when a portion close to the pipe end is clamped, the pipe end is also deformed, with the result that the inner diameter is not sized with high precision in some cases. In contrast, in the case of the thin material, since the rigidity is poor, even when a portion far apart from the pipe end is clamped, the centering effect is exerted, hardly resulting in the core deviation.

[0028]

From these points of view, the pipe end sizing apparatus of the present

invention allows the clamping position of the pipe to be altered so that, when a thick-wall material is sized, a portion closer to the pipe end is clamped, while, when a thin-wall material is sized, a portion far apart from the pipe end is clamped. Moreover, in the pipe end sizing method in accordance with the present invention, the clamping position of the pipe by the chuck is set in accordance with the value of a ratio (t/D) of the thickness t and the outer diameter D of the pipe.

[0029]

For example, if the value of a ratio (t/D) of the thickness t and the outer diameter D of the pipe (element pipe) is 0.04 or less, the pipe is preferably clamped by the chuck at a position that satisfies the following formula (3). The reason for having to provide such a condition as to satisfy the following formula (3) with respect to the clamping position of the pipe by the chuck will be explained in Examples.

$$L/D > -21.8 \times (t/D) + 1.7 \quad \dots(3)$$

Where, the meanings of the respective symbols in the formula are shown below:

t : Thickness of element pipe (mm)

D : Outer diameter of element pipe (mm)

L : Distance from the pipe end the plug is inserted to the clamping position by the chuck (mm)

Embodiments

[0030]

In order to confirm the effect of the present invention, a plug, as shown in Fig. 1, was inserted into the end of a seamless steel pipe made of carbon steel so that the pipe was diameter-expanded and the elliptic rate of the inner diameter of the pipe after having been diameter-expanded was examined. Table 1 shows the outer diameter and the wall thickness of each of pipes subjected to the experiments, as well as the shapes of the plugs, clamped positions and the elliptic rate of the inner diameter.

[0031]

With respect to the elliptic rate of the inner diameter, the inner face shape of the pipe after having been diameter-expanded was measured by a shape measuring apparatus, and it was calculated based upon the following equation. In the following equation, “dmax” represents the maximum inner diameter, “dmin” represents the minimum inner diameter and “dave” represents the average inner diameter, respectively.

Elliptic rate of inner diameter (%)

$$= (d_{\max} - d_{\min}) / d_{\text{ave}} \times 100$$

[0032]

[Table 1]

Table 1

No.		1	2	3	4	5	6	7
	Outer diameter D(mm)	323.9	323.9	323.9	323.9	323.9	339.7	323.9
Pipe shape	Thicknes t(mm)	6.35	6.35	6.35	6.35	6.35	14.00	20.00
	t/D	0.020	0.020	0.020	0.020	0.020	0.041	0.062
Plug shape	D1(mm)	315.9	315.9	315.9	315.9	315.9	315.9	287.9
	R1(°)	1.1	1.1	1.1	1.1	1.1	1.1	0.7
	D2(mm)	313.2	313.2	313.2	313.2	313.2	313.2	286.3
	R2(°)	5.9	5.9	5.9	5.9	5.9	5.9	5.0
	LR(mm)	70.0	70.0	70.0	70.0	70.0	70.0	65.0
	LB(mm)	10.0	10.0	10.0	10.0	10.0	10.0	10.0
Clamping position	Distance L(mm)	180	180	290	504	504	290	290
	L/D	0.56	0.56	0.90	1.56	1.56	0.85	0.90
	Elliptic rate of inner diameter (%)	0.53	0.48	0.42	0.22	0.23	0.29	0.30

[0033]

With respect to the results shown in Table 1, the relationship between the elliptic rate of inner diameter and L/D (L: distance from the pipe end of the pipe on the side from which a plug is inserted to the clamped position by the chuck, D: outer diameter of element pipe) is shown in Fig. 6, and the relationship between L/D with the elliptic rate of inner diameter being set to 0.3 % and t/D (t: wall thickness of the element pipe, D: outer diameter of the element pipe) is shown in Fig. 7.

[0034]

In Fig. 7, in the case of t/D = 0.020 (○ in the Figure) in Fig. 6, L/D at an intersection between an approximation straight line and the straight line indicating the elliptic rate of inner diameter = 0.3 % was selected, and in the

case of $t/D = 0.41$ (● in the Figure) and $t/D = 0.062$ (□ in the Figure), L/D of the respectively plotted values was selected.

[0035]

As shown in Table 1 and Fig. 6, in the case of a thick pipe in which t/D exceeds 0.04, the elliptic rate of inner diameter is maintained at 0.3, which is a low value, even when L/D is near 0.9; however, in the case of a thin pipe in which t/D is 0.020, the elliptic rate of inner diameter is varied depending on the value of L/D . This indicates that depending on the value of t/D , the distance from the pipe end which a plug is inserted to the clamped position by the chuck needs to be adjusted.

[0036]

Moreover, as shown in Table 1 and Fig. 7, in the case when t/D of the element pipe is 0.04 or less, in order to set L/D so that the elliptic rate of inner diameter becomes 0.3 %, L/D should be located within the range that satisfy the following formula (3).

$$L/D > -21.8 \times (t/D) + 1.7 \quad \dots(3)$$

Industrial applicability

[0037]

In accordance with the present invention, the inner diameter of a pipe end can be sized with superior dimensional precision; therefore, the present invention is effectively applied to a sizing process for joint portions of line pipes, oil pipes and the like.

Brief Description of the Drawings

[0038]

[FIG. 1] Fig. 1 is a schematic drawing that exemplifies a plug to be used in the present invention.

[FIG. 2] Fig. 2 is a schematic drawing that explains a pipe end sizing method in accordance with the present invention.

[FIG. 3] Fig. 3 is a schematic drawing that explains a pipe-diameter expanded state in accordance with the pipe end sizing method of the present invention.

[FIG. 4] Fig. 4 is a schematic drawing that explains a sizing method for a pipe end by the use of a conventional expanding apparatus.

[FIG. 5] Fig. 5 is a schematic drawing that explains problems with the conventional pipe end sizing method.

[FIG. 6] Fig. 6 is a drawing that shows the relationship between the elliptic rate of inner diameter and L/D in an embodiment.

[FIG. 7] Fig. 7 is a drawing that shows the relationship between L/D and t/D at the time when the elliptic rate of inner diameter becomes 0.3 % in the embodiment.

Description of the Reference Numerals

[0039]

1. Pipe

2. Chuck

3. Plug (31. Taper portion, 32. Diameter equivalent portion)
4. Cylinder
5. Plug used for a conventional method (51. Taper portion, 52. Diameter equivalent portion)

What is claimed is:

1. A method for sizing a pipe end by using a plug, the method comprising:

using the plug having a circular cross section and being constituted by a taper portion and a diameter equivalent portion continuously formed from a tip of the plug in succession;

an outer diameter of the taper portion gradually expands from the tip toward a rear end while satisfying the following formulas (1) and (2); and

setting a clamping position of the pipe by a chuck in accordance with a value of a ratio (t/D) of the thickness t and the outer diameter D of the pipe:

$$22 \leq LR / (D1 \times 0.01/2) \leq 115 \quad \dots (1)$$

$$R2 \geq R1 \quad \dots (2)$$

where the meanings of the respective symbols in the formulas are shown below:

D1: the outer diameter of the rear end of the taper portion, which also corresponds to the outer diameter (mm) of the diameter equivalent portion.

LR: the distance (mm) in the axial direction from the rear end of the taper portion to a position at which the outer diameter of the taper portion is represented by $D1 \times 0.99$.

R1: a taper angle (°) at the rear end of the taper portion.

R2: a taper angle (°) at the position in which the outer diameter of the taper portion is represented by $D1 \times 0.99$.

2. The method for sizing the pipe end according to claim 1, wherein the pipe is clamped at a position in which the following formula is satisfied, when the ratio (t/D) of the thickness t and the outer diameter D of the pipe is 0.04 or less:

$$L/D > -21.8 \times (t/D) + 1.7 \quad \dots(3)$$

where the meanings of the respective symbols in the formula are shown below:

t : Thickness of element pipe (mm)

D : Outer diameter of element pipe (mm)

L : Distance from the pipe end of the pipe on the side from which the plug is inserted to the clamped position by the chuck (mm)

DRAWINGS

Figure 1

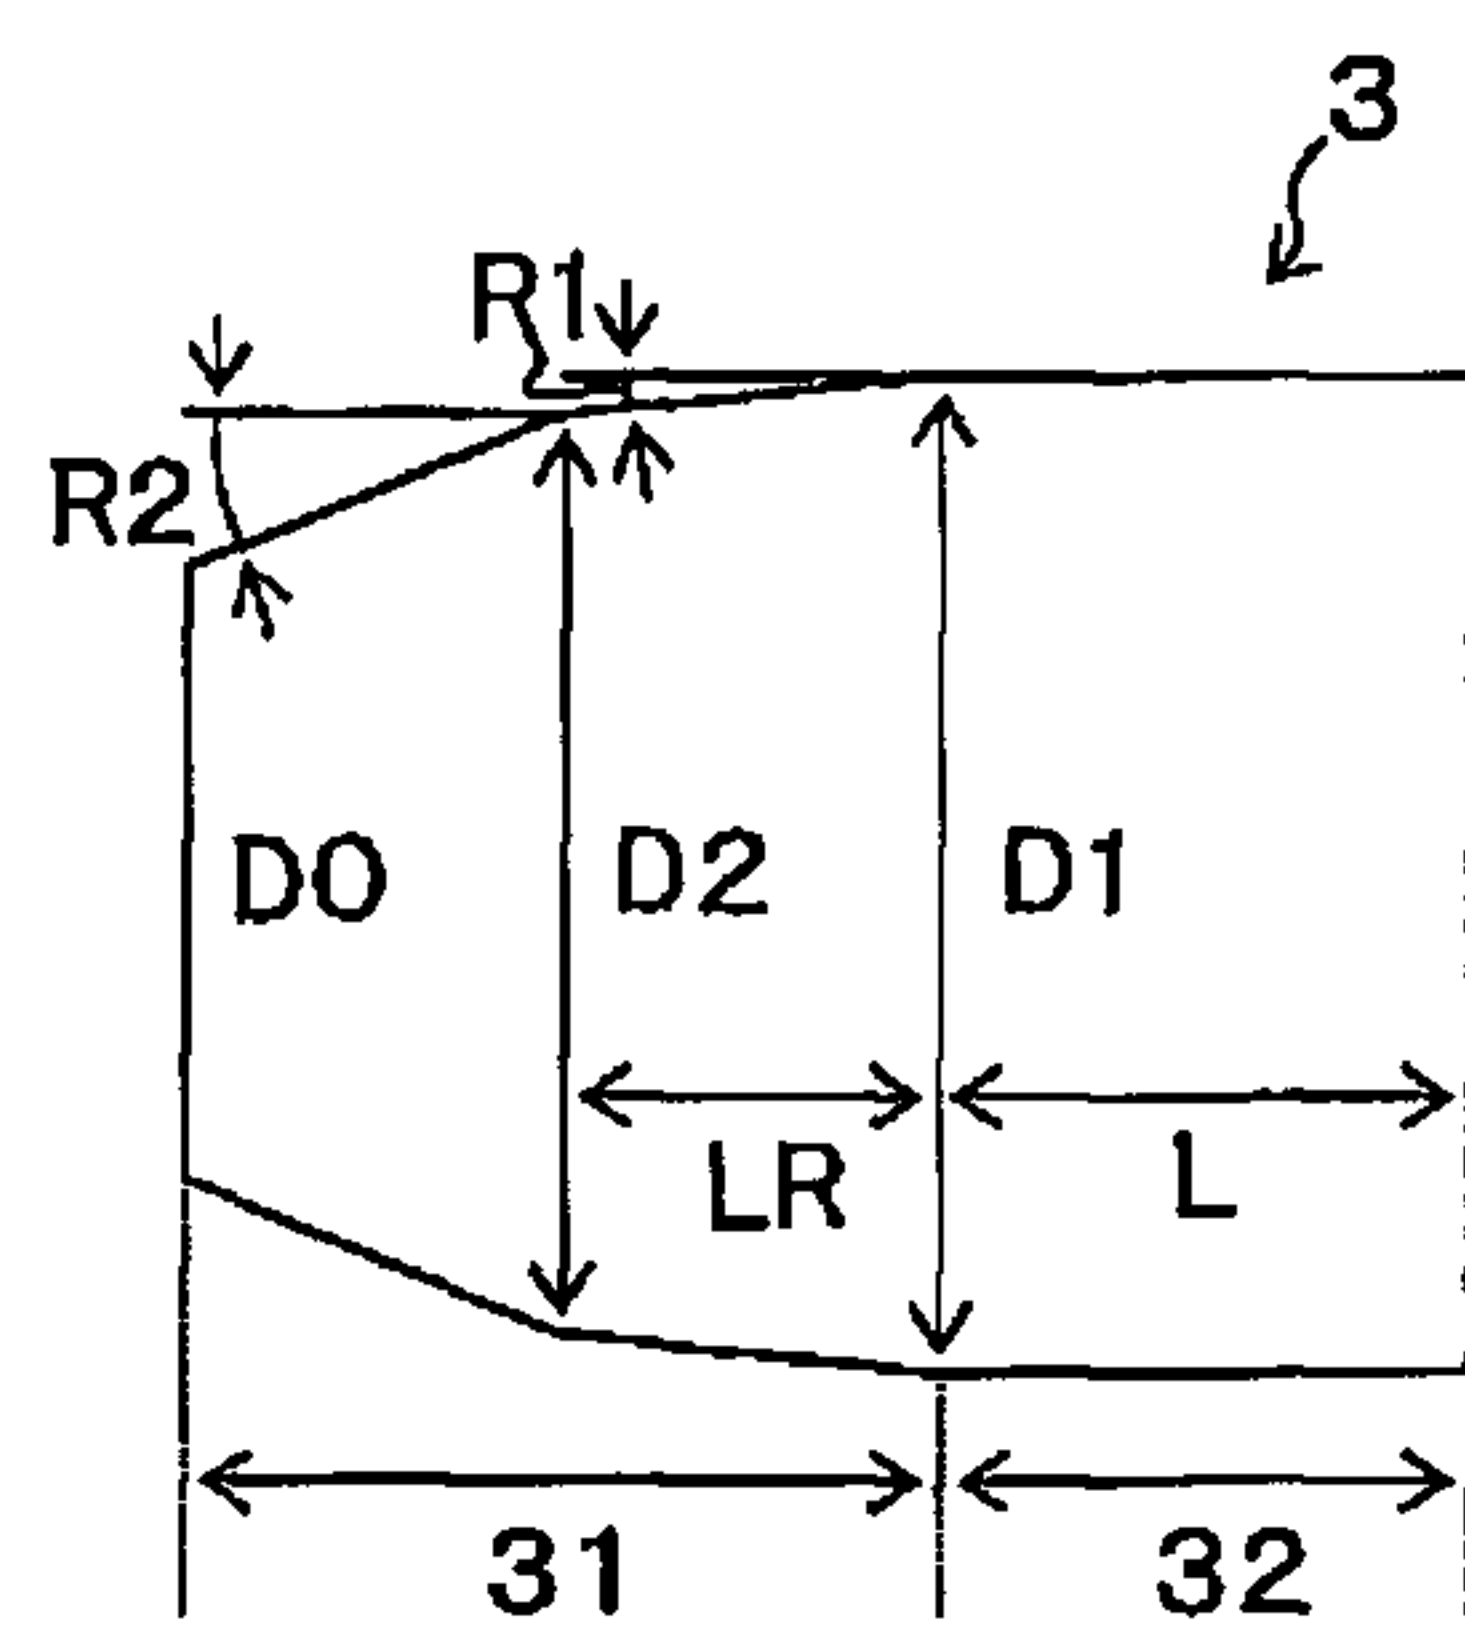


Figure 2

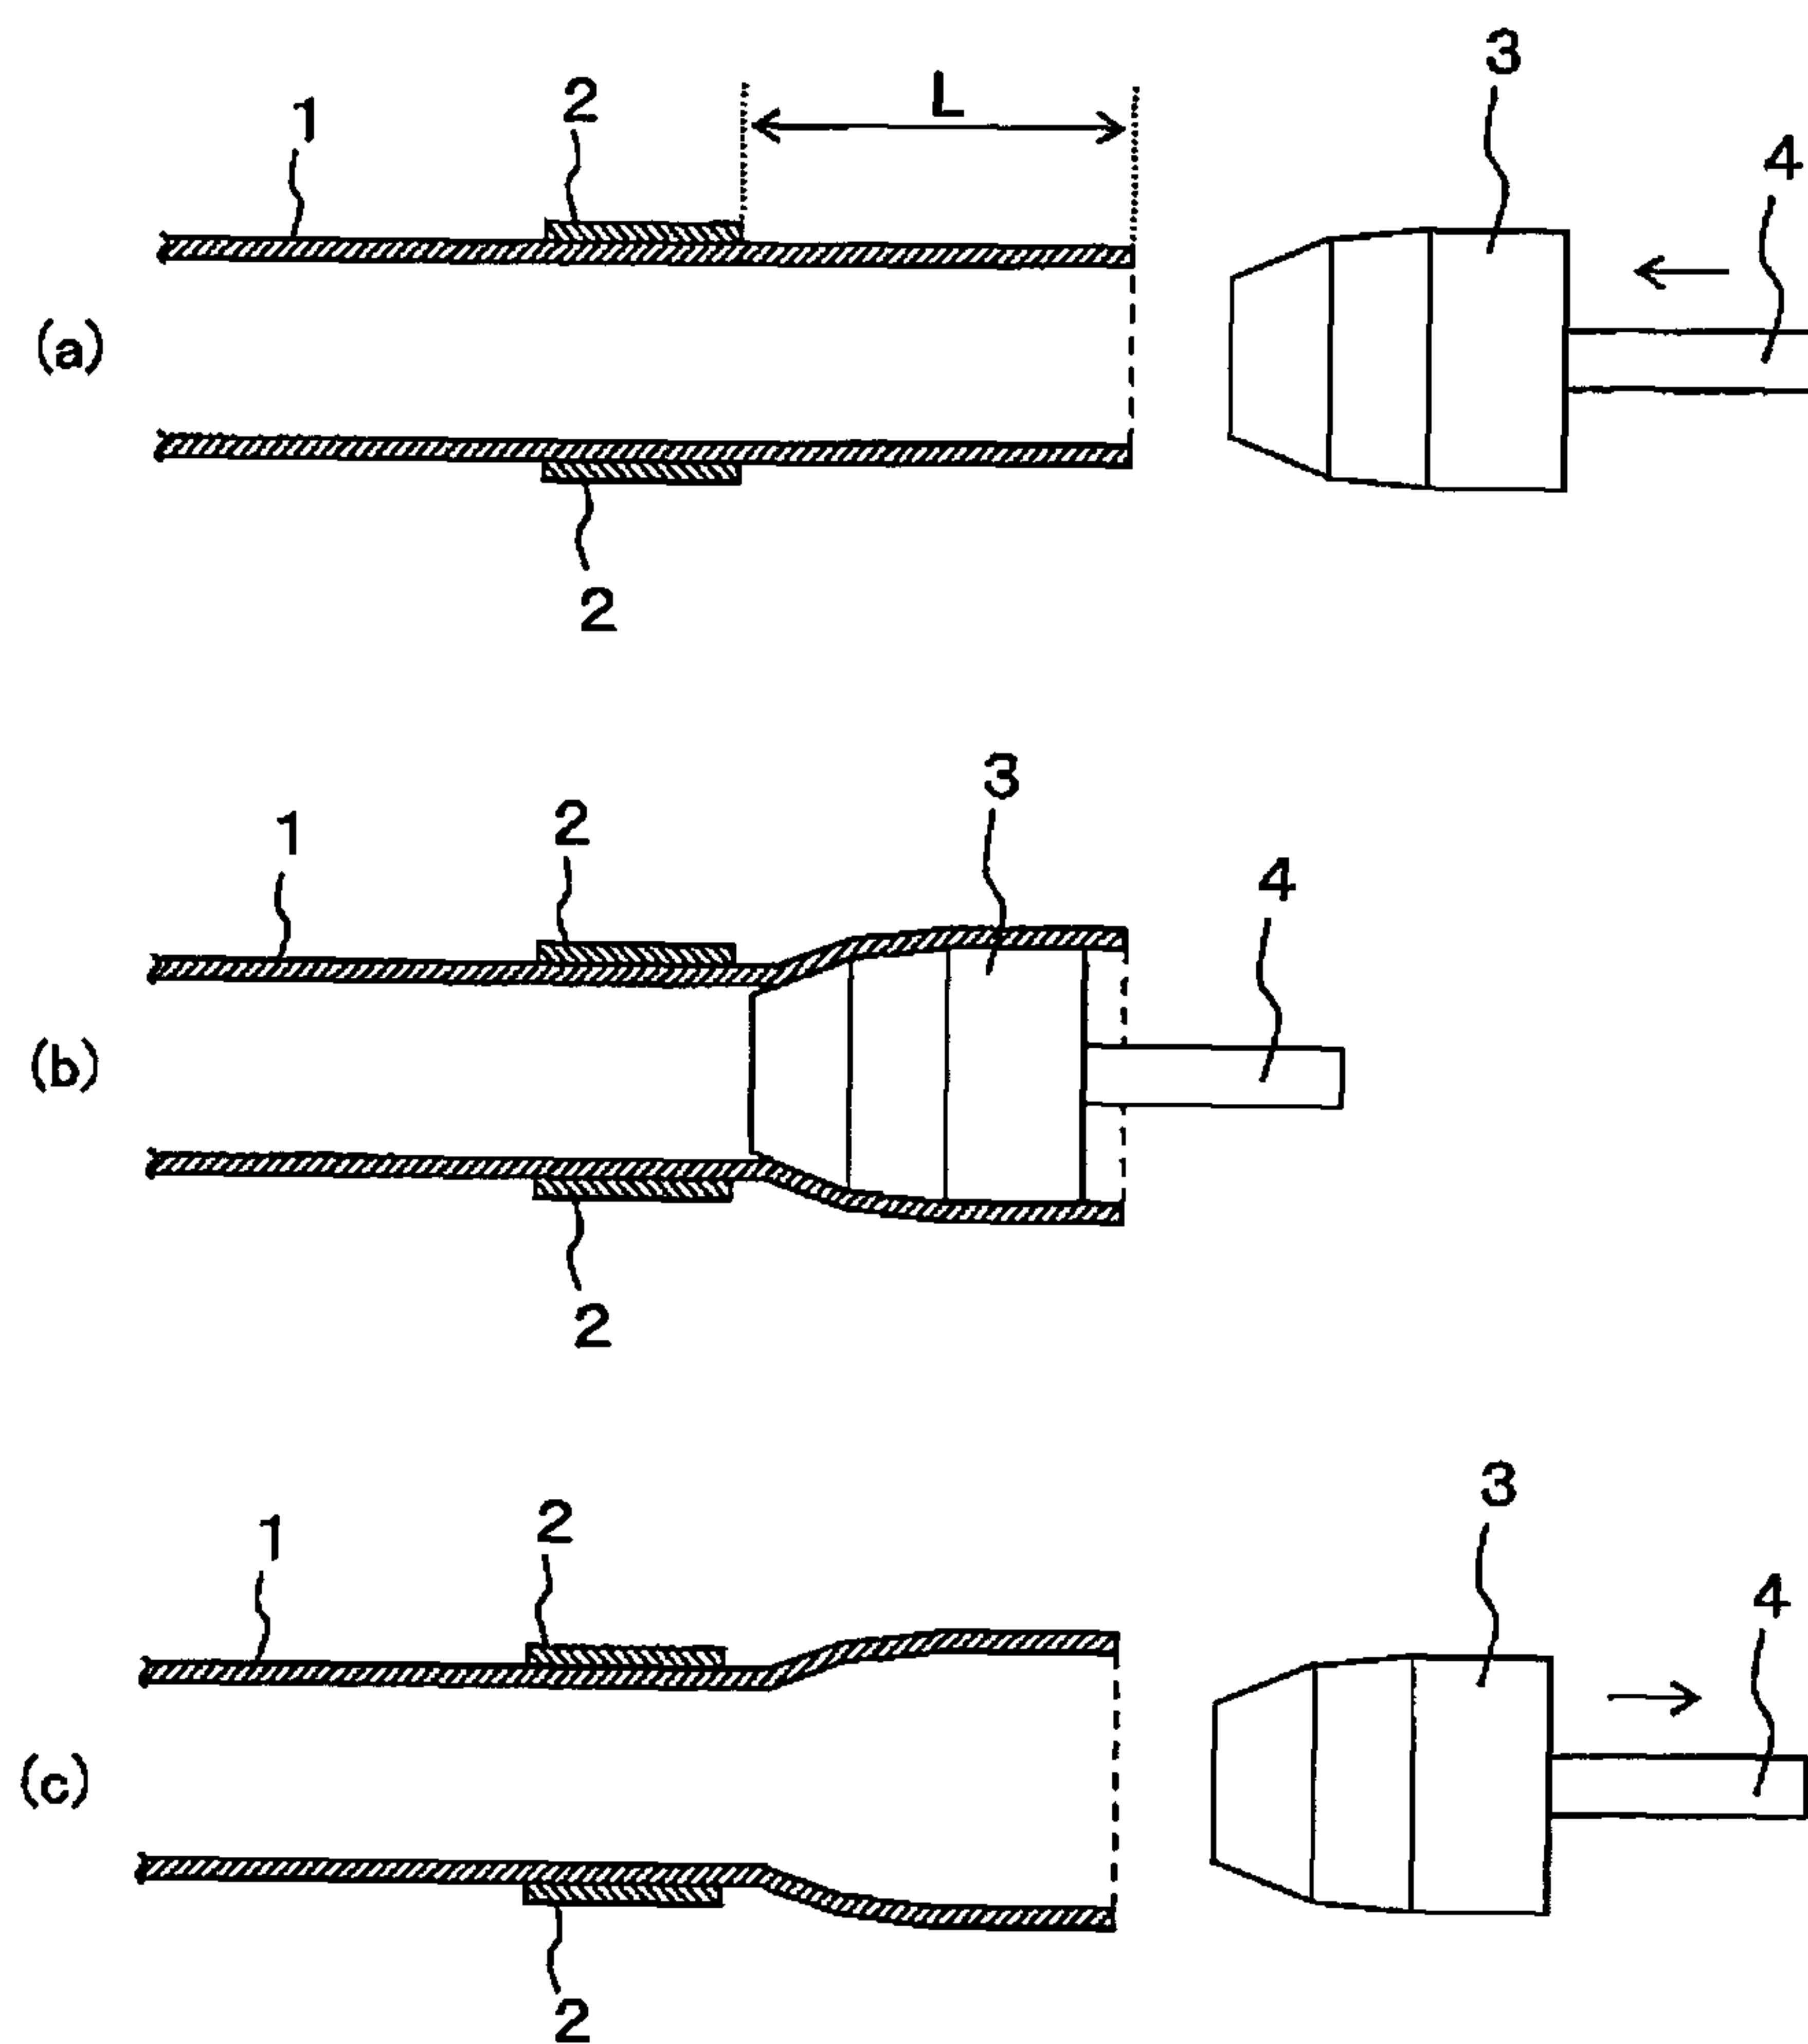


Figure 3

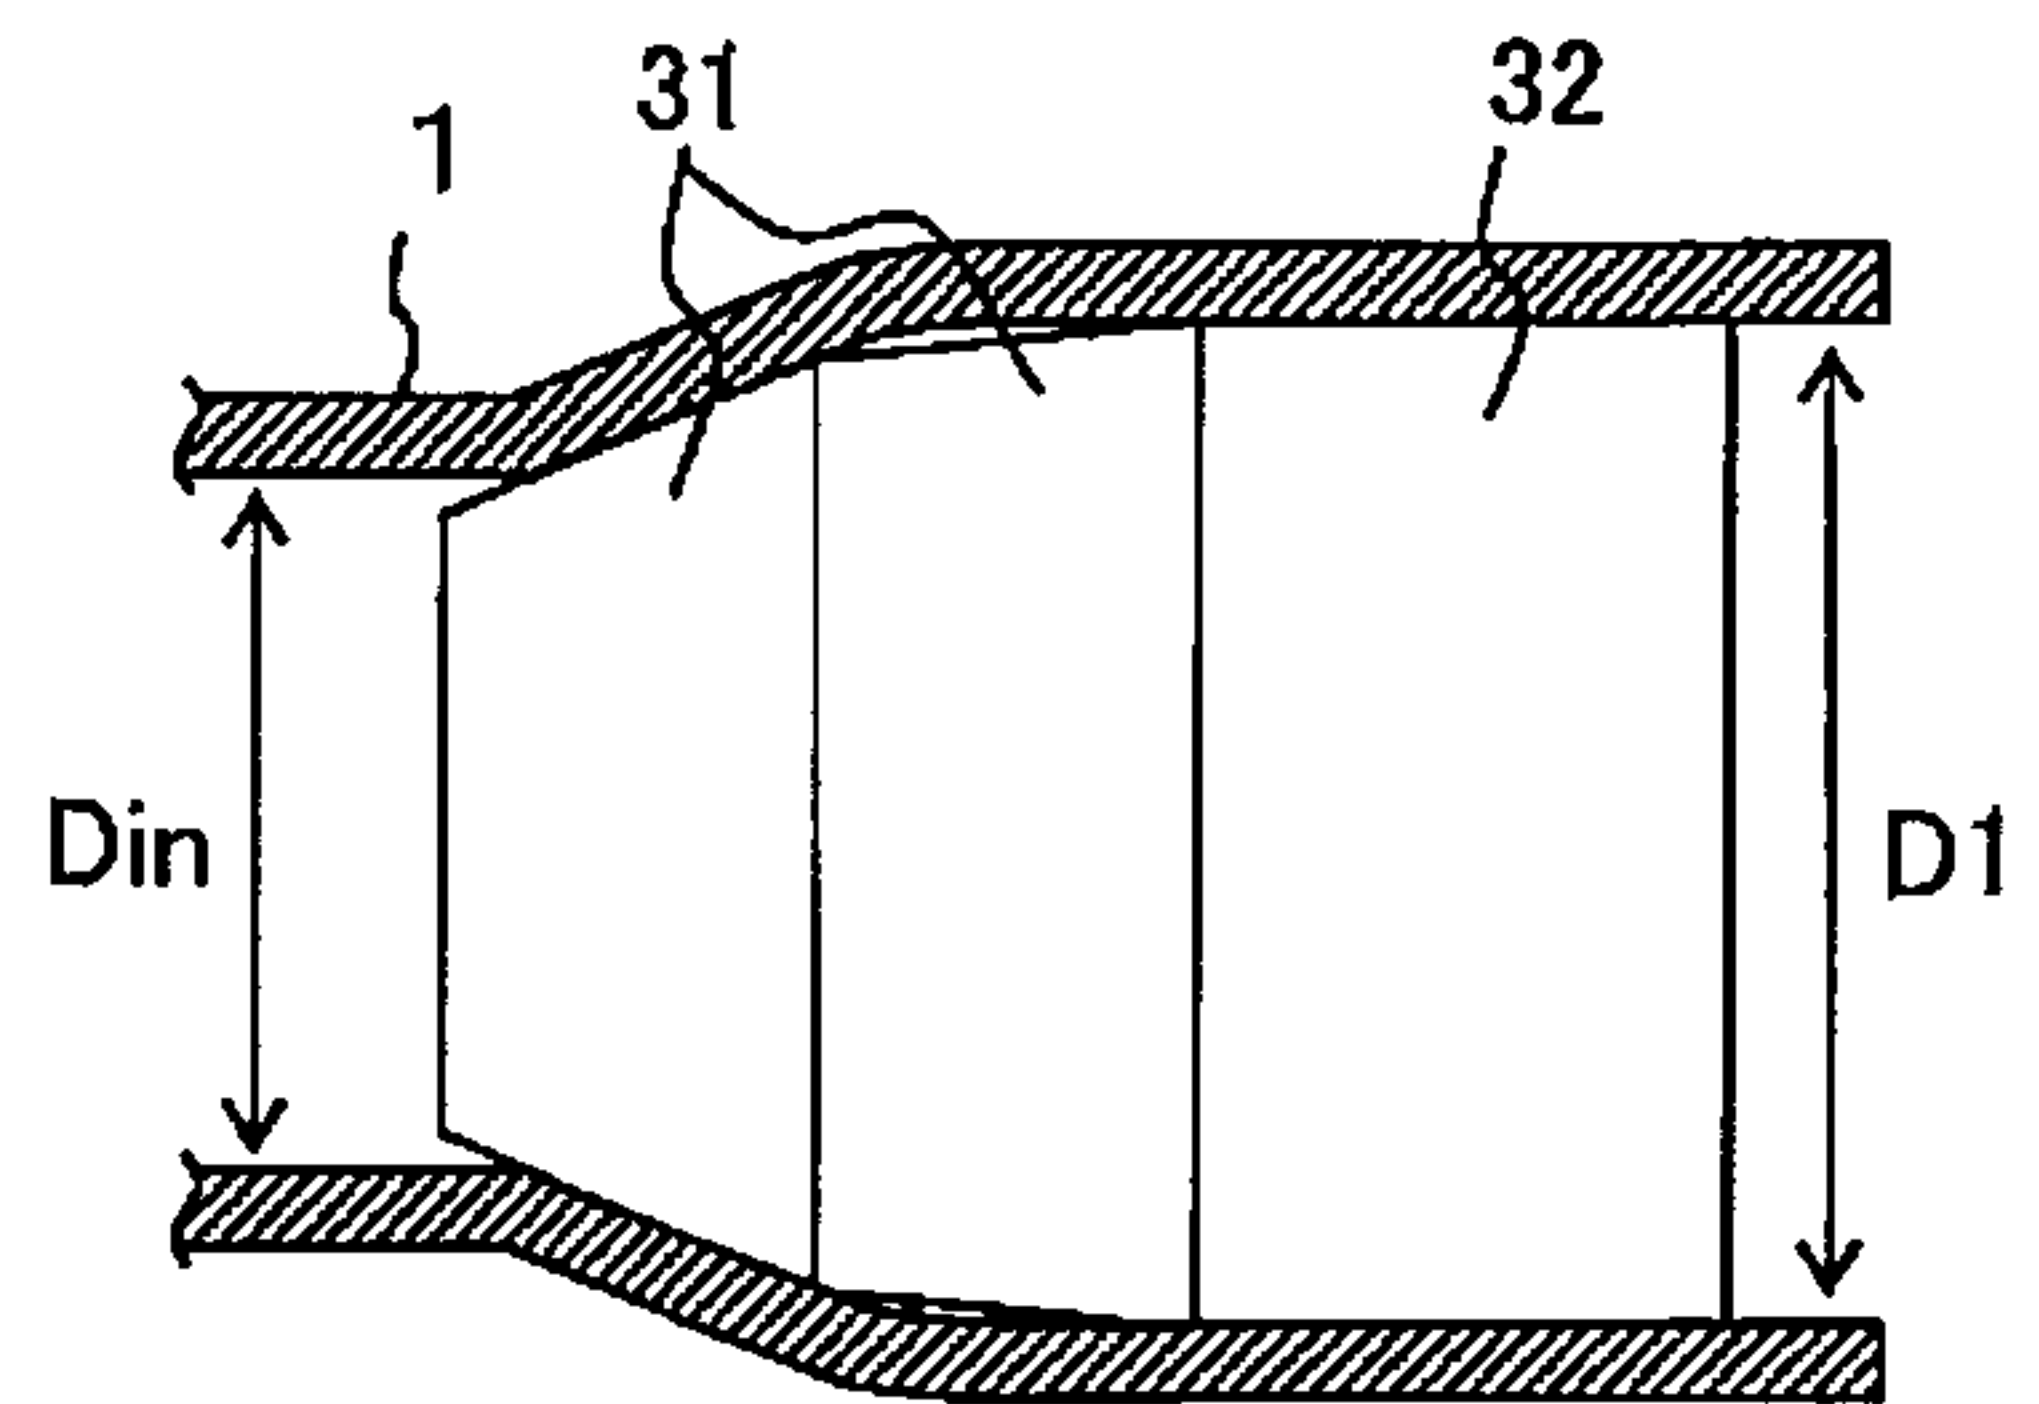


Figure 4

PRIOR ART

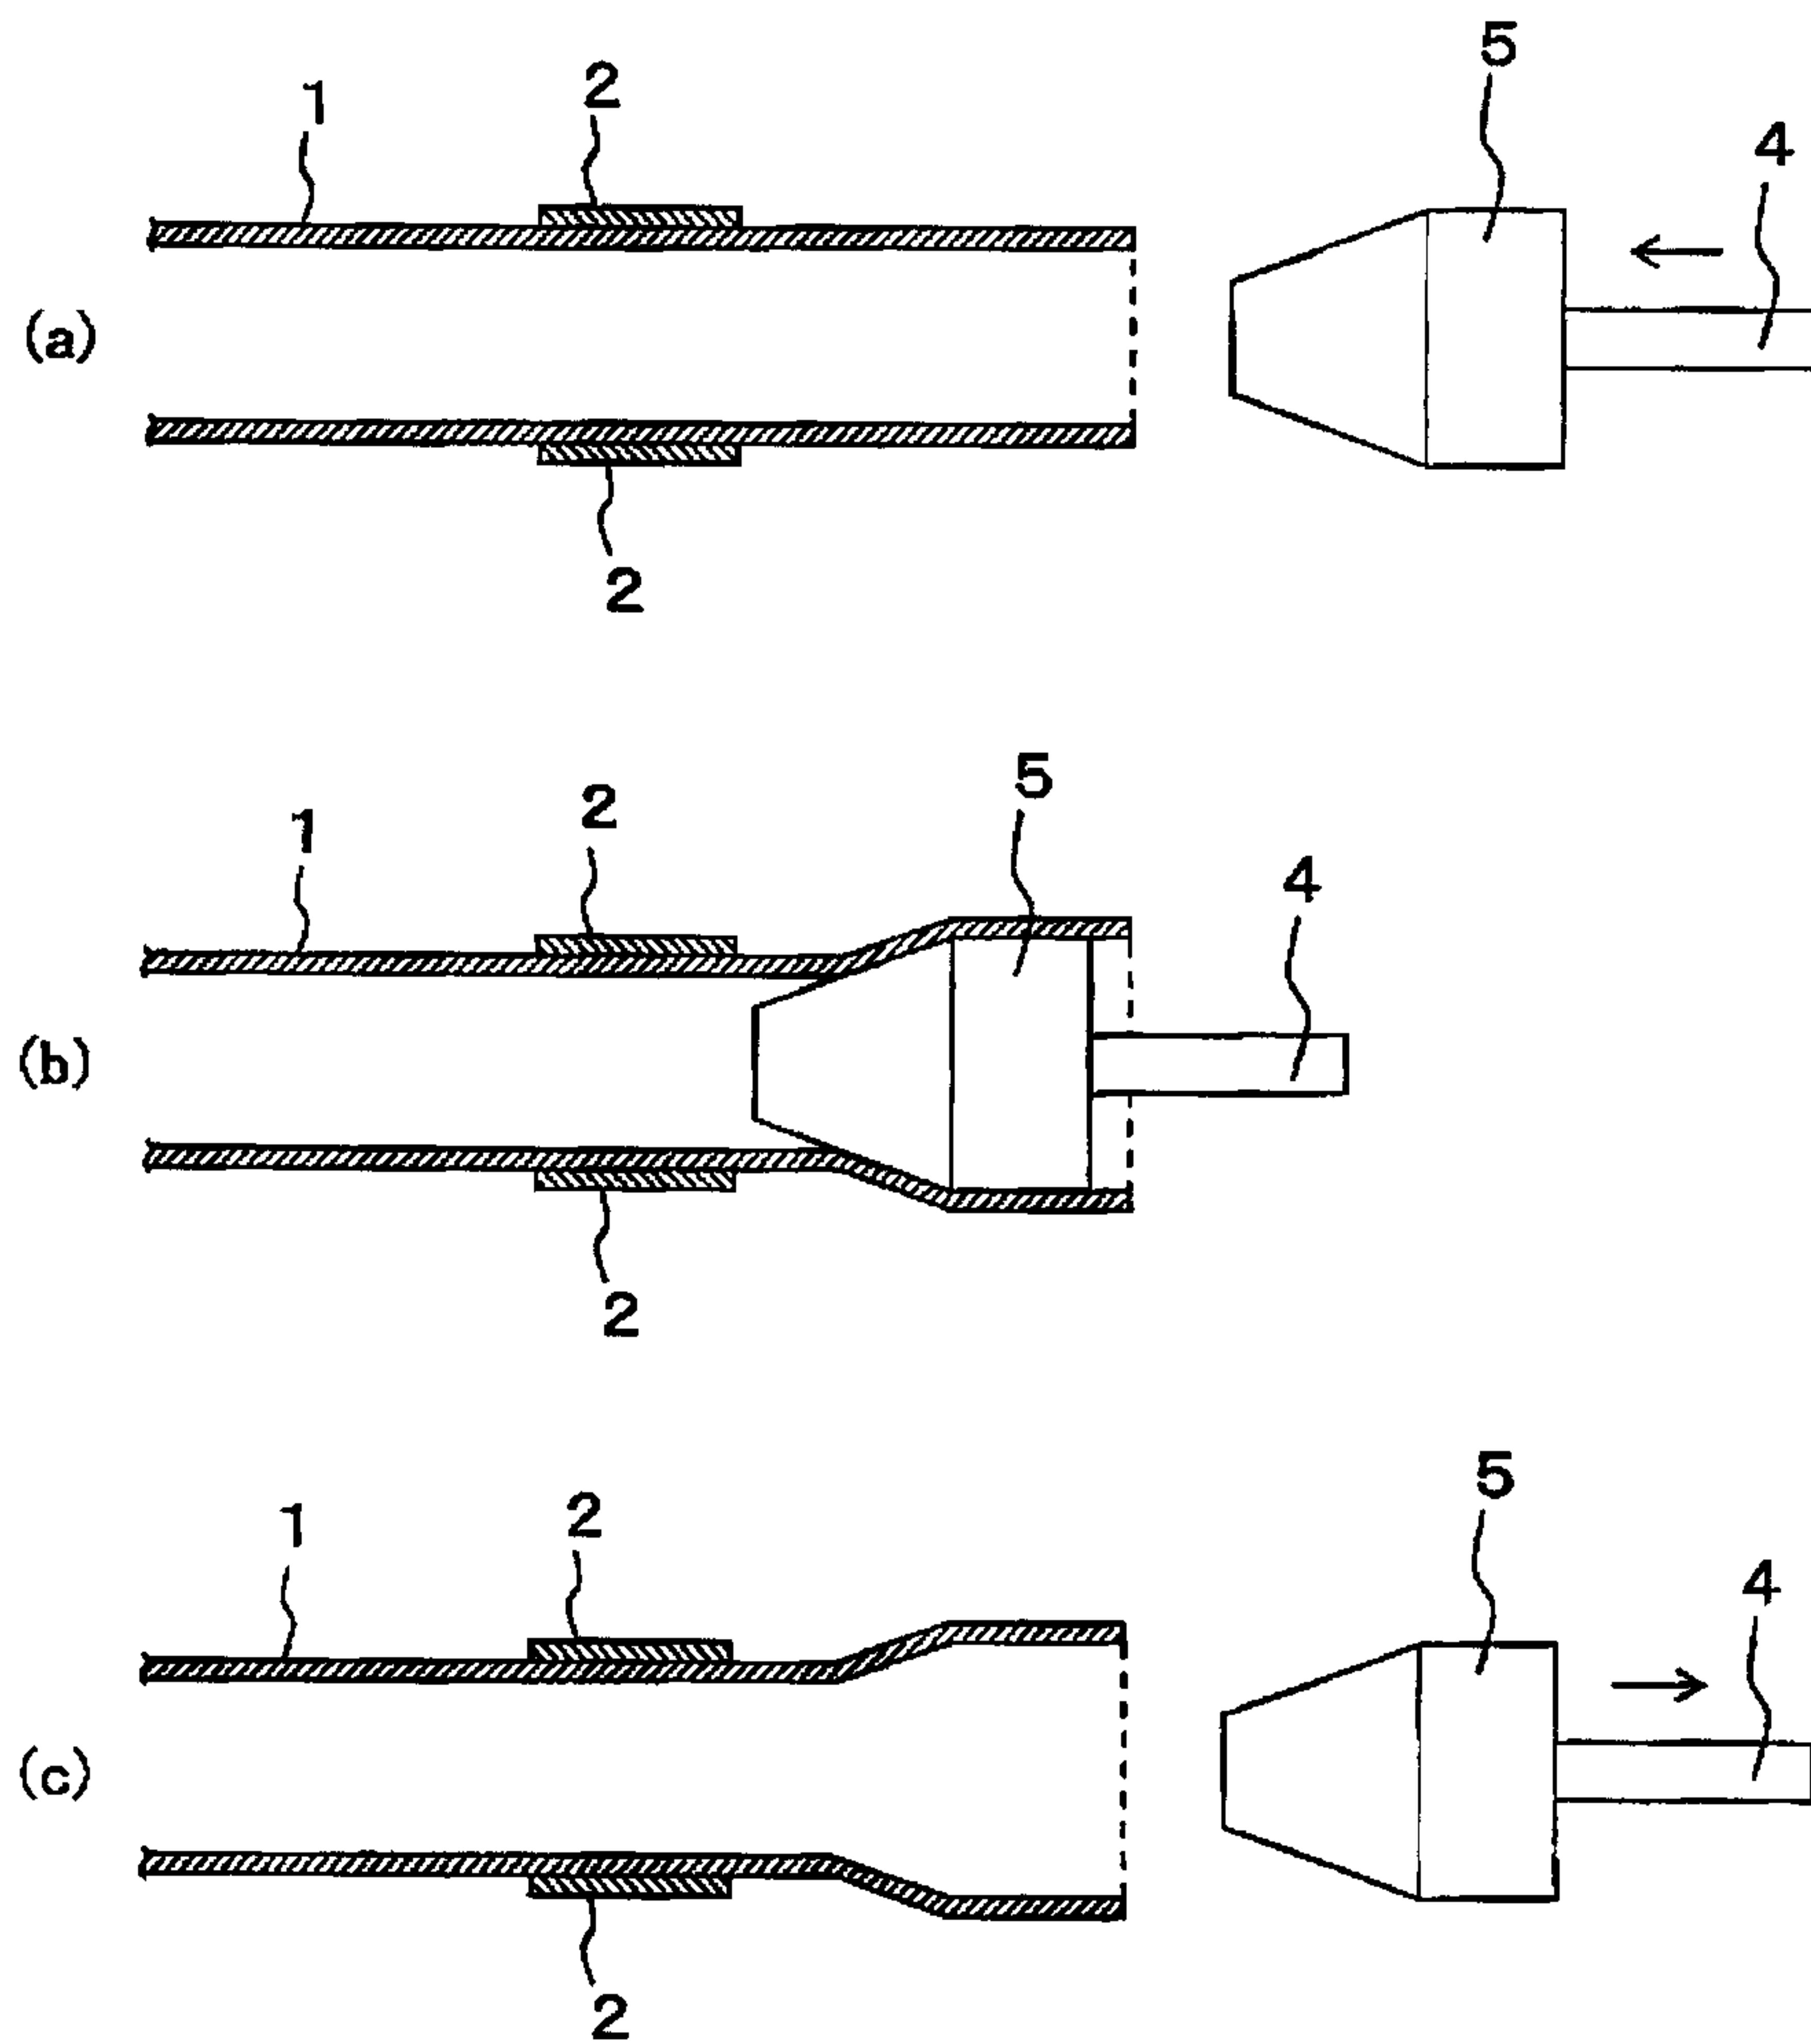


Figure 5

PRIOR ART

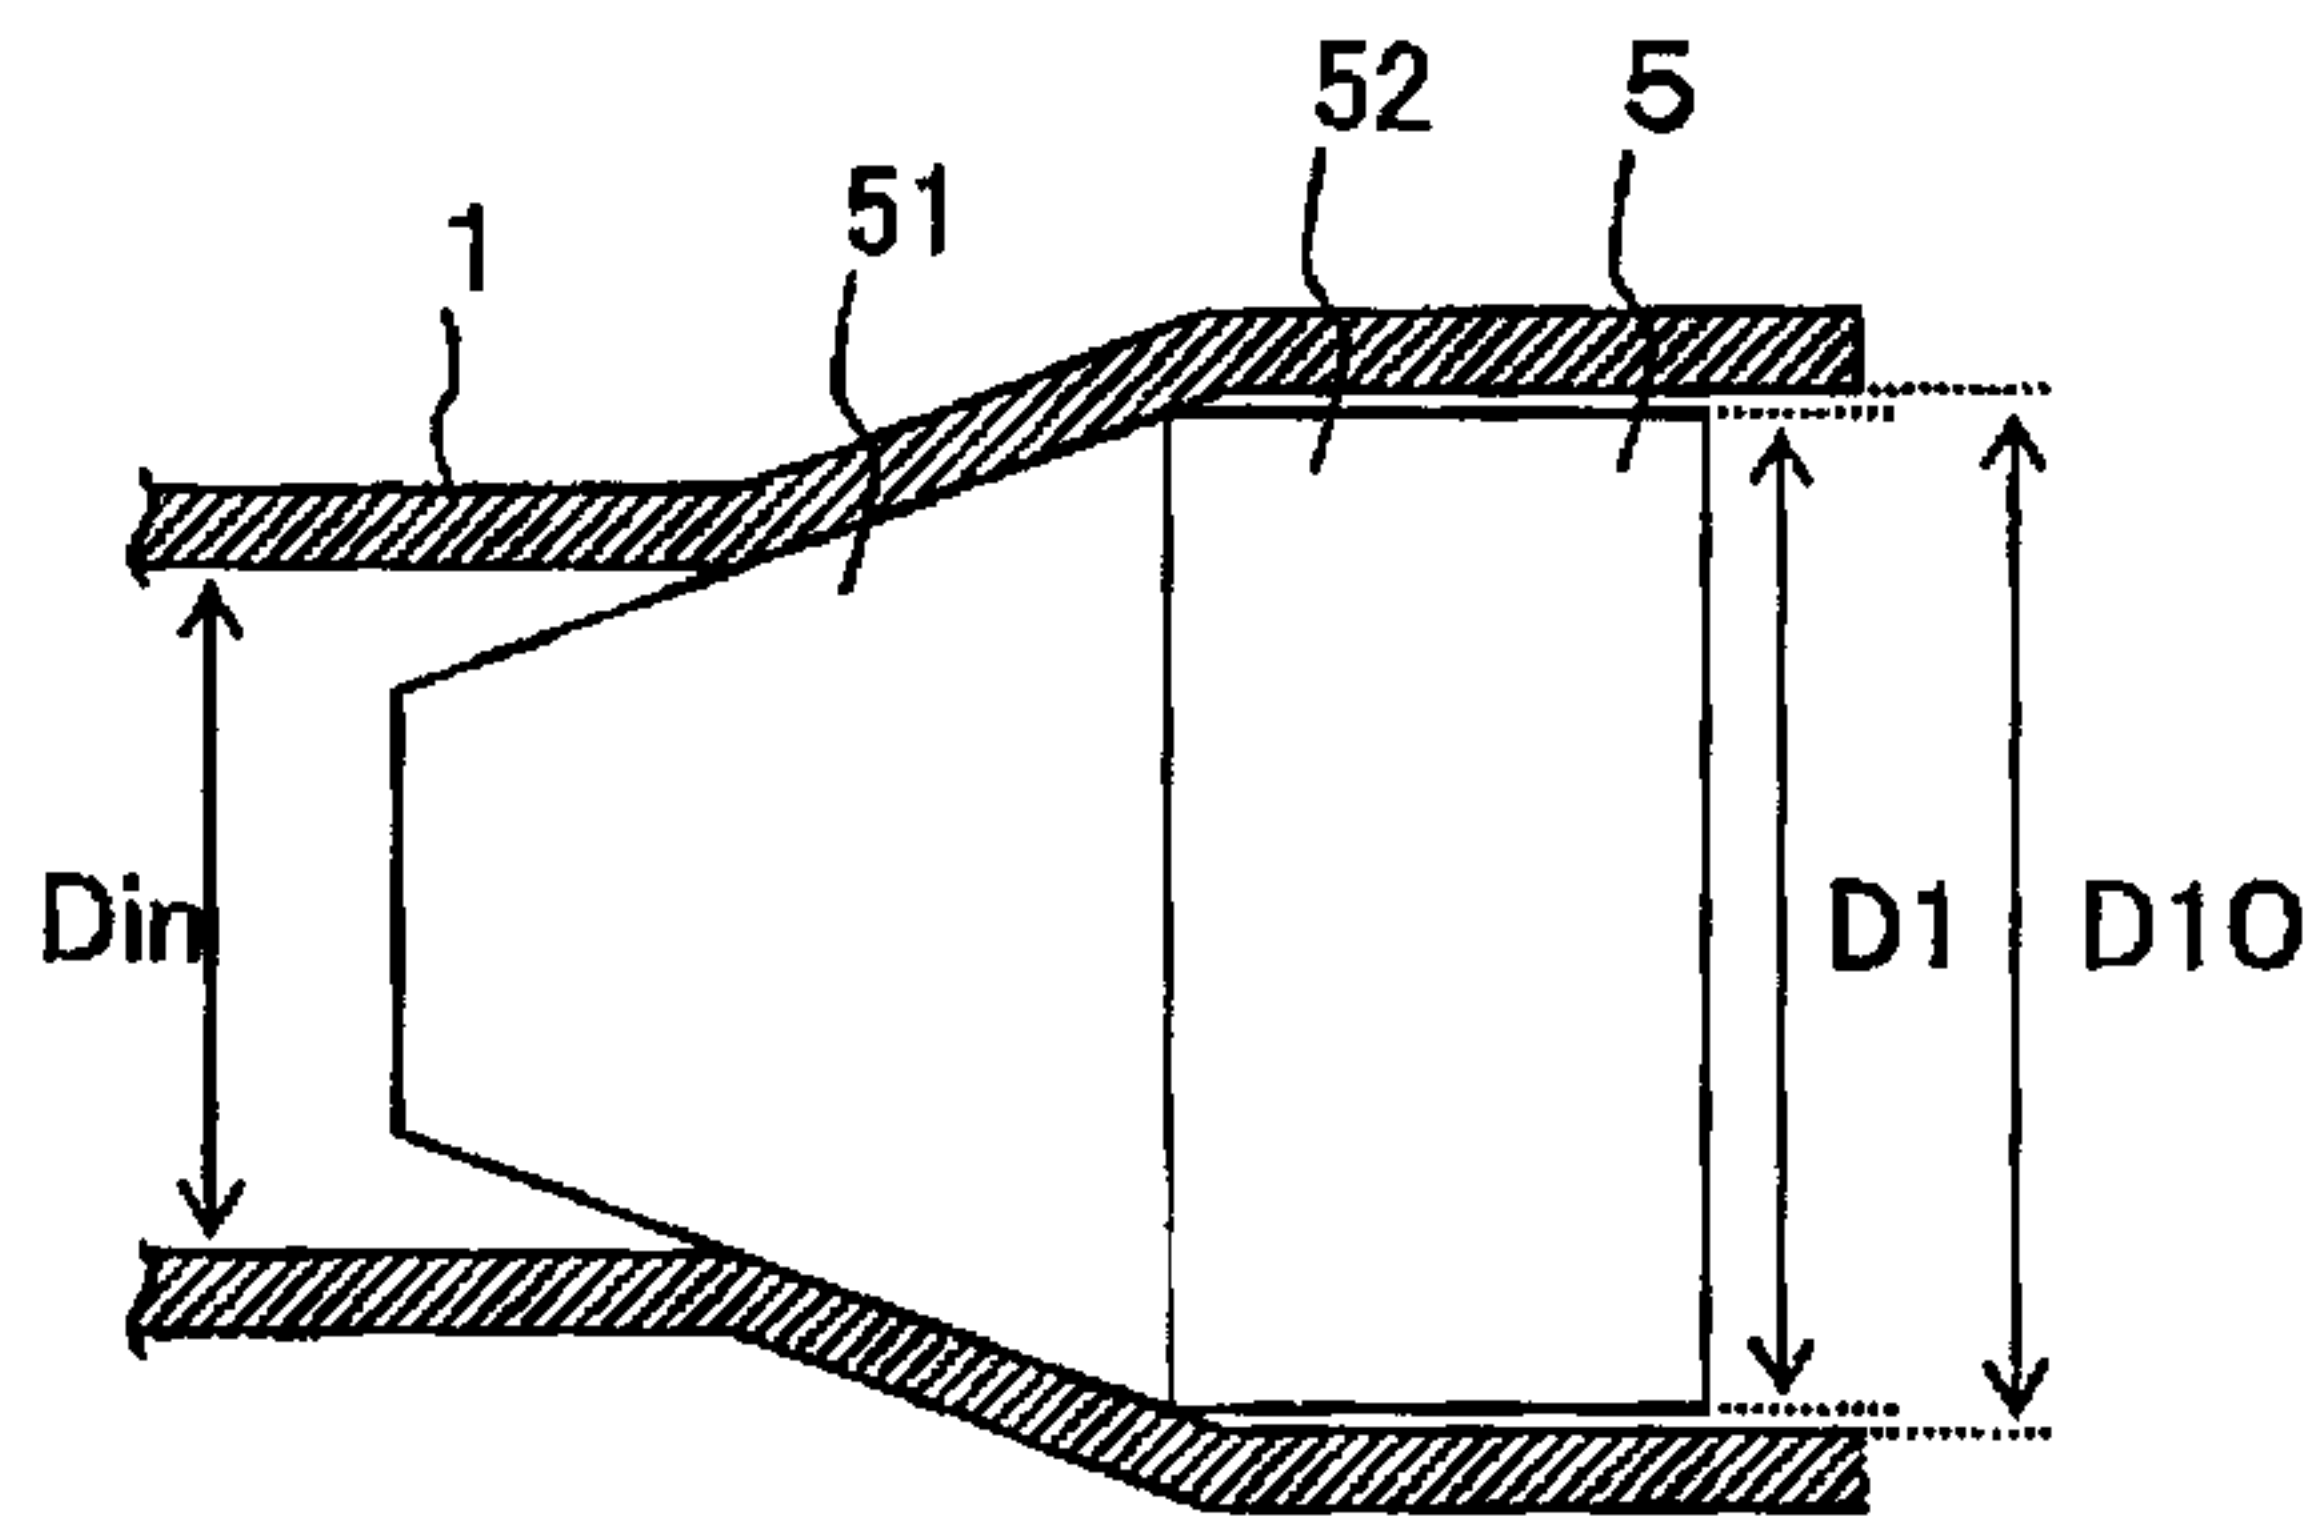


Figure 6

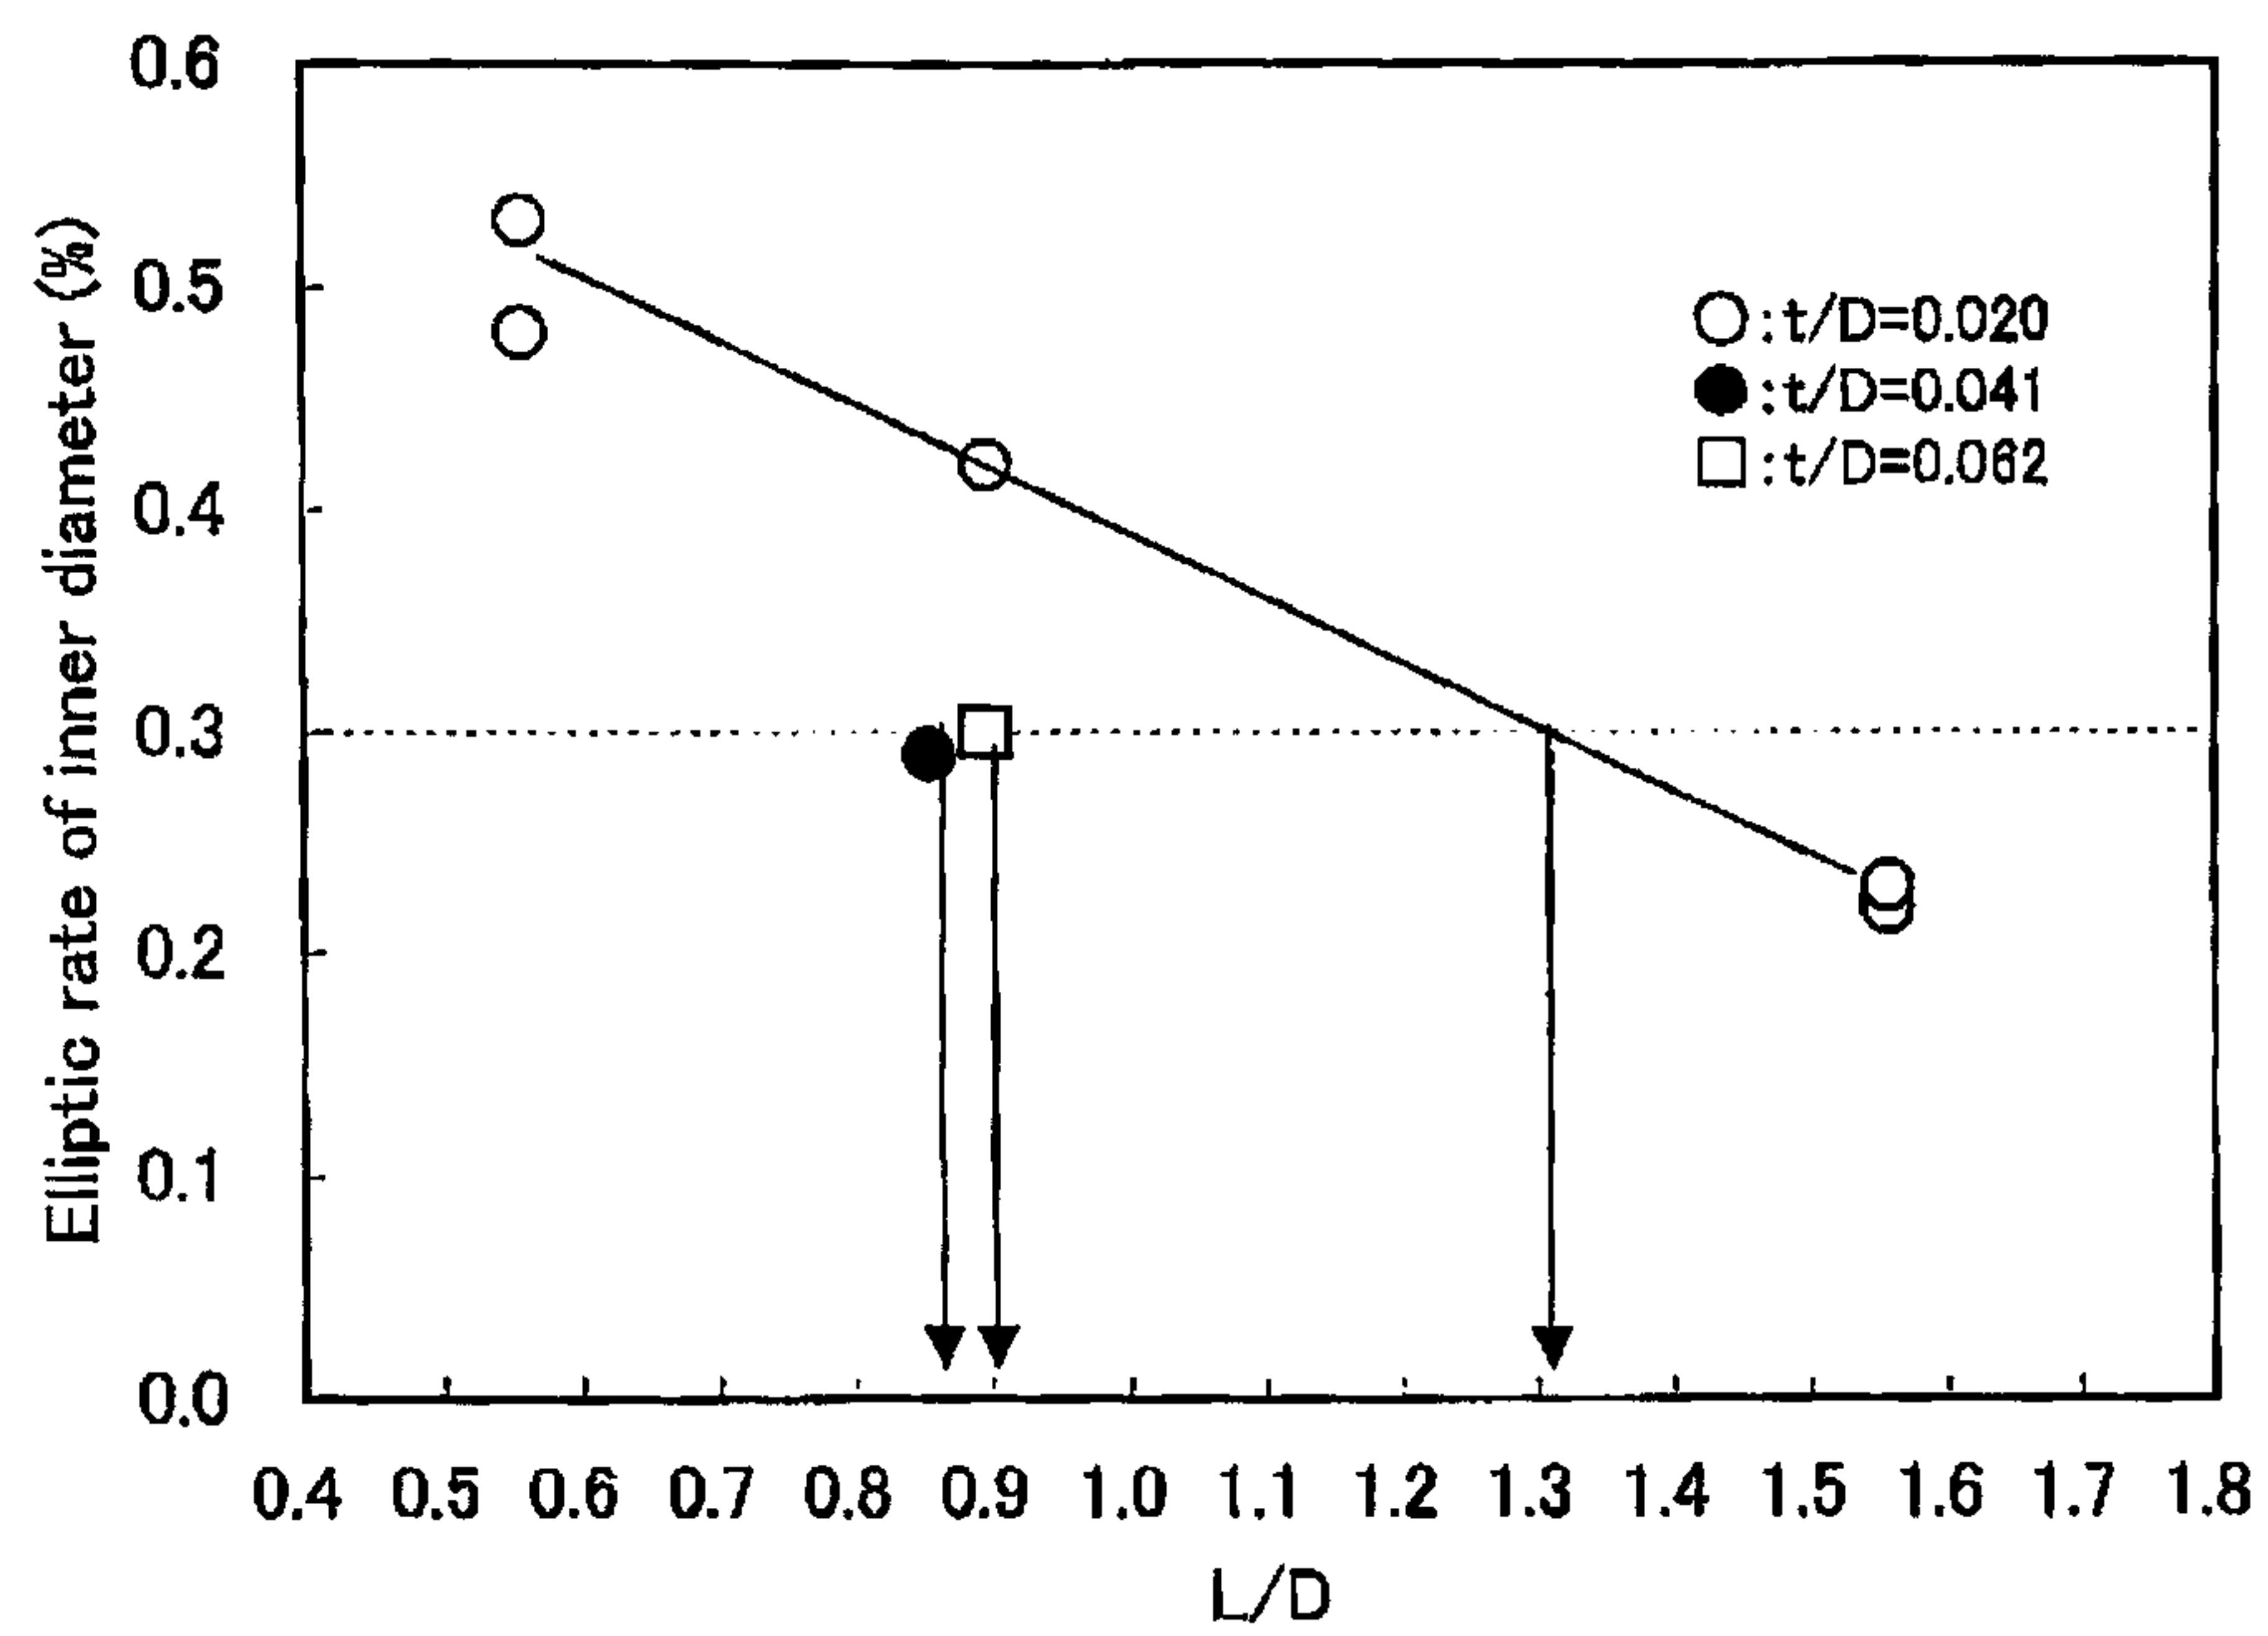


Figure 7

