

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 July 2005 (28.07.2005)

PCT


(10) International Publication Number  
WO 2005/069101 A2

- (51) International Patent Classification<sup>7</sup>: **G06F 1/00**
- (21) International Application Number: PCT/EP2004/053702
- (22) International Filing Date: 23 December 2004 (23.12.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/753,820 8 January 2004 (08.01.2004) US
- (71) Applicant (for all designated States except US): INTERNATIONAL BUSINESS MACHINES CORPORATION [US/US]; New Orchard Road, Armonk, NY 10504 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): CHAO, Ching-Yun [US/US]; 11518 Rustic Rock Drive, Austin, TX 78750 (US).
- (74) Agent: MATHER, Belinda; IBM United Kingdom Limited, Intellectual Property Law, Hursley Park, Winchester Hampshire SO21 2JN (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR ESTABLISHING A TRUST FRAMEWORK BASED ON SMART KEY DEVICES

(57) Abstract: A mechanism is provided for securing cryptographic functionality within a host system such that it may only be used when a system administrator physically allows it via a hardware security token. In addition, a hardware security unit is integrated into a data processing system, and the hardware security unit acts as a hardware certificate authority. The hardware security unit may be viewed as supporting a trust hierarchy or trust framework within a distributed data processing system. The hardware security unit can sign software that is installed on the machine that contains the hardware security unit. Server processes that use the signed software that is run on the machine can establish mutual trust relationships with the hardware security unit and amongst the other server processes based on their common trust of the hardware security unit.

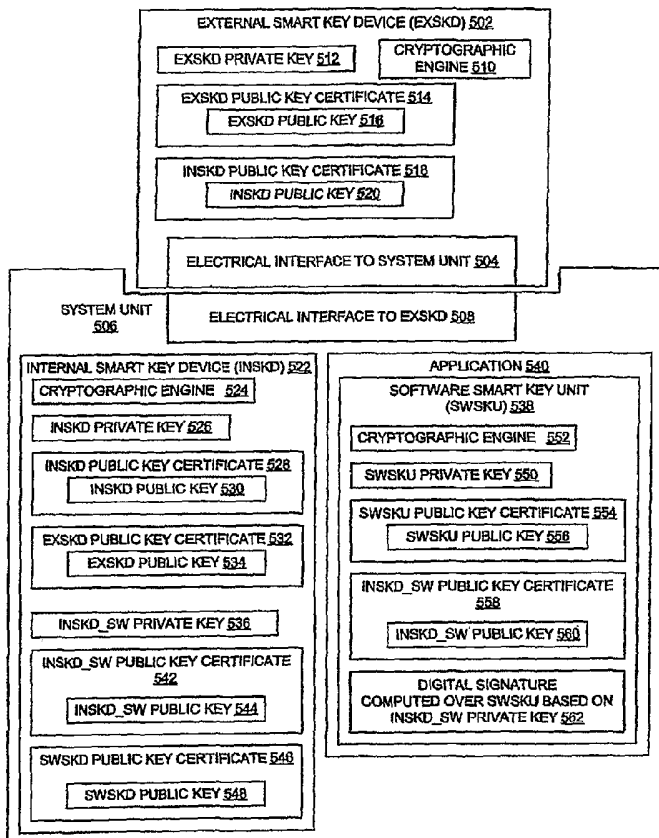

WO 2005/069101 A2



TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

**Published:**

— *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

AUS030854

1

## **Description**

# **METHOD AND SYSTEM FOR ESTABLISHING A TRUST FRAMEWORK BASED ON SMART KEY DEVICES**

### **Technical Field**

[001] The present invention relates to an improved data processing system and, in particular, to a method and apparatus for data storage protection using cryptography.

### **Background Art**

[002] In virtually every networking system, an administrative system secures resources by restricting access to those resources. A network within an enterprise may have many types of resources to be accessed: physical resources, such as client machines; and logical resources, such as computer programs. Different resources may have various authentication schemes. When an entity wants to access a restricted resource, the entity is required to authenticate itself to a requested service or an authentication service that acts on behalf of the requested service. The management of information about authorized entities to support these authentication schemes entails significant costs and administrative labor.

[003] Therefore, it would be advantageous to have a mechanism for managing trust relationships among entities in a data processing system that is founded on trust provided by a hardware entity within the data processing system.

### **Disclosure of Invention**

[004] A mechanism is provided for securing cryptographic functionality within a host system such that it may only be used when a system administrator physically allows it via a hardware security token. In addition, a hardware security unit is integrated into a data processing system, and the hardware security unit acts as a hardware certificate authority. The hardware security unit may be viewed as supporting a trust hierarchy or trust framework within a distributed data processing system. The hardware security unit can sign software that is installed on the machine that contains the hardware security unit. Server processes that use the signed software that is run on the machine can establish mutual trust relationships with the hardware security unit and amongst the other server processes based on their common trust of the hardware security unit.

[005] For example, a data processing system accepts a removable hardware device, which becomes electrically engaged with a system unit within the data processing system,

AUS030854

2

after which the removable hardware device and the hardware security unit mutually authenticate themselves, thereby enabling certain functions within the hardware security unit. While the removable hardware device remains electrically engaged with the system unit, the hardware security unit may act as a certificate authority to issue digital certificates for software modules. While the removable hardware device remains electrically engaged with the system unit, the hardware security unit may also receive and store a digital certificate corresponding to a private key possessed by a second hardware security unit that is not included in the system unit. Thereafter, software modules can mutually authenticate based on the digital certificates that are stored within the hardware security unit.

### **Brief Description of the Drawings**

[006] The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, further objectives, and advantages thereof, will be best understood by reference to the following detailed description when read in conjunction with the accompanying drawings, wherein:

[007] **FIG. 1A** depicts a typical network of data processing systems, each of which may implement the present invention;

[008] **FIG. 1B** depicts a typical computer architecture that may be used within a data processing system in which the present invention may be implemented;

[009] **FIG. 2** depicts a block diagram that shows a typical manner in which an individual obtains a digital certificate;

[010] **FIG. 3** depicts a block diagram that shows a typical manner in which an entity may use a digital certificate to be authenticated to a data processing system;

[011] **FIG. 4** depicts a block diagram that shows a portion of a data processing system that accepts a removable hardware device to enable cryptographic functionality in a hardware security unit within the data processing system;

[012] **FIG. 5** depicts a block diagram that shows a system unit that contains an internal smart key device and that uses an external smart key device to enable the cryptographic functionality within the internal smart key device;

[013] **FIG. 6** depicts a flowchart that shows an overview of a process for enabling the cryptographic functionality of the internal smart key device of a host system;

[014] **FIG. 7** depicts a flowchart that shows an overview of a process for enabling the cryptographic functionality of the internal smart key device of a host system for use by a particular software smart key unit;

[015] **FIG. 8** depicts a flowchart that shows a process for disabling the cryptographic

AUS030854

3

functionality of the internal smart key device of a host system;

[016] **FIGs. 9A-9B** depict a pair of flowcharts that show further detail for the mutual authentication procedure that is shown in step 604 of **FIG. 6**;

[017] **FIGs. 10A-10B** depict a pair of flowcharts that show further detail for the mutual authentication procedure that is shown in step 704 of **FIG. 7**;

[018] **FIG. 11A** depicts a flowchart that shows a process in an internal smart key device for performing operations as requested by a software smart key unit in which the operations are enabled or disabled based on the presence of an external smart key device;

[019] **FIG. 11B** depicts a flowchart that shows a process in an internal smart key device for performing operations as requested by a software smart key unit in which the operations are not required to be enabled by the presence of an external smart key device;

[020] **FIG. 12** depicts a block diagram that shows an embodiment of the present invention for protecting master secrets;

[021] **FIGs. 13-15** depict block diagrams that show different relationships between multiple external smart key devices and multiple internal smart key devices;

[022] **FIGs. 16A-16C** depict block diagrams that show a typical set of trusted relationships;

[023] **FIG. 17** depicts a block diagram that shows an example of a trust model that is constructed of trust relationships that are based on the trust provided by internal smart key devices;

[024] **FIG. 18** depicts a block diagram that shows a data processing system for generating operating system files in which each programmatic entity in the operating system contains functionality for establishing trust relationships in a trust hierarchy based on internal smart key devices;

[025] **FIG. 19** depicts a flowchart that shows a process for generating operating system modules that contain software smart key units such that the operating system modules are able to perform authentication operations with each other;

[026] **FIG. 20** depicts a block diagram that shows a data processing system for generating project code in which each programmatic entity contains functionality for establishing trust relationships in a trust hierarchy based on internal smart key devices;

[027] **FIG. 21** depicts a flowchart that shows a process for extending the certificate chain for an internal smart key device;

[028] **FIG. 22** depicts a block diagram that shows an example of a trust model that is

AUS030854

4

constructed of trust relationships that are based on the trust provided by a single local internal smart key device that maintains a certificate chain containing multiple root certificates for foreign internal smart key devices;

[029] **FIG. 23** depicts a flowchart that shows a process for obtaining a current root certificate chain maintained by the local internal smart key device;

[030] **FIG. 24** depicts a flowchart that shows a process for determining whether a digital certificate from a foreign internal smart key device is trustworthy;

[031] **FIG. 25** depicts a dataflow diagram that shows entities within a hardware-assisted trust model that may be used to ensure the integrity of software modules; and

[032] **FIG. 26** depicts a flowchart that shows a process for ensuring the integrity of software modules.

### **Mode for the Invention**

[033] In general, the devices that may comprise or relate to the present invention include a wide variety of data processing technology. Therefore, as background, a typical organization of hardware and software components within a distributed data processing system is described prior to describing the present invention in more detail.

[034] With reference now to the figures, **FIG. 1A** depicts a typical network of data processing systems, each of which may implement a portion of the present invention. Distributed data processing system **100** contains network **101**, which is a medium that may be used to provide communications links between various devices and computers connected together within distributed data processing system **100**. Network **101** may include permanent connections, such as wire or fiber optic cables, or temporary connections made through telephone or wireless communications. In the depicted example, server **102** and server **103** are connected to network **101** along with storage unit **104**. In addition, clients **105-107** also are connected to network **101**. Clients **105-107** and servers **102-103** may be represented by a variety of computing devices, such as mainframes, personal computers, personal digital assistants (PDAs), etc. Distributed data processing system **100** may include additional servers, clients, routers, other devices, and peer-to-peer architectures that are not shown.

[035] In the depicted example, distributed data processing system **100** may include the Internet with network **101** representing a worldwide collection of networks and gateways that use various protocols to communicate with one another, such as Lightweight Directory Access Protocol (LDAP), Transport Control Protocol/Internet Protocol (TCP/IP), Hypertext Transport Protocol (HTTP), Wireless Application Protocol (WAP), etc. Of course, distributed data processing system **100** may also include a

AUS030854

5

number of different types of networks, such as, for example, an intranet, a local area network (LAN), or a wide area network (WAN). For example, server 102 directly supports client 109 and network 110, which incorporates wireless communication links. Network-enabled phone 111 connects to network 110 through wireless link 112, and PDA 113 connects to network 110 through wireless link 114. Phone 111 and PDA 113 can also directly transfer data between themselves across wireless link 115 using an appropriate technology, such as Bluetooth™ wireless technology, to create so-called personal area networks (PAN) or personal ad-hoc networks. In a similar manner, PDA 113 can transfer data to PDA 107 via wireless communication link 116.

[036] The present invention could be implemented on a variety of hardware platforms; FIG. 1A is intended as an example of a heterogeneous computing environment and not as an architectural limitation for the present invention.

[037] With reference now to FIG. 1B, a diagram depicts a typical computer architecture of a data processing system, such as those shown in FIG. 1A, in which the present invention may be implemented. Data processing system 120 contains one or more central processing units (CPUs) 122 connected to internal system bus 123, which interconnects random access memory (RAM) 124, read-only memory 126, and input/output adapter 128, which supports various I/O devices, such as printer 130, disk units 132, or other devices not shown, such as an audio output system, etc. System bus 123 also connects communication adapter 134 that provides access to communication link 136. User interface adapter 148 connects various user devices, such as keyboard 140 and mouse 142, or other devices not shown, such as a touch screen, stylus, microphone, etc. Display adapter 144 connects system bus 123 to display device 146.

[038] Those of ordinary skill in the art will appreciate that the hardware in FIG. 1B may vary depending on the system implementation. For example, the system may have one or more processors, such as an Intel® Pentium®-based processor and a digital signal processor (DSP), and one or more types of volatile and non-volatile memory. Other peripheral devices may be used in addition to or in place of the hardware depicted in FIG. 1B. The depicted examples are not meant to imply architectural limitations with respect to the present invention.

[039] In addition to being able to be implemented on a variety of hardware platforms, the present invention may be implemented in a variety of software environments. A typical operating system may be used to control program execution within each data processing system. For example, one device may run a Unix® operating system, while another device contains a simple Java® runtime environment. A representative

AUS030854

6

computer platform may include a browser, which is a well known software application for accessing hypertext documents in a variety of formats, such as graphic files, word processing files, Extensible Markup Language (XML), Hypertext Markup Language (HTML), Handheld Device Markup Language (HDML), Wireless Markup Language (WML), and various other formats and types of files.

[040] The present invention may be implemented on a variety of hardware and software platforms, as described above with respect to **FIG. 1A** and **FIG. 1B**. More specifically, though, the present invention is directed to a mechanism for securing secret information through the use of a hardware security token. Before describing the present invention in more detail, though, some background information about digital certificates is provided for evaluating the operational efficiencies and other advantages of the present invention.

[041] Digital certificates support public key cryptography in which each party involved in a communication or transaction has a pair of keys, called the public key and the private key. Each party's public key is published while the private key is kept secret. Public keys are numbers associated with a particular entity and are intended to be known to everyone who needs to have trusted interactions with that entity. Private keys are numbers that are supposed to be known only to a particular entity, i.e. kept secret. In a typical asymmetric cryptographic system, a private key corresponds to exactly one public key.

[042] Within a public key cryptography system, since all communications involve only public keys and no private key is ever transmitted or shared, confidential messages can be generated using only public information and can be decrypted using only a private key that is in the sole possession of the intended recipient. Furthermore, public key cryptography can be used for authentication, i.e. digital signatures, as well as for privacy, i.e. encryption.

[043] Encryption is the transformation of data into a form unreadable by anyone without a secret decryption key; encryption ensures privacy by keeping the content of the information hidden from anyone for whom it is not intended, even those who can see the encrypted data. Authentication is a process whereby the receiver of a digital message can be confident of the identity of the sender and/or the integrity of the message.

[044] For example, when a sender encrypts a message, the public key of the receiver is used to transform the data within the original message into the contents of the encrypted message. A sender uses a public key of the intended recipient to encrypt data, and the receiver uses its private key to decrypt the encrypted message.



AUS030854

7

[045] When authenticating data, data can be signed by computing a digital signature from the data using the private key of the signer. Once the data is digitally signed, it can be stored with the identity of the signer and the signature that proves that the data originated from the signer. A signer uses its private key to sign data, and a receiver uses the public key of the signer to verify the signature.

[046] A certificate is a digital document that vouches for the identity and key ownership of entities, such as an individual, a computer system, a specific server running on that system, etc. Certificates are issued by certificate authorities. A certificate authority (CA) is an entity, usually a trusted third party to a transaction, that is trusted to sign or issue certificates for other people or entities. The certificate authority usually has some kind of legal responsibilities for its vouching of the binding between a public key and its owner that allow one to trust the entity that signed a certificate. There are many commercial certificate authorities; these authorities are responsible for verifying the identity and key ownership of an entity when issuing the certificate.

[047] If a certificate authority issues a certificate for an entity, the entity must provide a public key and some information about the entity. A software tool, such as specially equipped Web browsers, may digitally sign this information and send it to the certificate authority. The certificate authority might be a commercial company that provides trusted third-party certificate authority services. The certificate authority will then generate the certificate and return it. The certificate may contain other information, such as a serial number and dates during which the certificate is valid. One part of the value provided by a certificate authority is to serve as a neutral and trusted introduction service, based in part on their verification requirements, which are openly published in their Certification Service Practices (CSP).

[048] A certificate authority creates a new digital certificate by embedding the requesting entity's public key along with other identifying information and then signing the digital certificate with the certificate authority's private key. Anyone who receives the digital certificate during a transaction or communication can then use the public key of the certificate authority to verify the signed public key within the certificate. The intention is that the certificate authority's signature acts as a tamper-proof seal on the digital certificate, thereby assuring the integrity of the data in the certificate.

[049] Other aspects of certificate processing are also standardized. Myers et al., "Internet X.509 Certificate Request Message Format", Internet Engineering Task Force (IETF) Request for Comments (RFC) 2511, March 1999, specifies a format that has been recommended for use whenever a relying party is requesting a certificate from a

certificate authority. Adams et al., "Internet X.509 Public Key Infrastructure Certificate Management Protocols", IETF RFC 2511, March 1999, specifies protocols for transferring certificates. The present invention resides in a distributed data processing system that employs digital certificates; the description of FIGs. 2-3 provides background information about typical operations involving digital certificates.

[050] With reference now to FIG. 2, a block diagram depicts a typical manner in which an individual obtains a digital certificate. User 202, operating on some type of client computer, has previously obtained or generated a public/private key pair, e.g., user public key 204 and user private key 206. User 202 generates a request for certificate 208 containing user public key 204 and sends the request to certificate authority 210, which is in possession of CA public key 212 and CA private key 214. Certificate authority 210 verifies the identity of user 202 in some manner and generates X.509 digital certificate 216 containing user public key 218. The entire certificate is signed with CA private key 214; the certificate includes the public key of the user, the name associated with the user, and other attributes. User 202 receives newly generated digital certificate 216, and user 202 may then present digital certificate 216 as necessary to engage in trusted transactions or trusted communications. An entity that receives digital certificate 216 from user 202 may verify the signature of the certificate authority by using CA public key 212, which is published and available to the verifying entity.

[051] With reference now to FIG. 3, a block diagram depicts a typical manner in which an entity may use a digital certificate to be authenticated to a data processing system. User 302 possesses X.509 digital certificate 304, which is transmitted to an Internet or intranet application 306 on host system 308; application 306 comprises X.509 functionality for processing and using digital certificates. User 302 signs or encrypts data that it sends to application 306 with its private key.

[052] The entity that receives certificate 304 may be an application, a system, a subsystem, etc. Certificate 304 contains a subject name or subject identifier that identifies user 302 to application 306, which may perform some type of service for user 302. The entity that uses certificate 304 verifies the authenticity of the certificate before using the certificate with respect to the signed or encrypted data from user 302.

[053] Host system 308 may also contain system registry 310 which is used to authorize user 302 for accessing services and resources within system 308, i.e. to reconcile a user's identity with user privileges. For example, a system administrator may have

AUS030854

configured a user's identity to belong to certain a security group, and the user is restricted to being able to access only those resources that are configured to be available to the security group as a whole. Various well-known methods for imposing an authorization scheme may be employed within the system.

[054] In order to properly validate or verify a digital certificate, an application must check whether the certificate has been revoked. When the certificate authority issues the certificate, the certificate authority generates a unique serial number by which the certificate is to be identified, and this serial number is stored within the "Serial Number" field within an X.509 certificate. Typically, a revoked X.509 certificate is identified within a CRL via the certificate's serial number; a revoked certificate's serial number appears within a list of serial numbers within the CRL.

[055] In order to determine whether certificate 304 is still valid, application 306 obtains a certificate revocation list (CRL) from CRL repository 312 and validates the CRL. Application 306 compares the serial number within certificate 304 with the list of serial numbers within the retrieved CRL, and if there are no matching serial numbers, then application 306 validates certificate 304. If the CRL has a matching serial number, then certificate 304 should be rejected, and application 306 can take appropriate measures to reject the user's request for access to any controlled resources.

[056] Most data processing systems contain sensitive data that needs to be protected. For example, the data integrity of configuration information needs to be protected from illegitimate modification, while other information, such as a password file, needs to be protected from illegitimate disclosure. An operator of a given data processing system may employ many different types of security mechanisms to protect the data processing system. For example, the operating system on the data processing system may provide various software mechanisms to protect sensitive data, such as various authentication and authorization schemes, while certain hardware devices and software applications may rely upon hardware mechanisms to protect sensitive data, such as hardware security tokens and biometric sensor devices. Even though multiple software and hardware mechanisms may be employed within a given data processing system to protect sensitive data, the sensitive data may also be encrypted so that if someone gains illegitimate access to the encrypted sensitive data, any copy of the encrypted sensitive data would be useless without the ability to decrypt the encrypted sensitive data.

[057] The ability to ultimately protect all information that is contained within the data processing system has limitations, though. For example, in an effort to further protect a

AUS030854

10

password file, the password file may be encrypted using yet another secret, such as a password or a cryptographic key, often referred to as a master secret. However, this new secret also needs to be protected in some manner. Thus, a system administrator may enter a type of dilemma in which any attempt to implement another layer of security results in additional sensitive information that also needs to be protected. Turning now to the present invention, the remaining figures depict exemplary embodiments of the present invention which resolves this dilemma.

[058] With reference now to **FIG. 4**, a block diagram depicts a portion of a data processing system that accepts a removable hardware device to enable cryptographic functionality in a hardware security unit within the data processing system in accordance with an embodiment of the present invention. The present invention employs a pair of matching smart key devices that hold cryptographic keys and perform encryption functions. System unit **402** interfaces with external smart key device (EXSKD) **404**, which is a portable or removable device. System unit **402** also contains internal smart key device (INSKD) **406**, which is a matching device that is an integral part of the host system that receives the removable device, such as a motherboard. The internal smart key device is preferably a packaged, integrated circuit that is difficult to remove from the host system; while it may be described as a hardware security unit or device, it may also comprise a processing unit for executing instructions. In this example, EXSKD **404** and INSKD **406** are paired devices. The removable device is physically secured by system administration personnel, e.g., an IT administrator; the removable device, i.e. EXSKD **404**, is inserted into a host machine, such as system unit **402**, when an IT administrator needs to enable certain cryptographic functions that can only be performed by the matching device on the host machine, i.e. INSKD **406**. In other words, certain cryptographic functions are available when the external smart key device is inserted into the system unit. Only INSKD **406** can produce the results that are needed by the IT administrator because only INSKD **406** contains one or more particular cryptographic private keys for producing certain cryptographic output. Application **408** on system unit **402** has software smart key unit (SWSKU) **410** that is analogous to EXSKD **404** and INSKD **406**. Application **408** uses SWSKU **410** to perform certain functions, which are explained in more detail hereinbelow.

[059] With reference now to **FIG. 5**, a block diagram depicts a system unit that contains an internal smart key device and that uses an external smart key device to enable the cryptographic functionality within the internal smart key device in accordance with an

AUS030854

11

embodiment of the present invention. **FIG. 5** is similar to **FIG. 4** except that **FIG. 5** includes additional detail on the cryptographic keys that are stored within the various components.

[060] External smart key device (EXSKD) **502** is a removable hardware device; EXSKD **502** is preferably a portable device that is controlled by a system administrator and that acts as hardware security token. External smart key device **502** with electrical interface **504** is insertable into system unit **506** with electrical interface **508**; external smart key device **502** and system unit **506** electrically engage through their respective interfaces to exchange electrical signals representing digital information.

[061] External smart key device **502** contains cryptographic engine **510** for performing cryptographic functions using various data items that are stored in external smart key device **502**. EXSKD private key **512** is stored in a manner such that it cannot be read or accessed by entities that are external to EXSKD **502**; EXSKD **502** does not contain functionality for transmitting or otherwise providing a copy of EXSKD private key **512**. EXSKD public key certificate **514** contains a copy of EXSKD public key **516** that corresponds to EXSKD private key **512** as an asymmetric cryptographic key pair. EXSKD **502** also contains a copy of INSKD public key certificate **518**, which itself contains a copy of INSKD public key **520** that corresponds to INSKD private key **526** as an asymmetric cryptographic key pair. The copy of INSKD public key certificate **518** may be written onto EXSKD **502** as part of its manufacturing or initialization processes.

[062] System unit **506** contains internal smart key device (INSKD) **522**. Internal smart key device **522** contains cryptographic engine **524** for performing cryptographic functions using various data items that are stored in internal smart key device **522**. INSKD private key **526** is stored in a manner such that it cannot be read or accessed by entities that are external to INSKD **522**; INSKD **522** does not contain functionality for transmitting or otherwise providing a copy of INSKD private key **526**. INSKD public key certificate **528** contains a copy of INSKD public key **530** that corresponds to INSKD private key **526** as an asymmetric cryptographic key pair. INSKD **522** also contains a copy of EXSKD public key certificate **532**, which itself contains a copy of INSKD public key **534** that corresponds to EXSKD private key **512** as an asymmetric cryptographic key pair. The copy of EXSKD public key certificate **532** may be written into INSKD **522** as part of its manufacturing or initialization processes.

[063] In alternative embodiments, INSKD private key **526** and INSKD public key **530** may be used for other functions. In a preferred embodiment as shown in **FIG. 5**,

AUS030854

12

INSKD private key **526** and INSKD public key **530** are reserved for communications between INSKD **522** and EXSKD **502** while INSKD **522** employs one or more other cryptographic key pairs for other functions. In this example, INSKD\_SW private key **536** is used by INSKD **522** for securing communications between INSKD **522** and software smart key unit (SWSKU) **538** in application **540**. INSKD\_SW public key certificate **542** contains a copy of INSKD\_SW public key **544** that corresponds to INSKD\_SW private key **536** as an asymmetric cryptographic key pair. INSKD **522** also contains a copy of SWSKU public key certificate **546**, which itself contains a copy of SWSKU public key **548** that corresponds to SWSKU private key **550** as an asymmetric cryptographic key pair.

[064] System unit **506** supports execution of application **540** that contains SWSKU **538**, which itself contains cryptographic engine **552** for performing cryptographic functions using various data items that are stored in software smart key unit **538**. SWSKU **538** does not contain functionality for transmitting or otherwise providing a copy of SWSKU private key **550**. SWSKU public key certificate **554** contains a copy of SWSKU public key **556** that corresponds to SWSKU private key **550** as an asymmetric cryptographic key pair. SWSKU **538** also contains a copy of INSKD\_SW public key certificate **558**, which itself contains a copy of INSKD\_SW public key **560** that corresponds to INSKD\_SW private key **536** as an asymmetric cryptographic key pair. As explained in more detail further below, SWSKU **538** may be digitally signed. In the example that is shown in **FIG. 5**, SWSKU **538** contains digital signature **562** that has been computed over SWSKU **538** using INSKD\_SW private key **536**; in other words, INSKD **522** has digitally signed SWSKU **538** using INSKD\_SW private key **536**.

[065] With reference now to **FIG. 6**, a flowchart depicts an overview of a process for enabling the cryptographic functionality of the internal smart key device of a host system. The process commences when the external smart key device is electrically engaged with a system unit that includes an internal smart key device (step **602**). For example, an IT administrator may insert the external smart key device into a receiving unit that includes a slot for receiving the external smart key device. The internal smart key device and the external smart key device then perform a mutual authentication procedure (step **604**), after which the internal smart key device is enabled to perform cryptographic functions (step **606**), and the process is concluded. It may be assumed that any error in the mutual authentication procedure results in the continued disablement of the internal smart key device. In a less restrictive embodiment, the

AUS030854

13

cryptographic functions of the internal smart key device may then be invoked by any application that is running on the host system. In a more restrictive embodiment, the cryptographic functions of the internal smart key device may be invoked only by an application that includes a software smart key unit, as shown in **FIG. 7**.

[066] With reference now to **FIG. 7**, a flowchart depicts a process for enabling the cryptographic functionality of the internal smart key device of a host system for use by a particular software smart key unit in accordance with an embodiment of the present invention. The process commences when an application or an applet containing a software smart key unit invokes a cryptographic function of the internal smart key device, e.g., through an application programming interface (API) (step **702**). The internal smart key device and the software smart key unit then perform a mutual authentication procedure (step **704**), after which the internal smart key device is enabled to perform cryptographic functions for the software smart key unit (step **706**), and the process is concluded. Assuming that multiple software smart key units on a host system have completed a mutual authentication procedure with the internal smart key device, then the internal smart key device may be simultaneously enabled to perform cryptographic functions on behalf of the multiple software smart key units.

[067] While the external smart key device remains engaged with the system unit containing the internal smart key device, the internal smart key device is enabled to provide functionality to act as a certificate authority, i.e. generate new public certificates. In one embodiment, the external smart key device should be engaged with the system unit containing the internal smart key device when installing a new software package. A new public certificate may be issued to the new software package during the software installation; the private key that corresponds to the public key in the newly issued digital certificate may be embedded within the software package, and the private key may be protected by having the internal smart key device sign the software package. Furthermore, in a Java<sup>®</sup> environment, a JAR file and the Java<sup>®</sup> package in which the private key is embedded may be further sealed to prevent a malicious user from tampering with the private key.

[068] With reference now to **FIG. 8**, a flowchart depicts a process for disabling the cryptographic functionality of the internal smart key device of a host system in accordance with an embodiment of the present invention. The process commences when the external smart key device is electrically disengaged from the system unit containing the internal smart key device (step **802**), e.g., at some subsequent point in time after the external smart key device had been inserted and the internal smart key

AUS030854

device had been enabled. When the system unit detects the disengagement of the external smart key device, then the internal smart key device becomes disabled from further performing cryptographic functions (step 804), and the process is concluded.

[069] The process that is shown in FIG. 8 operates as a complementary process to either of the processes that are shown in FIG. 6 or FIG. 7. It should be noted, though, that the internal smart key device may still perform some functions such that it is not completely disabled, depending on the implementation of the present invention. It may be assumed that the cryptographic functionality in the internal smart key device may be enabled or disabled through software or hardware. For example, in a hardware mode, the operation of particular circuitry in the internal smart key device might be prevented from entering an operable state by certain flip-flops or other mechanisms that must be set or cleared based on an enablement state that represents whether the external smart key device has been accepted; in a software mode, the operation of certain cryptographic functions may be protected by setting and clearing special enablement flags that logically control the execution of the cryptographic functions.

[070] With reference now to FIGS. 9A-9B, a pair of flowcharts depict further detail for the mutual authentication procedure that is shown in step 604 of FIG. 6. FIG. 9A depicts the process for the internal smart key device to authenticate the external smart key device, while FIG. 9B depicts the process for the external smart key device to authenticate the internal smart key device. The process that is shown in FIG. 9A may be performed prior to the process that is shown in FIG. 9B or vice versa; depending on the manner in which the present invention is implemented, the processes may be independent and/or may be performed simultaneously, e.g., through appropriate signals or status flags that indicate the operations that are being attempted.

[071] Referring now to FIG. 9A, the process commences when the internal smart key device uses the public key of the external smart key device to encrypt a message, e.g., a random text string (step 902). The internal smart key device, through the appropriate interface of the host system, transfers the encrypted message to the external smart key device (step 904), which then decrypts the encrypted message with its private key (step 906). The external smart key device then encrypts the decrypted message with the public key of the internal smart key device (step 908) and passes the encrypted message to the internal smart key device (step 910). The internal smart key device then decrypts the encrypted message with its private key (step 912) and compares the received message with its original message (step 914). If the two messages match, then the internal smart key device provides an indication, e.g., with an appropriate signal or



AUS030854

by setting a logical flag variable, that the internal smart key device has determined that the external smart key device is authentic (step 916), thereby concluding the process.

[072] Referring now to **FIG. 9B**, the process commences when the external smart key device uses the public key of the internal smart key device to encrypt a message, e.g., a random text string (step 922). The external smart key device transfers the encrypted message to the internal smart key device (step 924), which then decrypts the encrypted message with its private key (step 926). The internal smart key device then encrypts the decrypted message with the public key of the external smart key device (step 928) and passes the encrypted message to the external smart key device (step 930). The external smart key device then decrypts the encrypted message with its private key (step 932) and compares the received message with its original message (step 934). If the two messages match, then the external smart key device provides an indication, e.g., with an appropriate signal or by setting a logical flag variable, that the external smart key device has determined that the internal smart key device is authentic (step 936), thereby concluding the process.

[073] With reference now to **FIGS. 10A-10B**, a pair of flowcharts depict further detail for the mutual authentication procedure that is shown in step 704 of **FIG. 7**. **FIG. 10A** depicts the process for the software smart key unit to authenticate the internal smart key device, while **FIG. 10B** depicts the process for the internal smart key device to authenticate the software smart key unit. The process that is shown in **FIG. 10A** may be performed prior to the process that is shown in **FIG. 10B** or vice versa; depending on the manner in which the present invention is implemented, the processes may be independent and/or may be performed simultaneously, e.g., through appropriate messages or status flags that indicate the operations that are being attempted.

[074] Referring now to **FIG. 10A**, the process commences when the software smart key unit uses the public key of the internal smart key device to encrypt a message, e.g., a random text string (step 1002). The software smart key unit transfers the encrypted message to the internal smart key device (step 1004), which then decrypts the encrypted message with its private key (step 1006). The internal smart key device then encrypts the decrypted message with the public key of the software smart key unit (step 1008) and passes the encrypted message to the software smart key unit (step 1010). The software smart key unit then decrypts the encrypted message with its private key (step 1012) and compares the received message with its original message (step 1014). If the two messages match, then the software smart key unit provides an indication, e.g., with an appropriate message or by setting a logical flag variable, that the software

AUS030854

16

smart key unit has determined that the internal smart key device is authentic (step 1016), thereby concluding the process.

[075] In contrast to FIG. 10A, FIG. 10B illustrates the use of a session key instead of a random text string as the message that is passed between the two entities. The session key is to be used for securing subsequent message traffic during a session between the two entities if the mutual authentication process between the two entities is successfully completed; the session may be timed, or the session may be terminated by a particular event, such as the termination of the execution of a software entity or the power shutdown of a hardware entity. The session key may be placed within a larger message containing other information prior to encryption, whereafter the encrypted message is passed between the two entities. In an alternative embodiment, a random text string may be used for the authentication procedure, after which the two entities may exchange a session key. As explained in more detail further below, additional information may be securely passed between the two entities during the authentication process to reduce the number of steps that are used to exchange information.

[076] Referring now to FIG. 10B, the process commences when the internal smart key device uses the public key of the software smart key unit to encrypt a session key (step 1022). The internal smart key device transfers the encrypted session key to the software smart key unit (step 1024), which then decrypts the encrypted session key with its private key (step 1026). The software smart key unit then encrypts the decrypted session key with the public key of the internal smart key device (step 1028) and passes the encrypted session key to the internal smart key device (step 1030). The internal smart key device then decrypts the encrypted session key with its private key (step 1032) and compares the received session key with its original session key (step 1034). If the two versions of the session key match, then the internal smart key device provides an indication, e.g., with an appropriate message or by setting a logical flag variable, that the internal smart key device has determined that the software smart key unit is authentic (step 1036), thereby concluding the process.

[077] Additional security steps may be performed in conjunction with the process that is shown in FIG. 7. For example, at step 702, an application or an applet has requested the use of functionality embedded in the internal smart key device. At some point in time, prior to starting the process that is shown in FIG. 10B, the internal smart key device may perform an additional step of verifying whether the software smart key unit in the requesting application or applet contains secure code. As mentioned above with respect to FIG. 5, SWSKU 538 may be digitally signed; SWSKU 538 contains

AUS030854

17

digital signature 562 that has been computed over SWSKU 538 using INSKD\_SW private key 536. Hence, the internal smart key device may verify whether or not the software smart key unit in the requesting application or applet contains secure code by verifying the digital signature associated with the software smart key unit.

[078] In a Java<sup>®</sup> environment, the software smart key unit may be implemented as a signed JAR file; in one embodiment, the internal smart key device is used to verify the digital signature of the signed JAR file. In a different embodiment, the JAR file and the Java<sup>®</sup> package may be further sealed so that the class loader would enforce that all code in the package should be loaded from the sealed JAR file. The act of sealing the JAR file and the Java<sup>®</sup> package can prevent functionality from being modified by malicious users via injecting code into the class path. Moreover, the class loader itself may be signed and sealed such that the integrity of the class loader can be verified.

[079] In a more generic computational environment, while internal smart key device may digitally sign a software smart key unit and later validate the digital signature, the process of ensuring that the software smart key unit is signed and validated may be controlled by an appropriate operating system module within the data processing system with assistance from the internal smart key device, e.g., a program loader that loads software modules for execution. Prior to allowing the software module to execute, the program loader could perform additional security processes. Moreover, the program loader itself may be signed and sealed such that the integrity of the program loader can be verified.

[080] Although the above-mentioned process provides a mechanism for ensuring the integrity of the software smart key unit, the operations of the software smart key unit within a data processing system may still be regarded as somewhat vulnerable because its cryptographic keys may be viewed and copied by inspecting the code that comprises the software smart key unit; it may be assumed that the cryptographic keys are stored in the clear within the software smart key unit.

[081] Hence, in order to protect the software smart key unit, in particular its private key, yet another security step may be performed in conjunction with the process that is shown in FIG. 7. At some prior point in time, the software smart key unit can be encrypted, thereby concealing any sensitive information within the software smart key unit, particularly its private key. In a different embodiment, a software module that includes a software smart key unit could be encrypted. For example, when a software module is installed on a data processing system, the internal smart key device on the data processing system could encrypt the software module as part of the installation

AUS030854

18

procedure for the application program that includes the software module.

[082] In a system in which this additional step is performed, then the software smart key unit and/or a software module that includes the software smart key unit would require decryption before it could be executed. At a point in time similar to that described above with respect to protecting the integrity of the software smart key unit using digital signatures, e.g., at some point in time prior to starting the process that is shown in **FIG. 10B**, the internal smart key device would perform an additional step of decrypting the software smart key unit and/or the software module that includes the software smart key unit. Again, in a manner similar to that described above, the decryption process may be controlled by an appropriate operating system module within the data processing system with assistance from the internal smart key device. Further detail about the process of modifying software modules upon installation for use in conjunction with an internal smart key device and about the process of executing such software modules in a secure manner is provided hereinbelow.

[083] With reference now to **FIG. 11A**, a flowchart depicts a process in an internal smart key device for performing operations as requested by a software smart key unit in which the operations are enabled or disabled based on the presence of an external smart key device. The process commences when the internal smart key device receives a request message from the software smart key unit (step **1102**); the request message contains a message-type variable that indicates the type of operation that is being requested by the software smart key unit. A determination is then made as to whether or not the software smart key unit has been authenticated by the internal smart key device (step **1104**); the determination may be performed by successfully decrypting the contents of the received message using the session key that the internal smart key device passed to the software smart key unit during a prior authentication procedure, e.g., as described above with respect to **FIG. 10B**. If the software smart key unit has not been authenticated, then the internal smart key device generates an appropriate error response (step **1106**) and returns the response message to the requesting software smart key unit (step **1108**), thereby concluding the process.

[084] If the software smart key unit has been authenticated, then the internal smart key device determines if the external smart key device is still electrically engaged with the system unit (step **1110**). For example, the determination may merely entail checking a special register that would have been cleared had the electrical connection between the system unit and the external smart key device been broken. If the external smart key device is not electrically engaged with the system unit, then the internal smart key

AUS030854

19

device generates an error response at step **1106** and returns the response message to the software smart key unit at step **1108**, thereby concluding the process.

[085] If the software smart key unit has been authenticated and the external smart key device is still electrically engaged with the system unit, then the internal smart key device performs the requested function for the software smart key unit, if possible. Step **1112** and step **1114** depict examples of functionality that may be provided by an internal smart key device; the enumeration of these examples does not imply that other functions may not be available in other implementations of the present invention. In a preferred embodiment, the internal smart key device performs the following functions only if the external smart key device remains electrically engaged with the internal smart key device after mutual authentication: issuing new digital certificates while acting as a certificate authority; and signing a software module using a private key of the internal smart key device, wherein the private key corresponds to an available public key certificate. It should be noted that the present invention does not allow any interface for retrieving a private key of the internal smart key device; hence, performing a signing operation using its private key can only be performed by the internal smart key device.

[086] If the software smart key unit has requested a digital signature on a data item that was embedded within the request message, then the internal smart key device computes a digital signature over the data item using an appropriate private key and inserts the digitally signature (preferably, along with the copy of the data item that it returns) into the response message (step **1112**). If the software smart key unit has requested a digital certificate, then the internal smart key device generates a digital certificate using an appropriate private key and inserts the digital certificate into the response message (step **1114**); the digital certificate may include various identifying information that was provided by the software smart key unit within the request message. After the appropriate response message has been generated, which would include encrypting any sensitive data with the appropriate session key, the response message is returned to the software smart key unit at step **1108**, and the process is concluded.

[087] Referring again to step **1112**, any type of digital data item may be signed. Referring again to **FIG. 4**, application **408** represents many different types of applications that may incorporate the functionality of the present invention. In one embodiment, the application may be an application server that signs Java<sup>®</sup> JAR files, either files that have been generated directly by the application server or on behalf of

AUS030854

other applications on the host system. In certain cases, a newly generated JAR file may itself contain a software smart key unit that is able to invoke functionality in the internal smart key device of the host system.

[088] With reference now to **FIG. 11B**, a flowchart depicts a process in an internal smart key device for performing operations as requested by a software smart key unit in which the operations are not required to be enabled by the presence of an external smart key device. The process commences when the internal smart key device receives a request message from the software smart key unit (step **1122**); the request message contains a message-type variable that indicates the type of operation that is being requested by the software smart key unit. A determination is then made as to whether or not the software smart key unit has been authenticated by the internal smart key device (step **1124**); the determination may be performed by successfully decrypting the contents of the received message using the session key that the internal smart key device passed to the software smart key unit during a prior authentication procedure, e.g., as described above with respect to **FIG. 10B**. If the software smart key unit has not been authenticated, then the internal smart key device generates an appropriate error response (step **1126**) and returns the response message to the requesting software smart key unit (step **1128**), thereby concluding the process.

[089] If the software smart key unit has been authenticated, then the internal smart key device performs the requested function for the software smart key unit, if possible. Step **1130** and step **1132** depict examples of functionality that may be provided by an internal smart key device; the enumeration of these examples does not imply that other functions may not be available in other implementations of the present invention. In a preferred embodiment, the following functions would be performed by an internal smart key device without the presence of an external smart key device: encryption and decryption given the required keys; validating a digital signature given the certificate; mutually authenticating a software smart key unit; and allowing stored sensitive information to be read/write accessed by a mutually authenticated software smart key unit.

[090] If the software smart key unit has requested the registration of a master secret that was embedded within the request message, then the internal smart key device stores the master secret in association with some identifying information for the software smart key unit and generates a response message (step **1130**). If the software smart key unit has requested the retrieval of a previously registered master secret, then the internal smart key device retrieves the master secret based on the identity of the

AUS030854

21

software smart key unit and generates a response message (step 1132). After the appropriate response message has been generated, which would include encrypting any sensitive data with the appropriate session key, the response message is returned to the software smart key unit at step 1128, and the process is concluded.

[091] In this manner, it is only necessary to keep an external smart key device electrically engaged with the internal smart key device if particularly sensitive operations need to be performed by the internal smart key device, such as issuing digital certificates. As described with respect to FIG. 11B, a software smart key unit can save sensitive information, such as cryptographic keys, in the internal smart key device after the software smart key unit has mutually authenticated with the internal smart key device without requiring the presence of an external smart key device; the sensitive information can only be retrieved by the same software smart key unit.

[092] This approach is advantageous because the software smart key unit can mutually authenticate with the internal smart key device in a manner that is independent from the external smart key device. For example, this approach allows starting a software program in an unattended mode, i.e. no human to insert the external smart key device; the program may use a previously signed and sealed software smart key unit to retrieve any sensitive information from the internal smart key device. The software program may retrieve a master secret from the internal smart key device to decrypt passwords and other encrypted configuration information to complete the start-up process securely without human intervention.

[093] With reference now to FIG. 12, a block diagram illustrates an embodiment of the present invention for protecting master secrets. As noted above, secret information that is stored on a data processing system may be encrypted with a master secret, which necessitates the need to protect the master secret. In prior art system, the protection of the master secret is typically protected through mechanisms that are external to the host system on which the master secret is being used. In contrast to a typical prior art system, an embodiment of the present invention may be used to protect master secrets on the host system in which the master secrets will be used.

[094] FIG. 12 is similar to FIG. 4; system unit 1202 interfaces with external smart key device 1204, and system unit 1202 also contains internal smart key device 1206. System unit 1202 also supports software smart key units 1208-1212. In contrast to FIG. 4, though, internal smart key device 1206 in FIG. 12 has been enhanced to include master secret registry 1214 for securing master secrets, which may be a password, an encryption key, or some other form. As briefly described above with

AUS030854

22

respect to steps 1130 and 1132 in FIG. 11B, software smart key units 1208-1212 may store a master secret in internal smart key device 1206 through a secure request/response mechanism. Internal smart key device 1206 stores the master secrets from software smart key units 1208-1212 in association with identifying information for the requesting software smart key unit. For example, master secret registry 1214 contains SWSKU identifier 1216 associated with master secret 1218; a lookup operation that might be performed on SWSKU ID 1216 would relate it to master secret 1218. Alternatively, master secret registry 1214 may support more than one master secret per software smart key unit; a group of master secrets may be registered or retrieved with each requested operation as appropriate. Although FIG. 11B only illustrates a registration operation and a retrieval operation, other operations that may be relevant to the management of master secrets, e.g., a deletion operation or an overwrite operation, may also be supported.

[095] As noted above the description of FIG. 10B, additional information may be securely passed between the internal smart key device and the software smart key unit during the authentication process to reduce the number of steps that are used to exchange information. To that end, the master secrets for the software smart key unit may be passed during the authentication process. Since the authentic software smart key unit is the only entity that should have a copy of the software smart key unit's private key, then only the software smart key unit should be able to decrypt the software smart key unit's master secrets that are provided by the internal smart key device during the authentication process.

[096] With reference now to FIGS. 13-15, block diagrams illustrate different relationships between multiple external smart key devices and multiple internal smart key devices. The description of the previous figures may appear to imply that there is a unique one-to-one relationship between an external smart key device and an internal smart key device. Referring to FIG. 13, solitary internal smart key device 1302 may be enabled through the use of any of multiple external smart key devices 1304-1308. For example, each of a small group of IT administrators may have a removable smart key device that may be inserted into a particular server machine that contains internal smart key device 1302. Referring to FIG. 14, solitary external smart key device 1402 may enable any of multiple internal smart key devices 1404-1408. For example, an IT administrator may use a single removable smart key device on multiple server machines, each of which contains only one of internal smart key devices 1404-1408. Referring to FIG. 15, multiple external smart key devices 1502-1506 may enable any



AUS030854

of multiple internal smart key devices **1512-1516**. For example, each of a small group of IT administrators may have a removable smart key device that may be inserted into many different server machines, each of which contains only one of internal smart key devices **1512-1516**. In order to support a many-to-one relationship or a one-to-many relationship on a given smart key device, the given smart key device only requires the storage or configuration of additional public key certificates for the additional corresponding internal smart key devices and/or external smart key devices.

[097] Before discussing additional embodiments for the present invention, some background information about trust relationships based on digital certificates is provided for evaluating the operational efficiencies and other advantages of the additional embodiments of present invention.

[098] With reference now to **FIGS. 16A-16C**, each block diagram depicts a typical set of trusted relationships. Referring now to **FIG. 16A**, certificate authority **1602** has issued digital certificates to servers **1604** and **1606**. As noted above, a certificate authority is a trusted entity that issues digital certificates on behalf of other entities, possibly human users but possibly on behalf of programmatic entities or hardware entities, such as applications or data processing devices. Thus, servers **1604** and **1606** may have been represented by users, such as users **202** or **302** shown in **FIG. 2** or **FIG. 3**; alternatively, servers **1604** and **1606** may be some other type of programmatic entities, such as application **408** shown in **FIG. 4**. The certificate authority **1602** has issued digital certificates to servers **1604** and **1606**. Servers **1604** and **1606** can establish trust relationships **1608** and **1610** with the certificate authority **1602** subsequently by performing mutual authentication with the certificate authority **1602** as described by this invention. At some point in time, server **1604** may present its digital certificate to server **1606** along with proof-of-possession of the corresponding private key, e.g., a data item that has been signed using its private key, while requesting a service that is provided by server **1606**. Because server **1606** trusts certificate authority **1602**, server **1606** is able to authenticate server **1604** by verifying that the digital certificate which was received from server **1604** was signed by certificate authority **1602**. The reverse situation is also true, and server **1604** would be able to authenticate server **1606**. In this manner, server **1604** and server **1606** are able to establish trust relationship **1612** between themselves.

[099] Referring to **FIG. 16B**, server **1614** has established trust relationship **1616** with server **1606**. In this example, no basis is provided for trust relationship **1616**, and server **1604** has not accepted trust relationship **1616** with server **1614**.

AUS030854

24

[100] Referring to **FIG. 16C**, similar reference numerals refer to similar elements as shown in **FIG. 16A**; **FIG. 16C**, though, shows additional elements to those shown in **FIG. 16A**. Certificate authority **1620** has issued digital certificates to servers **1606** and **1622**. Given that certificate authority **1620** has issued digital certificates to servers **1606** and **1622**, certificate authority is said to have established trust relationships **1624** and **1626** with servers **1606** and **1622**, respectively. At some point in time, server **1622** may present its digital certificate to server **1606** while requesting a service that is provided by server **1606**. Because server **1622** trusts certificate authority **1620**, server **1606** is able to authenticate server **1622** by verifying that the digital certificate which was received from server **1622** was signed by certificate authority **1620**. The reverse situation is also true, and server **1622** would be able to authenticate server **1606**. In this manner, server **1622** and server **1606** are able to establish trust relationship **1628** between themselves.

[101] Trust relationships may be transitive. As noted above with respect to **FIG. 16B**, server **1606** had established trust relationship **1616** with server **1614**. However, server **1604** did not recognize trust relationship **1616**, possibly because server **1606** was not able to provide sufficient information about the basis for trust relationship **1616**. In **FIG. 16C**, though, server **1606** is able to provide sufficient information about its trusted relationships among the servers with which server **1606** has established trust relationships. In this example, server **1606** provides information about trust relationship **1628** to server **1604**. Given trust relationship **1612** between server **1604** and server **1606** and trust relationship **1628** between server **1606** and server **1622**, server **1604** and server **1622** are able to establish transitive trust relationship **1630** between server **1604** and server **1622**. The servers may transfer certificates in accordance with the certificate management protocols that were mentioned above.

[102] In this manner, the servers are able to form complex, hierarchical, trust relationships between themselves and the certificate authorities. Each certificate authority may be considered as the root of a tree structure; a certificate authority is sometimes referred to as the root authority, especially when other entities within a tree structure also act as secondary certificate authorities. The use of multiple root certificate authorities allows multiple tree structures to overlap, e.g., as shown in **FIG. 16C**. Turning back now to the present invention, the remaining figures depict examples of embodiments of the present invention in which the present invention is implemented to construct a trust model using the advantages of the internal and external smart key devices that have been described above.

AUS030854

25

[103] With reference now to **FIG. 17**, a block diagram depicts an example of a trust model that is constructed of trust relationships that are based on the trust provided by internal smart key devices in accordance with an embodiment of the present invention. The internal smart key devices of the present invention provide a high level of trustworthiness in acting as a certificate authority. As described above with respect to other figures, the internal smart key device provides a mechanism for securing information. As described with respect to **FIG. 11**, one of the functions that may be provided by an internal smart key device is the issuance of digital certificates. Since the internal smart key device would be implemented as part of a system unit within a data processing system, e.g., such as a specialized chip on a motherboard, the internal smart key device should be protected physically, thereby making it difficult for malicious users to implement improper schemes. In addition, the trustworthiness of an internal smart key device is enhanced by the fact that the issuance of digital certificates by the internal smart key device may be controlled by a system administrator through the use of an external smart key device. Hence, the ability of an internal smart key device to issue digital certificates allows an internal smart key device to act as the foundation for a trust model.

[104] In this manner, different types of entities, e.g., different kinds of hardware and software computing resources, are able to form complex, hierarchical, trust relationships between themselves and the internal smart key devices acting as hardware-based certificate authorities. In this trust model, trust is rooted in the certificate authority functionality that is provided by an internal smart key device on a data processing system. The trust relationship hierarchy may be represented, as in **FIG. 17**, by an inverted pyramid in which the internal smart key device is at the apex of the inverted pyramid, and the computing resources form the inverted pyramid. In a distributed data processing environment, the trust relationships may be viewed as a collection of overlapping inverted pyramids where each pyramid is based on the internal smart key device on each machine, as shown in **FIG. 17**.

[105] In **FIG. 17**, an example of a trust model shows two internal smart key devices **1702** and **1704**, which include certificate authority modules **1706** and **1708**, respectively, that contain functionality for allowing each internal smart key device to act as a certificate authority. Internal smart key device **1704** has issued a certificate to secondary software certificate authority module **1710**, which is a software application executing on the same system unit on which internal smart key device **1704** resides. Hierarchically superior software certificate authority modules within the data

AUS030854

26

processing system, such as secondary software certificate authority module 1710, derive authority from a hierarchically inferior software certificate authority within the trust hierarchy, such as the root trust that is provided by the certificate authority functionality of the internal smart key device on the data processing system, i.e., internal smart key device 1704. For example, internal smart key device 1704 may sign the digital certificate of secondary software certificate authority module 1710, which uses the corresponding private key to sign the digital certificates that it issues. In this manner, secondary software certificate authority module 1710 acts as a subordinate certificate authority to internal smart key device 1704, which would be reflected in certificate chains which are rooted by internal smart key device 1704. In another example, internal smart key device 1704 may sign a subordinate software certificate authority module, which itself may sign another subordinate software certificate authority module.

[106] Internal smart key device 1702 has issued digital certificates to entities 1712-1718, while secondary software certificate authority 1710 has issued digital certificates to entities 1722-1728, thereby establishing trust relationships between certificate issuers and the certificate issuees; entities 1712-1718 and entities 1722-1728 may be applications or some other type of programmatic entity. In addition, secondary software certificate authority 1710 has issued a digital certificate to entity 1716, thereby establishing a trust relationship between those two entities.

[107] While FIG. 17 represents a trust model in which all of the computing resources may comprise certificate-handling functionality for authenticating themselves with each other, these computing resources need to be configured to include the certificate-handling functionality. For example, if the different entities in FIG. 17 represent software applications, these software applications need to include a module that has been provided a unique public key certificate and that bears a unique corresponding private key.

[108] For example, each computing resource that is to act independently such that it requires the ability to perform authentication operations with other resources may have an embedded software smart key unit, e.g., in the manner shown in FIG. 5 in which application 540 contains SWSKU 538. Application 540 contains SWSKU 538 which includes SWSKU private key 550; SWSKU public key certificate 554 contains a copy of SWSKU public key 556 that corresponds to SWSKU private key 550 as an asymmetric cryptographic key pair. SWSKU 538 also contains a copy of INSKD\_SW public key certificate 558. Hence, application 540 is part of a trust hierarchy that is

AUS030854

27

rooted in INSKD 522. Using the information that is embedded within SWSKU 538 and the functional abilities of SWSKU 538, application 540 is able to authenticate with any other computing resource that also trusts INSKD 522. Thus, in order to implement a trust model in which all of the computing resources may comprise certificate-handling functionality for authenticating themselves with each other in accordance with the present invention, a system administrator needs to ensure that each computing resource comprises an internal smart key device, if the computing resource is a data processing device, or comprises a software smart key unit, if the computing resource is a programmatic entity.

[109] However, in the example shown in FIG. 5, SWSKU 538 came to be embedded in application 540 in some manner. Various processes may be used to embed the required functionality in each of the programmatic resources, as described hereinbelow.

[110] With reference now to FIG. 18, a block diagram depicts a data processing system for generating operating system files in which each programmatic entity in the operating system contains functionality for establishing trust relationships in a trust hierarchy based on internal smart key devices in accordance with an embodiment of the present invention. FIG. 18 is similar to FIG. 4; system unit 1802 interfaces with external smart key device 1804, and system unit 1802 also contains internal smart key device 1806.

[111] In this example, operating system installation application 1808 is responsible for installing operating system files on a machine that includes system unit 1802. During the installation procedure, operating system installation application 1808 reads operating system files 1812 from the distribution medium, such as magnetic tape or CD-ROM, and generates fully operable modules 1814, as explained in more detail hereinbelow.

[112] It should be noted that although FIG. 18 depicts an example in which actions are performed with respect to operating system files, an alternative embodiment is applicable to any type of application file. For example, operating system installation application 1808 may be generalized to be described as an installation application for any given software application, and the given software application may be represented by generic application files that are similar to operating system files 1812. After the installation process is completed, the installation application has generated application files with certificate-bearing software smart key units that are similar to signed operating system files 1814.

[113] Whereas FIG. 18 depicts an example of a system in which all operating system

AUS030854

28

files are secured so that only properly installed operating system modules may be executed on system unit **1802**, the alternative embodiment that is mentioned above could restrict execution of all software within the system. Using an appropriate installation process for each installed application, each application module may be secured. In this manner, system unit **1802** may restrict software execution only to software modules that have been installed on the system through a process that is controlled by the presence of an external smart key device. In a Java<sup>®</sup>-based implementation of the present invention, all Java<sup>®</sup> applications may be required to contain a software smart key unit that is placed into the application during an installation process; as mentioned above, all JAR files and Java<sup>®</sup> packages may be sealed so that the class loader would enforce that all code in the package should be loaded from a sealed JAR file.

[114] With reference now to **FIG. 19**, a flowchart depicts a process for generating operating system modules that contain software smart key units such that the operating system modules are able to perform authentication operations with each other in accordance with an embodiment of the present invention. The process begins with an operating system installation application checking whether there is at least one additional operating system module that has not yet been processed (step **1902**). If not, then the process is concluded. If so, then the operating system installation application reads an operating system module from a distribution medium (step **1904**). For example, referring again to **FIG. 18**, the operating system modules on the distribution medium is not complete; the operating system modules may not be installed without further processing. Operating system modules **1812** incorporate stub routines or empty modules in the form of distribution versions of the operating system files; if these operating system files are installed and then executed without further modification, the operating system services would not be able to perform authentication operations, thereby causing the operating system to be inoperable.

[115] Hence, after the operating system installation application has read an operating system module **1812** from the distribution medium, such as magnetic tape or CD-ROM, the operating system installation application deletes the stub routines or empty modules from the operating system module that is currently being processed (step **1906**). The operating system installation application generates an asymmetric cryptographic key pair (step **1908**) and then requests the internal smart key device on the local system unit to issue a digital certificate based on the newly generated key pair on behalf of the operating system module that is currently being processed (step **1910**). In

AUS030854

this manner, the SWSKU of the operating system installation application impersonates the entity on behalf of which the digital certificate is being requested and issued; alternatively, a software certificate authority function within the operating system installation application may issue the digital certificate, thereby requiring the public key certificate of the software certificate authority along with the public key certificate of the internal smart key device to become part of the certificate chain of the entity on behalf of which the digital certificate is being requested and issued. It may be assumed that the operating system installation operation is controlled by a system administrator who possesses an external smart key device; by engaging the external smart key device with the system unit during the operating system installation procedure, the system administrator enables the internal smart key device to issue digital certificates, thereby preventing the installation procedure from being spoofed in some manner by a malicious user. It may also be assumed that each operating system module has a unique identifier within a namespace that covers all of the operating system modules such that the unique identifier may be incorporated into the digital certificate.

[116] The operating system installation application then generates an instance of a software smart key unit (step **1912**). The newly generated SWSKU incorporates the unique private key that was generated by the operating system installation application on behalf of the new SWSKU. The new SWSKU also incorporates the public key certificate that corresponds to the private key that was issued by the local INSKD; in addition, any other public key certificates that form part of the digital certificate chain for the new SWSKU may also be included. Certificate chains represent a trust path through a trust hierarchy. Although public key certificates are generally freely given and freely obtainable, building a certificate chain can be computationally expensive; thus, the inclusion of any digital certificates that the new SWSKU may need to represent its certificate chain allows the new SWSKU, when executing, to quickly present its certificate chain during an authentication operation, thereby making the authentication operation more efficient.

[117] The operating system installation application then generates a fully operable module, such as one of modules **1814** in **FIG. 18**, by embedding the new SWSKU into the operating system module that is currently being processed, i.e. in place of the removed stubs and empty modules (step **1914**). The process then loops back to step **1902** to check if there are any unprocessed operating system modules, and if not, the process is concluded. As operating system modules are processed, the newly generated SWSKU modules are incorporated into modified operating system modules as

AUS030854

30

necessary. The deployed operating system modules and/or the newly embedded SWSKU modules may also be digitally signed by SWSKU 1810 to show their authenticity.

[118] In this manner, all of the operating system files are enabled to perform authentication operations with embedded functionality for implementing trust relationships. During the operating system installation procedure, INSKD 1806 acts as a certificate authority to issue digital certificates, or alternatively, operating system installation application 1808 acts as a certificate authority to issue digital certificates for modules 1814; in their certificate chains, each module in modules 1814 has its own private key and corresponding public key certificate, the public key certificate of INSKD 1806, and if necessary because it acted as a certificate authority, the public key certificate of the operating system installation application 1808. Thus, each module has a certificate chain that asserts a trust hierarchy that is based on INSKD 1806. In the runtime environment, when a first module in modules 1814 attempts to authenticate to a second module in modules 1814, the first module would present its certificate chain along with proper proof-of-possession, e.g., a digital signature signed by using the corresponding private key, to the second module; because the second module trusts INSKD 1806 on which the first module's certificate chain is based, the second module will authenticate and trust the first module. Because each module in modules 1814 trusts INSKD 1806 and is able to present a certificate chain that relates back to INSKD 1806, each module is able to trust the other similar modules, thereby implementing the trust model as described with respect to FIG. 17.

[119] With reference now to FIG. 20, a block diagram depicts a data processing system for generating project code in which each programmatic entity contains functionality for establishing trust relationships in a trust hierarchy based on internal smart key devices in accordance with an embodiment of the present invention. FIG. 20 is similar to FIG. 4; system unit 2002 interfaces with external smart key device 2004, and system unit 2002 also contains internal smart key device 2006.

[120] In this example, software configuration management (SCM) application 2008 is responsible for managing all code modules and other types of files for a particular project in which a software application is being created. As project files are created by software engineers, the project files are checked into the SCM system, which is able to track versions of the source code in accordance with discrepancy reports and project timelines. The engineers incorporate stub routines or empty modules into the project modules such that preliminary versions of the project modules are able to be tested and



AUS030854

integrated without regard to fully implementing authentication considerations.

[121] However, when the need arises to generate a so-called production-level application that may be distributed to customers or otherwise deployed in a production environment, the SCM system removes the stubs and empty modules and replaces them with embedded software smart key units, which are software modules themselves. Hence, at some point in time when the final compilation and linking operations occur, SWSKU 2010 in SCM application 2008 generates asymmetric key pairs along with SWSKU modules containing the newly generated key pairs and corresponding digital certificates. As project modules 2012 are processed, the newly generated SWSKU modules are linked into project modules 2014 as necessary. The production-level project modules 2014 and/or the newly embedded SWSKU modules may also be digitally signed by SWSKU 2010 to show their authenticity.

[122] In this manner, each computing resource within a project application that requires the ability to complete an authentication operation may be provided with a software smart key unit that is able to perform the authentication operation. However, the scenario that is illustrated within FIG. 20 differs significantly from the scenario that is illustrated within FIG. 18. In FIG. 18, the operating system modules 1814 are modified by operating system installation application 1808 on system unit 1802. In a preferred embodiment, the digital certificates that have been issued to the SWSKU's in the modified operating system modules 1816 have been signed by INSKD 1806 on system unit 1802.

[123] Hence, when the modified operating system modules are executing in a runtime environment, the certificate authority that issued the digital certificates for the modified operating system modules is part of the runtime environment. This is not the case in the scenario that is presented in FIG. 20. When the modified project modules are executing in a runtime environment, the digital certificates that are embedded in the SWSKU's of the modified project modules have been signed by the internal smart key device of the system unit on which the production version of the project application was created. In other words, the certificate authority that issued the digital certificates to the SWSKU's in the modified project modules is not part of the runtime environment. When a modified project module attempts to complete an authentication operation with another modified project module, the authentication operation can be completed because each of the modified project modules trusts the internal smart key device of the system unit on which the production version of the project application was created. However, when a modified project module attempts to complete an au-

AUS030854

32

thentication operation with an operating system module, e.g., one of operating system modules **1814**, the authentication operation fails because the operating system module does not trust the internal smart key device that acted as the certificate authority for the operating system module's digital certificate. Therefore, a mechanism is needed for extending the trust relationships in a runtime environment.

[124] With reference now to **FIG. 21**, a flowchart depicts a process for extending the certificate chain for an internal smart key device in accordance with an embodiment of the present invention. As noted above, some modules that are executing within a runtime environment may have functionality for establishing trust relationships that are based on an internal smart key device that is present within the runtime environment; since the internal smart key device has acted as the certificate authority for these modules, these modules are able to present digital certificate chains that are easily verifiable because the internal smart key device is at the root of the trust hierarchy. When an application is installed into a runtime environment that supports the internal smart key device of the present invention, the application modules may have the functionality for establishing trust relationships between the application modules yet lack the ability to establish trust relationships with other modules in the runtime environment because the root certificate authorities differ; the other modules do not have the ability to trust the digital certificates that are presented by the application modules.

[125] The process that is described with respect to **FIG. 21** hereinbelow provides a mechanism for allowing those application modules to establish themselves as trustworthy. The process is preferably performed when the application modules are being installed within a runtime environment that includes an internal smart key device, although the runtime environment can be modified at any time before the application modules are executed within the runtime environment. In this example, though, the application modules do not need to be modified. Thus, the process that is described hereinbelow differs from the process that is described with respect to **FIG. 19** in which the modification of the operating system modules was required.

[126] The process commences when the internal smart key device receives a request message from a software smart key unit in an installation application or some other form of administrative utility application in which the request message indicates a request to assert the root digital certificate of a foreign internal smart key device, i.e. outside of the local runtime environment (step **2102**). For example, the administrative utility application has access to configuration files that accompany the production version of the application modules that have been installed or that are being installed

AUS030854

within the local runtime environment. These configuration files contain a copy of the digital certificate that was used by a foreign internal smart key device to generate the digital certificates for the software smart key units that were embedded within the application modules, e.g., in a manner similar to that described with respect to **FIG. 20**. In other words, the configuration files may be accompanied by a copy of the public key certificate that was used by the foreign internal smart key device of the runtime environment of a vendor that produced the application that is being installed. The request to assert the digital certificate of the foreign internal smart key device is made without the ability of the internal smart key device of the current runtime environment to check for a common trusted entity; since each internal smart key device acts as the root trusted entity within its own trust hierarchy, there is no other common trusted entity on which trust can be founded for the internal smart key device of the current runtime environment and the foreign internal smart key device. Hence, the process of asserting the digital certificate must be a secure procedure that provides the trustworthiness for completing the task.

[127] In order to ensure the trustworthiness of the operation to assert the digital certificate of a foreign internal smart key device, a determination is made as to whether or not the software smart key unit of the requesting application has been authenticated by the internal smart key device (step **2104**); the determination may be performed by successfully decrypting the contents of the received message using the session key that the internal smart key device passed to the software smart key unit during a prior authentication procedure, e.g., as described above with respect to **FIG. 10B**. If the software smart key unit has not been authenticated, then the internal smart key device generates an appropriate error response (step **2106**) and returns the response message to the requesting software smart key unit (step **2108**), thereby concluding the process.

[128] If the software smart key unit has been authenticated, then the internal smart key device determines if the external smart key device is still electrically engaged with the system unit (step **2110**). In this manner, the entire procedure is determined to be under the control of a system administrator that has the privilege of performing the procedure. If the external smart key device is not electrically engaged with the system unit, then the internal smart key device generates an error response at step **2106** and returns the response message to the software smart key unit at step **2108**, thereby concluding the process.

[129] If the software smart key unit has been authenticated and the external smart key device is still electrically engaged with the system unit, then the internal smart key

device performs the requested function for the software smart key unit. The internal smart key device adds the asserted root certificate of the foreign internal smart key device to a table or a list of trusted root certificates (step 2112), which possibly contains multiple certificates that have been previously asserted. After the appropriate response message has been created (step 2114), the response message is returned to the software smart key unit at step 2108, and the process is concluded.

[130] With reference now to **FIG. 22**, a block diagram depicts an example of a trust model that is constructed of trust relationships that are based on the trust provided by a single local internal smart key device that maintains a certificate chain containing multiple root certificates for foreign internal smart key devices in accordance with an embodiment of the present invention. As explained with respect to **FIG. 5** and other figures, an internal smart key device possesses at least one private key and its corresponding public key certificate; similarly, **FIG. 22** shows internal smart key device 2202 containing digital certificate 2204. As explained with respect to **FIG. 21**, it may be necessary for a system administrator to assert additional root certificates into the trust hierarchy of a particular runtime environment; **FIG. 22** shows that digital certificates 2206 and 2208 have been previously asserted and are now stored within internal smart key device 2202 as part of its trusted certificate chain.

[131] As noted above, when application modules are installed into a runtime environment that supports the internal smart key device of the present invention, the application modules may have been provided with the functionality for establishing trust relationships between the application modules yet lack the ability to establish trust relationships with other modules in the runtime environment because the root certificate authorities differ. The application modules can be regarded as residing in one trust hierarchy with the other modules residing within a different trust hierarchy.

[132] In order to overcome this problem, the process that is described with respect to **FIG. 21** illustrates a mechanism for introducing multiple trust hierarchies within a single runtime environment. This solution is further illustrated with respect to **FIG. 22**. By accepting digital certificates 2206 and 2208, internal smart key device 2202 implicitly forms trust relationships 2210 and 2212 with the foreign internal smart key devices that are associated with the accepted digital certificates. In this manner, internal smart key device 2202 supports trust hierarchies 2214, 2216, and 2218 with root certificates 2204, 2206, and 2208, respectively. Given that root certificates 2206 and 2208 are available for validating the digital certificates of application modules that were signed by the foreign internal smart key devices that are represented by root c er-

AUS030854

35

tificates 2206 and 2208, other modules in the runtime environment are able to form trust relationships 2220 and 2222 that bridge the trust hierarchies.

- [133] With reference now to FIG. 23, a flowchart depicts a process for obtaining a current root certificate chain maintained by the local internal smart key device. Whereas FIG. 21 depicts a process for a system administrator to assert a root certificate into the trust hierarchy of a particular runtime environment by storing the root certificate within the local smart key device, FIG. 23 illustrates a process for obtaining the current root certificate chain from the local internal smart key device. The process commences when the internal smart key device receives a request message from a software smart key unit whereby it requests the current root certificate chain that is maintained by the local internal smart key device (step 2302). The local internal smart key device then returns a response message containing the current root certificate chain to the requesting software smart key unit (step 2304), and the process is concluded. The local internal smart key device may require that the requesting software smart key unit had previously authenticated to the local internal smart key device. In contrast to FIG. 11 or FIG. 21, which illustrate operations in an internal smart key device that are only performed when the system administrator has used an external smart key device to enable the operations, the process that is illustrated in FIG. 23 does not require enablement via an external smart key device.

- [134] With reference now to FIG. 24, a flowchart depicts a process for determining whether a digital certificate from a foreign internal smart key device is trustworthy. At some point in time, a module requests access to a computing resource that is controlled by another module within a runtime environment. Assuming that the two modules have not previously completed a mutual authentication operation, then the two modules attempt to complete a mutual authentication operation, e.g., similar to the mutual authentication operation that is described with respect to FIGs. 9A-9B. In this example, it may be assumed that the module that is controlling the desired computing resource is included within the local trust hierarchy that is based on the local internal smart key device while the requesting module is included within a trust hierarchy that is based on a foreign internal smart key device; however, a root certificate for the foreign internal smart key device has been previously asserted into the local smart key device.

- [135] The process commences when the controlling module and the requesting module have initiated an authentication operation (step 2402). The controlling module then obtains the digital certificate of the requesting module (step 2404), most likely directly

AUS030854

36

from the requesting module; the public key from the digital certificate is used to determine whether the requesting module possesses the private key that corresponds to the public key, although these steps are not shown in **FIG. 24**.

[136] In order to determine the authenticity of the digital signature on the requesting module's digital certificate, the controlling module requires a trustworthy copy of the foreign internal smart key device's digital certificate, thereby providing a copy of the public key that corresponds to the private key that was used to generate the digital signature. Although the requesting module should possess a copy of the digital certificate for the foreign internal smart key device that has issued the requesting module's digital certificate, thereby allowing the requesting module to provide a copy of the foreign internal smart key device's digital certificate to the controlling module, the controlling module needs an independent, trustworthy method for obtaining a copy of the foreign internal smart key device's digital certificate. In an attempt to obtain a copy of the foreign internal smart key device's digital certificate, the controlling module obtains the root certificate chain that is currently being maintained by the local internal smart key device (step **2406**).

[137] The controlling module then verifies that the root certificate for the foreign internal smart key device is in the retrieved root certificate chain (step **2408**). As mentioned above, in the example that is shown in **FIG. 24**, it may be assumed that a root certificate for the foreign internal smart key device has been previously asserted into the local smart key device. Hence, step **2406** results in the return of a root certificate chain that includes a copy of the foreign internal smart key device's digital certificate.

[138] The controlling module then verifies the authenticity of the requesting module's digital certificate by verifying the digital signature on the requesting module's digital certificate (step **2410**), and the process is concluded. Assuming that the digital signature is verified, the controlling module may proceed with the authentication operation.

[139] Another embodiment of the present invention is provided hereinbelow with respect to **FIG. 25** and **FIG. 26**, and the example of this implementation relies on various aspects of the present invention that have been previously described. As described above, a hardware security unit within a data processing system, such as an internal smart key device, can function as a certificate authority. As described with respect to **FIG. 17**, the certificate authority functionality of an internal smart key device may be viewed as the root of a trust model in which the computing resources within a data processing system are entities within a trust relationship hierarchy. The trust re-

AUS030854

lationship hierarchy may be represented, as in **FIG. 17**, by an inverted pyramid in which the internal smart key device is at the apex of the inverted pyramid, and the computing resources form the inverted pyramid. As described with respect to **FIGS. 18-20**, the certificate authority functionality of a hardware security unit may be used to sign software cryptographic modules, i.e. software security units or software smart key units, and also to issue digital certificates to software cryptographic modules. As mentioned briefly above, the software package of the software cryptographic module can be sealed to prevent code tampering.

[140] With reference now to **FIG. 25**, a dataflow diagram illustrates entities within a data processing system that implements a hardware-assisted trust model that may be used to ensure the integrity of software modules in accordance with an implementation of the present invention. Before describing **FIG. 25**, a specific example is described within a Java<sup>®</sup> runtime environment. After the class files of a Java<sup>®</sup> application, which includes some form of software cryptographic unit, have been sealed to prevent code tampering, program integrity is enforced by class loaders. To ensure that a class loader can be trusted, the class loader needs to be signed and sealed as well. To guarantee the integrity of the class loader, the loader that loads the class loader, i.e., the operating system program loader, needs to be signed and sealed in some manner. To guarantee the integrity of the operating system program loader, the loader that loads the operating system program loader, i.e. the boot loader in a ROM of the data processing system, needs to be signed and sealed.

[141] With respect to a more generic, non-Java<sup>®</sup> environment, after the software package of a software cryptographic module has been sealed to prevent code tampering, program integrity is enforced by the operating system program loader. To ensure that the operating system program loader can be trusted, the operating system program loader needs to be signed and sealed as well. To guarantee the integrity of the operating system program loader, the loader that loads the operating system program loader, i.e. the boot loader in the system ROM, needs to be signed and sealed as well. These requirements and operations are reflected in **FIG. 25**.

[142] Boot ROM **2502** has been signed by the private key of internal smart key device **2504**; this may occur during the manufacturing process, during an site-specific installation procedure in which the boot ROM is configured using a flash memory update, or in some other manner. Thereafter, boot ROM **2502** is able to perform a mutual authentication procedure with internal smart key device **2504**, thereby creating a trust relationship between boot ROM **2502** and internal smart key device **2504**.

AUS030854

38

[143] Operating system program loader 2506 has also been signed by the private key of internal smart key device 2504; this may occur in accordance with the process that is described with respect to FIG. 18 and FIG. 19. Boot ROM 2502 is able to guarantee the integrity of operating system program loader 2506 by validating the signature on the sealed program module(s) of the operating system program loader 2506 with assistance from internal smart key device 2504, which assists boot ROM 2502 because it has already established a trust relationship with boot ROM 2502 through the completion of a mutual authentication procedure. Thereafter, operating system program loader 2506 is able to perform a mutual authentication procedure with internal smart key device 2504, thereby creating a trust relationship between operating system program loader 2506 and internal smart key device 2504.

[144] Application module 2508 has been signed by the private key of internal smart key device 2504 or by a software cryptographic unit in the operating system that acts as a certificate authority with internal smart key device 2504 acting as the root certificate authority; this may occur in accordance with the process that is described with respect to FIG. 20. Operating system program loader 2506 is able to guarantee the integrity of application module 2508 by validating the signature on the sealed application program module with assistance from internal smart key device 2504, which assists operating system program loader 2506 because it has already established a trust relationship with operating system program loader 2506 through the completion of a mutual authentication procedure. Thereafter, application module 2508 is able to perform a mutual authentication procedure with internal smart key device 2504, operating system modules 2510, or other application modules 2512 in order to trust relationships as necessary.

[145] With reference now to FIG. 26, a flowchart illustrates a process for using the integrity of software modules in accordance with an implementation of the present invention. The process begins during the startup of a data processing system when hardware circuitry within the data processing system validates the digital signature on the boot ROM through assistance of the internal smart key unit within the data processing system (step 2602). Assuming that the digital signature on the boot ROM has been successfully validated, the startup hardware on the data processing system then activates the boot ROM of the data processing system (step 2604), thereby preventing the boot ROM from performing many types of operations until the internal smart key device has validated it, or in alternative implementations, preventing the boot ROM from performing any operations until the internal smart key device has



AUS030854

validated it.

[146] At some subsequent point in time, presumably still during the startup procedure of the data processing system, the boot ROM verifies the digital signature(s) on signed/sealed operating system module(s) that are required for further initialization of the data processing system (step 2606). Assuming that the boot ROM is able to validate the digital signature(s) on operating system module(s), the boot ROM then loads the operating system module(s) (step 2608) and passes execution control to the operating system module(s) (step 2610).

[147] At some subsequent point in time, a program loader within the operating system verifies the digital signature on signed/sealed application module(s) that are being invoked on the data processing system (step 2612), e.g., in response to a request by a user of the data processing system. Assuming that the program loader is able to validate the digital signature(s) on the application module(s), then the program loader loads the application module(s) (step 2614) and passes execution control to the application module(s) (step 2616), thereby concluding the process. In this manner, the present invention may be employed to ensure the integrity of all software modules that execute on the data processing system; all software that executes on the data processing system must be signed by the internal smart key device or by a software certificate authority module that is trusted by the internal smart key device. The trust relationship is established via mutual authentication between the software certificate authority module and the internal smart key device and also via a configuration process to add the certificate of the software certificate authority module into the list of trusted certificates into the internal smart key device. As partially described with respect to FIG. 25 and more fully with respect to the previous figures, appropriate trust relationships are established during software execution through mutual authentication procedures that employ the digital certificates that have been previously embedded in the respective entities.

[148] The advantages of the present invention should be apparent in view of the detailed description that is provided above. The present invention provides a mechanism for securing cryptographic functionality within a host system such that it may only be used when a system administrator physically allows it via a hardware security token. In addition, a hardware security unit is integrated into a data processing system, and the hardware security unit acts as a hardware certificate authority. The hardware security unit may be viewed as supporting a trust hierarchy or trust framework within a distributed data processing system. The hardware security unit can sign software that is

AUS030854

installed on the machine that contains the hardware security unit. Server processes that use the signed software that is run on the machine can establish mutual trust relationships with the hardware security unit and amongst the other server processes based on their common trust of the hardware security unit.

[149] It is important to note that while the present invention has been described in the context of a fully functioning data processing system, those of ordinary skill in the art will appreciate that the processes of the present invention are capable of being distributed in the form of instructions in a computer readable medium and a variety of other forms, regardless of the particular type of signal bearing media actually used to carry out the distribution. Examples of computer readable media include media such as EPROM, ROM, tape, paper, floppy disc, hard disk drive, RAM, and CD-ROMs and transmission-type media, such as digital and analog communications links.

[150] A method is generally conceived to be a self-consistent sequence of steps leading to a desired result. These steps require physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. It is convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, parameters, items, elements, objects, symbols, characters, terms, numbers, or the like. It should be noted, however, that all of these terms and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities.

[151] The description of the present invention has been presented for purposes of illustration but is not intended to be exhaustive or limited to the disclosed embodiments. Many modifications and variations will be apparent to those of ordinary skill in the art. The embodiments were chosen to explain the principles of the invention and its practical applications and to enable others of ordinary skill in the art to understand the invention in order to implement various embodiments with various modifications as might be suited to other contemplated uses.

[152] It will be understood by those skilled in the art that, although the present invention has been described in relation to the preceding example embodiments, the invention is not limited thereto and that there are many possible variations and modifications which fall within the scope of the invention.

[153] The scope of the present disclosure includes any novel feature or combination of features disclosed herein. The applicant hereby gives notice that new claims may be formulated to such features or combination of features during prosecution of this ap-

AUS030854

plication or of any such further applications derived therefrom. In particular, with reference to the appended claims, features from dependent claims may be combined with those of the independent claims and features from respective independent claims may be combined in any appropriate manner and not merely in the specific combinations enumerated in the claims.

[154] For the avoidance of doubt, the term “comprising”, as used herein throughout the description and claims is not to be construed as meaning “consisting only of”.

AUS030854

42

## Claims

- [001] A data processing system comprising: a system unit including: a processor for executing instructions in software modules; and a first hardware security unit including: means for storing a private key of a first asymmetric cryptographic key pair and a public key of a second asymmetric cryptographic key pair; means for authenticating a software module; and means for acting as a certificate authority to issue digital certificates to software modules; and a first software module executable on the system unit including: means for storing a private key of the second asymmetric cryptographic key pair and a public key of the first asymmetric cryptographic key pair; and means for authenticating the hardware security unit.
- [002] The data processing system of claim 1 wherein the hardware security unit further comprises: means for receiving a digital certificate corresponding to a private key possessed by a second hardware security unit that is not included in the system unit; and means for storing the received digital certificate.
- [003] The data processing system of claim 1 or 2 further comprising: a removable hardware device including: means for storing a private key of a third asymmetric cryptographic key pair and a public key of the first asymmetric cryptographic key pair; a first hardware interface for electrically engaging the system unit; and means for authenticating the hardware security unit; and the system unit further including: a second hardware interface for electrically engaging a removable hardware device.
- [004] The data processing system of claim 3 wherein the hardware security unit further comprises: means for enabling the hardware security unit to act as a certificate authority to issue digital certificates to software modules based on whether the removable hardware device remains electrically engaged with the system unit after the removable hardware device and the hardware security unit have been mutually authenticated.
- [005] The data processing system of any preceding claim wherein the first software module further comprises: means for authenticating a second software module that is executing in the data processing system.
- [006] The data processing system of claim 5 further comprising: means for receiving a digital certificate for the second software module; and means for verifying the received digital certificate as having been issued by the hardware security unit.

AUS030854

43

- [007] The data processing system of claim 5 further comprising: means for receiving a digital certificate for the second software module; means for retrieving a set of digital certificates from the hardware security unit; and means for verifying the digital certificate for the second software module based on a certificate in the set of digital certificates from the hardware security unit.
- [008] The data processing system of any preceding claim further comprising: means for requiring a software module executable on the system unit to have been signed by the first hardware security unit before executing the software module.
- [009] The data processing system of any preceding claim further comprising: means for requiring all software modules executable on the system unit to have been signed by the first hardware security unit before execution.
- [010] The data processing system of any preceding claim further comprising: means for requiring all software modules executable on the system unit to be able to authenticate to the first hardware security unit before execution.
- [011] The data processing system of any preceding claim further comprising: a software smart key module that is signed by the first hardware security unit, wherein the first hardware security unit includes means for acting as a certificate authority.
- [012] The data processing system of claim 11 further comprising: means for requiring software modules executable on the system unit to have been signed either by the software smart key module or by the first hardware security unit before execution.
- [013] The data processing system of claim 11 further comprising: means for requiring all software modules executable on the system unit to be able to authenticate either to the software smart key module or to the first hardware security unit before execution.
- [014] The data processing system of claim 11 further comprising: means for secondary software certificate authority modules to derive trust authority from the first hardware security unit in an inverted pyramid form of a trust hierarchy.
- [015] The data processing system of claim 11 further comprising: means for allowing software certificate authority modules to sign subordinate software certificate authority modules.
- [016] The data processing system of claim 1 further comprising: means for requiring all interacting software applications that are installed on the system unit to be able to mutually authenticate to one another.

AUS030854

44

- [017] The data processing system of claim 16 further comprising: means for allowing interacting software applications to verify each other as signed by a trusted software certificate authority or by the first hardware security unit.
- [018] The data processing system of any preceding claim further comprising: means for asserting a digital certificate of a hardware security unit on a different system unit into a list of trusted certificate authorities in the first hardware security unit.
- [019] The data processing system of any preceding claim further comprising: means for asserting a digital certificate of a software certificate authority trusted on a different data processing system into a list of trusted certificate authorities in the first hardware security unit.
- [020] A method for performing cryptographic functions in a data processing system, the method comprising: executing a software module on a system unit including a hardware security unit, wherein the hardware security unit contains a private key of a first asymmetric cryptographic key pair and a public key of a second asymmetric cryptographic key pair; performing a mutual authentication operation between the hardware security unit and the software module, wherein the software module contains a private key of the second asymmetric cryptographic key pair and a public key of the first asymmetric cryptographic key pair; and issuing digital certificates by the hardware security unit to software modules.
- [021] The method of claim 20 further comprising: receiving at the hardware security unit a digital certificate corresponding to a private key possessed by a second hardware security unit that is not included in the system unit; and storing the received digital certificate.
- [022] The method of claim 21 further comprising: receiving a request from the software module to retrieve the received digital certificate; and providing the received digital certificate to the software module.
- [023] The method of claim 20 further comprising: electrically engaging a removable hardware device with the system unit, wherein the removable hardware device contains a private key of a third asymmetric cryptographic key pair and a public key of a fourth asymmetric cryptographic key pair, and wherein the hardware security unit contains a private key of the fourth asymmetric cryptographic key pair and a public key of the third asymmetric cryptographic key pair; performing a mutual authentication operation between the removable hardware device and the hardware security unit.

AUS030854

45

- [024] The method of claim 23 further comprising: in response to successfully performing the mutual authentication operation between the removable hardware device and the hardware security unit, enabling the hardware security unit to act as a certificate authority to issue digital certificates while the removable hardware device remains electrically engaged with the system unit.
- [025] The method of claim 23 further comprising: in response to successfully performing the mutual authentication operation between the removable hardware device and the hardware security unit, enabling the hardware security unit to receive and store at the hardware security unit a digital certificate corresponding to a private key possessed by a second hardware security unit that is not included in the system unit.
- [026] The method of claim 20 further comprising: authenticating, by the software module, a second software module that is executing in the data processing system.
- [027] The method of claim 26 further comprising: receiving a digital certificate for the second software module; and verifying the received digital certificate as having been issued by the hardware security unit.
- [028] The method of claim 26 further comprising: receiving a digital certificate for the second software module; retrieving a set of digital certificates from the hardware security unit; and verifying the digital certificate for the second software module based on a certificate in the set of digital certificates from the hardware security unit.
- [029] The method of any of claims 20 to 28 further comprising: requiring a software module executable on the system unit to have been signed by the hardware security unit before executing the software module.
- [030] The method of any of claims 20 to 28 further comprising: requiring all software modules executable on the system unit to have been signed by the hardware security unit before execution.
- [031] The method of any of claims 20 to 28 further comprising: requiring all software modules executable on the system unit to be able to authenticate to the hardware security unit before execution.
- [032] The method of any of claims 20 to 31 further comprising: signing a software smart key module by the hardware security unit, wherein the hardware security unit includes means for acting as a certificate authority.
- [033] The method of claim 32 further comprising: requiring software modules

AUS030854

46

executable on the system unit to have been signed either by the software smart key module or by the hardware security unit before execution.

- [034] The method of claim 32 further comprising: requiring all software modules executable on the system unit to be able to authenticate either to the software smart key module or to the hardware security unit before execution.
- [035] The method of claim 32, 33 or 34 further comprising: allowing secondary software certificate authority modules to derive trust authority from the hardware security unit in an inverted pyramid form of a trust hierarchy.
- [036] The method of claim 32, 33, 34 or 35 further comprising: allowing software certificate authority modules to sign subordinate software certificate authority modules.
- [037] The method of any of claims 20 to 36 further comprising: requiring all interacting software applications that are installed on the system unit to be able to mutually authenticate to one another.
- [038] The method of claim 37 further comprising: allowing interacting software applications to verify each other as signed by a trusted software certificate authority or by the hardware security unit.
- [039] The method of any of claims 20 to 38 further comprising: asserting a digital certificate of a hardware security unit on a different system unit into a list of trusted certificate authorities in the hardware security unit.
- [040] The method of any of claims 20 to 38 further comprising: asserting a digital certificate of a software certificate authority trusted on a different data processing system into a list of trusted certificate authorities in the hardware security unit.
- [041] A computer program product on a computer readable medium for use in a data processing system for performing cryptographic functions, the computer program product comprising: means for executing a software module on a system unit including a hardware security unit, wherein the hardware security unit contains a private key of a first asymmetric cryptographic key pair and a public key of a second asymmetric cryptographic key pair; means for performing a mutual authentication operation between the hardware security unit and the software module, wherein the software module contains a private key of the second asymmetric cryptographic key pair and a public key of the first asymmetric cryptographic key pair; and means for issuing digital certificates by the hardware security unit to software modules.



AUS030854

[042] A computer program product comprising computer-implementable instructions to carry out the method of any of claims 20 to 40.

[043] A computer program product comprising computer-implementable instructions for execution in a data processing system to provide the data processing system of any of claims 1 to 19.

[Fig. 001]

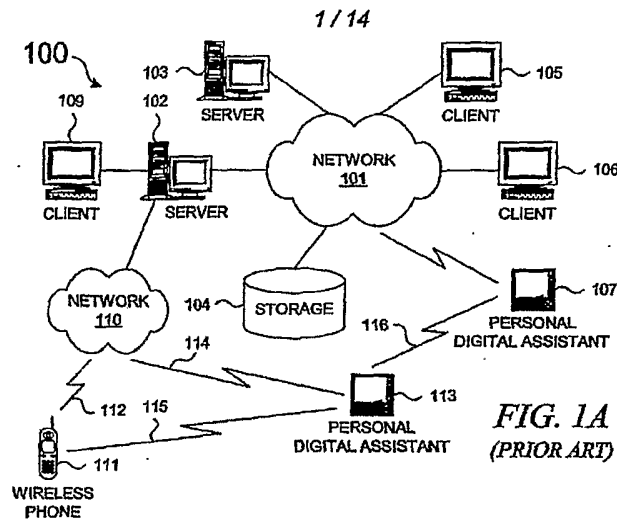


FIG. 1A  
(PRIOR ART)



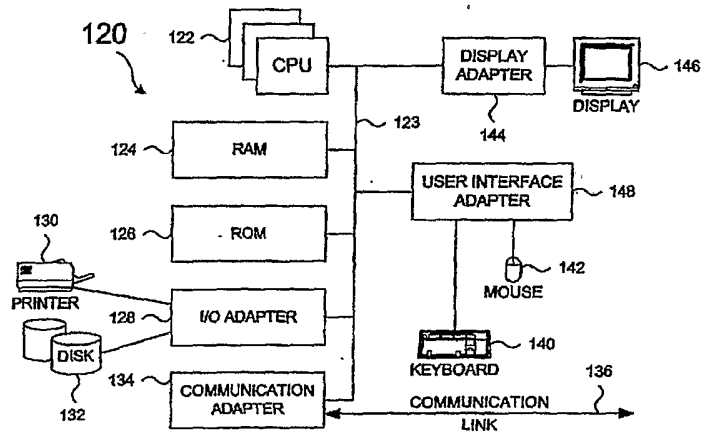


FIG. 1B  
(PRIOR ART)

[Fig. 002]

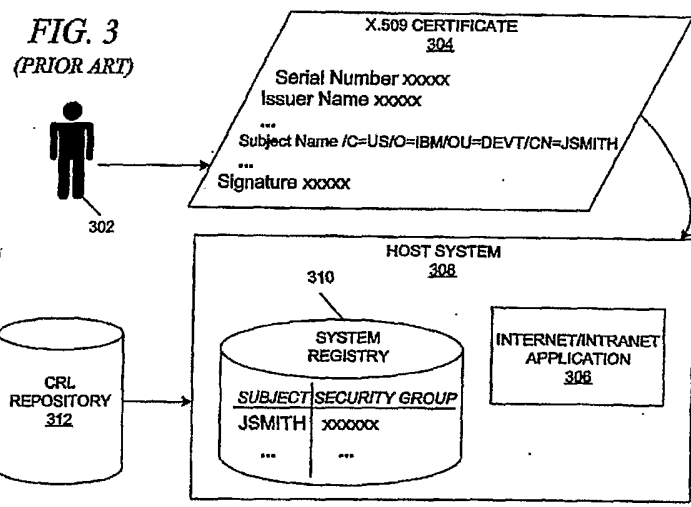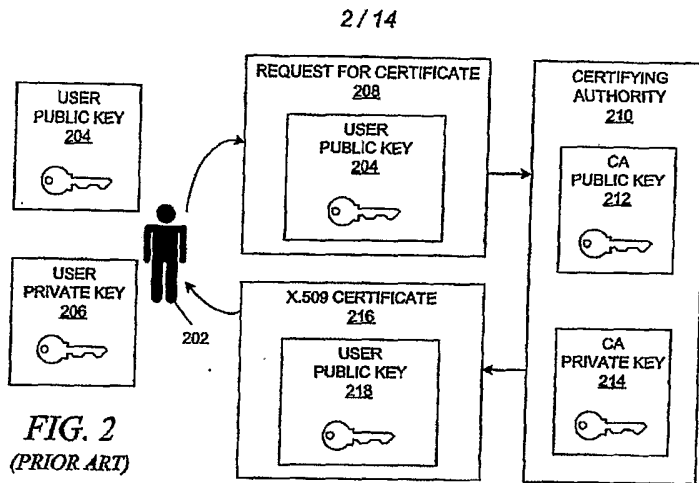

[Fig. 003]




FIG. 4

3/14

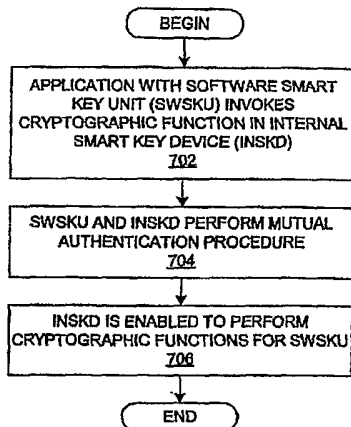


FIG. 7

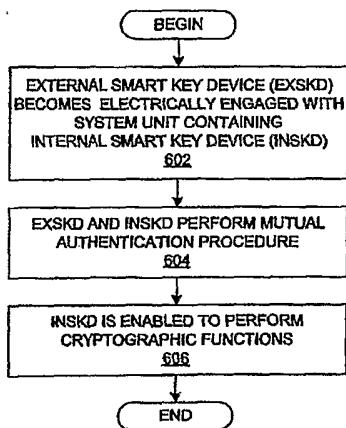


FIG. 6

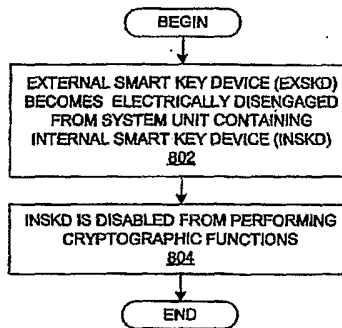


FIG. 8

[Fig. 004]

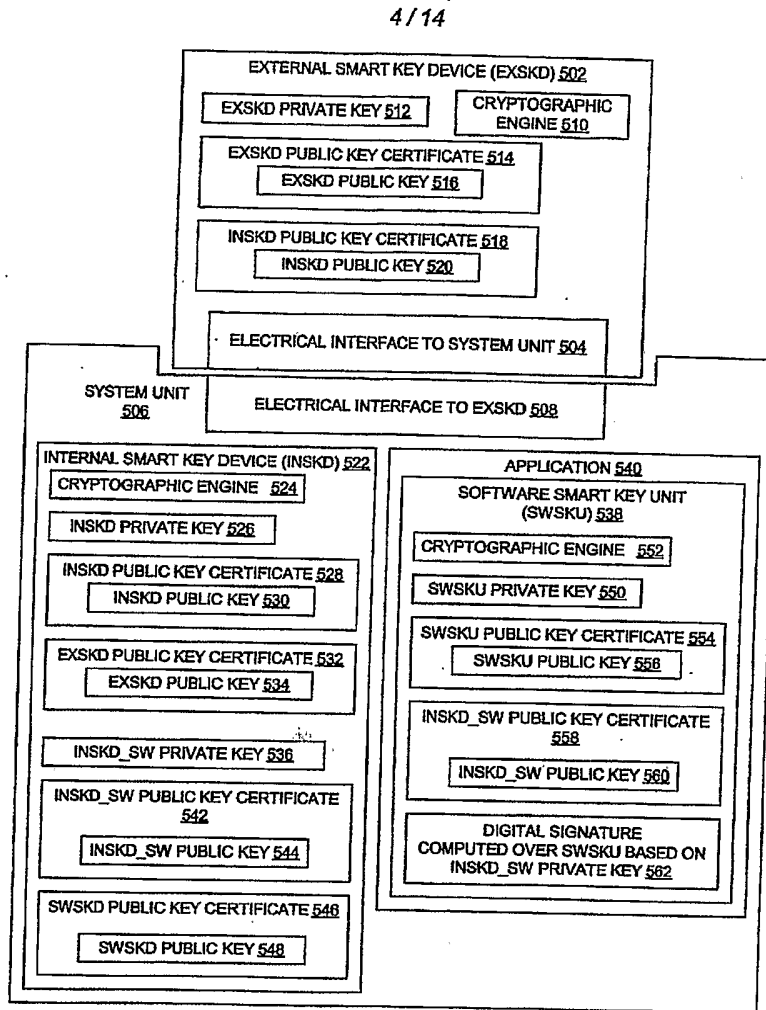


FIG. 5

[Fig. 005]

5/14

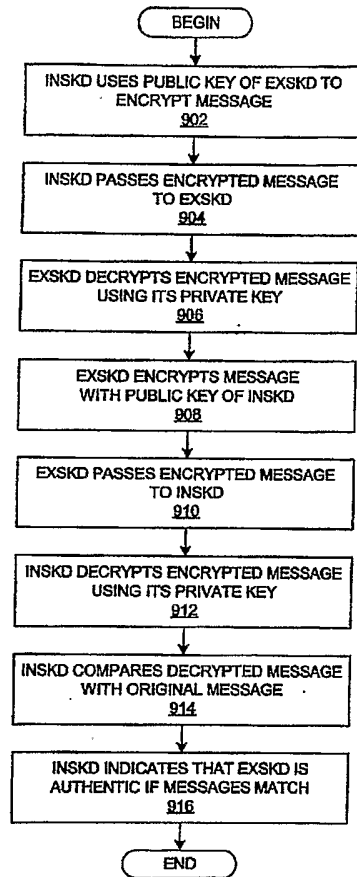


FIG. 9A

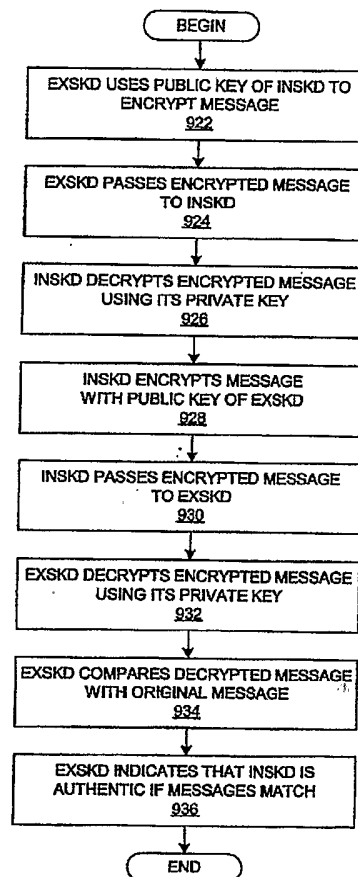


FIG. 9B

[Fig. 006]

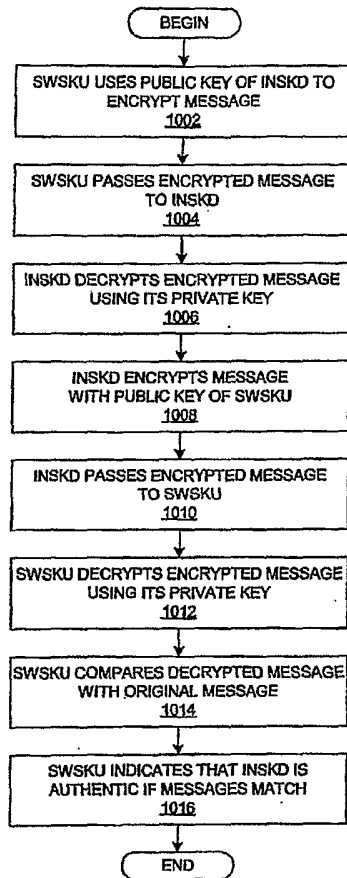


FIG. 10A

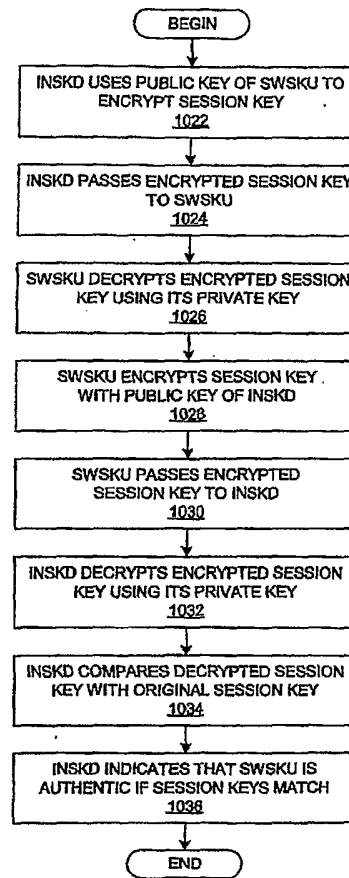


FIG. 10B

[Fig. 007]

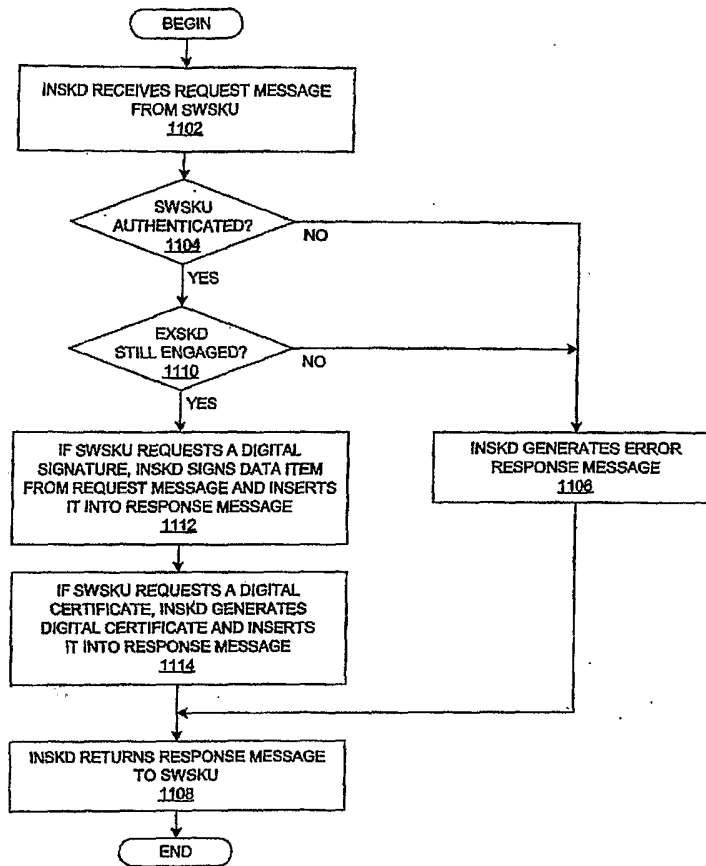


FIG. 11A



[Fig. 008]

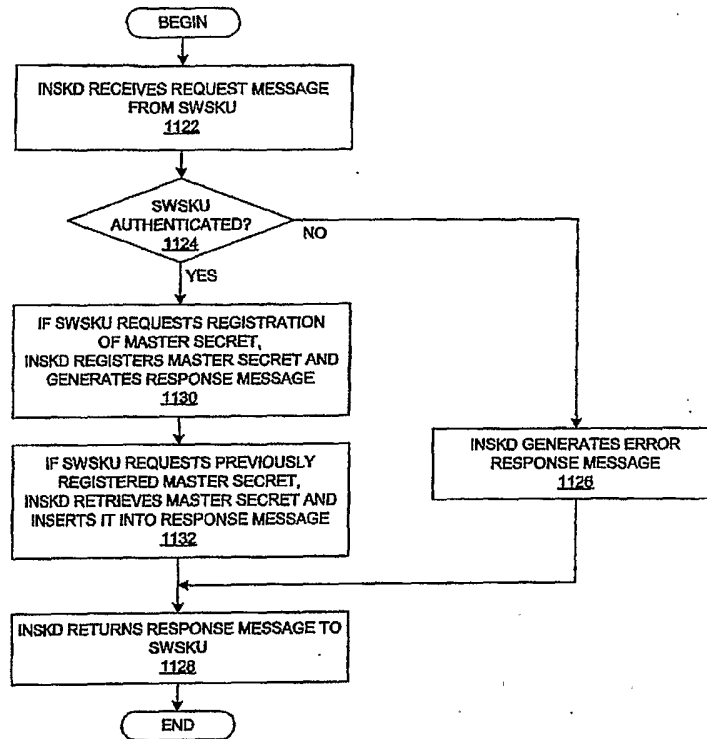


FIG. 11B

[Fig. 009]

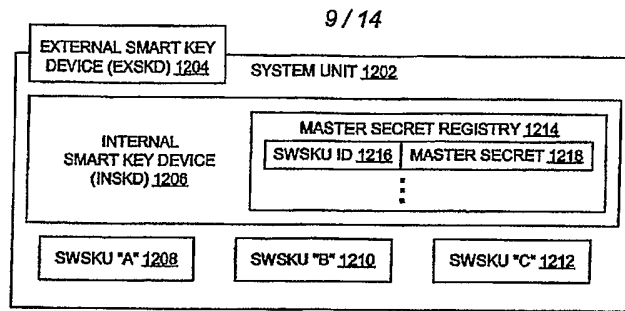


FIG. 12

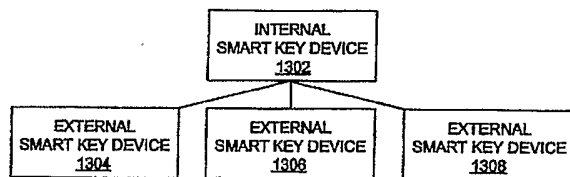


FIG. 13

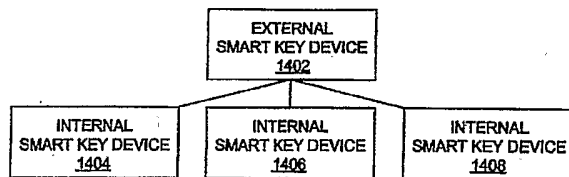


FIG. 14

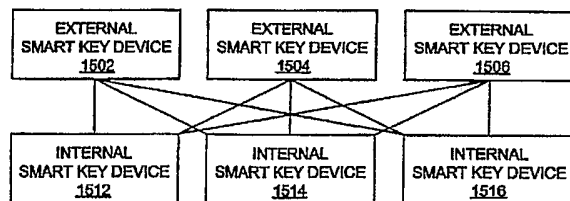


FIG. 15

10/14

[Fig. 010]

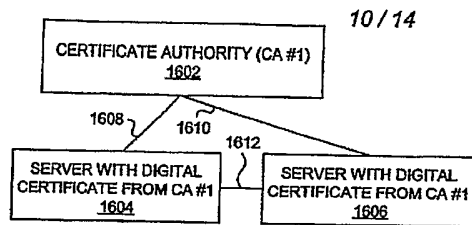


FIG. 16A  
(PRIOR ART)

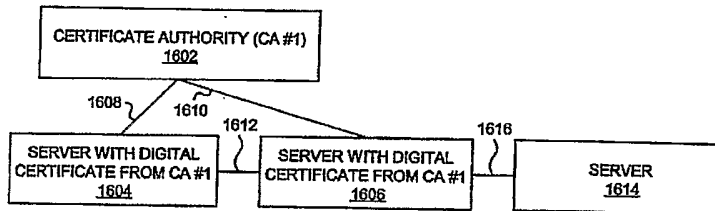


FIG. 16B  
(PRIOR ART)

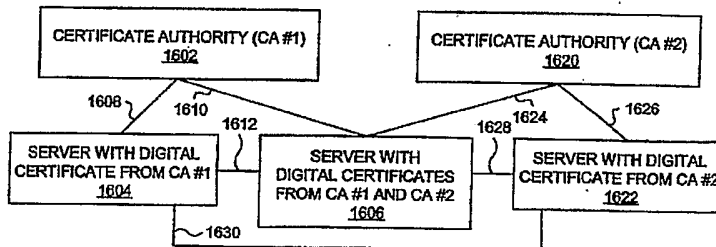


FIG. 16C  
(PRIOR ART)

[Fig. 011]

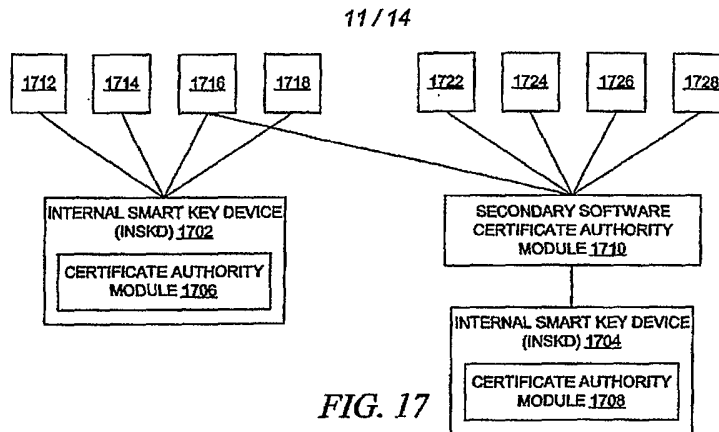


FIG. 17

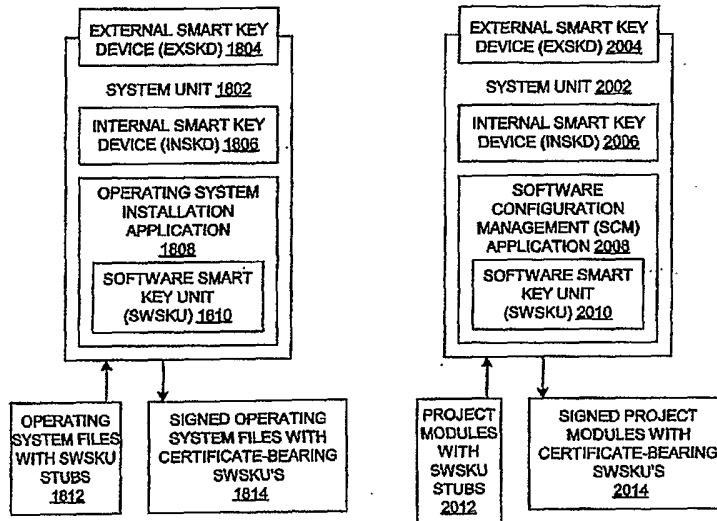


FIG. 18

FIG. 20

[Fig. 012]

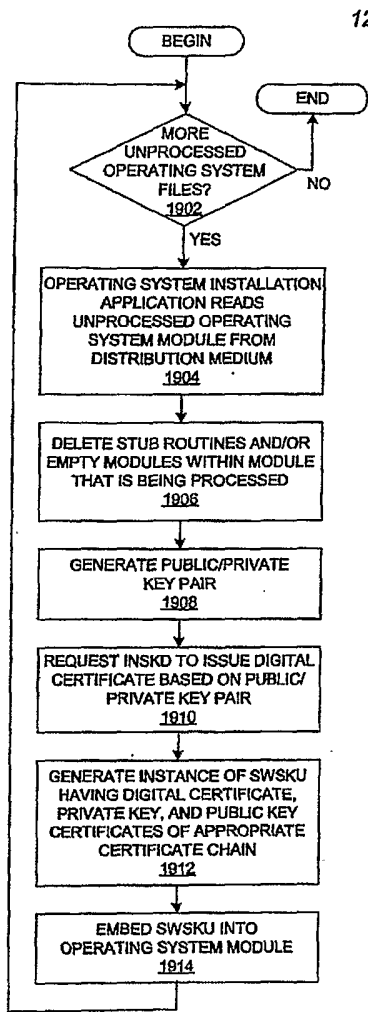


FIG. 19




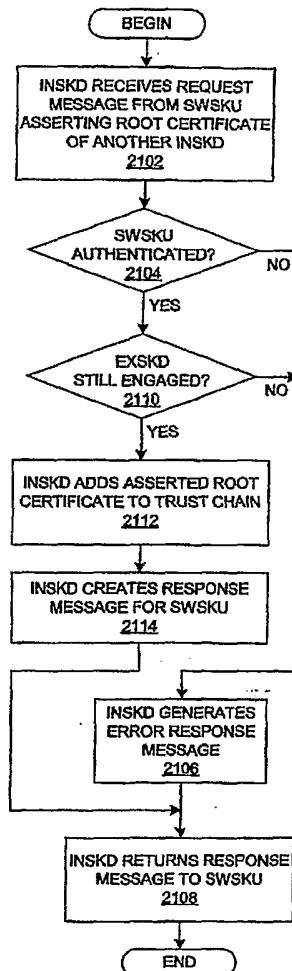


FIG. 21

[Fig. 013]

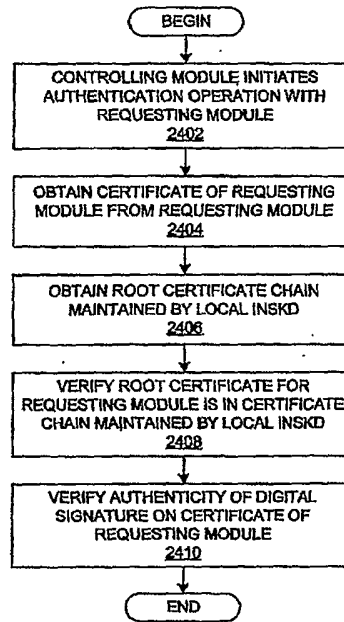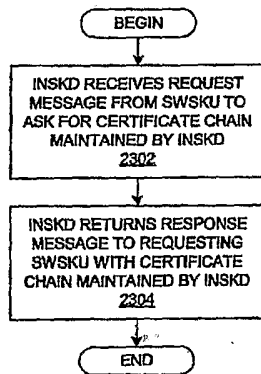

[Fig. 014]

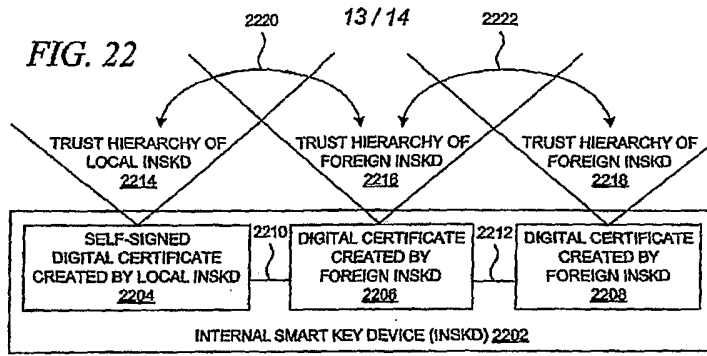