

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2015/038739 A1

(43) International Publication Date
19 March 2015 (19.03.2015)

WIPO | PCT

(51) International Patent Classification:
E06B 3/667 (2006.01) *C03C 27/06* (2006.01)
E06B 3/677 (2006.01) *C03C 27/12* (2006.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:
PCT/US2014/055136

(22) International Filing Date:
11 September 2014 (11.09.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14/025,931 13 September 2013 (13.09.2013) US

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors: FREE, Michael Benton; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US). WOLK, Martin B.; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US). COLLIER, Terry O.; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US). VOGEL-MARTIN, Margaret M.; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US). SCHWARTZ, Evan, L.; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(74) Agents: VIETZKE, Lance, L. et al.; 3M Center Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: VACUUM GLAZING PILLARS DELIVERY FILMS AND METHODS FOR INSULATED GLASS UNITS

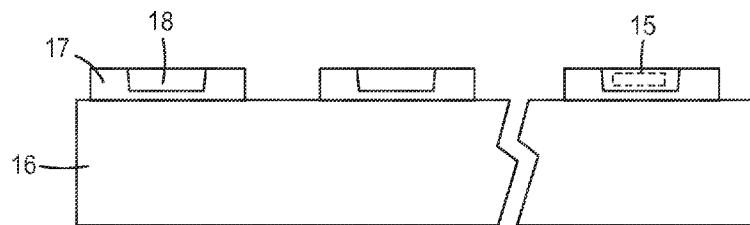


FIG. 3

(57) Abstract: Pillar delivery films for vacuum insulated glass units. The delivery films include a support film or pocket tape, a sacrificial material on the support film, and a plurality of pillars. The pillars are at least partially embedded in the sacrificial material or formed within sacrificial material molds, and the sacrificial material is capable of being removed while leaving the pillars substantially intact. In order to make an insulated glass unit, the delivery films are laminated to a receptor such as a glass pane, and the support film and sacrificial material are removed to leave the pillars remaining on the glass.

WO 2015/038739 A1

**VACUUM GLAZING PILLARS DELIVERY FILMS
AND METHODS FOR INSULATED GLASS UNITS**

BACKGROUND

5 Windows are poor thermal insulators and contribute significantly to building heat loss and energy inefficiency. The need to meet green building standards is driving the adoption of energy efficient insulated glass units including vacuum designs. A vacuum insulated glass unit 10 is shown in FIGS. 1 and 2. Unit 10 includes two panes of glass 11 and 12 separated by a vacuum gap. Pillars 14 in the gap maintain the separation of glass 10 panes 11 and 12, which are hermetically sealed together by an edge seal 13, typically a low melting point glass frit, surrounding the pillars. Manufacturing vacuum insulated glass units efficiently and cost effectively can present challenges, particularly with 15 selection of suitable pillars, placement of the pillars, and sealing the glass panes together with the vacuum gap. Accordingly, a need exists for improved ways to make and install pillars for vacuum insulated glass units.

SUMMARY

20 A pillar delivery film, consistent with the present invention, includes a support film, a sacrificial material layer on the support film, and a plurality of pillars. Each pillar is at least partially embedded in the sacrificial material layer, which is capable of being removed from the pillars while leaving the pillars substantially intact.

25 Another pillar delivery film, consistent with the present invention, includes a support film, a plurality of molds on the support film, and a plurality of pillars located in the molds. The molds are composed of a sacrificial material, which is capable of being removed from the pillars while leaving the pillars substantially intact.

30 A pillar delivery pocket film, consistent with the present invention, includes a support film having a plurality of pockets formed within it and a plurality of pillars located in the pockets. The support film is composed of a sacrificial material, which is capable of being removed from the pillars while leaving the pillars substantially intact.

35 Another pillar delivery pocket film, consistent with the present invention, includes a support film having a plurality of pockets formed within it, a sacrificial material located within the pockets, and a plurality of pillars at least partially embedded

in the sacrificial material in the pockets. The sacrificial material is capable of being removed from the pillars while leaving the pillars substantially intact.

A method for transferring pillars from a delivery film to a receptor surface, consistent with the present invention, includes providing a delivery film having a support film, a sacrificial material on the support film, and a plurality of pillars at least partially within the sacrificial material. The delivery film is laminated to a receptor surface with the pillars facing the receptor surface. The support film is removed while leaving the pillars on the receptor surface and at least a portion of the sacrificial material on the pillars. The sacrificial material is then removed while leaving the pillars remaining and substantially intact on the receptor surface.

A method for making a delivery film having pillars and transferring them to a receptor surface, consistent with the present invention, includes providing a support film with a releasable surface. A plurality of pillars are molded on the releasable surface of the support film using a mold applied to the releasable surface, and the mold is removed from the releasable surface while leaving the pillars substantially intact. The pillars are then transferred from the support film to a receptor surface.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are incorporated in and constitute a part of this specification and, together with the description, explain the advantages and principles of the invention. In the drawings,

FIG. 1 is an exploded perspective view of a vacuum insulated glass unit;

FIG. 2 is a side sectional view of a vacuum insulated glass unit;

FIG. 3 is a diagram of a pillar delivery film for transfer to a sacrificial material

layer;

FIG. 4 is a diagram of a pillar delivery film for transfer to a sacrificial material layer;

FIG. 5 is a diagram of a pillar delivery film and method for transfer directly to glass;

FIG. 6 is a diagram of a pillar delivery film and method for transfer to a sacrificial material layer;

FIG. 7 is a diagram of a pillar delivery film and method having a sacrificial material mold on a support film;

FIG. 8 is a diagram of a pillar delivery film and method for transfer to a sacrificial material layer on a support film;

FIG. 9 is a diagram of a pillar delivery film and method for transfer to a sacrificial material layer on a support film;

5 FIG. 10 is a diagram of coated pre-formed pillars;

FIG. 11 is a top view of pocket tape for delivering pillars;

FIG. 12 is a side sectional view of a portion of the pocket tape;

FIG. 13A is a side sectional view of pocket tape having pre-formed pillars;

FIG. 13B is a perspective view of the pillar resulting from the pocket tape of FIG.

10 13A;

FIG. 14A is a side sectional view of pocket tape having cured form-in-place pillars;

FIG. 14B is a perspective view of the pillar resulting from the pocket tape of FIG. 14A;

15 FIG. 15A is a side sectional view of pocket tape having cured form-in-place pillars with adhesive;

FIG. 15B is a perspective view of the pillar resulting from the pocket tape of FIG. 15A;

20 FIG. 16A is a side sectional view of pocket tape having cured form-in-place pillars with retention rings;

FIG. 16B is a perspective view of the pillar resulting from the pocket tape of FIG. 16A;

FIG. 17A is a side sectional view of sacrificial pocket tape having cured form-in-place pillars;

25 FIG. 17B is a perspective view of the pillar resulting from the pocket tape of FIG. 17A;

FIG. 18A is a side sectional view of carrier film and sacrificial pocket tapes having cured form-in-place pillars;

30 FIG. 18B is a perspective view of the pillar resulting from the pocket tape of FIG. 18A;

FIG. 19A is a side sectional view of a pocket tape having cured form-in-place pillars in sacrificial pockets;

FIG. 19B is a perspective view of the pillar resulting from the pocket tape of FIG. 19A;

FIG. 20 is a diagram of a pillar delivery film and method using a strippable tool;

5 FIG. 21 is a diagram of a pillar delivery film and method using a strippable tool with a sacrificial material layer;

FIG. 22 is a diagram of a pillar delivery film and method using a rotary tool; and

FIG. 23 is a diagram of a pillar delivery film and method using a strippable skin.

DETAILED DESCRIPTION

10 Embodiments of the present invention include pillar delivery films and methods that can be used to provide the pillars required for fabrication of vacuum insulated glass units. The delivery films contain the pillars, and the methods can use the films to place the pillars on glass panes. One method involves mechanically depositing the pillars onto a pocket film or a film with a releasable surface and lamination transferring the pillars 15 onto glass. Another method involves molding the pillars in place on a pocket film or a film with a releasable surface and mechanically transferring the pillars to glass. Another method involves molding the pillars in place on a pocket film or a film with a releasable surface and lamination transferring the pillars onto glass. The mechanical transfer of pillars, referred to as pick and place, can use robotics for the movement and placement of 20 the pillars. The mold in place of the pillars and lamination transfer of them are described below. The methods can also deliver the edge seal in the glass units. The delivery films and methods can make use of lamination transfer films.

25 Examples of pillars for vacuum insulated glass units are described in U.S. Patent Application No. 14/025,958, filed September 13, 2013, of M. Vogel-Martin, entitled “Vacuum Glazing Pillars for Insulated Glass Units,” which is incorporated herein by reference as if fully set forth. Examples of lamination transfer films are described in U.S. Patent Application No. 2014/0021492, which is incorporated herein by reference as if fully set forth.

30 FIG. 3 is a diagram of a pillar delivery film with a sacrificial material layer for transfer to glass. The delivery film includes a support film 16, a sacrificial resin material 17 forming molds, and form in place pillars 18. The pillars can optionally include a pre-formed pillar body 15.

FIG. 4 is a diagram of a pillar delivery film with a sacrificial material layer for transfer to glass. The delivery film includes a support film 19, a sacrificial resin material 20 can be a continuous or discontinuous layer on support film 19, pre-formed pillars 21, and an optional functional layer 22 on or around the pillars. As illustrated, pillars 21 can 5 be on or at least partially embedded within material 20. The pillars can optionally include pre-formed pillar bodies 15.

FIG. 5 is a diagram of a section of a pillar delivery film and method for transfer directly to glass. The delivery film includes a support film 24 having a mold 25. The mold is filled with a curable pillar resin 26 to form a filled mold on the support film (step 10 30). Alternatively a preformed pillar may be inserted into the mold before or after the curable resin fill. The support film is laminated to glass 27 (step 31), and the film and glass laminate is cured (step 32). Film 24 with mold 25 is removed (step 36), resulting in pillar 26 on glass 27. Alternatively, a molded pocket tape 28 can be used. Pocket tape 15 28 is filled with a curable pillar resin to form pillar 26 (step 33). The filled pocket tape 28 is laminated to glass 27 (step 34), and tape and glass laminate is cured (step 35). Pocket tape 28 is removed (step 36), resulting in pillar 26 on glass 27.

FIG. 6 is a diagram of a section of a pillar delivery film and method with a sacrificial material layer for transfer to glass. Mold 41 can optionally be on mold support film 40. The mold is filled with a curable pillar resin 42 to form a filled mold 20 (optionally on mold support film 40) (step 50). Mold 41 (or optionally mold support film 40) is laminated to transfer film 44 having a sacrificial material layer 43 (step 51), and the mold (optionally be on mold support film 40) and transfer film 44 laminate is cured (step 52). Mold 41 or optionally be on mold support film 40 is removed (step 56), resulting in pillar delivery film comprising pillar 42 on transfer film 44 with sacrificial 25 material 43 between them. Alternatively, a molded pocket tape 45 can be used. Pocket tape 45 is filled with a curable pillar resin to form pillar 42 (step 53). The filled pocket tape 45 is laminated to transfer film 44 having sacrificial material layer 43 (step 54), and pocket tape and transfer film 44 laminate is cured (step 55). Pocket tape 45 is removed 30 (step 56), resulting in pillar delivery film comprising pillar 42 on transfer film 44 with sacrificial material 43 between them.

FIG. 7 is a diagram of a section of a pillar delivery film and method having a sacrificial material mold on a support film. The delivery film includes a mold support film 60 having a sacrificial material mold 61. The mold support film 60 may be the

sacrificial mold 61. Mold 61 is filled with a curable pillar resin 62 to form a filled mold on mold support film 60 (step 70). The resin material is cured (step 71), and uncured pillar resin is deposited on the cured resin material (step 72). Mold support film 60 is laminated to glass 63 (step 73), and the film and glass laminate is cured (step 74). Mold support film 60 is removed, leaving sacrificial material mold 61 on resin pillar 62 (step 75). The sacrificial material is baked out (step 79), resulting in pillar 62 on glass 63. Alternatively, mold support film 60 is laminated to glass 63 without the uncured pillar resin (step 76), and the film and glass laminate is cured (step 77). Mold support film 60 is removed, leaving sacrificial material mold 61 on resin pillar 62 (step 78). The sacrificial material is baked out (step 79), resulting in pillar 62 on glass 63.

FIG. 8 is a diagram of a section of a pillar delivery film and method for transfer to a sacrificial material layer on a transfer film and lamination to glass. A support film 80 includes a release surface or coating 81. Using a continuous cast and cure process, a pillar 82 is formed on support film 80 (step 90), and support film 80 with pillar 82 is laminated to a transfer film 83 having a sacrificial material coating 84 (step 91). Support film 80 is removed, transferring pillar 82 to transfer film 83 (step 92). An optional adhesive 85 can be applied to pillar 82 (step 93). Transfer film 83 is laminated to glass 86 (step 94), and transfer film 83 is removed (step 95). Sacrificial material 84 is removed (step 96), resulting in pillar 82 on glass 86 with optional adhesive 85. As illustrated, pillars 82 can be partially embedded within optional adhesive 85.

FIG. 9 is a diagram of a section of a pillar delivery film and method for transfer to a sacrificial material layer on a support film. The delivery film includes a support film 100 with a release surface or coating 102. Using a continuous cast and cure process, a pillar 103 is formed on support film 100 (step 110) with a pillar land 106 between pillars, and an adhesive 104 is deposited on pillar 103 (step 111). Support film 100 with pillar 103 is laminated to glass 105 (step 112). Support film 100 is removed (step 113), resulting in removal of pillar land 106 and transfer of pillar 103 to glass 105 with adhesive 104.

FIG. 10 is a diagram of coated pre-formed pillars. A pre-formed pillar 120 is coated in a wet or dry coating process (step 123) to form a coating 121 surrounding pillar 120. The coated pillar can then be transferred to glass 122 using, for example, the methods described above. Additional functional layers can also be optionally added to

the coated pillar. Coating 121 can include, for example, an adhesive coating, an silsesquioxane precursor with nanoparticles, or a polymer derived ceramic.

FIG. 11 is a top view of pocket tape 130 for delivering pillars. Pocket tape 130 typically includes holes 131 to engage machine gears. Material pockets 132 are formed 5 in pocket tape 130. FIG. 12 is a side sectional view of a portion of the pocket tape 130 having pockets 132. Pocket 132 includes a film portion 133 and a pocket portion 134 for using in forming, transferring, and delivering, pillars.

FIGS. 13A-19A are side sectional views of various pocket tapes used to form pillars, and FIGS. 13B-19B are perspective views of the resulting pillars. FIG. 13A is a 10 side sectional view of a pocket tape 140 having pre-formed pillars 141 (FIG. 13B). FIG. 14A is a side sectional view of a pocket tape 142 having cured form-in-place pillars 143 (FIG. 14B). FIG. 15A is a side sectional view of a pocket tape 144 having cured form-in-place pillars 145 with an adhesive 146 (FIG. 15B). FIG. 16A is a side sectional view 15 of a pocket tape 147 having cured form-in-place pillars 148 with adhesive 151 and adhesive retention rings 149 to limit the lateral spread of the adhesive (FIG. 16B) and a liner 150. FIG. 17A is a side sectional view of a pocket tape 151, formed from a sacrificial material, having cured form-in-place pillars 152 (FIG. 17B). FIG. 18A is a side sectional view of carrier film tape 153 and a sacrificial pocket tape 155 having cured form-in-place pillars 154 (FIG. 18B). FIG. 19A is a side sectional view of a pocket tape 20 156 having cured form-in-place pillars 157 in pockets formed from a sacrificial material 158 (FIG. 19B).

FIG. 20 is a diagram of a section of a pillar delivery film and method using a strippable tool 160 composed of a strippable film molds 161. The delivery film includes a support film 162 having a sacrificial material 163. Strippable tool 160 is laminated to 25 support film 162 to create molds (step 170), and a curable pillar paste 164 is coated onto support film 162 (step 171), creating curable pillar 164A and land 164B. The filled support film 162 is cured (step 172), and an adhesive 165 is coated onto cured pillar 164 (step 173), creating an adhesive coating 165A on the cured pillar 164A and an adhesive coating 165B on the cured land 164B. Strippable tool 160 is removed (step 174), taking 30 with it cured land 164B and adhesive 165B, resulting in zero land pillar transfer film having pillar 164A on sacrificial material 163 and adhesive 165A.

FIG. 21 is a diagram of a section of a pillar delivery film and method using a strippable tool 180 composed of a strippable film molds 181 with a sacrificial material

layer 183. The delivery film includes a support film 182. Strippable tool 180 is laminated to support film 182 (step 190), and a curable pillar paste 184 is coated onto support film 182 (step 191), creating curable pillar 184A and land 184B. The filled support film 182 is cured (step 192), and an adhesive 185 is coated onto cured pillar 184 (step 193), creating an adhesive coating 185A on the cured pillar 184A and an adhesive coating 185B on the cured land 184B. Strippable tool 180 is removed (step 194), taking with it cured land 184B and adhesive 185B, resulting in a zero land pillar transfer film having pillar 184A and sacrificial material 183 on support film 182 and adhesive 185A on pillar 184A.

10 FIG. 22 is a diagram of a pillar delivery film and method using a rotary tool having an opaque perforated rotary mold tool 200 and curing units 201. The delivery film includes a support film 204 having a sacrificial material 205. A pillar material 206 is applied to support film 204 through perforated rotary mold tool 200 and cured by curing units 201 (step 210), resulting in formed pillars on support film 204 when 15 removed from perforated rotary mold tool 200 (step 211). An adhesive 207 is coated on pillar 206 (step 212), resulting in zero land pillar transfer film having pillar 206 on sacrificial material 205 and support film 204 and with adhesive 207.

20 FIG. 23 is a diagram of a section of a pillar delivery film and method using a strippable skin, which is a type of strippable tool. The delivery film includes a structured film mold 220 with a strippable skin 222 or a replicated resin mold 221 on film 220 with strippable skin 222. A curable pillar paste 223 is coated onto the mold film 220 (step 230), creating curable pillar 223A and land 223B, the filled mold film 220 is cured (step 231), and an adhesive 224 is coated on cured pillar 223 (step 232), creating an adhesive coating 224A on the cured pillar 223A and an adhesive coating 224B on the cured land 25 223B. Strippable skin 222 is removed (step 233), taking with it cured land 223B and adhesive 224B, resulting in a zero land pillar transfer film having pillar 223 on support film 220 and with an adhesive 224.

30 In the fabrication processes described above, additional or supplemental steps can be used within the described steps. In the processes described above, or other processes of the present invention, the sacrificial material can be removed by being cleanly baked out or by being otherwise capable of removal. The term “cleanly baked out” means that the sacrificial material can be removed by pyrolysis or combustion without leaving a substantial amount of residual material such as ash. In some of the side sectional views

of the delivery films described above, only one mold and corresponding pillar are shown for illustrative purposes only. The delivery films typically include many of the molds and pillars for delivery of the pillars to vacuum insulated glass units.

Exemplary materials for the processes described above are provided in the 5 Examples. Exemplary materials for the pillars for the vacuum insulated glass units include the following: ceramic nanoparticles; ceramic precursors; sintered ceramic; glass ceramic; glass frit; glass beads or bubbles; metal; or combinations thereof.

EXAMPLES

Materials		
Abbreviation or Trade Designation	Description	Available from
FILTEK Supreme+ 5032W 2009-04	paste	3M Company, St. Paul, MN
QPAC 40	poly(alkylene carbonate) copolymer	Empower Materials, Inc., New Castle, DE
QPAC 100	poly(alkylene carbonate) copolymer	Empower Materials, Inc., New Castle, DE
QPAC 130	poly(alkylene carbonate) copolymer	Empower Materials, Inc., New Castle, DE
T50	silicon release liner	Solutia Inc., St. Louis, MO

10

Example 1: Replicated mold of sacrificial material.

A coating solution was prepared by dissolving enough of QPAC 40 in 1,3-dioxolane to produce a final weight percent of 30% QPAC 40. The coating solution was hand coated on the backside of a 0.051 mm (0.002 inch) thick T50 silicone release liner 15 in a notch bar coater. Approximately 50 milliliters of the coating solution was applied to the T50 backside and pulled through a notch bar coater set with a gap of .024 inches. The coating was dried at ambient for 1 hour.

The coated film was placed on a hotplate coating side up and held at 50 °C until heated. A tool containing square protrusions on a 0.132 cm pitch was placed onto the 20 coated film, protrusion side down. Individual square posts on this tool tapered at 6 degrees from 296 um at the base to 227 um at the top, and were 305 um tall. A 4.6 kg weight was placed onto the top of the tool, embossing the coating. The tool was allowed to contact the film at temperature for 5 minutes. The weight was removed from the tool and the assembly was removed from the hotplate, and allowed to return to room

temperature. The tool was then removed. The coated film now contained wells in the coating that corresponded to the protrusions on the tool.

The wells in the film were then filled with FILTEK Supreme+ 5032W 2009-04 by applying the FILTEK Supreme+ paste to the film and doctoring off the excess with a spatula. The filled sample was then laminated to a clean glass slide at room temperature with a silicone hand roller. The resulting laminate was then cured under germicidal lamps for five minutes. The T50 liner was then removed, leaving cast posts attached to the glass slide, surrounded by the sacrificial mold.

10 **Example 2: Replicated mold of sacrificial material with adhesive.**

A coating solution was prepared by dissolving enough of QPAC 40 in 1,3-dioxolane to produce a final weight percent of 30% QPAC 40. The coating solution was hand coated on the backside of a 0.051 mm (0.002 inch) thick T50 silicone release liner in a notch bar coater. Approximately 50 milliliters of the coating solution was applied to the T50 backside and pulled through a notch bar coater set with a gap of .024 inches. The coating was dried at ambient for 1 hour.

The coated film was placed on a hotplate coating side up and held at 50 °C until heated. A tool containing square protrusions on a 0.132 cm pitch was placed onto the coated film, protrusion side down. Individual square posts on this tool tapered at 6 degrees from 296 um at the base to 227 um at the top, and were 305 um tall. A 4.6 kg weight was placed onto the top of the tool, embossing the coating. The tool was allowed to contact the film at temperature for 5 minutes. The weight was removed from the tool and the assembly was removed from the hotplate, and allowed to return to room temperature. The tool was then removed. The coated film now contained wells in the coating that corresponded to the protrusions on the tool.

The wells in the film were then filled with FILTEK Supreme+ 5032W 2009-04 by applying the FILTEK Supreme+ paste to the film and doctoring off the excess with a spatula. The resulting laminate was then cured under germicidal lamps for five minutes. A second layer of FILTEK Supreme+ 5032W 2009-04 by applying the FILTEK Supreme+ paste to the film and doctoring off the excess with a spatula, leaving a thin layer of uncured FILTEK Supreme+ paste on top of the cured layer, imparting adhesion to the sample.

The sample was then laminated to a clean glass slide at room temperature with a silicone hand roller. The resulting laminate was then cured under germicidal lamps for five minutes. The T50 liner was then removed, leaving cast posts attached to the glass slide, surrounded by the sacrificial mold.

5

Example 3: Particle delivery film.

A coating solution was prepared by dissolving enough of QPAC 40 in 1-3 dioxolane to produce a final weight percent of 5% QPAC 40. The coating solution was delivered at a rate of 30 cm³/min to a 10.2 cm (4 inch) wide slot-type coating die. After 10 the solution was coated on the backside of a 0.051 mm (0.002 inch) thick T50 silicon release liner, the coated web travelled approximately 2.4 m (8 ft) before entering a 9.1 m (30 ft) conventional air floatation drier with all 3 zones set at 65.5 °C (150 °F). The substrate was moving at a speed of 3.05 m/min (10 ft/min) to achieve a wet coating thickness of about 80 micrometers.

15

A piece of the coated film slightly larger than 6 in x 6 in was placed on a hotplate held at 50 °C. Grade 36+ shaped abrasive particles prepared according to the disclosure of U.S. Patent No. 8,142,531 having a side length of about 0.8mm and about 0.2 mm thick, and a sidewall angle of 98 degrees. The particles were pressed into the heated film in a grid with 2 cm spacing, creating a particle delivery film. The particle 20 delivery film was removed from the hotplate and brought to room temperature.

25

The cooled particle delivery film was laminated at 230F, coating and particle side down to a 0.125 inch thick 6 in x 6 in section of glass using a thermal film laminator (GBC Catena 35, GBC Document Finishing, Lincolnshire, IL). The laminated sample was allowed to cool to room temperature. The T50 liner was then removed, leaving the particles arranged on the substrate.

Example 4: Particle delivery film with integrated edge seal.

A coating solution was prepared by dissolving enough of QPAC 40 in 1-3 dioxolane to produce a final weight percent of 5% QPAC 40. The coating solution was 30 delivered at a rate of 30 cm³/min to a 10.2 cm (4 inch) wide slot-type coating die. After the solution was coated on the backside of a 0.051 mm (0.002 inch) thick T50 silicon release liner, the coated film travelled approximately 2.4 m (8 ft) before entering a 9.1 m (30 ft) conventional air floatation drier with all 3 zones set at 65.5 °C (150 °F). The

substrate was moving at a speed of 3.05 m/min (10 ft/min) to achieve a coated film with a wet coating thickness of about 80 micrometers.

A slurry was prepared consisting of glass particles and QPAC 40 in MEK. A screen-print mesh was prepared by masking a 5.75 in x 5.75 in square with tape on the top of the screen. A second solid square 5.25 in x 5.25 in was created with tape and centered in the first square to create a square opening in the mesh 0.25 in wide. A section of the coated film larger than 6 in x 6 in was placed under the screen, and the screen pressed and held against the coated film with weights. The prepared slurry was forced through the opening in the screen-print mesh with foam applicators. The screen was removed, and the slurry was allowed to dry overnight at room temperature, creating an edge seal delivery film.

A piece of the edge seal delivery film slightly larger than 6 in x 6 in was placed on a hotplate held at 50 °C. Grade 36+ shaped abrasive particles prepared according to the disclosure of U.S. Patent No. 8,142,531 having a side length of about 0.8mm and about 0.2 mm thick, and a sidewall angle of 98 degrees. The particles were pressed into the heated film in a grid with 2 cm spacing, creating a particle delivery film. The particle and edge seal delivery film was removed from the hotplate and brought to room temperature.

The cooled particle and edge seal delivery film was laminated at 230°F , coating and particle side down to a 0.125 inch thick 6 in x 6 in section of glass using a thermal film laminator (GBC Catena 35, GBC Document Finishing, Lincolnshire, IL). The laminated sample was allowed to cool to room temperature. The T50 liner was then removed, leaving the particles arranged on the substrate, and the edge seal arranged around the perimeter of the glass.

Example 5: Landless replication via mask method.

A coating solution was prepared by dissolving enough of QPAC 40 in 1,3-dioxolane to produce a final weight percent of 5% QPAC 40. The coating solution was delivered at a rate of 30 cm³/min to a 10.2 cm (4 inch) wide slot-type coating die. After the solution was coated on the backside of a 0.051 mm (0.002 inch) thick T50 silicon release liner, the coated film travelled approximately 2.4 m (8 ft) before entering a 9.1 m (30 ft) conventional air floatation drier with all 3 zones set at 65.5 °C (150 °F). The

substrate was moving at a speed of 3.05 m/min (10 ft/min) to achieve coated film with a wet coating thickness of about 80 micrometers.

A 2 mil perforated film was prepared by laser cutting (LaseX, Inc., White Bear Lake, MN) 500 micron diameter holes spaced on 2 cm centers into an .008 inch polypropylene film. The perforated film was laminated at 230 °F, coating side down to a section of the coated film using a thermal film laminator (GBC Catena 35, GBC Document Finishing, Lincolnshire, IL). The laminated sample was allowed to cool to room temperature.

10 The wells in the film were then filled with FILTEK Supreme+ 5032W 2009-04 by applying the FILTEK Supreme+ paste to the film and doctoring off the excess with the edge of a glass microscope slide. The resulting film was then cured under germicidal lamps for five minutes.

15 The perforated film was peeled off of the substrate, leaving a particle delivery film that contained particles of cured FILTEK Supreme+ paste in the size and position of the holes in the perforated film.

20 The cooled particle delivery film was laminated at 230 °F, coating and particle side down to a glass microscope slide using a thermal film laminator (GBC Catena 35, GBC Document Finishing, Lincolnshire, IL). The laminated sample was allowed to cool to room temperature. The T50 substrate was then removed, leaving the particles arranged on the glass, held by the QPAC 40 layer.

Example 6: Landless replication with adhesive layer via mask method.

A coating solution was prepared by dissolving enough of QPAC 40 in 1-3 dioxolane to produce a final weight percent of 5% QPAC 40. The coating solution was 25 delivered at a rate of 30 cm³/min to a 10.2 cm (4 inch) wide slot-type coating die. After the solution was coated on the backside of a 0.051 mm (0.002 inch) thick T50 silicon release liner, the coated film travelled approximately 2.4 m (8 ft) before entering a 9.1 m (30 ft) conventional air floatation drier with all 3 zones set at 65.5 °C (150 °F). The substrate was moving at a speed of 3.05 m/min (10 ft/min) to achieve coated film with a 30 wet coating thickness of about 80 micrometers.

A 2 mil perforated film was prepared by laser cutting (LaseX, Inc., White Bear Lake, MN) 500 micron diameter holes spaced on 2 cm centers into an .008 inch polypropylene film. The perforated film was laminated at 230°F, coating side down to a

section of the previously coated film using a thermal film laminator (GBC Catena 35, GBC Document Finishing, Lincolnshire, IL). The laminated sample was allowed to cool to room temperature.

5 The wells in the film were then filled with FILTEK Supreme+ 5032W 2009-04 by applying the FILTEK Supreme+ paste to the film and doctoring off the excess with the edge of a glass microscope slide. The resulting film was then cured under germicidal lamps for five minutes. A second layer of FILTEK Supreme+ 5032W 2009-04 by applying the FILTEK Supreme+ paste to the film and doctoring off the excess with a spatula, leaving a thin layer of uncured FILTEK Supreme+ paste on top of the cured 10 layer, imparting adhesion to the sample.

The perforated film was peeled off of the substrate, leaving a particle delivery film that contained particles of cured FILTEK Supreme+ paste in the size and position of the holes in the film, with a thin layer of uncured FILTEK Supreme+ paste on the top of the columns.

15 The cooled particle delivery film was laminated at 230°F, coating and particle side down to a glass microscope slide using a thermal film laminator (GBC Catena 35, GBC Document Finishing, Lincolnshire, IL). The laminated sample was allowed to cool to room temperature. The resulting laminate was then cured under germicidal lamps for five minutes. The T50 liner and QPAC 40 substrate was then removed, leaving the 20 particles arranged on the glass.

Example 7 – Coated encapsulated pillars

A particle delivery film was created by applying FILTEK Supreme+ paste drop wise to 2 mil unprimed PET and grade 36+ shaped abrasive particles prepared according 25 to the disclosure of U.S. Patent No. 8,142,531 having a side length of about 0.8 mm and about 0.2 mm thick, and a sidewall angle of 98 degrees. The particles were pressed into the resin. The sample was crosslinked using 4 passes of ultraviolet irradiation (RPC Industries UV Processor QC 120233AN/DR, Plainfield, IL) at 50 f pm in air. Any excess resin surrounding the pillars was removed using a razor blade to create planarized 30 pillars. The planarized pillars were released from the PET by flexing it in a tight radius.

A light microscope image at 50X of the FILTEK Supreme+ paste planarized slip cast pillar showed that the pillar appeared as a light core with an opaque nanoparticle resin planarizing one surface.

CLAIMS

1. A pillar delivery film, comprising:
 - a support film;
 - 5 a sacrificial material layer on the support film; and
 - a plurality of pillars, wherein each pillar is at least partially embedded in the sacrificial material layer,
 - wherein the sacrificial material layer is capable of being removed from the pillars while leaving the pillars substantially intact.

10

2. The delivery film of claim 1, wherein the sacrificial material layer is a thermoplastic or thermoset material.

15

3. The delivery film of claim 1, wherein the sacrificial material layer is discontinuous and in discrete regions around the pillars.

4. The delivery film of claim 1, wherein the sacrificial material layer is a continuous layer on the support film.

20

5. The delivery film of claim 1, wherein the pillars are comprised of sintered ceramic bodies.

6. The delivery film of claim 1, further comprising an edge seal on the support film and surrounding the pillars.

25

7. The delivery film of claim 1, further comprising a functional coating on a surface of the pillars.

30

8. The delivery film of claim 7, wherein the functional coating comprises an adhesive.

9. A pillar delivery film, comprising:
 - a support film;

a plurality of molds on the support film, wherein the molds are composed of a sacrificial material; and

a plurality of pillars located in the molds,

5 wherein the sacrificial material of the molds is capable of being removed from the pillars while leaving the pillars substantially intact.

10. The delivery film of claim 9, wherein the sacrificial material is a thermoplastic or thermoset material.

10 11. The delivery film of claim 9, wherein the pillars are comprised of sintered ceramic bodies.

12. The delivery film of claim 9, further comprising an edge seal on the support film and surrounding the pillars.

15

13. A pillar delivery pocket film, comprising:

a support film, wherein a plurality of pockets are formed within the support film and the support film is composed of a sacrificial material; and

a plurality of pillars located in the pockets of the support film,

20 wherein the sacrificial material is capable of being removed from the pillars while leaving the pillars substantially intact.

14. The delivery pocket film of claim 13, wherein the sacrificial material is a thermoplastic or thermoset material.

25

15. The delivery pocket film of claim 13, wherein the pillars are comprised of sintered ceramic bodies.

30 16. The delivery pocket film of claim 13, further comprising an edge seal on the support film and surrounding the pillars.

17. A pillar delivery pocket film, comprising:
a support film, wherein a plurality of pockets are formed within the support film;
and
a sacrificial material located within the pockets of the support film; and
5 a plurality of pillars at least partially embedded in the sacrificial material in the
pockets of the support film,
wherein the sacrificial material within the pockets is capable of being removed
from the pillars while leaving the pillars substantially intact.

10 18. The delivery pocket film of claim 17, wherein the sacrificial material is a
thermoplastic or thermoset material.

19. The delivery pocket film of claim 17, wherein the pillars are comprised of
sintered ceramic bodies.

15 20. The delivery pocket film of claim 17, further comprising an edge seal on the
support film and surrounding the pillars.

20 21. The delivery pocket film of claim 17, wherein the sacrificial material is only
located in the pockets of the support film.

22. The delivery pocket film of claim 17, wherein the sacrificial material is a
continuous layer on the support film.

25 23. The delivery pocket film of claim 17, further comprising a liner over the pillars
on a side of the pillars opposite the support film.

24. A method for transferring pillars from a delivery film to a receptor surface,
comprising:

30 providing a delivery film having a support film, a sacrificial material on the
support film, and a plurality of pillars at least partially embedded within the sacrificial
material;

laminating the delivery film to a receptor surface with the pillars facing the receptor surface;

removing the support film while leaving the pillars on the receptor surface and at least a portion of the sacrificial material on the pillars; and

5 removing the sacrificial material while leaving the pillars remaining and substantially intact on the receptor surface.

25. The method of claim 24, wherein the providing step includes:

forming the pillars on the support film from an uncured pillar material; and
10 curing the pillar material.

26. The method of claim 24, wherein the providing step includes forming the pillars within a mold composed of the sacrificial material.

15 27. The method of claim 24, wherein the providing step includes forming the pillars within pockets formed within the support film.

28. The method of claim 24, wherein the providing step further comprises:
applying an adhesive to an exposed surface of the pillars; and
20 curing the adhesive.

25 29. The method of claim 24, wherein the providing step comprises:
forming the pillars within a strippable tool applied to the support film; and
removing the strippable tool while leaving the pillars substantially intact on the support film.

30. The method of claim 24, wherein the providing step comprises:
forming the pillars through a perforated rotary mold tool applied to the support film; and
removing the perforated rotary mold tool while leaving the pillars substantially intact on the support film.

31. The method of claim 24, wherein the providing step further comprises including a release coating on the support film between the support film and the pillars.

32. A method for making a delivery film having pillars and transferring the pillars to
5 a receptor surface, comprising:

providing a support film with a releasable surface;

molding a plurality of pillars on the releasable surface of support film using a
mold applied to the releasable surface;

removing the mold from the releasable surface while leaving the pillars
10 substantially intact on releasable surface; and

transferring the pillars from the support film to a receptor surface.

33. The method of claim 32, wherein the transferring step comprises:

laminating the support film to the receptor surface with the pillars facing the
15 receptor surface; and



removing the support film while leaving the pillars on the receptor surface.

34. The method of claim 32, wherein the transferring step comprises mechanically
transferring the pillars to the receptor surface.

20

35. The method of claim 32, wherein the removing step comprises removing a
sacrificial material as the mold from the releasable surface of the support film.

1/15

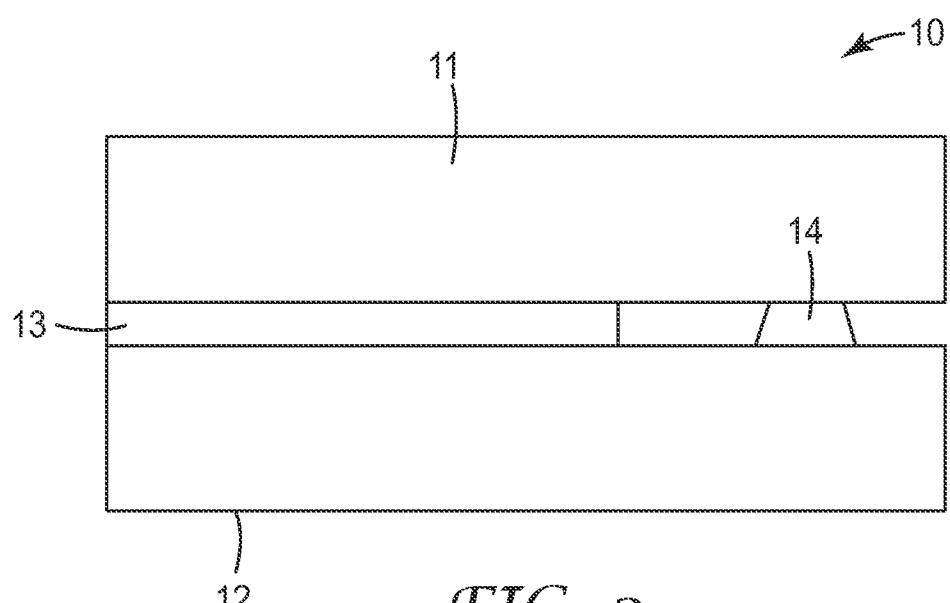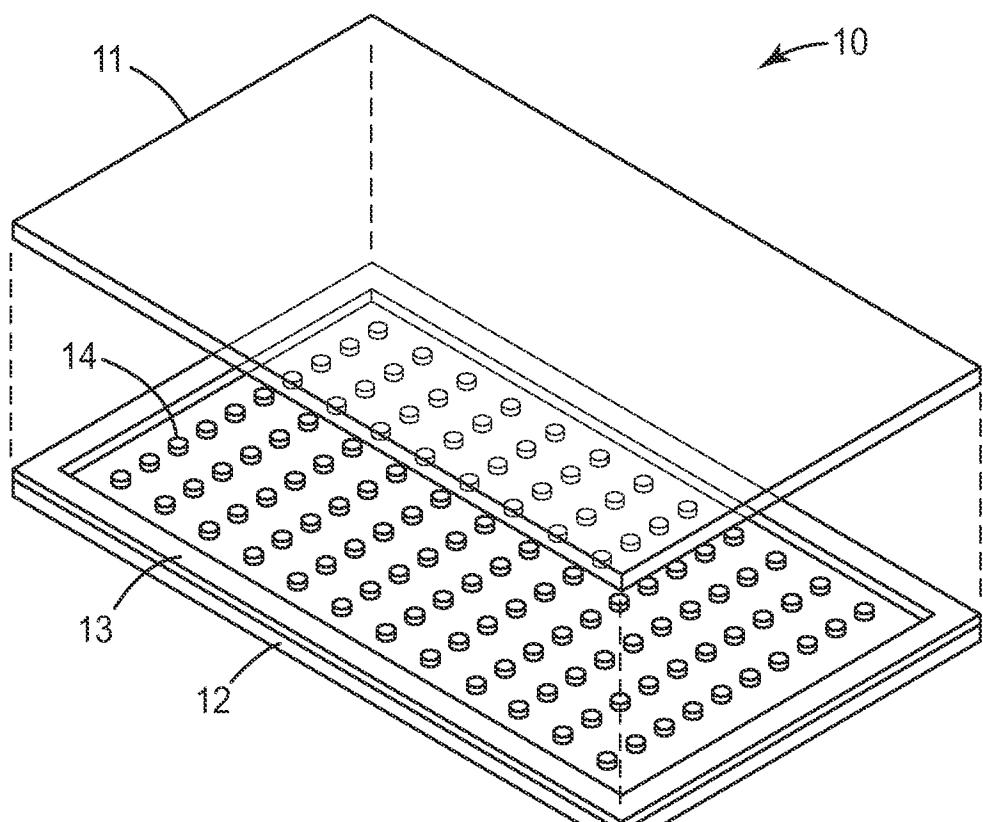

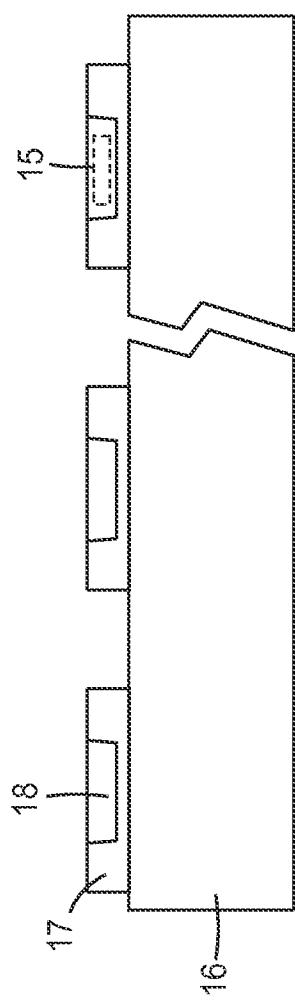


FIG. 3

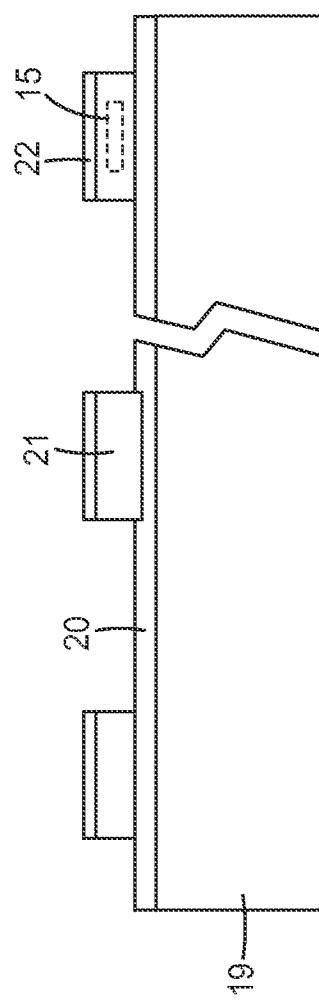


FIG. 4

3/15

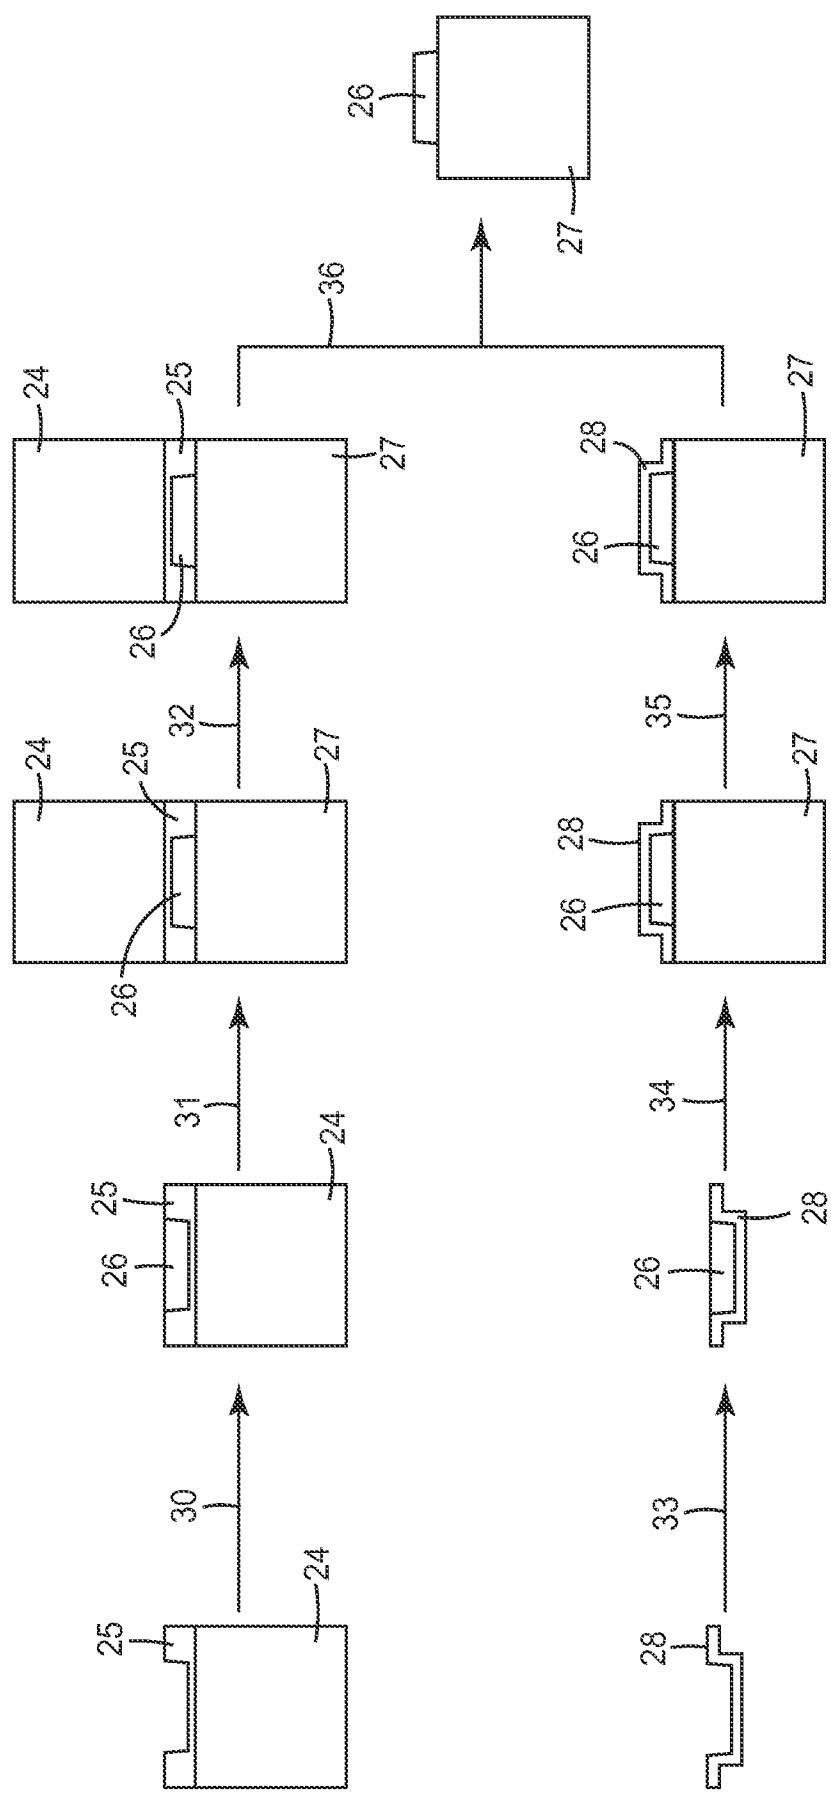


FIG. 5

4/15

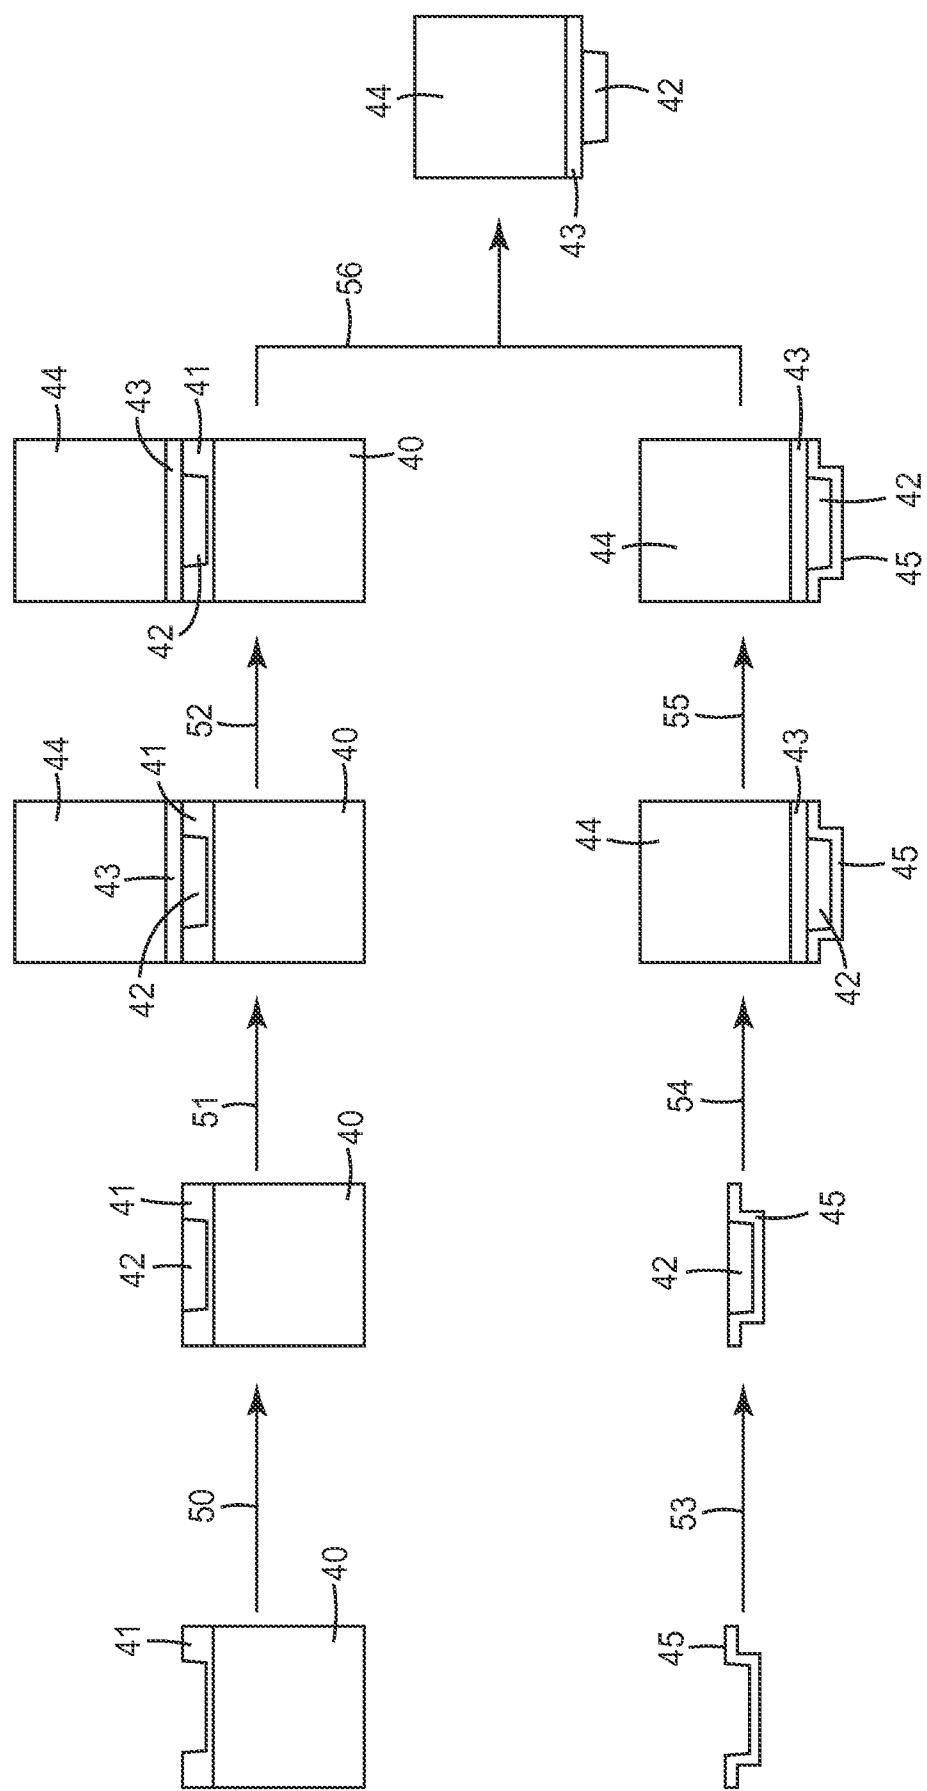


FIG. 6

5/15




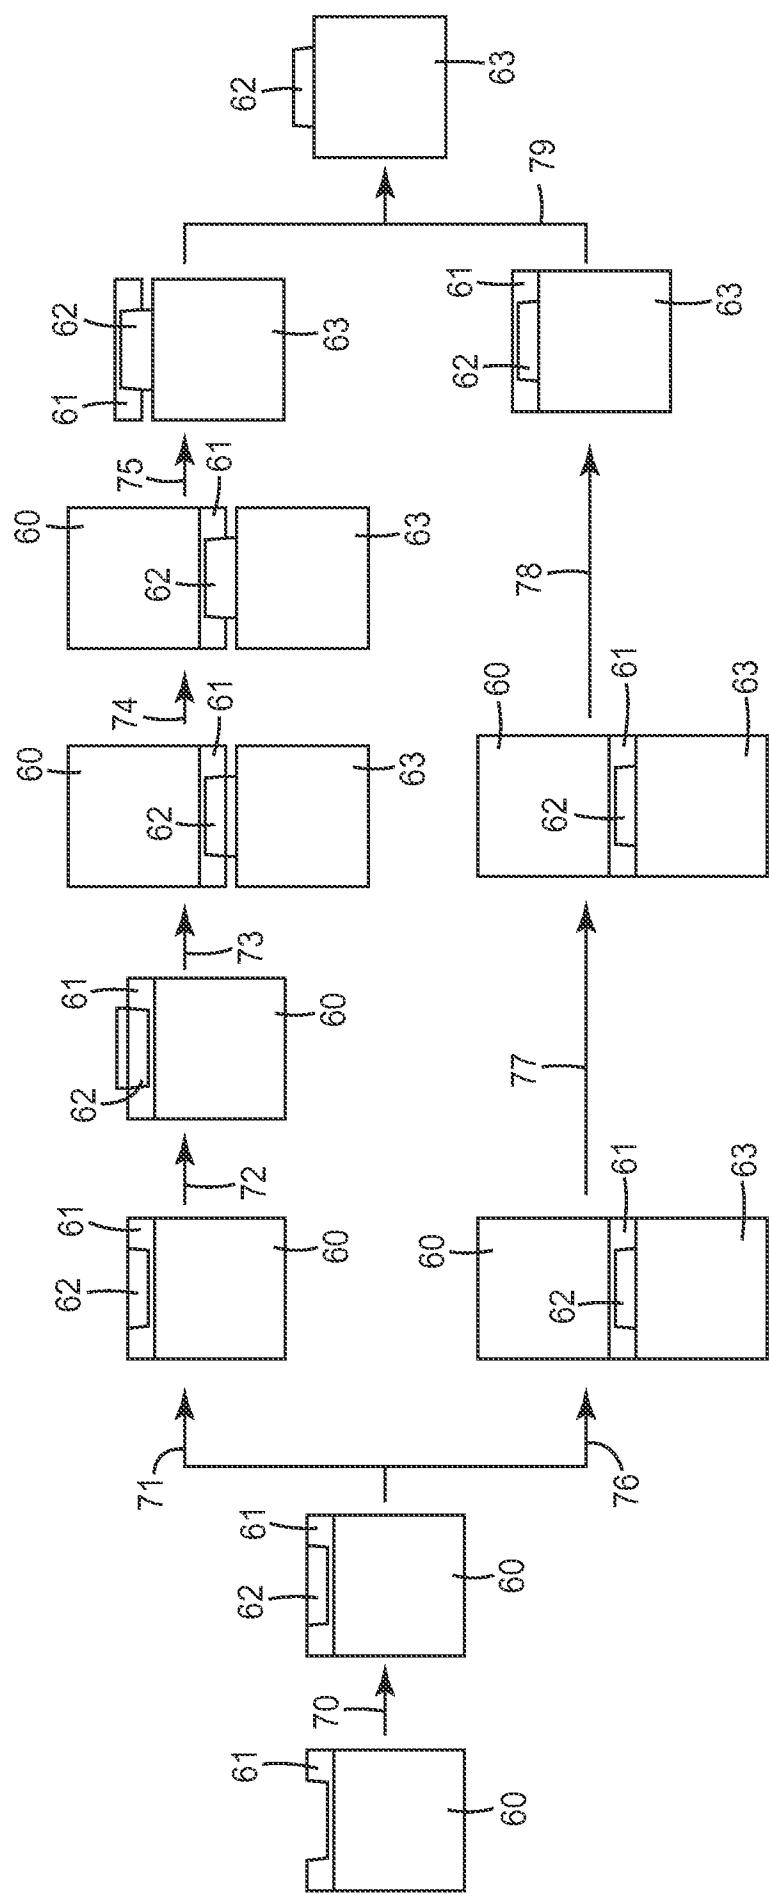




FIG. 7








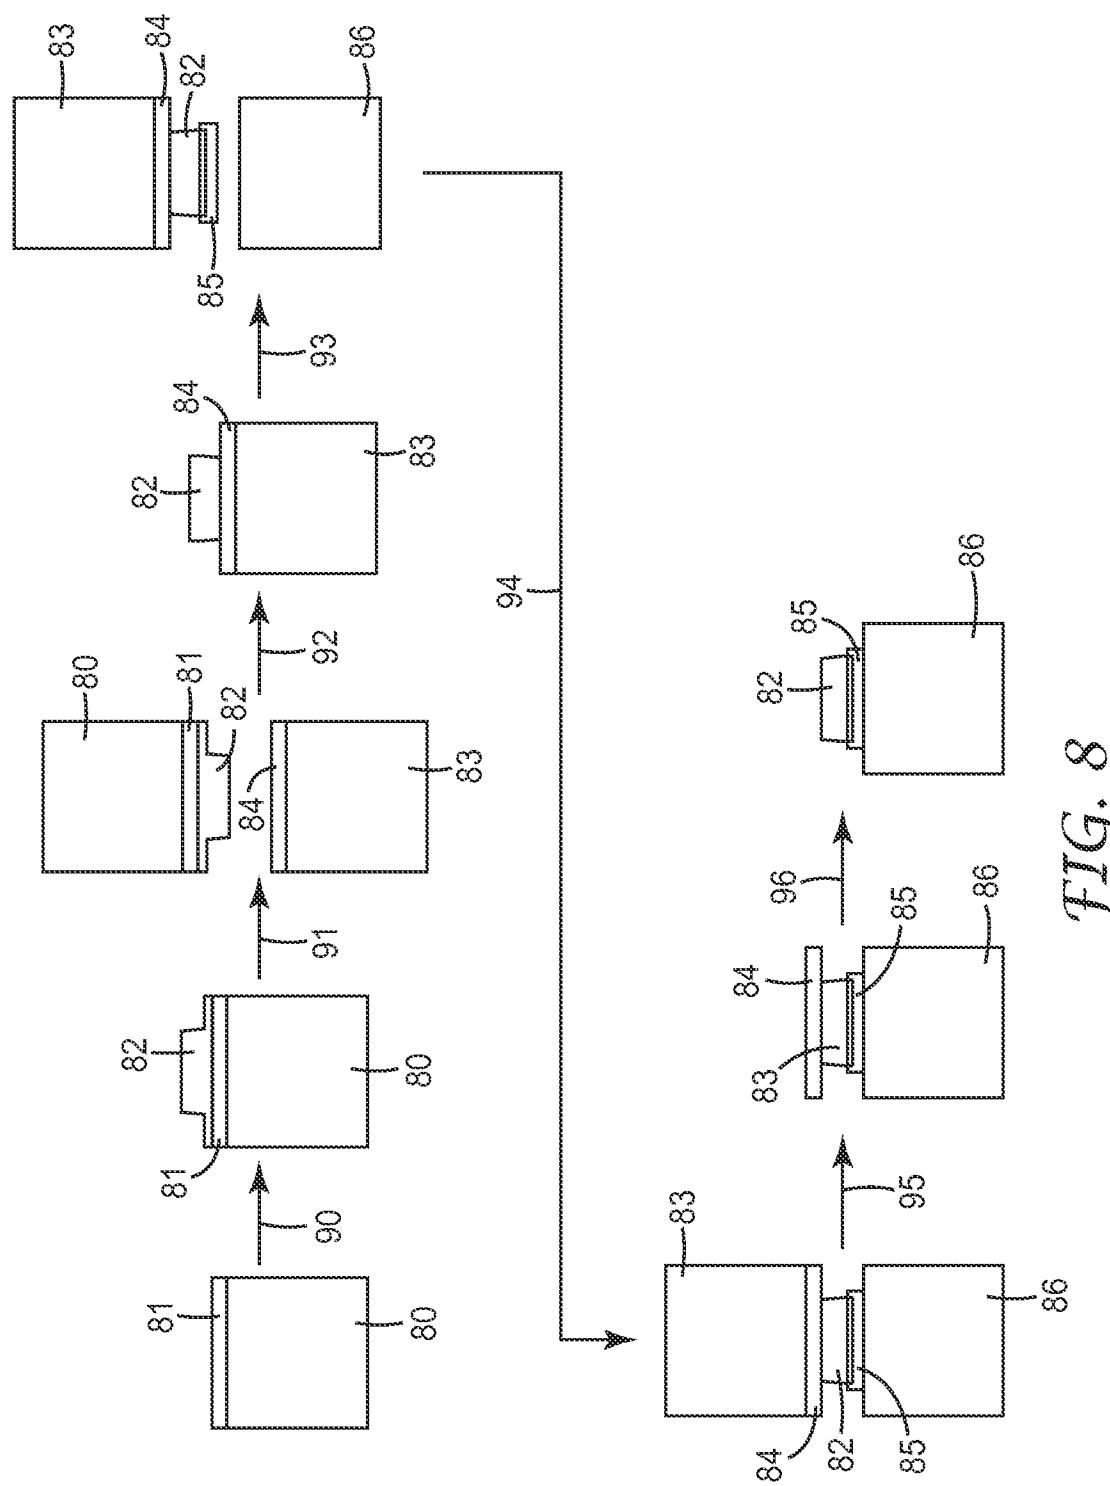


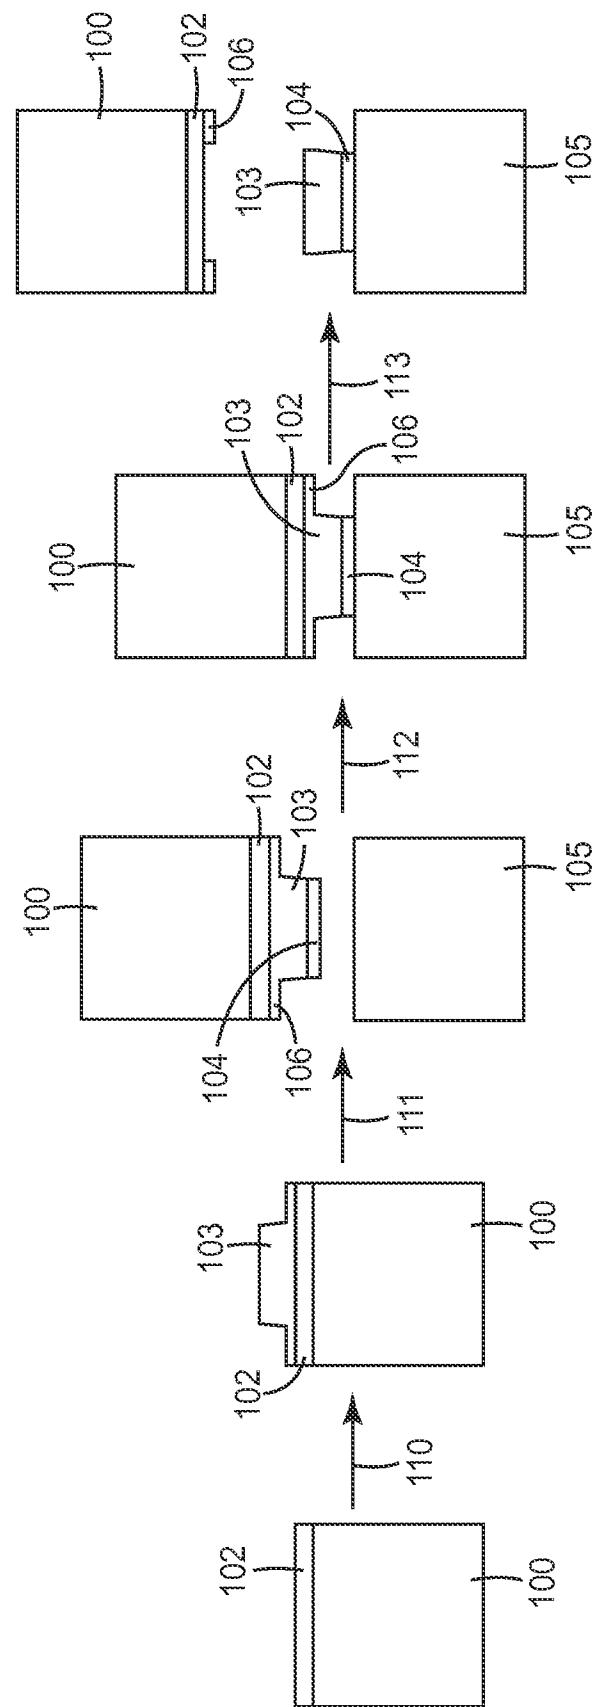

9. 11. 1954

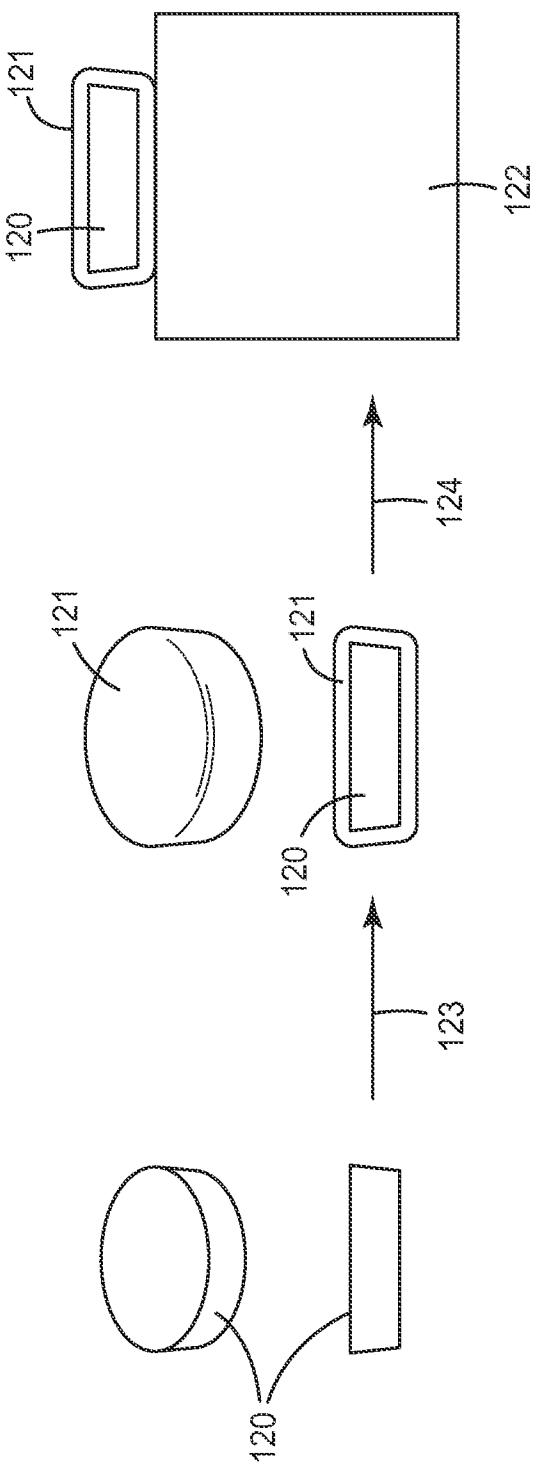

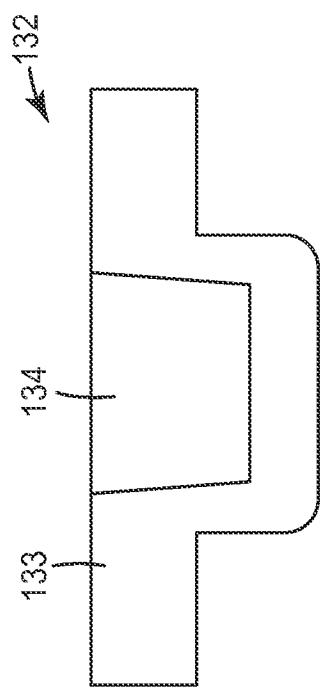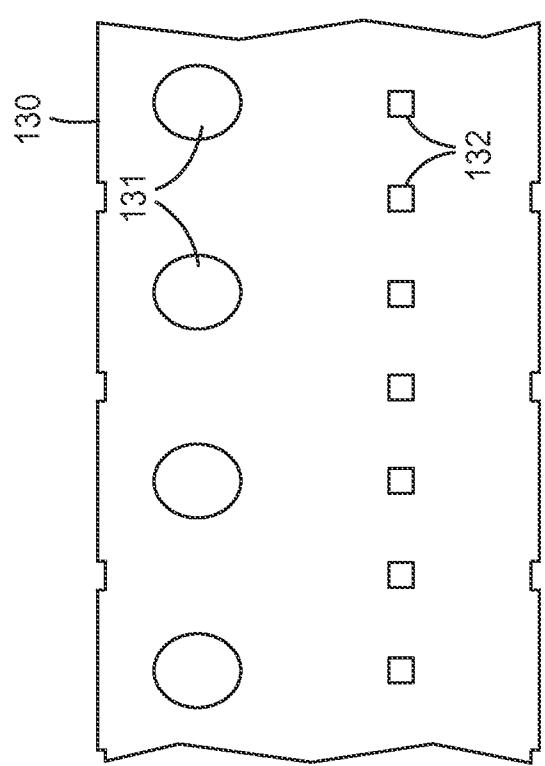

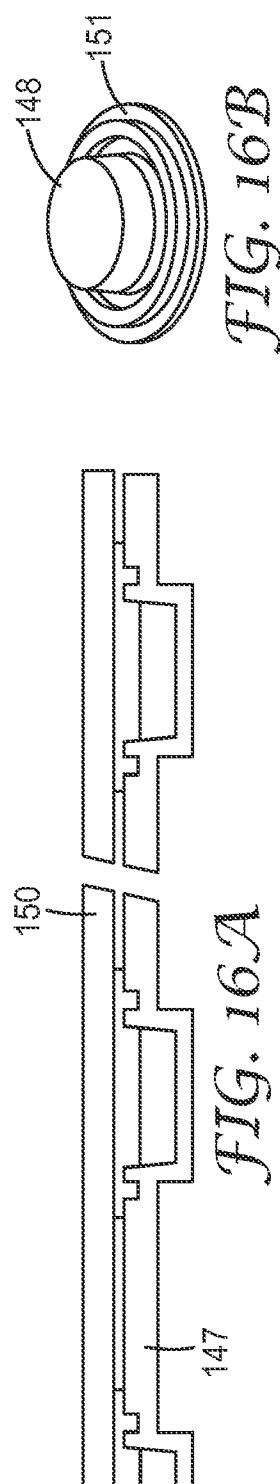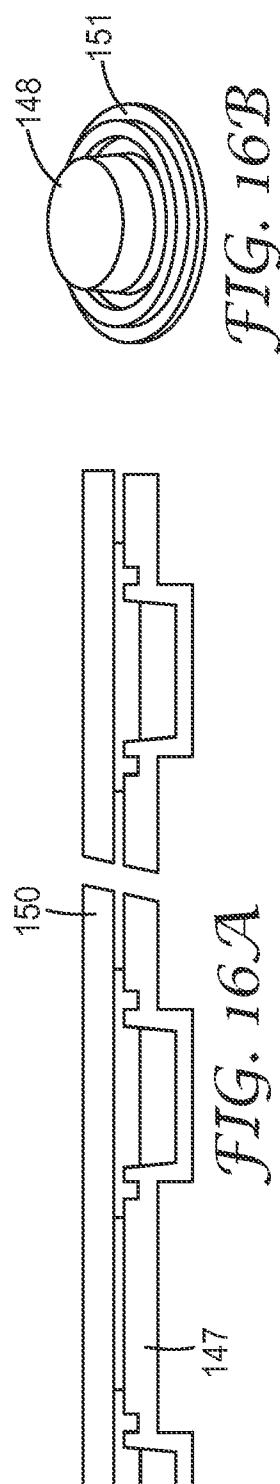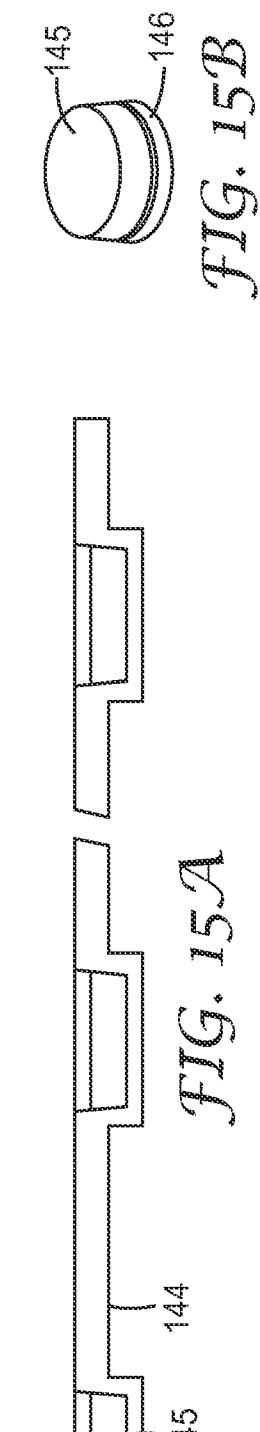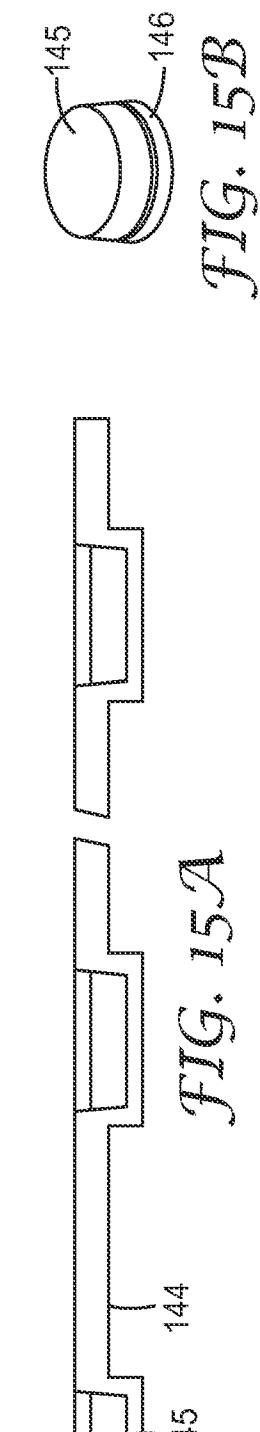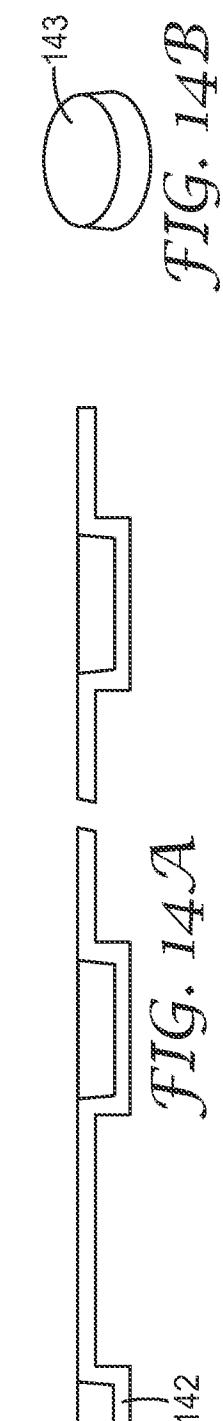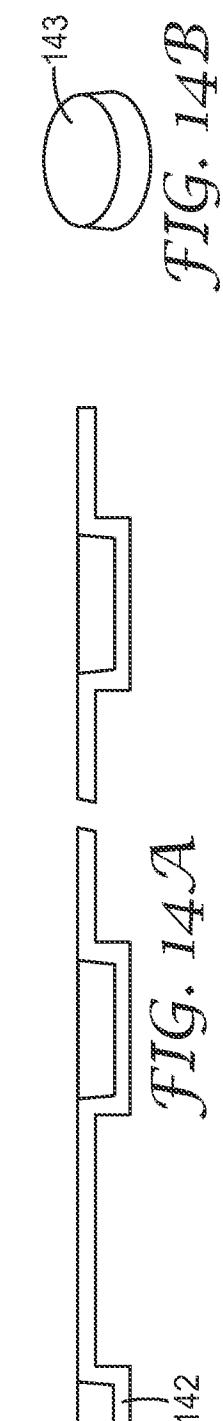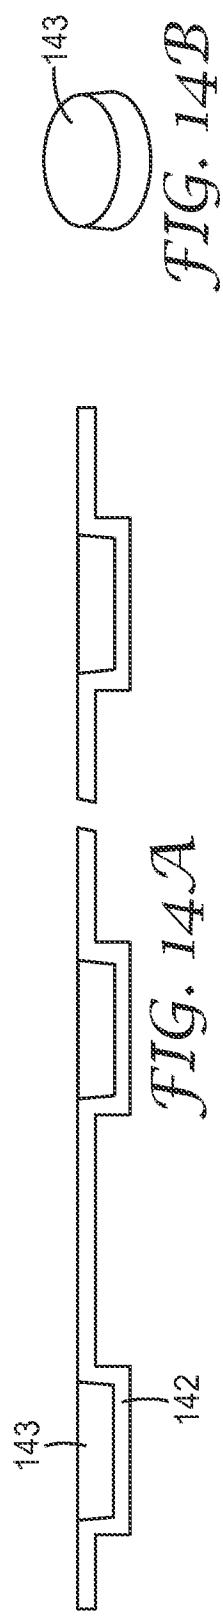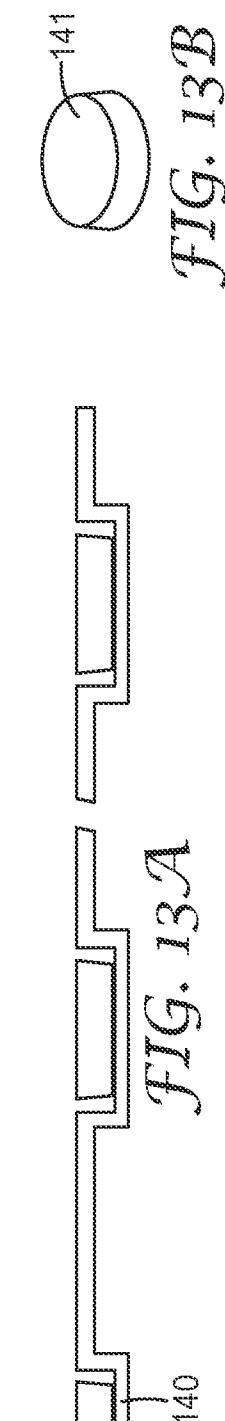

11/15




FIG. 17A



FIG. 17B



FIG. 18A




FIG. 18B

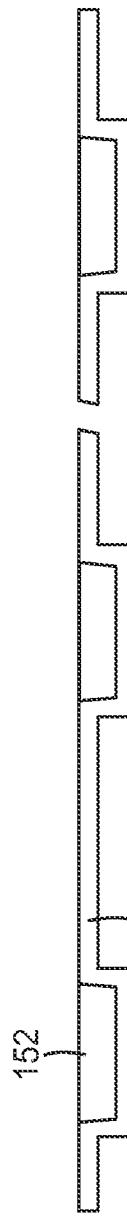


FIG. 19A

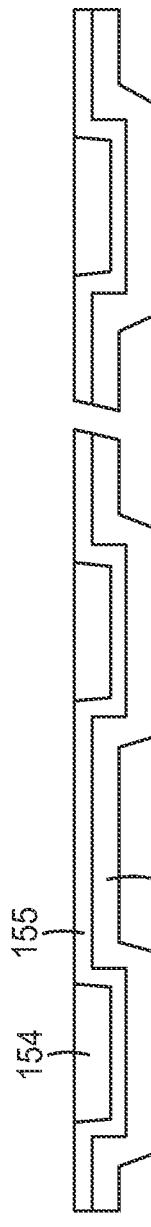


FIG. 19B

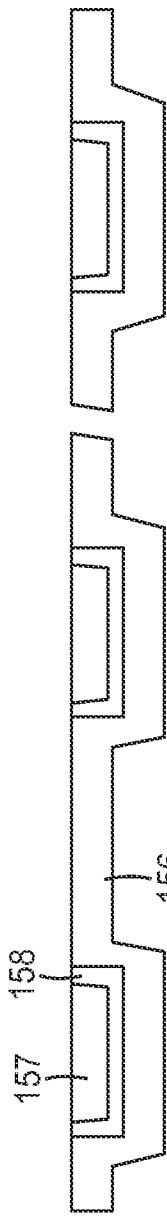


FIG. 19C

12/15

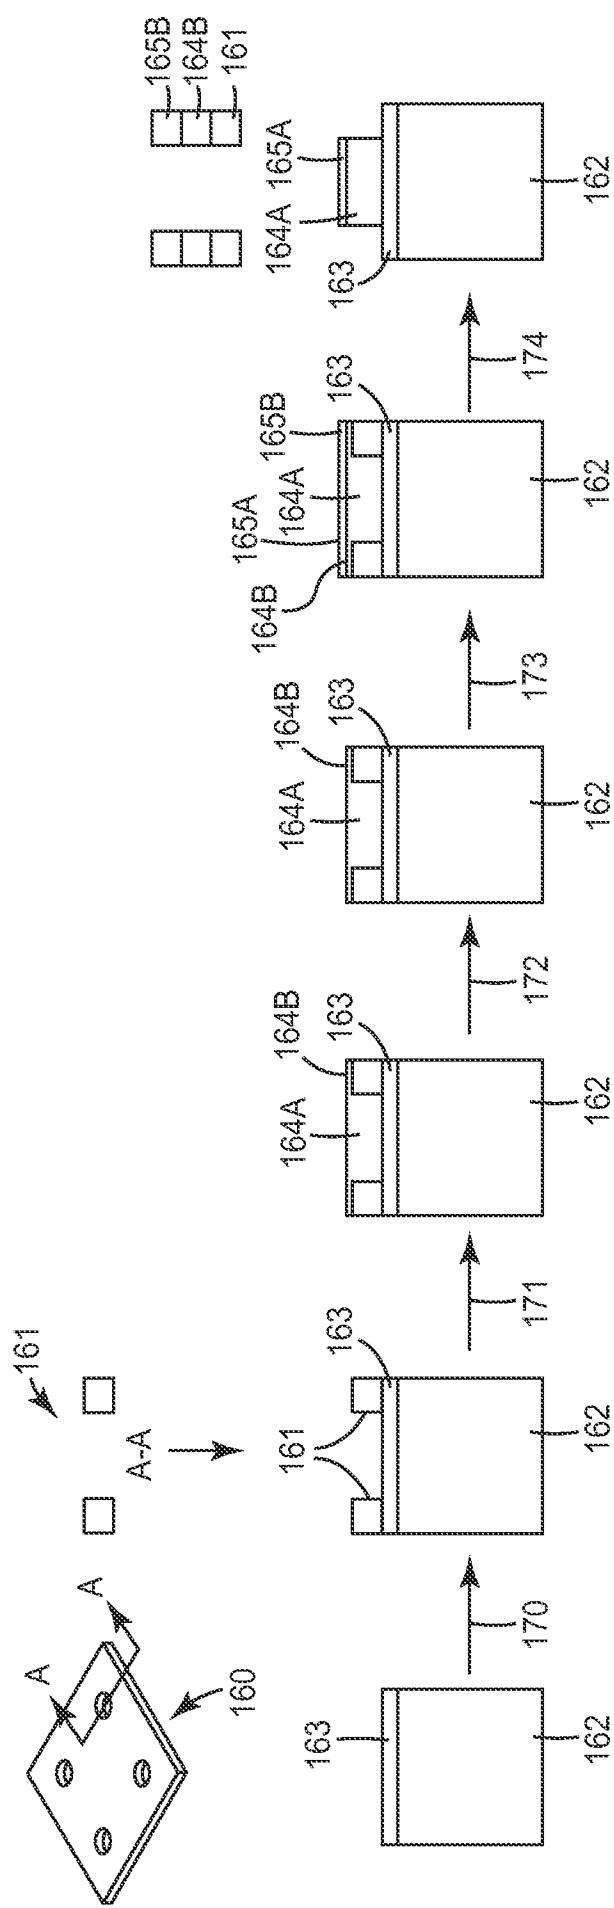
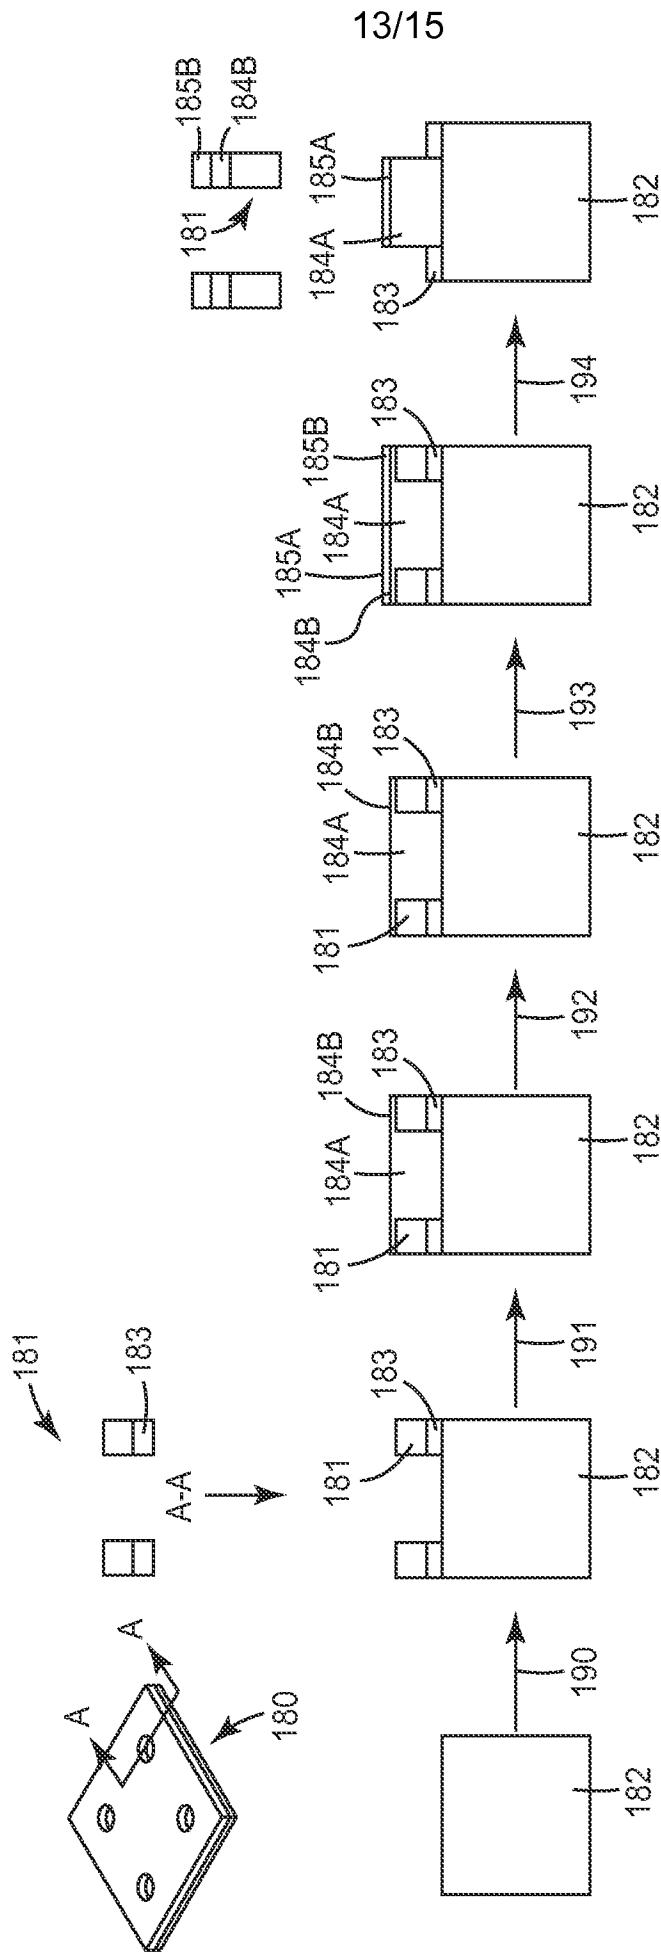


FIG. 20



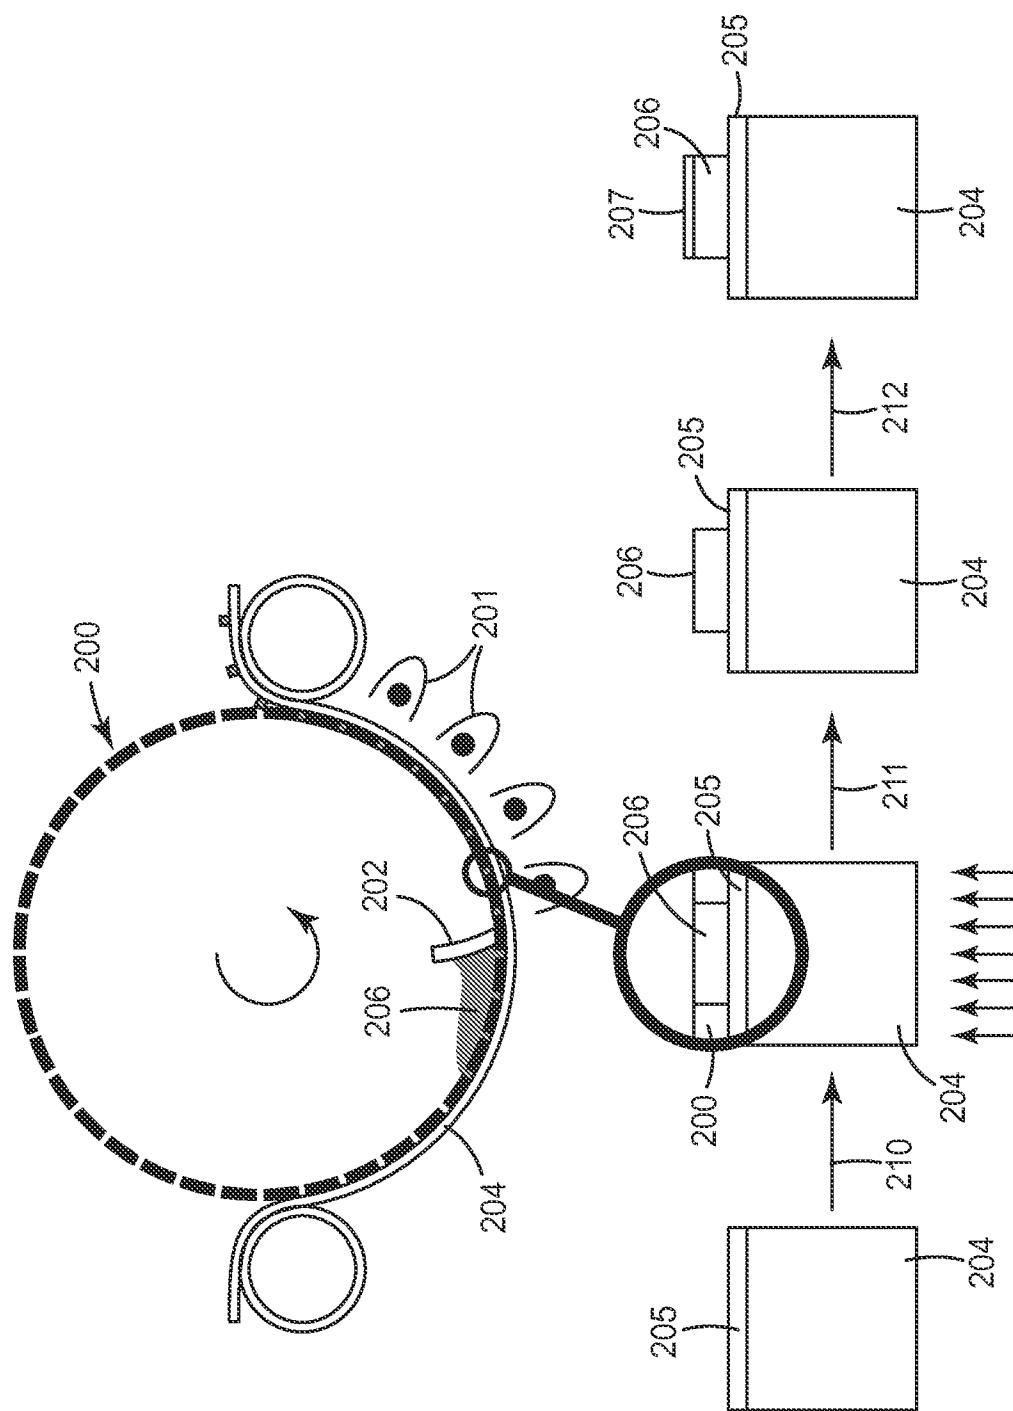


FIG. 22

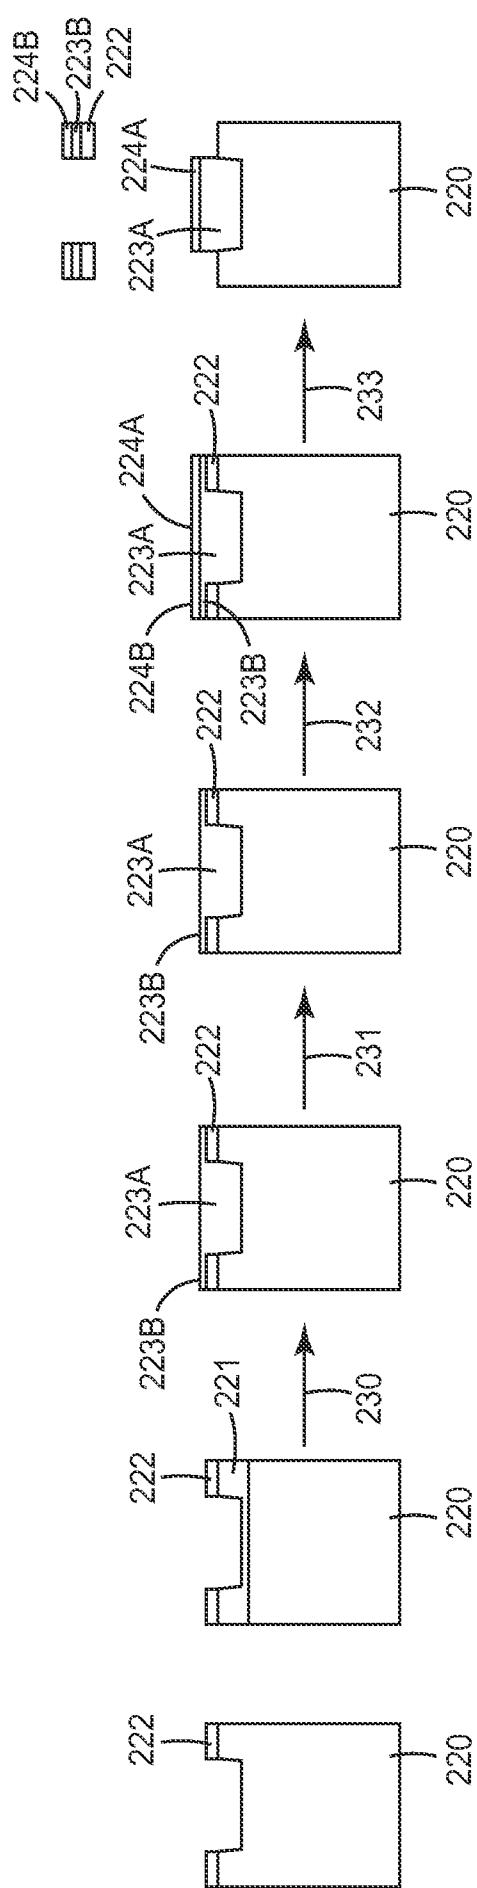


FIG. 23

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/055136**A. CLASSIFICATION OF SUBJECT MATTER****E06B 3/667(2006.01)i, E06B 3/677(2006.01)i, C03C 27/06(2006.01)i, C03C 27/12(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E06B 3/667; E06B 3/663; B32B 17/06; C03C 27/06; C03C 27/12; D02G 3/00; E04C 2/54; E06B 3/66; E06B 3/24; E06B 3/677


Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: pillar, support film, mold, pocket**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 10-507500A (UNIV. OF SYDNEY) 21 July 1998 See figures 1-7	1-35
A	JP 2005-200301 A (UNIV. OF SYDNEY) 28 July 2005 See figures 1-7	1-35
A	US 6326067 B1 (VEERASAMY; VIJAYEN S.) 04 December 2001 See figures 1-5	1-35
A	US 6420002 B1 (AGGAS; STEVEN L. et al.) 16 July 2002 See figures 1-8	1-35
A	US 2010-0260950 A1 (TANG JIANZHENG) 14 October 2010 See figure 1	1-35

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 23 December 2014 (23.12.2014)	Date of mailing of the international search report 23 December 2014 (23.12.2014)
Name and mailing address of the ISA/KR International Application Division Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701, Republic of Korea Facsimile No. +82-42-472-7140	Authorized officer RYU, Jei Jun Telephone No. +82-42-481-3403



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/055136

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 10-507500 A	21/07/1998	CA 2201897 A1 CA 2201897 C CA 2448923 A1 CA 2448923 C CA 2628389 A1 CA 2628389 C CN 1168708 A0 EP 0787241 A1 EP 0787241 B1 JP 10-507500 A JP 2005-200301A JP 3728529 B2 JP 4264420 B2 KR 10-0419163 B1 KR 10-0496898 B1 US 05891536 A US 06054195 A US 06071575 A US 06083578 A WO 96-12862 A1	02/05/1996 24/08/2004 02/05/1996 29/07/2008 02/05/1996 15/06/2010 24/12/1997 02/02/2000 04/12/2002 21/07/1998 28/07/2005 21/12/2005 20/05/2009 21/04/2004 23/06/2005 06/04/1999 25/04/2000 06/06/2000 04/07/2000 02/05/1996
JP 2005-200301 A	28/07/2005	AU PM88-8994 D0 CA 2201897 A1 CA 2201897 C CA 2448923 A1 CA 2448923 C CA 2628389 A1 CA 2628389 C CN 1168708 A0 DE 69529085 D1 DE 69529085 T2 EP 0787241 A1 EP 0787241 A1 EP 0787241 A4 EP 0787241 B1 JP 10-507500 A JP 3728529 B2 JP 4264420 B2 KR 10-0419163 B1 KR 10-0496898 B1 KR 10-2004-0004451 A TW 300271 B US 05891536 A US 06054195 A US 06071575 A US 06083578 A WO 96-12862 A1	10/11/1994 02/05/1996 24/08/2004 02/05/1996 29/07/2008 02/05/1996 15/06/2010 24/12/1997 16/01/2003 09/10/2003 06/08/1997 02/02/2000 02/09/1998 04/12/2002 21/07/1998 21/12/2005 20/05/2009 21/04/2004 23/06/2005 13/01/2004 11/03/1997 06/04/1999 25/04/2000 06/06/2000 04/07/2000 02/05/1996
US 6326067 B1	04/12/2001	AU 2000-46847 A1	17/11/2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/055136

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		AU 2000-68027 A1 AU 2000-80117 A1 AU 2001-10794 A1 AU 2001-40243 A1 AU 2001-63322 A1 AU 2001-91247 A1 JP 2003-510238 A JP 4653368 B2 US 2002-0035852 A1 US 2002-0197423 A1 US 6291036 B1 US 6336984 B1 US 6365242 B1 US 6399169 B1 US 6444281 B1 US 6478911 B1 US 6558494 B1 US 6635321 B2 US 6641689 B1 US 6701749 B2 WO 00-66868 A1 WO 01-02685 A1 WO 01-23700 A1 WO 01-27430 A1 WO 01-29357 A1 WO 01-90525 A1 WO 02-27135 A1	22/01/2001 23/04/2001 30/04/2001 30/04/2001 03/12/2001 08/04/2002 18/03/2003 16/03/2011 28/03/2002 26/12/2002 18/09/2001 08/01/2002 02/04/2002 04/06/2002 03/09/2002 12/11/2002 06/05/2003 21/10/2003 04/11/2003 09/03/2004 09/11/2000 11/01/2001 05/04/2001 19/04/2001 26/04/2001 29/11/2001 04/04/2002
US 6420002 B1	16/07/2002	AU 2000-64017 A1 AU 6401700 A WO 01-12941 A1	13/03/2001 13/03/2001 22/02/2001
US 2010-0260950 A1	14/10/2010	CA 2698936 A1 CN 201377262 Y DE 202010004111 U1 FR 2944313 A3 FR 2944313 B3 GB 201005610 D0 GB 2469376 A JP 03-160269 U KR 20-2010-0010303 U	10/10/2010 06/01/2010 17/06/2010 15/10/2010 04/03/2011 19/05/2010 13/10/2010 26/05/2010 20/10/2010