



(86) Date de dépôt PCT/PCT Filing Date: 2005/04/19
(87) Date publication PCT/PCT Publication Date: 2005/12/15
(45) Date de délivrance/Issue Date: 2014/04/01
(85) Entrée phase nationale/National Entry: 2006/09/22
(86) N° demande PCT/PCT Application No.: US 2005/013315
(87) N° publication PCT/PCT Publication No.: 2005/118027
(30) Priorité/Priority: 2004/05/27 (US10/855,872)


(51) Cl.Int./Int.Cl. *A61M 5/14* (2006.01),
A61M 39/28 (2006.01), *A61M 5/142* (2006.01)

(72) Inventeurs/Inventors:
STEWART, JANICE, US;
MEINZER, RANDOLPH, US;
BELLO, DEBRA K., US;
MULLAN, JANET, US;
BRUNDLE, ALAN, US;
JACOBSON, JAMES D., US;
BUI, TUAN, US;
CHAU, QUI, US

(73) Propriétaire/Owner:
BAXTER INTERNATIONAL INC., US

(74) Agent: SIM & MCBURNEY

(54) Titre : SYSTEME DE RECONNAISSANCE D'INFORMATIONS D'IDENTIFICATION POUR UN DISPOSITIF MEDICAL
(54) Title: IDENTIFICATION INFORMATION RECOGNITION SYSTEM FOR A MEDICAL DEVICE

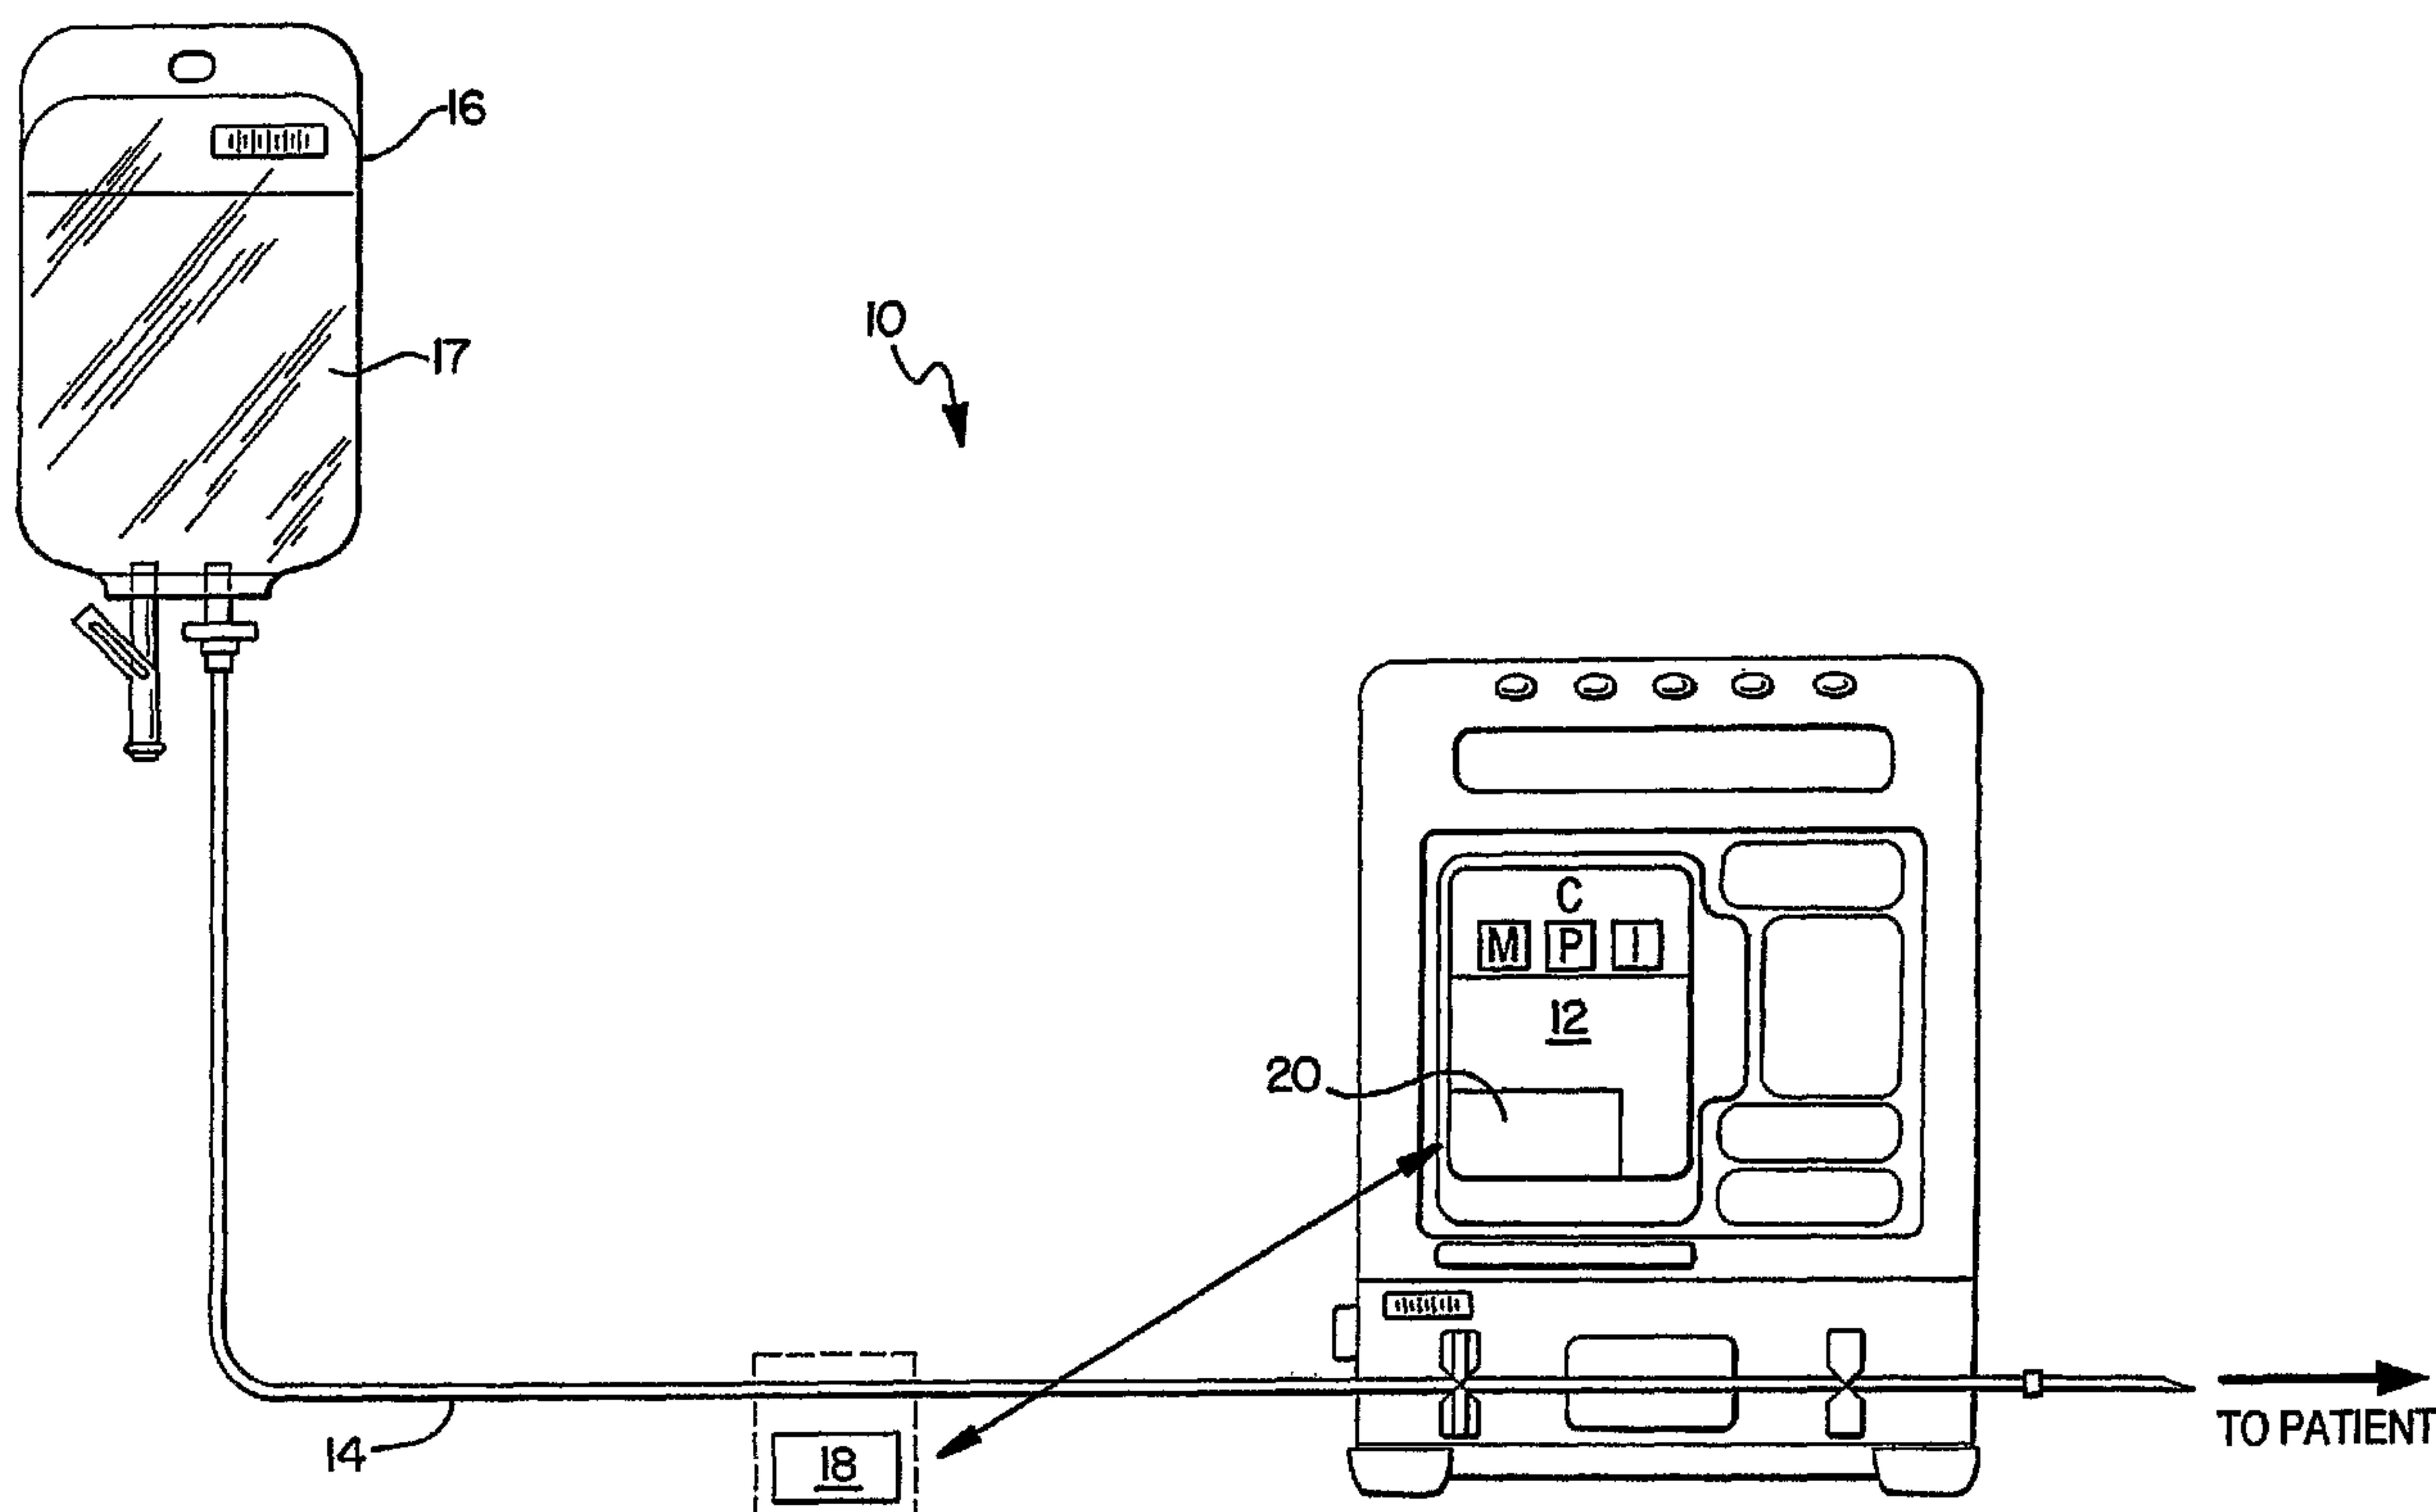

(57) Abrégé/Abstract:

A medical delivery system (10) is provided for delivering a medicament (17) or fluid (17) to a patient. The system comprises a disposable element such as a line set (14) associated with a container (16) containing the fluid (17), an identifier (18) associated with the line set (14) and having identification information associated therewith, and a delivery device (12) configured to engage the line set (14) and deliver the fluid (17) to the patient. The delivery device (12) includes a recognition system (20) that is capable of obtaining the identification information associated with the identifier (18). The identification information may include information regarding the identification of the fluid (17), a type of line set (14), or a type of administration associated with the line set (14). The device (12) can be capable of configuration based on the identification information.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 December 2005 (15.12.2005)

PCT

(10) International Publication Number
WO 2005/118027 A1

(51) International Patent Classification⁷: **A61M 5/14**,
5/142, 39/28

(21) International Application Number:
PCT/US2005/013315

(22) International Filing Date: 19 April 2005 (19.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/855,872 27 May 2004 (27.05.2004) US

(71) Applicant (for all designated States except US): **BAXTER INTERNATIONAL INC.** [US/US]; ONE BAXTER PARKWAY, DEERFIELD, Illinois 60015 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STEWART, Janice** [US/US]; 1202 Barclay Circle, Inverness, Illinois 60010 (US). **MEINZER, Randolph** [US/US]; 1703 Spruce Street, Spring Grove, Illinois 60081 (US). **BELLO, Debra, K.** [US/US]; 223 West Congressional Court, Vernon

Hills, Illinois 60061 (US). **MULLAN, Janet** [US/US]; 23459 Eagle Nest Road, Antioch, Illinois 60002 (US). **BRUNDLE, Alan** [GB/US]; 609 South Cook Street, Barrington, Illinois 60010 (US). **JACOBSON, James, D.** [US/US]; 2729 Gettysburg Court, Lindenhurst, Illinois 60046 (US). **BUI, Tuan** [US/US]; 14436 Greenfield Court, Green Oaks, Illinois 60048 (US). **CHAU, Qui** [US/US]; 4520 Concord Lane, Skokie, Illinois 60076 (US).


(74) Agents: **FOLEY, Austin, J.** et al.; Baxter International Inc., One Baxter Parkway, Deerfield, Illinois 60015 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: IDENTIFICATION INFORMATION RECOGNITION SYSTEM FOR A MEDICAL DEVICE

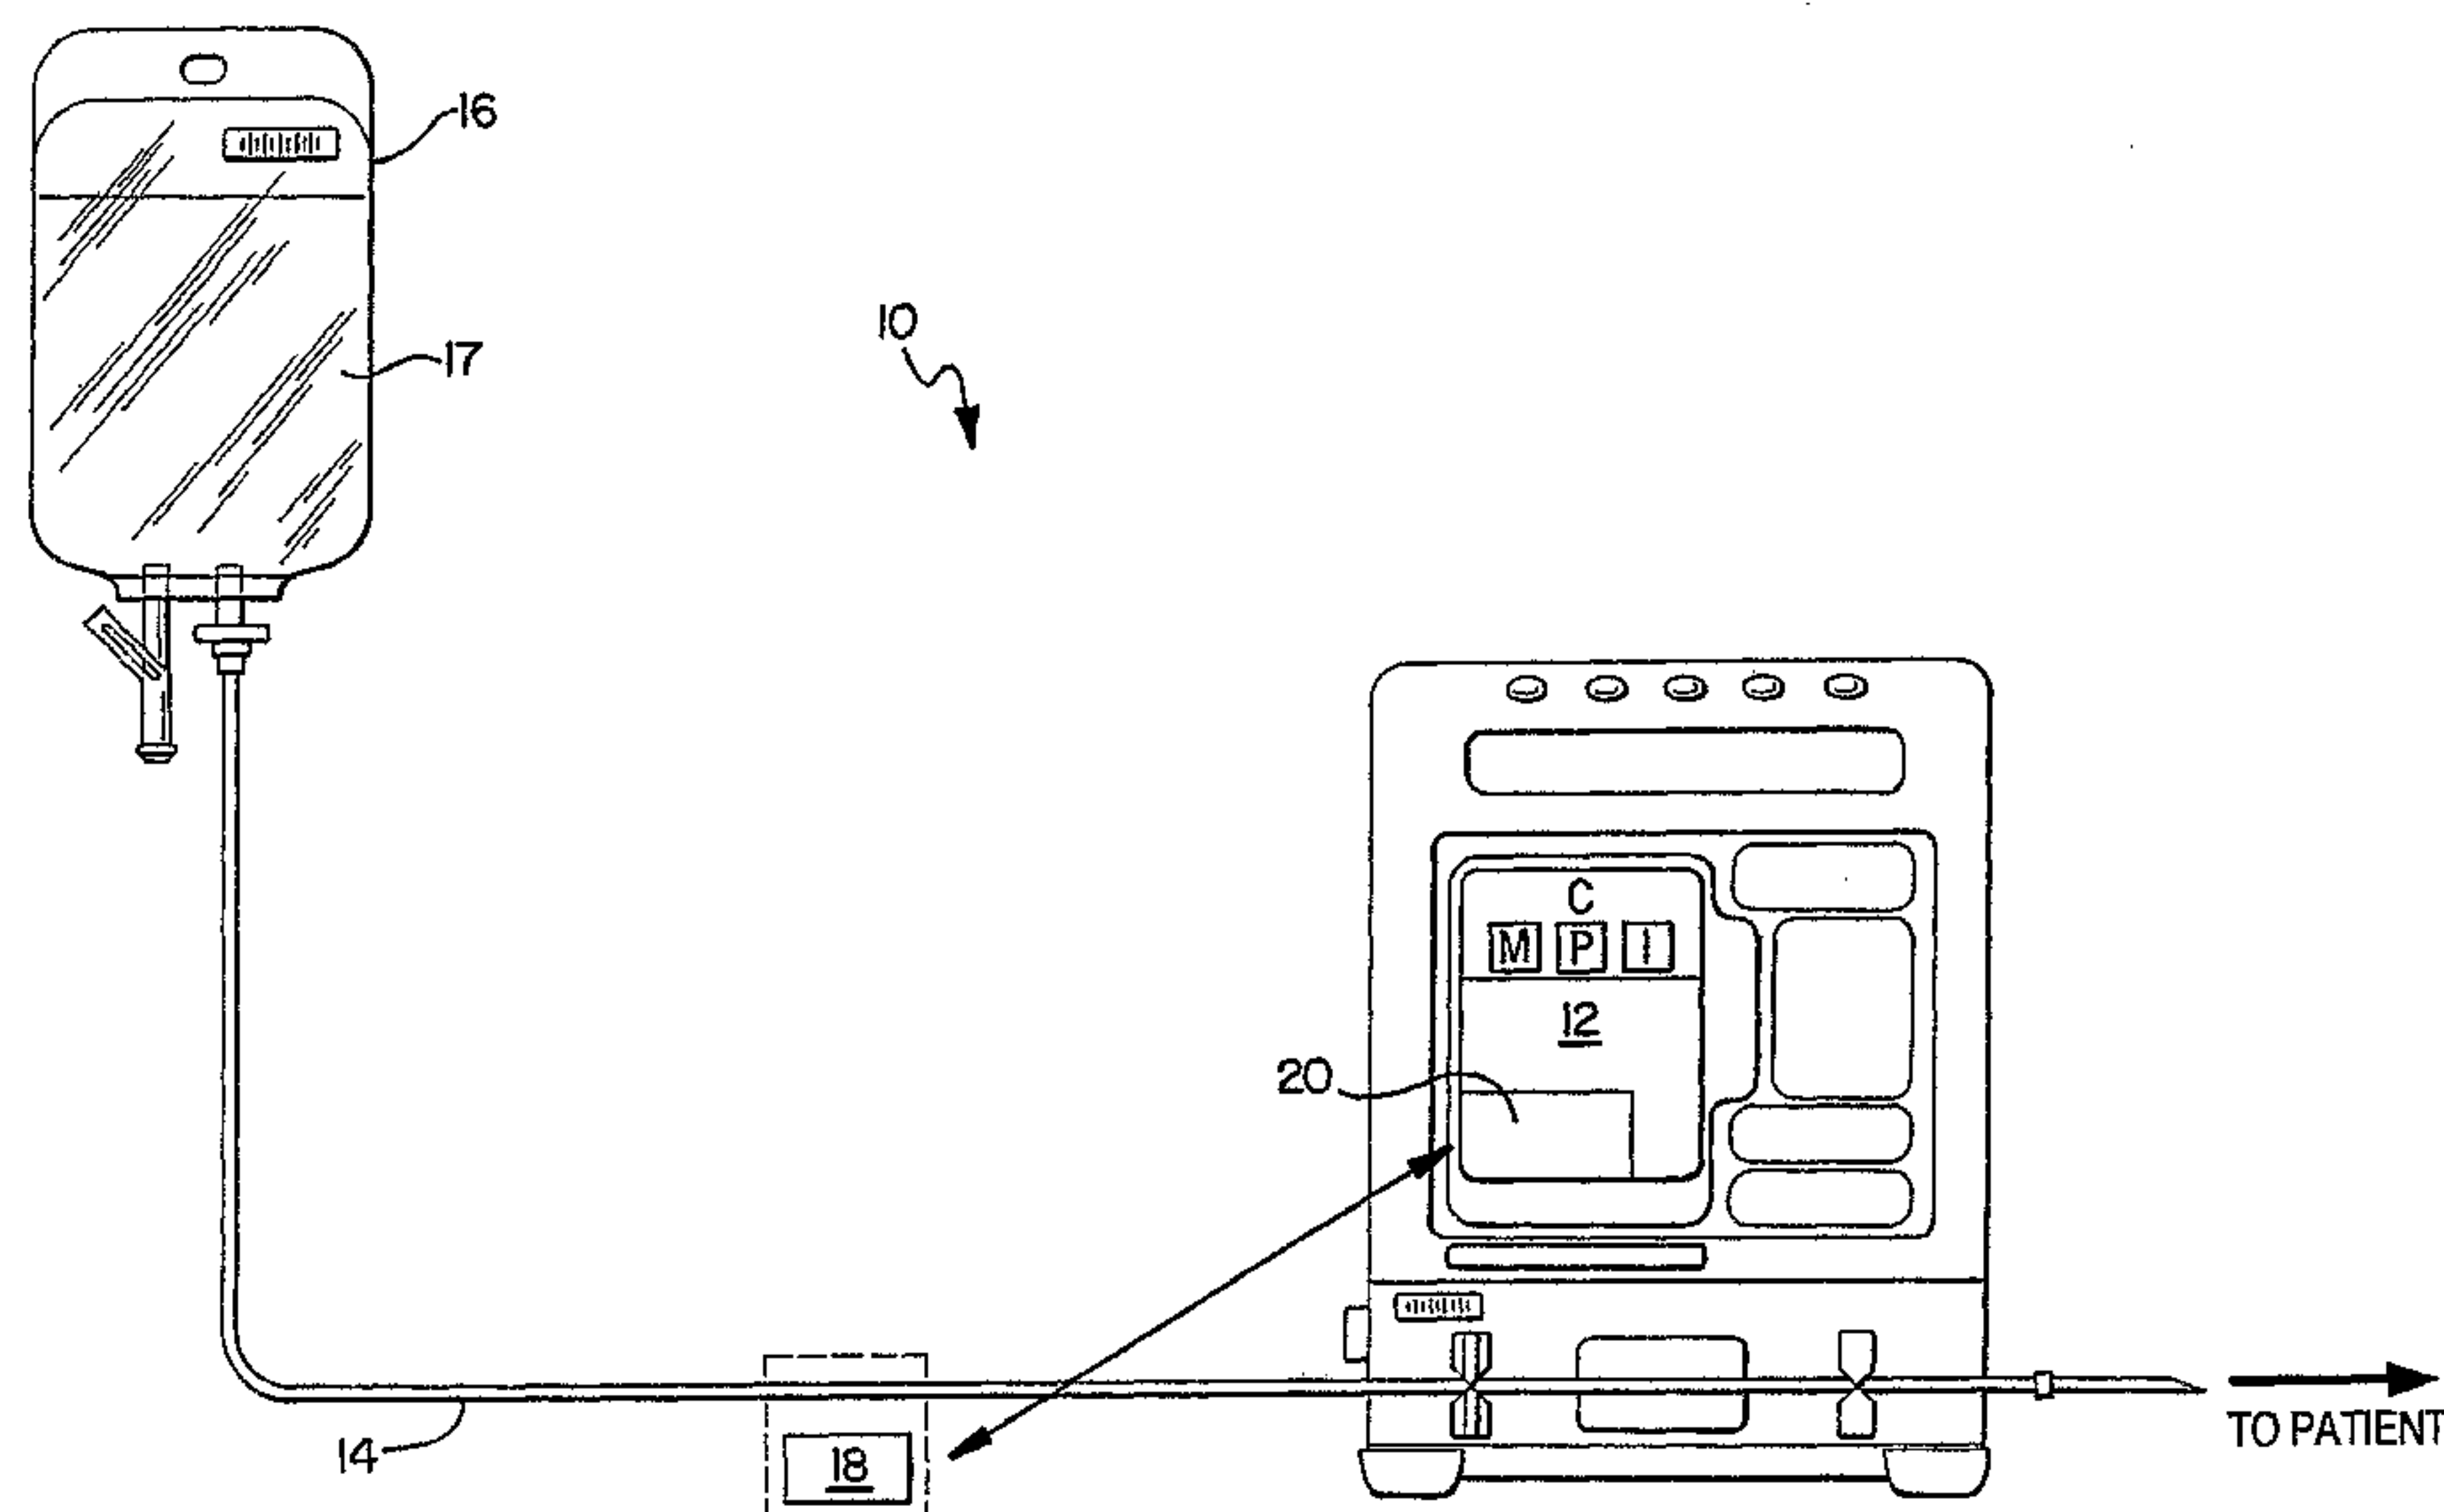

(57) Abstract: A medical delivery system (10) is provided for delivering a medicament (17) or fluid (17) to a patient. The system comprises a disposable element such as a line set (14) associated with a container (16) containing the fluid (17), an identifier (18) associated with the line set (14) and having identification information associated therewith, and a delivery device (12) configured to engage the line set (14) and deliver the fluid (17) to the patient. The delivery device (12) includes a recognition system (20) that is capable of obtaining the identification information associated with the identifier (18). The identification information may include information regarding the identification of the fluid (17), a type of line set (14), or a type of administration associated with the line set (14). The device (12) can be capable of configuration based on the identification information.

WO 2005/118027 A1

WO 2005/118027 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

IDENTIFICATION INFORMATION RECOGNITION SYSTEM FOR A MEDICAL DEVICE

DESCRIPTION

Technical Field

The instant invention relates generally to medical delivery systems and more particularly to administration line sets for use with medical delivery devices and a system for identifying information associated with the line set.

Background of the Invention

The administration of therapeutic fluids to a patient is well known in the art. Many types of medical delivery devices exist to deliver various therapeutic fluids to a patient, such as, for example, parenteral fluids, drugs or other medicaments, electrolytes, blood and blood products, and the like. One particular type of medical delivery device is an infusion pump, which can deliver one or more of these therapeutic fluids to a patient via a variety of administration types, such as, for example, intravenous (IV), intra-arterial (IA), subcutaneous, epidural, irrigation of fluid spaces applications, and the like. Many medical delivery devices that operate under these types of administration typically utilize an administration line set and an associated container containing one or more therapeutic fluids. In the case of an infusion pump, the line set is typically loaded into a delivery mechanism of the pump, which facilitates delivery of the fluid to the patient.

Each type of administration and each type of therapeutic fluid typically involve numerous operational parameters, variables, constraints and other related information, such as medical and pharmaceutical related information, that must be monitored and followed to

11 1111 11 11 1111 1111 1111 1111 11 1111 1111 1111 1111

ensure proper, effective and safe delivery of therapeutic fluids to the patient and effective treatment of the patient. The nature and the amount of this information make its entry into a medical device a daunting task that can be susceptible to human error. Even though most known delivery devices are microprocessor-controlled, software-driven units having associated memory and are thus capable of customization and control by a user—typically via a download of specific data or software from another source—there remains a risk of improperly matching data and software to the appropriate therapy, drug or fluid, or administration set, especially from a logistical standpoint. Additionally, presently known delivery devices, such as infusion pumps, operate within a fixed operating configuration with a fixed set of functionality, regardless of the therapy, drug or fluid, or administration set. This can be another source of error. The potential for error in the delivery of fluids to a patient are numerous and the minimization of such potential is an important goal.

The present invention addresses these and other issues and generally provides new and improved systems, devices and methods associated with administration line sets and associated therapeutic fluids for use with medical delivery devices for delivery of the fluids to a patient.

Summary of the Invention

The present invention provides a medication delivery system for delivering a medicament or fluid to a patient. According to a particular aspect of the present invention, a disposable element is provided having an identifier. A medical device associated with the system is capable of recognizing the identifier. In particular embodiment, the system comprises a line set associated with a container containing the fluid, an identifier associated with the line set and having identification information associated therewith, and a delivery device configured to engage the line set and deliver the fluid to the patient. The delivery device includes a recognition system that is capable of obtaining the identification information associated with the identifier.

According to another aspect, the identification information is obtained by the device upon engagement between the device and the line set. The identification information may include information regarding the identification of the fluid, a type of line set, or a type of administration associated with the line set.

According to another aspect, the identifier may be a bar code, a passive RF device, a magnetic device, a non-volatile memory device, or the like.

According to another aspect, the identifier may be integrated with a slide clamp associated with the line set.

5 According to another aspect, the delivery device may include a slide clamp receptacle configured to accept the slide clamp associated with the line set.

According to another aspect, the recognition system can be integrated with the slide clamp receptacle.

10 According to yet another aspect, the device can be capable of configuration based on the identification information.

According to yet another aspect, the device is automatically configured when the identification information is obtained from the identifier.

According to yet another aspect, the device upon configuration, is capable of functionality specifically associated with the identification information.

15 According to another aspect, a disposable element such as a MEMS pump can be utilized in the system of the present invention.

According to another aspect, there is provided a disposable line set having a slide clamp attached to said line set, said slide clamp having an identifier and adapted to be engaged by a slide clamp receptacle of a medical device, wherein said identifier is adapted to be recognized by a recognition system operable with said slide clamp receptacle, and wherein the identifier is a memory device capable of being re-configured.

According to another aspect, there is provided an administration line set for use with a medical delivery device for delivering a medicament to a patient, the line set comprising:

25 at least one tube configured to be connected to a container containing the medicament; and

an identifier integrated with a slide clamp attached to the tube and having identification information including information regarding a type of administration associated therewith, the identifier configured to be recognizable by a recognition system integrated with a slide clamp receptacle configured to engage the slide clamp, the recognition system obtaining the identification information associated with the identifier when the slide clamp receptacle engages the slide clamp, wherein the identifier is a memory device capable of being re-set.

3a

According to another aspect, there is provided a disposable member for use with a medical delivery device for delivering a medicament to a patient, said member comprising a line set configured to be connectable to a container containing a medicament, and a slide clamp associated with said line set, said slide clamp having an identifier integrated with the slide clamp and having identification information including information regarding identification of the patient associated therewith, said member configured to be recognizable by a recognition system integrated with a slide clamp receptacle configured to engage said slide clamp, the recognition system configured to obtain said identification information associated with the identifier when the slide clamp receptacle engages the slide clamp, wherein the identifier is a memory device capable of being re-programmed.

According to another aspect, there is provided a medical device adapted to cooperate with a disposable line set having an identifier which is integrated with a slide clamp attached to the line set, wherein the identifier is one of a passive RF device and a non-volatile memory device, said medical device including a slide clamp receptacle configured to engage the slide clamp and having a recognition system integrated with the slide clamp receptacle, said system configured to recognize the identifier when the slide clamp receptacle engages the slide clamp.

According to another aspect, there is provided an apparatus for delivering a medicament to a patient, the device adapted to cooperate with a disposable line set having an identifier which is integrated with a slide clamp attached to the line set, the identifier identifying a material forming the line set, the apparatus comprising a medication delivery device having a recognition system integrated with a slide clamp receptacle that is adapted to engage the slide clamp, the recognition system being configured to recognize the identifier when the slide clamp receptacle engages the slide clamp, and wherein the identifier is a memory device capable of being re-configured.

According to another aspect, there is provided a medication delivery system for delivering a medicament to a patient, the system comprising:

a line set adapted to be connected to a container containing the medicament;

an identifier which is integrated with a slide clamp attached to the line set and having identification information specific to the line set, wherein the identifier is one of a passive RF device and a non-volatile memory device; and

3b

a delivery device configured to deliver the medicament to the patient and having a slide clamp receptacle configured to engage the slide clamp, the delivery device including a recognition system integrated with the slide clamp receptacle that is capable of obtaining the identification information associated with the identifier when the slide clamp receptacle engages the slide clamp.

According to another aspect, there is provided a medication delivery system for delivering a fluid to a patient, the system comprising:

a line set adapted to be connected to a container containing the fluid;

an identifier which is integrated with a slide clamp and attached to the line set and having identification information including information regarding identification of the patient associated therewith, wherein the identifier is a memory device capable of being re-set; and

a delivery device including a slide clamp receptacle configured to engage the slide clamp and deliver the fluid to the patient, the delivery device including a recognition system integrated with the slide clamp receptacle that is capable of obtaining the identification information associated with the identifier when the slide clamp receptacle engages the slide clamp.

According to another aspect, there is provided a medical fluid delivery system for delivering a fluid to a patient, the system comprising:

a line set adapted to be connected to a container containing the fluid;

a slide clamp associated with the line set and having an identifier that is integrated with the slide clamp and includes identification information including information regarding a type of administration, wherein the identifier is a memory device capable of being re-programmed; and

a delivery device including a slide clamp receptacle configured to engage the slide clamp and associated line set to facilitate delivery of the fluid to the patient, the delivery device including a recognition system integrated with the slide clamp receptacle that is capable of obtaining the identification information from the identifier when the delivery device engages the slide clamp.

According to another aspect, there is provided a method for recognizing identification information comprising the steps of:

providing an identifier configured to be integrated with a slide clamp attached

3c

to a line set, the identifier having identification information including information regarding one of a material forming the line set, identification of a patient, and a type of administration, wherein the identifier is a memory device capable of being re-configured;

providing a medical device having a system capable of obtaining identification
5 information from the identifier, the system being integrated with a slide clamp receptacle that is configured to engage the slide clamp;

positioning the slide clamp in the slide clamp receptacle; and

obtaining the identification information in response to the step of positioning.

According to another aspect, there is provided a method for recognizing identification
10 information associated with an administrative line set, the method comprising the steps of:

providing an identifier, wherein the identifier is one of a passive RF device and a nonvolatile memory device which is integrated with a slide clamp attached to the line set and having identification information;

providing a delivery device having a system capable of obtaining identification
15 information from the identifier, the system being integrated with a slide clamp receptacle configured to engage the slide clamp;

engaging the slide clamp with the slide clamp receptacle; and

obtaining the identification information upon engagement.

These and other aspects of the present invention will be apparent from the drawings
20 and written specification set forth herein, including the appended claims.

Brief Description of the Drawings

FIG. 1 is a general schematic diagram of a medical delivery system in accordance with the principles of the present invention.

25 FIG. 2 is a schematic diagram of a particular embodiment of the medical delivery system generally schematically depicted in FIG. 1, including a medical infusion pump.

FIG. 3 is a perspective view of a slide clamp for use with an administration line set in accordance with the principles of the present invention.

FIG. 4 is a generic screen shot of a display of the medical pump depicted in FIG. 2,
30 showing various fields of the display that can be configured in accordance with identification information obtained by the pump.

55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

FIG. 5 is a schematic diagram of a medical delivery system according to another embodiment of the present invention.

FIG. 6 is a schematic diagram of a medical delivery system according to another embodiment of the present invention.

5

Detailed Description of the Preferred Embodiments

While this invention is susceptible to embodiments in many different forms, there are shown in the drawings and herein described in detail, preferred embodiments of the invention with the understanding that the present disclosures are to be considered as exemplifications of the principles of the invention and are not intended to limit the broad aspects of the invention to the embodiments illustrated.

Referring to FIG. 1, a medication delivery system or medical fluid delivery system 10 is generically depicted. The system 10 includes a medical delivery device 12 including a controller (C) having an associated memory (M), a processor (P) and an input device (I). While the controller (C) is preferably integrated with the device 12, it should be noted that the controller (C) can also be separate and/or distinct from the device 12. For example, the controller (C) may be associated with a personal digital assistant (PDA) or other external computing device, which is distinct from the device 12.

Referring again to FIG. 1, the system 10 further includes at least one administration line set 14, which may be considered a disposable member or disposable element. The line set 14 may be in communication with a container 16 containing medicament 17, or a fluid 17, to be delivered to a patient. The combination of the line set 14 and the container 16 containing the fluid 17 is sometimes referred to as an administration kit. The container 16 can take a variety of different forms, and in one preferred embodiment, the container is a flexible bag. The line set 14 generally includes a tubing having an end connected to or otherwise in communication with the container 16 and another end having a catheter or other device for communication with the patient. The device 12 acts on a portion of the line set 14 to deliver the fluid 17 to the patient. The device 12 may be of any type capable of delivering various fluids to a patient, such as, for example, parenteral fluids, drugs or other medicaments, electrolytes, blood and blood products, and the like. The fluid 17 may comprise any flowable substance that can be delivered to a patient. The device 12 can deliver one or more types of fluids to a patient via a variety of administration types, such as, for example, intravenous (IV),

5 10 15 20 25 30

intra-arterial (IA), subcutaneous, epidural, irrigation of fluid spaces applications, and the like. One preferred form of the device 12 is an infusion pump such as the one disclosed in U.S. Patent Nos. 5,782,805 and 5,842,841, which are hereby incorporated by reference and made a part hereof.

5 As shown in FIG. 1, an identifier 18 is associated with the administration line set 14. The identifier 18 may further be referred to as an indicia 18. The identifier 18 may be physically attached to, loosely associated with, or in the vicinity of, the line set 14. The identifier 18 may also be integral with the line set 14 or separately attached. The identifier 18 has identification information associated therewith. The identification information, which can
10 comprise an identification code or a data set made up of multiple data components or a single component of data, can be any type of information that the device 12 can utilize in operation and carrying out treatment of a patient. In a preferred embodiment, the identification information includes information regarding identification of the patient, the medicament or fluid 17, a type of the line set 14, a type of administration associated with the line set 14, the
15 material forming the line set 14 (e.g., PVC, non-PVC) and/or other operational parameters. The identification information may also include information regarding the durometer of the line set, dimensions of the line set such as outside and inside diameter data, micro-bore information and/or other parameters necessary to accurately deliver medicament through the line set. With regard to the medicament, the identifier 18 may include identification
20 information such as a drug identification number as is known in the art. The identifier 18 may also contain information concerning: the patient, such as the patient name, age, sex, weight, allergies, disease, condition, etc.; the medicine connected as part of the line set 14 (i.e., in the container 16), such as the drug/non-drug type, name, concentration, etc.; and, the medication therapy to be conducted with the line set 14, including all or any of the process parameters
25 necessary for the medication therapy. Such process parameters may include at least medication type, medication concentration, medication amount, individual bolus volume, total bolus volume, bolus rate, dose, timing between bolus deliveries, maximum number of boluses, maximum number of boluses per unit time, loading dose volume, loading dose rate, loading dose time, maintenance rate, maintenance volume, maintenance time, maintenance dose, diluent volume and patient weight. Finally, the identifier 18 may include information
30 concerning profile data, including but not limited to patient profiles data such as patient pain

state, chronologic age, age group, and gestational age, and condition profile data such as the medical condition or medical disease state, including but not limited to renal disease, congenital heart disease, and liver failure. In addition to including specific medication therapy information, the identifier 18 may also include generic medication therapy. For example, the
5 identifier 18 may include process parameters and data applicable to a variety of medications, a category of medications, or to a category of patient and/or condition profiles.

The information or code for the identifier 18 may be provided by a programming device and installed onto the identifier 18. As explained in greater detail below, the identifier 18 may be associated with a medical device wherein the medical device is enacted by
10 recognition of the identifier 18. The identifier 18 may also be programmed with an additional component or identification bit that allows the identification information or data code to be re-used by the programming device in a subsequent system. This will also be described with respect to other embodiments below.

The identifier 18 may be attached to the line set 14 by the manufacturer of the line set
15 14, by the hospital pharmacy, or by some other entity. When the identifier 18 is attached to the line set 14 by the manufacturer, the line set typically does not yet include a container 16. As such, the line set 14 with the identifier 18 may be pre-made and provided as having information applicable to a category or group of medications. This line set 14, with the identifier 18, may then be attached to a container 16 having medication within this category.
20 Alternatively, the line set 14 may be highly customized and contain many of the patient specific and/or therapy specific process parameters identified above. Such customization is typically performed by a pharmacy wherein a specific prescription and therapy instructions are added to the identification identifier 18.

The identifier 18 can be in any form, such as, for example, a bar code or other IR
25 technology, an RFID, such as an RFID tag, any other passive RF device that can be interrogated, a magnetic storage device, a non-volatile memory, or any other device or technology that can represent information to, and allow retrieval by, another device or system. The device 12 includes a recognition system 20 that is capable of recognizing the identifier 18 and/or obtaining, or retrieving, the identification information for use by the device 12. In a
30 preferred embodiment, the recognition system 20 is part of the controller (C). The form of the recognition system 20 will depend on the particular form of the identifier 18 and associated

15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

technology. For example, if the identifier 18 is a bar code, the recognition system will be an IR or other light-emitting device that is capable of reading a bar code. An appropriate form of the recognition system 20 will be apparent to one of skill in the art when the form of the identifier 18 is determined and will include all known devices and technologies that are capable of obtaining or retrieving the identification information from the particular form of the identifier 18. It is understood that the identifier 18 and the recognition system 20 can be used such that once the identifier 18 is in a predetermined vicinity of the recognition system 20 without a physical connection or confronting relation, the recognition system 20 can recognize and identify the information associated with the identifier 18.

FIG. 2 depicts a preferred embodiment in the form of a medical delivery system 30. The system 30 includes an infusion pump 32 and at least one administration line set 34 associated with a container 35 containing a fluid 36 to be delivered to a patient. It should be noted that the infusion pump 32 can be of any type of infusion pump, including, for example, volumetric infusion pumps, peristaltic pumps, cassette pumps, syringe pumps or MEMS (micro-electromechanical system) pumps. The infusion pump 32 is preferably a microprocessor-based pump that is capable of being programmed, utilizing software and/or firmware, to facilitate operation and functionality of the pump 32. Software is preferably stored on a computer-readable storage medium resident in the controller (C) of the pump 32, such as, for example, the memory (M). The line set 34 includes a fluid tube 38 that is engaged by the pump 32 and facilitates flow of the fluid 36 to the pump 32. The system 30 is depicted in FIG. 2 as having three administration line sets 34, although a single line set and a single channel pump could be used. The pump 32 can deliver one or more types of fluids to a patient via a variety of administration types, such as, for example, intravenous (IV), intra-arterial (IA), subcutaneous, epidural, irrigation of fluid spaces applications, and the like. Types of fluids may include, for example, parenteral fluids, drugs or other medicaments, electrolytes, blood and blood products, and the like. In this particular embodiment, the pump 32 includes three channels 40, each configured to accept the tube 38 of one of the line sets 34. As is well known in the art, the channels 40 of the pump operate to deliver the fluid 36 from the container 35, through the tube 38 of the line set 34 and to the patient. Each of the administration line sets 34 include a slide clamp 42, such as the one shown in more detail in FIG. 3. The slide clamp 42 is configured to engage the tube 38 of the line set to prevent unwanted flow through the tube

until it is loaded into a tube receptacle 43 associated with the pump channel 40. The pump includes a slide clamp receptacle 44 for each of the channels 40.

In one preferred embodiment, the slide clamp 42 includes the identifier 18 as previously described. The slide clamp 42 and identifier 18 may also be considered disposable.

5 The identifier 18 of the slide clamp 42 can be in any form, such as, for example, a bar code (including but not limited to one-dimensional or two-dimensional bar codes) or other IR technology, an RFID, such as an RFID tag, any other passive RF device or transponder that can be interrogated, a magnetic storage device, a non-volatile memory, or any other device or technology that can represent the identification information to, and allow retrieval by, the
10 pump 32. The pump 32 includes the recognition system 20 as previously described that is capable of recognizing the identifier 18 and/or obtaining, or retrieving, the identification information for use by the pump 32. In a preferred embodiment, the identifier 18 is a bar code 50 on the slide clamp 42, as shown in FIG. 3, and the recognition system 20 is a bar code reader (in a preferred embodiment, is integrated into the clamp receptacle 44) that can
15 interrogate the bar code 50 and obtain the identification information for use by the pump 32. In a preferred embodiment, the identification information includes information regarding identification of the medicament 36, or fluid 36, a type of the line set 34, a type of administration associated with the line set 34, and/or other desired information, such as, for example, an age of a patient or other patient data, a type of therapy, a type of disease, and a
20 type of condition of the patient. It is further understood that the identifier 18 can be located on a number of different locations of the slide clamp 42. The recognition system 20 is positioned accordingly based on the position of the identifier 18 or the slide clamp 42.

When the pump 32 obtains the identification information from the identifier 18, the pump 32 can utilize this information in a number of ways, including to alter operation of the
25 pump. For example, once the pump 32 obtains the identification information, the pump 32 can be configured in accordance with the identification information. In a preferred embodiment, the pump 32 is automatically configured when the identification information is obtained from the identifier 18, or configured in response to obtaining the information. Configuration may include set up and/or execution of any number of operational parameters and/or user interfaces
30 of the pump 32. For example, upon configuration, the pump operating system may modify availability of certain functionality, such as by adding or enabling certain functionality

specifically associated with the identification information. For example, configuration may include enabling a function that should only be available for a particular type of administration, fluid or line set. Conversely, the pump operating system may modify availability of certain functionality by disabling functionality for particular types of administrations, fluids or line sets. For example, the identifier 18 may include information that identifies the type of line set 34 being used, e.g., epidural. Based on identification of the line set 34 being an epidural line set, subsequent operation of the pump 32 and treatment of the patient can be dictated by this initial identification. The pump 32 could also be configured to operate based on recognition of a type of material that forms the line set 34.

The configuration aspect of the present invention can have numerous applications within the context of a medical delivery system. While some examples of specific configurations are described herein, it should be understood that there are numerous other potential configurations that are achievable, alone or in combination, in accordance with the basic principles of the present invention, and although not specifically described, are nevertheless intended to be within the scope of the present invention by virtue of their application of these principles.

In accordance with the principles of the present invention, the controller (C) of the pump 32 can be configured to facilitate configuration of the pump based on a set of configuration information associated with predetermined identification information, which is preloaded in the memory (M). In such cases, the recognition system receives identification information from the identifier associated with the administration line set and the processor retrieves the set of configuration information associated with the received identification information based on a comparison of the predetermined identification information with the received identification information. Upon a match between the received identification information and the predetermined identification information, the processor configures the controller based on the set of configuration information. Match criteria can be defined in a number of ways, such as, for example, a match between a type of line set or type of administration associated with a line set. The match criteria may also be defined by identification of certain parameters or values associated with the identification information, such as, for example, identification of a parameter or value falling within a predetermined range. It is contemplated that a healthcare facility can customize the controller of the pump by

defining the predetermined identification information, match criteria and/or the preloaded set of configuration information or profiles.

In certain instances, it may be desirable to modify availability of features and functions of the pump 32 based on the identification information, such as add functionality to, or enabling functionality on the pump 32 for certain identification information or other criteria. For example, the added functionality may include messaging specifically associated with the identification information, such as messaging to a user regarding unique characteristics of a particular type of fluid or administration line set. The added functionality may also include accessibility by a user to a set of guidelines for administration of a particular fluid, such as guidelines for the recommended administration of a particular drug. The added functionality may also include accessibility by a user to a set of guidelines on a predetermined policy, such as a policy set by a hospital, regarding line set changes. The functionality may include certain notifications, such as notification to a user of a type of administration associated with a particular fluid. In certain instances, it may be desirable to provide functionality that includes linking a user to certain types of information, such as a drug protocol associated with a drug identified by the identification information. In this example, the protocol may include information regarding dosing and administration specific to the drug. In other instances, it may be desirable to add functionality that includes a warning system, which may include an alarm, for drug incompatibility based on identification of a particular drug. In some instances, it may also be desirable to add functionality that includes an escalating alarm function, which provides for escalation of an alarm associated with a particular event associated with treatment when the alarm is not addressed by a caregiver. In certain instances, it may also be desirable to remove from, or disable functionality on the pump 32 based on the identification information. For example, a particular function may be disabled based on the identification information, such as disablement of a function based on an identification of a type of administration. As a more specific example, the function of automatic piggybacking may be disabled on the pump 32 based on identification of an epidural type of administration.

The configuration may include adjustments or changes to the system. For example, an adjustment to a sensing system of the pump 32 may be desirable based on the identification information.

It is also contemplated that the configuration may include functionality based on identification of a treatment system, such as identification of a specific combination of container, fluid, line set, and/or administration type, e.g., an administration line set kit. In such instances, functionality may be added that is treatment system specific, such as the addition of notifications or guidelines for the specific combination. For example, a particular fluid container and line set combination, such as a combination included in a particular line set kit, may have certain guidelines applicable only to the particular combination.

The configuration may also include changes to a user interface 46 (shown in FIG. 2) of the pump 32 based on the configuration. For example, as shown in FIG. 4, added functionality may require the addition of one or more soft-keys 60 on a display 48 of the pump 32. Certain labels, messaging or other information may also be provided on the display 48 within a display field 62 of the display 48 based on the added functionality. Conversely, certain soft-keys 60 may be "grayed-out" or removed if certain functionality is disabled and certain labels or information within the display field 62 may be removed. The display field 62 can be further divided into smaller sub-fields that can also be customized. It should be noted that the soft-keys 60 can alternatively serve as labels for hard keys (not shown) on the user interface 46 of the pump 32. It should be apparent that when the user interface of the pump 32 is customized based on the identification information, many sources of potential error can be eliminated.

The identification information associated with the identifier 18 can also be used in diagnostic applications. For example, the information may indicate to the pump 32 that certain tests or diagnostic routines should be performed. It is also contemplated that the identifier 18 can be associated with a diagnostic line set. In this case, specific operational parameters, mechanisms, and alarms on the pump 32 can be evaluated for proper operation when the diagnostic line set is loaded into the pump 32 and the pump 32 recognizes the identification information as indicating that a diagnostic line set has been loaded. For example, the identifier 18 associated with a diagnostic line set can instruct the pump 32 to perform a check and certify that associated alarms are in proper working order. A diagnostic administration kit may include a container containing a particular fluid to be used in the testing. In such case, once the pump 32 recognizes the identifier 18 associated with the diagnostic kit, the pump 32 can run a series of checks wherein the expected operational parameters of the pump 32 based on the particular fluid can be used as a diagnostic benchmark.

FIG. 5 shows another embodiment of a system of the present invention, generally designated with the reference numeral 100. Similar to the embodiments described above, the system 100 utilizes a disposable element and an identifier. In one preferred embodiment, a disposable element such as a disposable pump is utilized. The disposable pump can be a
5 micro-pump or a MEMS (micro electro-mechanical system) pump, or other type of disposable pump. As shown in FIG. 5, the system 100 generally includes a medical device 112, preferably a MEMS pump, an administration line set 114 and a container 116. The system 100 may also take the form of any of the systems such as disclosed in commonly-owned U.S. Patent Application Publication No. 2003/0130625, entitled "Infusion System".

10 The container 116 is a container similar to the container 16 described above. In one preferred embodiment, the container 116 is a flexible bag adapted to contain a medication, or medicament, such as a medical fluid. The administration line set 114 is similar the line set 14 described above. The line set 114 includes a tubing having one end connected to or otherwise in communication with the container 116 and another end having a catheter or
15 other device for communication with the patient.

As further shown in FIG. 5, the MEMS pump 112 is operably associated with the line set 114. The MEMS pump 112 may be connected to the line set 114 in various configurations. For example, the MEMS pump 112 may have an inlet port 120 and an outlet port 122 wherein the MEMS pump 112 is connected at an intermediate portion of the line set
20 114. Accordingly, a portion of the line set 114 is connected to the inlet port 120 and a portion of the line set 114 is connected to the outlet port 122 wherein the MEMS pump 112 is operably connected to the line set 116, through the line set 114 and to the patient. The disposable pump 112 could further be incorporated into an interior of the line set 114 or otherwise take some integral form with the line set 114.

25 As discussed, the pump 112 may be a MEMS pump 112. MEMS devices are typically etched in silicon. It is further understood that MEMS may also describe other types of micro electromechanical system devices such as devices that are micro-molded in plastic. Thus, MEMS devices may include devices etched in silicon, molded in plastic or otherwise fabricated on a small scale.

The system 100 may also use an identifier 118. In one preferred embodiment, the identifier 118 is associated with or otherwise connected to the MEMS pump 112. It is understood, however, that the identifier 118 may also be associated with other elements, and connected at other locations such as the disposable line set 114 as shown in FIG. 5. The identifier 118 is similar as described above and can contain any of the information or identifying indicia or data as described above.

The system 100 may further use a controller 130. The controller 130 is operably associated with the MEMS pump 112. The controller 130 may communicate with the MEMS pump 112 via a wireless connection. Alternatively, a hard connection may be utilized wherein the MEMS pump 112 may be plugged into the controller 130. It is further understood that the controller 130 can be integral as part of the MEMS pump 112. It is further understood that the controller 130 can be a separate hand-held computer or a separate network controller that controls the pump 112 via a network communication link. Similar to the discussion above, the controller 130 has a recognition system 132. The recognition system 132 is capable of recognizing the data contained in the identifier 118.

The recognition system 132 can cooperate with the identifier 118 to operate the system 100. For example, the identifier 118 may contain information that identifies the type of line set 114 connected to the MEMS pump 112. The identifier 118 may further contain any of the other types of information as described above. The information contained on the identifier 118 may also include data relating to functionality that instructs the controller 130 in controlling operation of the MEMS pump 112. It is further understood that the disposable element such as the MEMS pump 112 can be activated by a separate patient care system.

It is understood that the disposable element can take a variety of different forms. The disposable element could be considered the MEMS pump 112 or the line set 114, or the combination of both elements. In addition, other types of MEMS components could also be used in the system 100.

FIG. 6 discloses another embodiment of a system of the present invention, generally designated with the reference numeral 200. Similar to the embodiments described above, the system 200 utilizes a disposable element and an identifier. Similar to the system 100 of FIG. 5, a MEMS component such as a MEMS pump is utilized. As shown in FIG. 6, the system 200 generally includes a medical device 212, preferably a MEMS pump 212, an administration

line set 214 and a container 216. The system further includes a programming device 220 and a controller 230.

Similar to the systems described above, an identifier 218 is associated with a disposable element. In the preferred embodiment of FIG. 6, the identifier 218 is associated with the MEMS pump 212 and can contain any of the data as previously described. As further shown in FIG. 6, a programming device 220 is utilized to program the identifier 218 with the desired data, identification code or other identifying information. As part of this programming function, the programming device 220 may program the identifier 218 with an additional identification component to be used at a separate stage of the system 200. It is understood that the identifier 218 will be a device having memory as is known and also be capable of being re-configurable, re-settable or changeable. Once programmed by the programming device 220, the MEMS pump 212 may be activated by a controller 230. The controller 230 may be part of an overall patient care system operated, for example, in a hospital setting. In one embodiment, the controller 230 could be in the form of a hand-held computer such as a personal digital assistant. The controller 230 recognizes the identifier 218 and activates the pump 212. Once activated, the controller 230 controls the MEMS pump 212 wherein the pump 212 operates to deliver medication to a patient. The pump 212 has the ability to recognize a predetermined event such as when the fluid is generally substantially pumped from the container 216 to define a generally empty container. For example, a predetermined pressure sensed by the MEMS pump 212, once reached, could cause the MEMS pump 212 to shut down. Once the MEMS pump 212 shuts down, this condition could trigger the additional identification component, stored in memory with the identifier 218, or at another location in a separate memory device, to change the state of the additional identification component to indicate that the MEMS pump 212 has shut down. Thus, when the pump 212 recognizes that the container 216 is empty, the additional identification component changes state in memory and may be considered to be activated. Upon activation, the additional identification component is capable of being recognized. This recognition can take various forms. For example, in one embodiment, a signal is communicated back to the controller 230 and/or the programming device 220 to indicate to the programming device 220 that the original identification data may be re-used in a subsequent operation of a system 200. Alternatively, the controller 230 and/or programming device 220 can pull or read the additional information component from its

location such as on the identifier 218 on the pump 212. Thus, the additional identification component allows for the identifier 218 to comprise a reusable identification component. In addition, the identifier 218 is capable of being settable and then re-settable or configurable and then re-configurable (e.g. changeable). In one embodiment, the identifier 218 is an RFID identifier. The component can also comprise any form of electrically-alterable non-volatile memory. It is understood that the communication can be directly to the programming device 220 or communicated through the controller 230. By using the additional identification component, or additional information bit, the identification code can be re-used to enhance overall operation of the system. Also, it is understood that the predetermined event described above could also be an event such as when the controller indicates an end to an infusion therapy (e.g., independent of the amount of medicament remaining in the container).

It is further understood that while the additional identification component can be re-used for a new infusion therapy with a new set of system components, the system is configured such that it will not allow the additional identification component to be used with the same components as in the original therapy. Thus, the additional identification component and for example, the disposable MEMS pump used in a first infusion therapy cannot be re-used together in a second infusion therapy. If this was attempted, the system would not operate for the second infusion therapy. The additional identification component can only be used with new components for a new therapy.

Additional features can be utilized with any of the embodiments described above. As discussed, a kit can be formed that may include the container 16, the line set 14 and the identifier 18. The identifier 18 can be associated with or connected to either of the container 16 and the line set 14. In some embodiments, the container 16 may contain a pre-attached reconstitution device having a pre-attached drug container such as a vial. The reconstitution device could be activated to reconstitute the drug with the fluid 17 in the container 16. It is understood that the identifier 18 can also include information regarding the vial that may be pre-attached to the reconstitution device. In another embodiment, a disposable pump such as a micro-pump or MEMS pump can also be connected to the line set 14 and be considered as part of the kit. The identifier 18 associated with such kits can have any of the information described above for overall proper operation of the system. In yet another embodiment, the container 16, or container 16 associated with the kit may include a pre-mixed medicament 17.

The identifier 18 associated with the pre-mixed medicament 17 can have an expiration date associated therewith. The delivery device or pump used with such kit has the recognition system that recognizes the identifier 18 and a date of operation of the pump. The pump is configured such that it will not operate if the recognition system determines the operation date is a date after the recognized expiration date. Thus, if the recognition system of the pump reads an expired date, the pump will not operate and give an indication of an expired medicament. In one preferred embodiment, the system will also include an alarm system operably associated with the system that is capable of generating an alarm if an expired medicament is detected. The alarm can take many different forms and may have audible components, visual components or a combination of both.

It is further understood that a pump utilized in the present invention will incorporate safety software. The safety software is capable of generating basic failure alarms wherein the pump would assume a fail safe condition such as no free flow of medicament through the pump. Various software/pump configurations may be utilized. For example, all software may be located on the pump head, or all software may be located off of, or remote from the pump head. In addition, all software may be located off of the pump head with the exception of the specific safety software being located on the pump head.

SPECIFIC EXAMPLES

Two specific examples of the application of the principles of the present invention will now be described.

In the first example, an administration line set having an identifier is loaded into the pump. Upon insertion of the slide clamp into the slide clamp receptacle on the pump, the recognition system of the pump obtains the identification information from the identifier. In this example, the identification information indicates to the pump that the type of administration associated with the line set that was loaded into the pump is enteral. Based on the identification of the enteral administration type, the pump software performs a configuration of the pump for enteral administration based on one of a set of administration line set profiles associated with enteral administration. In this particular example, the recordation of volume history is enabled by the pump.

In the second example, an administration line set having an identifier is loaded into the pump. Upon insertion of the slide clamp into the slide clamp receptacle on the pump, the recognition system of the pump obtains the identification information from the identifier. In this example, the identification information indicates to the pump that the type of administration associated with the line set that was loaded into the pump is epidural. Based on the identification of the epidural administration type, the pump software performs a configuration of the pump for epidural administration. In this case, the pump enables functionality that includes a continuous drip of the fluid, disablement of a piggy back feature of the pump, disablement of an air line sensor of the pump, and disablement of an occlusion detection feature of the pump.

It should be understood that the invention may be embodied in other specific forms without departing from the central characteristics thereof. The present embodiments, therefore, are to be considered in all respects illustrative and not restrictive, and the invention is not to be limited to the details given herein.

What is claimed is:

1. A disposable line set having a slide clamp attached to said line set, said slide clamp having an identifier and adapted to be engaged by a slide clamp receptacle of a medical device, wherein said identifier is adapted to be recognized by a recognition system operable with said slide clamp receptacle, and wherein the identifier is a memory device capable of being re-configured.
2. The line set of claim 1 and the identifier having machine-readable indicia.
3. The line set of claim 1 and the identifier being one of a passive RF device and a non-volatile memory device.
4. The line set of claim 1 wherein the identifier identifies a type of line set.
5. The line set of claim 4 wherein the line set comprises at least one of an intravenous line set, an intra-arterial line set, a subcutaneous line set, an epidural line set and an irrigation of fluid spaces line set.
6. The line set of claim 1 wherein the line set is adapted to be directly connected to the medical device.
7. The line set of any one of claims 1 to 6 wherein the medical device is a medication delivery device.
8. The line set of claim 7 wherein the medication delivery device is an infusion pump.
9. The line set of claim 1 wherein the identifier identifies a material forming the line set and is adapted to instruct the device to operate in a predetermined manner based on the device recognizing the identifier.

10. An administration line set for use with a medical delivery device for delivering a medicament to a patient, the line set comprising:

at least one tube configured to be connected to a container containing the medicament;
and

an identifier integrated with a slide clamp attached to the tube and having identification information including information regarding a type of administration associated therewith, the identifier configured to be recognizable by a recognition system integrated with a slide clamp receptacle configured to engage the slide clamp, the recognition system obtaining the identification information associated with the identifier when the slide clamp receptacle engages the slide clamp, wherein the identifier is a memory device capable of being re-set.

11. The line set of claim 10 wherein the identification information includes information regarding the tube.

12. The line set of claim 10 or 11 wherein the identifier identifies a type of tube.

13. The line set of any one of claims 10 to 12 wherein the identifier is one of a passive radio frequency (RF) device and a non-volatile memory device.

14. The line set of any one of claims 10 to 13, wherein the type of administration is one of an intravenous (IV) administration, an intra-arterial (IA) administration, a subcutaneous administration, an epidural administration, and an irrigation of fluid spaces administration.

15. A disposable member for use with a medical delivery device for delivering a medicament to a patient, said member comprising a line set configured to be connectable to a container containing a medicament, and a slide clamp associated with said line set, said slide clamp having an identifier integrated with the slide clamp and having identification information including information regarding identification of the patient associated therewith, said member configured to be recognizable by a recognition system integrated with a slide clamp receptacle configured to engage said slide clamp, the recognition system configured to obtain said identification

information associated with the identifier when the slide clamp receptacle engages the slide clamp, wherein the identifier is a memory device capable of being re-programmed.

16. A medical device adapted to cooperate with a disposable line set having an identifier which is integrated with a slide clamp attached to the line set, wherein the identifier is one of a passive RF device and a non-volatile memory device, said medical device including a slide clamp receptacle configured to engage the slide clamp and having a recognition system integrated with the slide clamp receptacle, said system configured to recognize the identifier when the slide clamp receptacle engages the slide clamp.

17. The medical device of claim 16 wherein the medical device comprises a medication delivery device.

18. The medical device of claim 17 wherein the medication delivery device is an infusion pump.

19. The medical device of any one of claims 16 to 18 wherein the recognition system is capable of reading machine-readable indicia.

20. An apparatus for delivering a medicament to a patient, the device adapted to cooperate with a disposable line set having an identifier which is integrated with a slide clamp attached to the line set, the identifier identifying a material forming the line set, the apparatus comprising a medication delivery device having a recognition system integrated with a slide clamp receptacle that is adapted to engage the slide clamp, the recognition system being configured to recognize the identifier when the slide clamp receptacle engages the slide clamp, and wherein the identifier is a memory device capable of being re-configured.

21. A medication delivery system for delivering a medicament to a patient, the system comprising:

a line set adapted to be connected to a container containing the medicament;

an identifier which is integrated with a slide clamp attached to the line set and having identification information specific to the line set, wherein the identifier is one of a passive RF device and a non-volatile memory device; and

a delivery device configured to deliver the medicament to the patient and having a slide clamp receptacle configured to engage the slide clamp, the delivery device including a recognition system integrated with the slide clamp receptacle that is capable of obtaining the identification information associated with the identifier when the slide clamp receptacle engages the slide clamp.

22. The system of claim 21 wherein the identification information is obtained by the delivery device upon engagement between the device and the slide clamp.

23. The system of claim 21 or 22 wherein the delivery device comprises an infusion pump.

24. The system of any one of claims 21 to 23 wherein the identification information is adapted to include information regarding the medicament.

25. The system of any one of claims 21 to 24 wherein the line set is adapted to be associated with the medicament that is one of a parenteral fluid, a drug, an electrolyte, blood and a blood product.

26. The system of any one of claims 21 to 25 wherein the identification information includes information regarding a type of administration.

27. A medication delivery system for delivering a fluid to a patient, the system comprising:
a line set adapted to be connected to a container containing the fluid;
an identifier which is integrated with a slide clamp and attached to the line set and having identification information including information regarding identification of the patient associated therewith, wherein the identifier is a memory device capable of being re-set; and
a delivery device including a slide clamp receptacle configured to engage the slide clamp and deliver the fluid to the patient, the delivery device including a recognition system integrated

with the slide clamp receptacle that is capable of obtaining the identification information associated with the identifier when the slide clamp receptacle engages the slide clamp.

28. The system of claim 27 wherein the delivery device engages the line set when the slide clamp is inserted into the receptacle.

29. A medical fluid delivery system for delivering a fluid to a patient, the system comprising:
a line set adapted to be connected to a container containing the fluid;
a slide clamp associated with the line set and having an identifier that is integrated with the slide clamp and includes identification information including information regarding a type of administration, wherein the identifier is a memory device capable of being re-programmed; and
a delivery device including a slide clamp receptacle configured to engage the slide clamp and associated line set to facilitate delivery of the fluid to the patient, the delivery device including a recognition system integrated with the slide clamp receptacle that is capable of obtaining the identification information from the identifier when the delivery device engages the slide clamp.

30. A method for recognizing identification information comprising the steps of:
providing an identifier configured to be integrated with a slide clamp attached to a line set, the identifier having identification information including information regarding one of a material forming the line set, identification of a patient, and a type of administration, wherein the identifier is a memory device capable of being re-configured;
providing a medical device having a system capable of obtaining identification information from the identifier, the system being integrated with a slide clamp receptacle that is configured to engage the slide clamp;
positioning the slide clamp in the slide clamp receptacle; and
obtaining the identification information in response to the step of positioning.

31. A method for recognizing identification information associated with an administrative line set, the method comprising the steps of:

providing an identifier, wherein the identifier is one of a passive RF device and a nonvolatile memory device which is integrated with a slide clamp attached to the line set and having identification information;

providing a delivery device having a system capable of obtaining identification information from the identifier, the system being integrated with a slide clamp receptacle configured to engage the slide clamp;

engaging the slide clamp with the slide clamp receptacle; and
obtaining the identification information upon engagement.

1/4


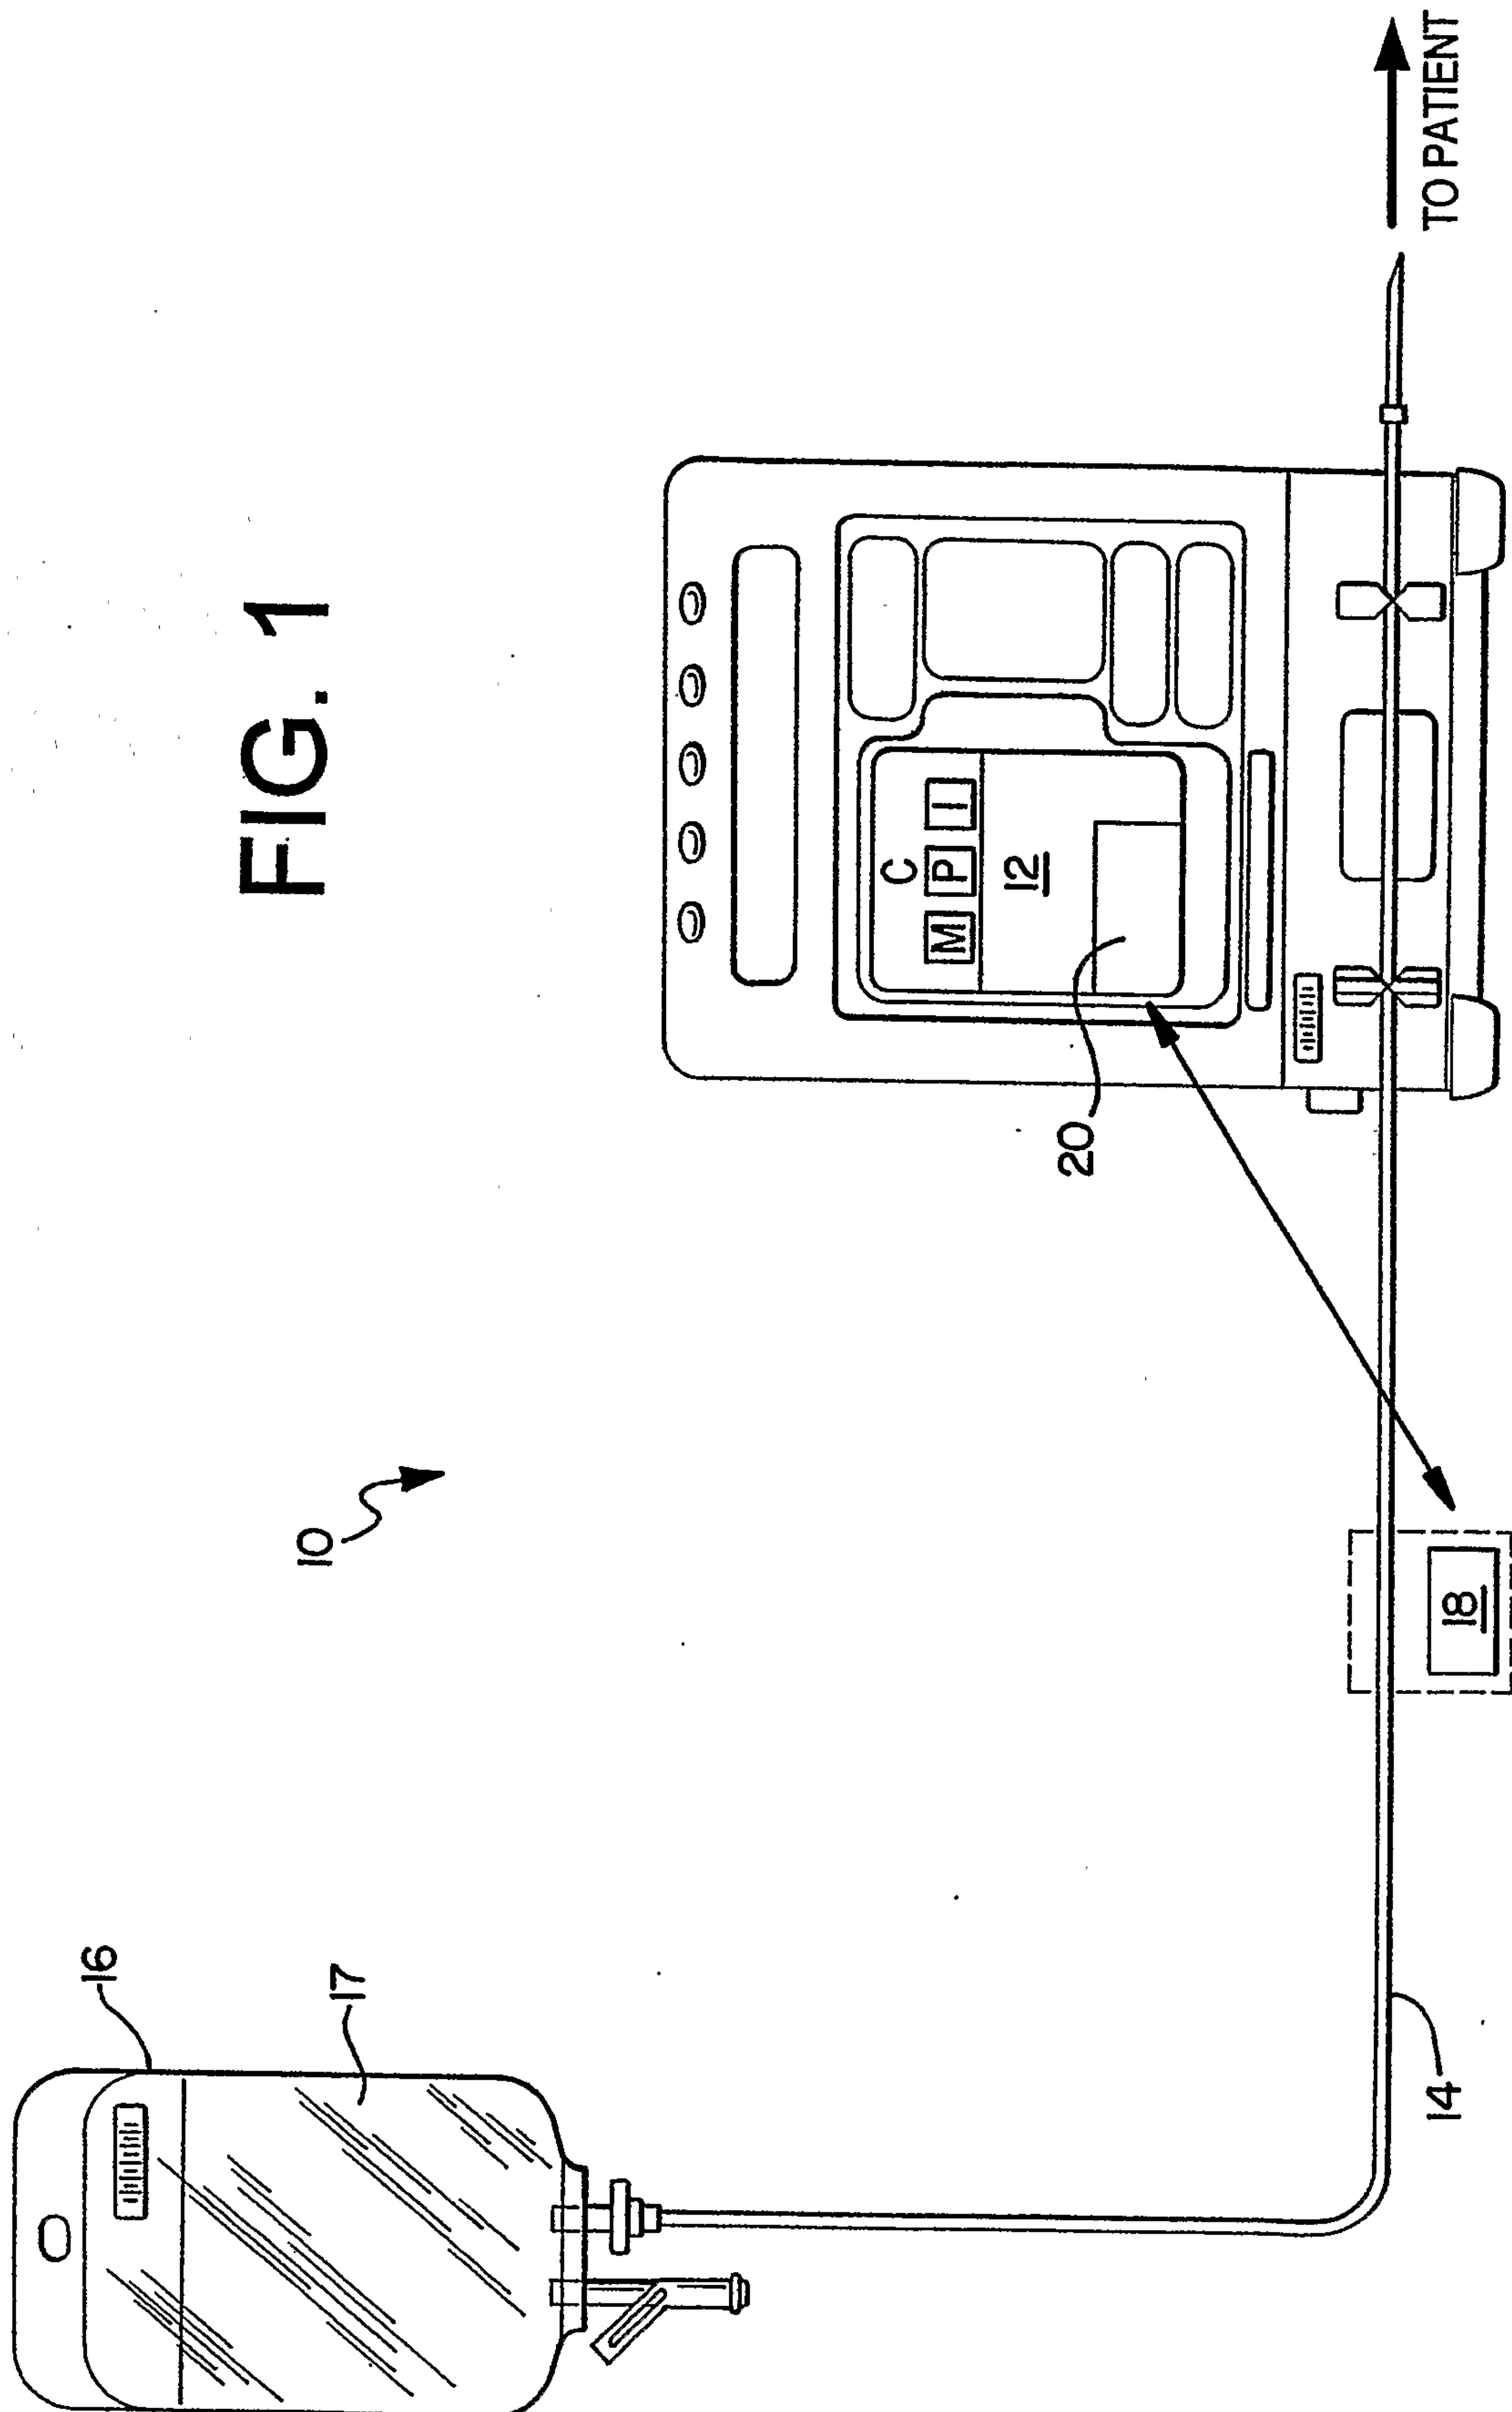


FIG. 2

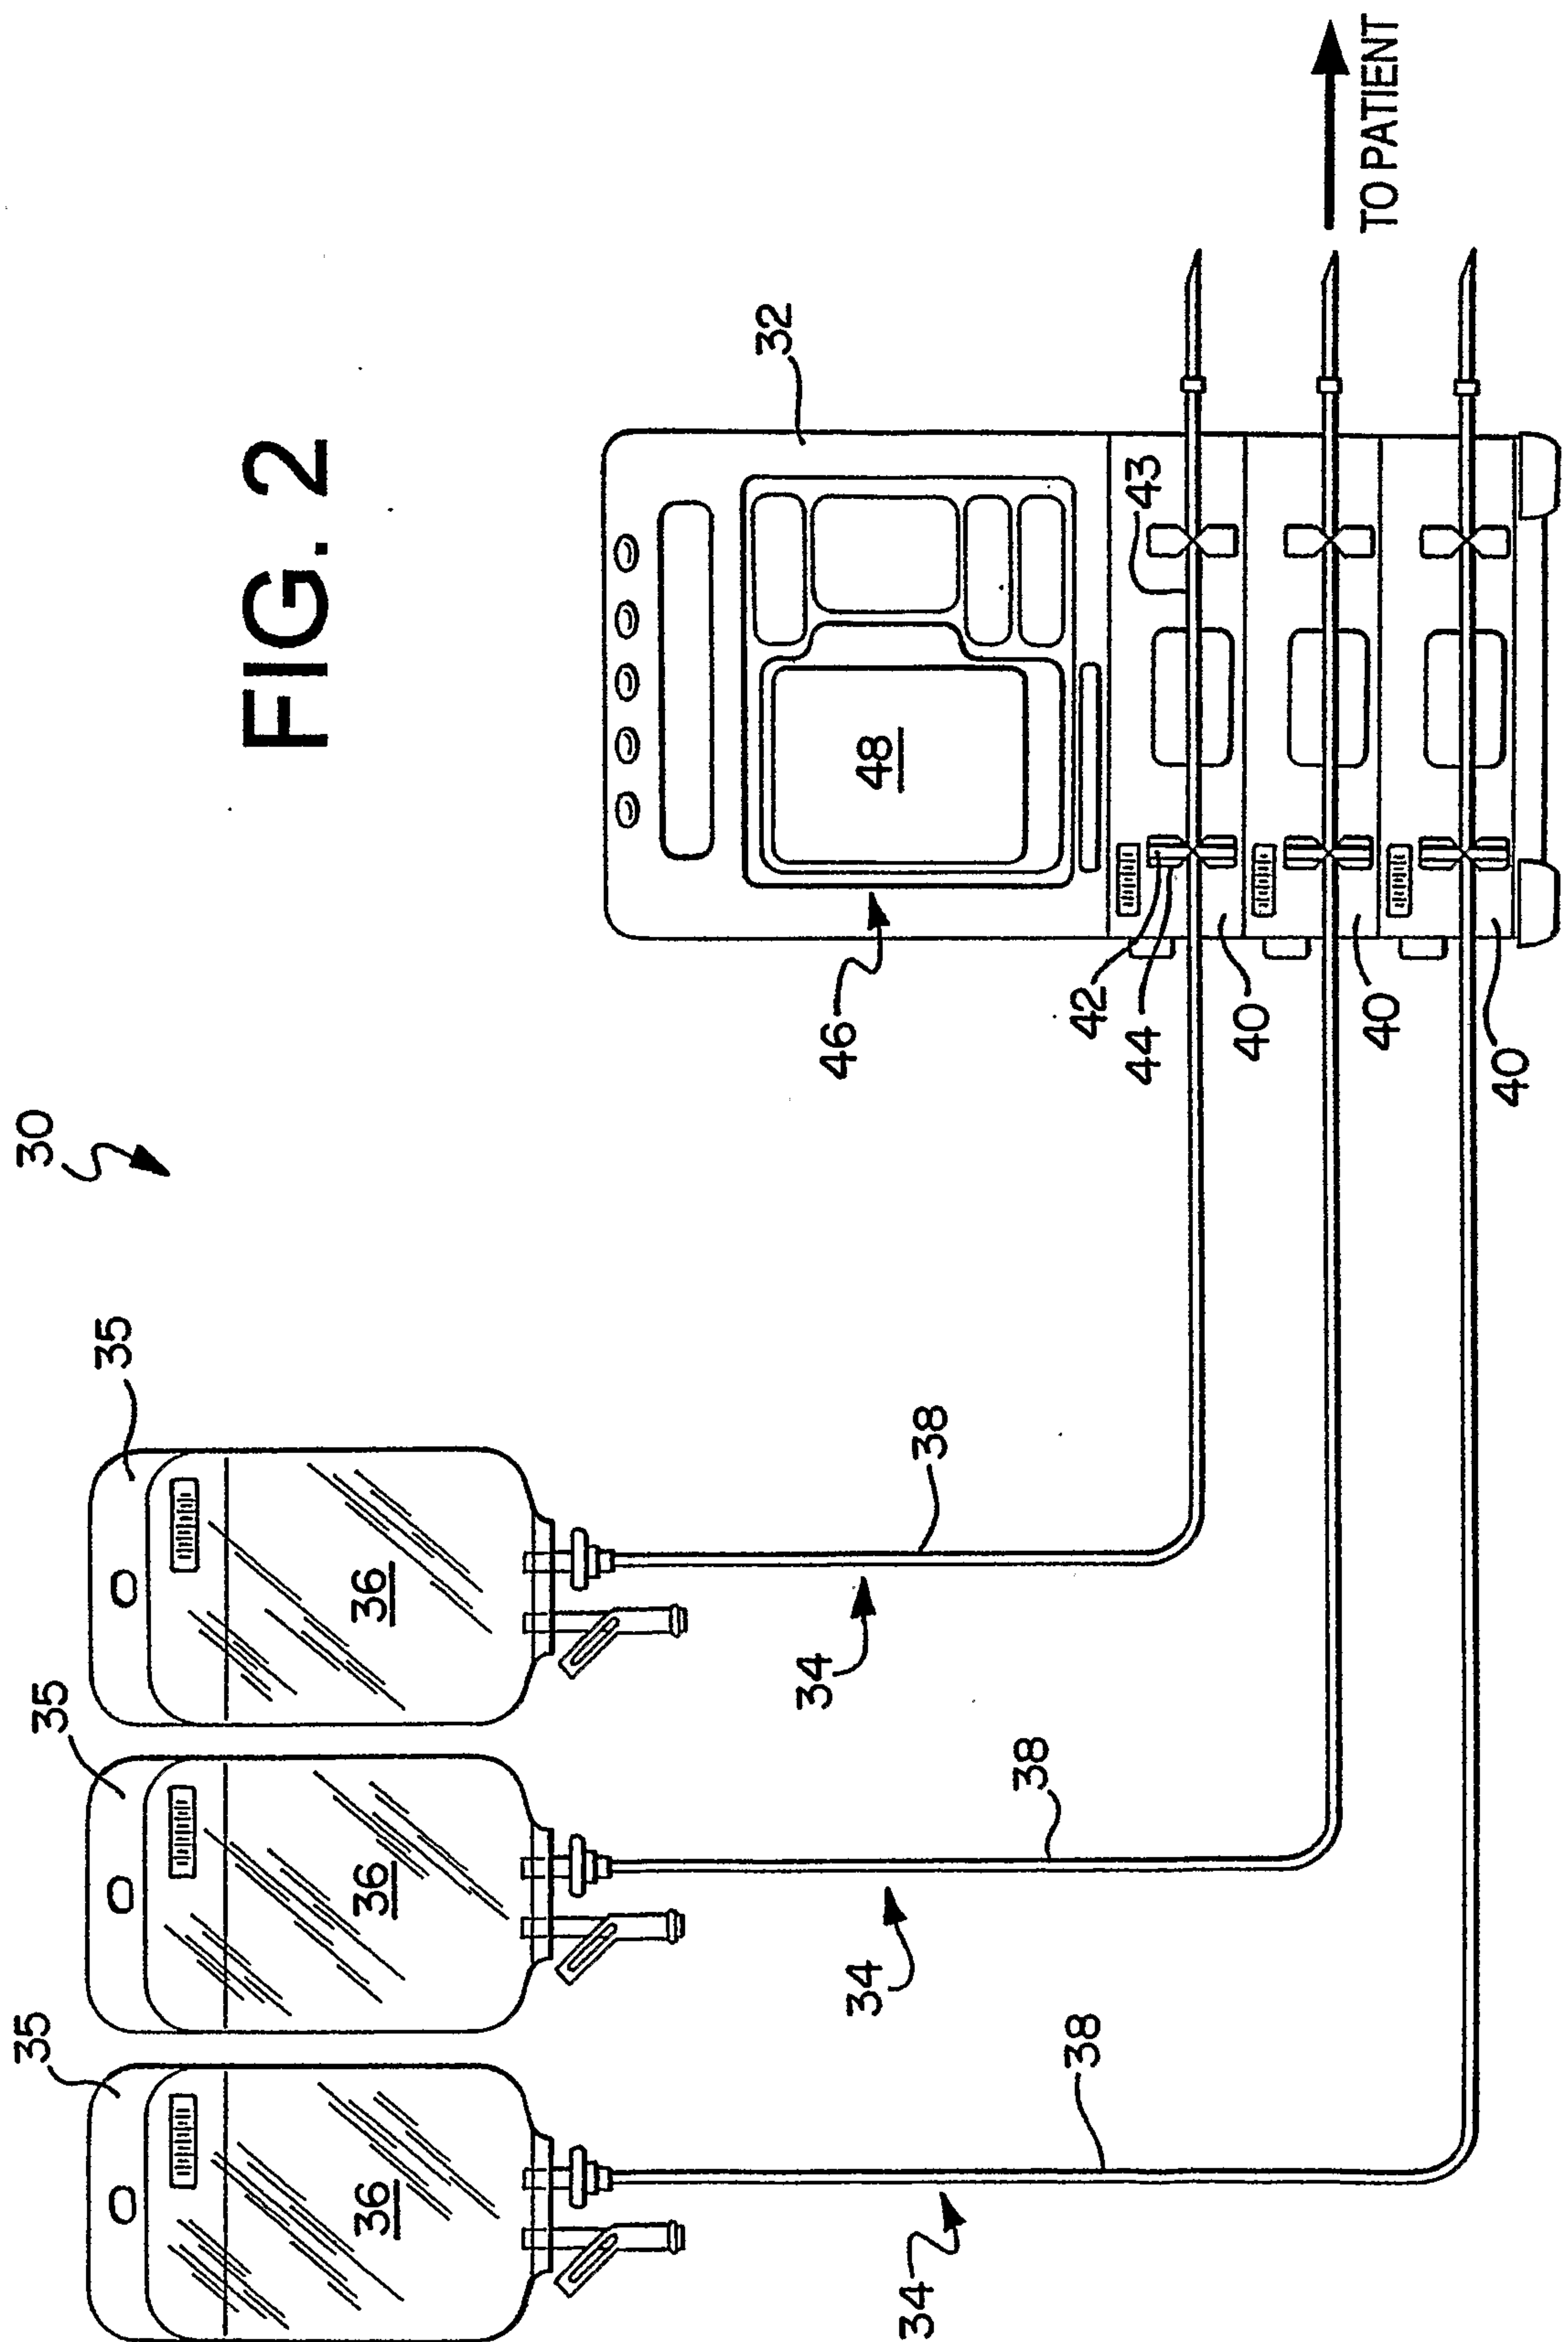

3/4

FIG. 3


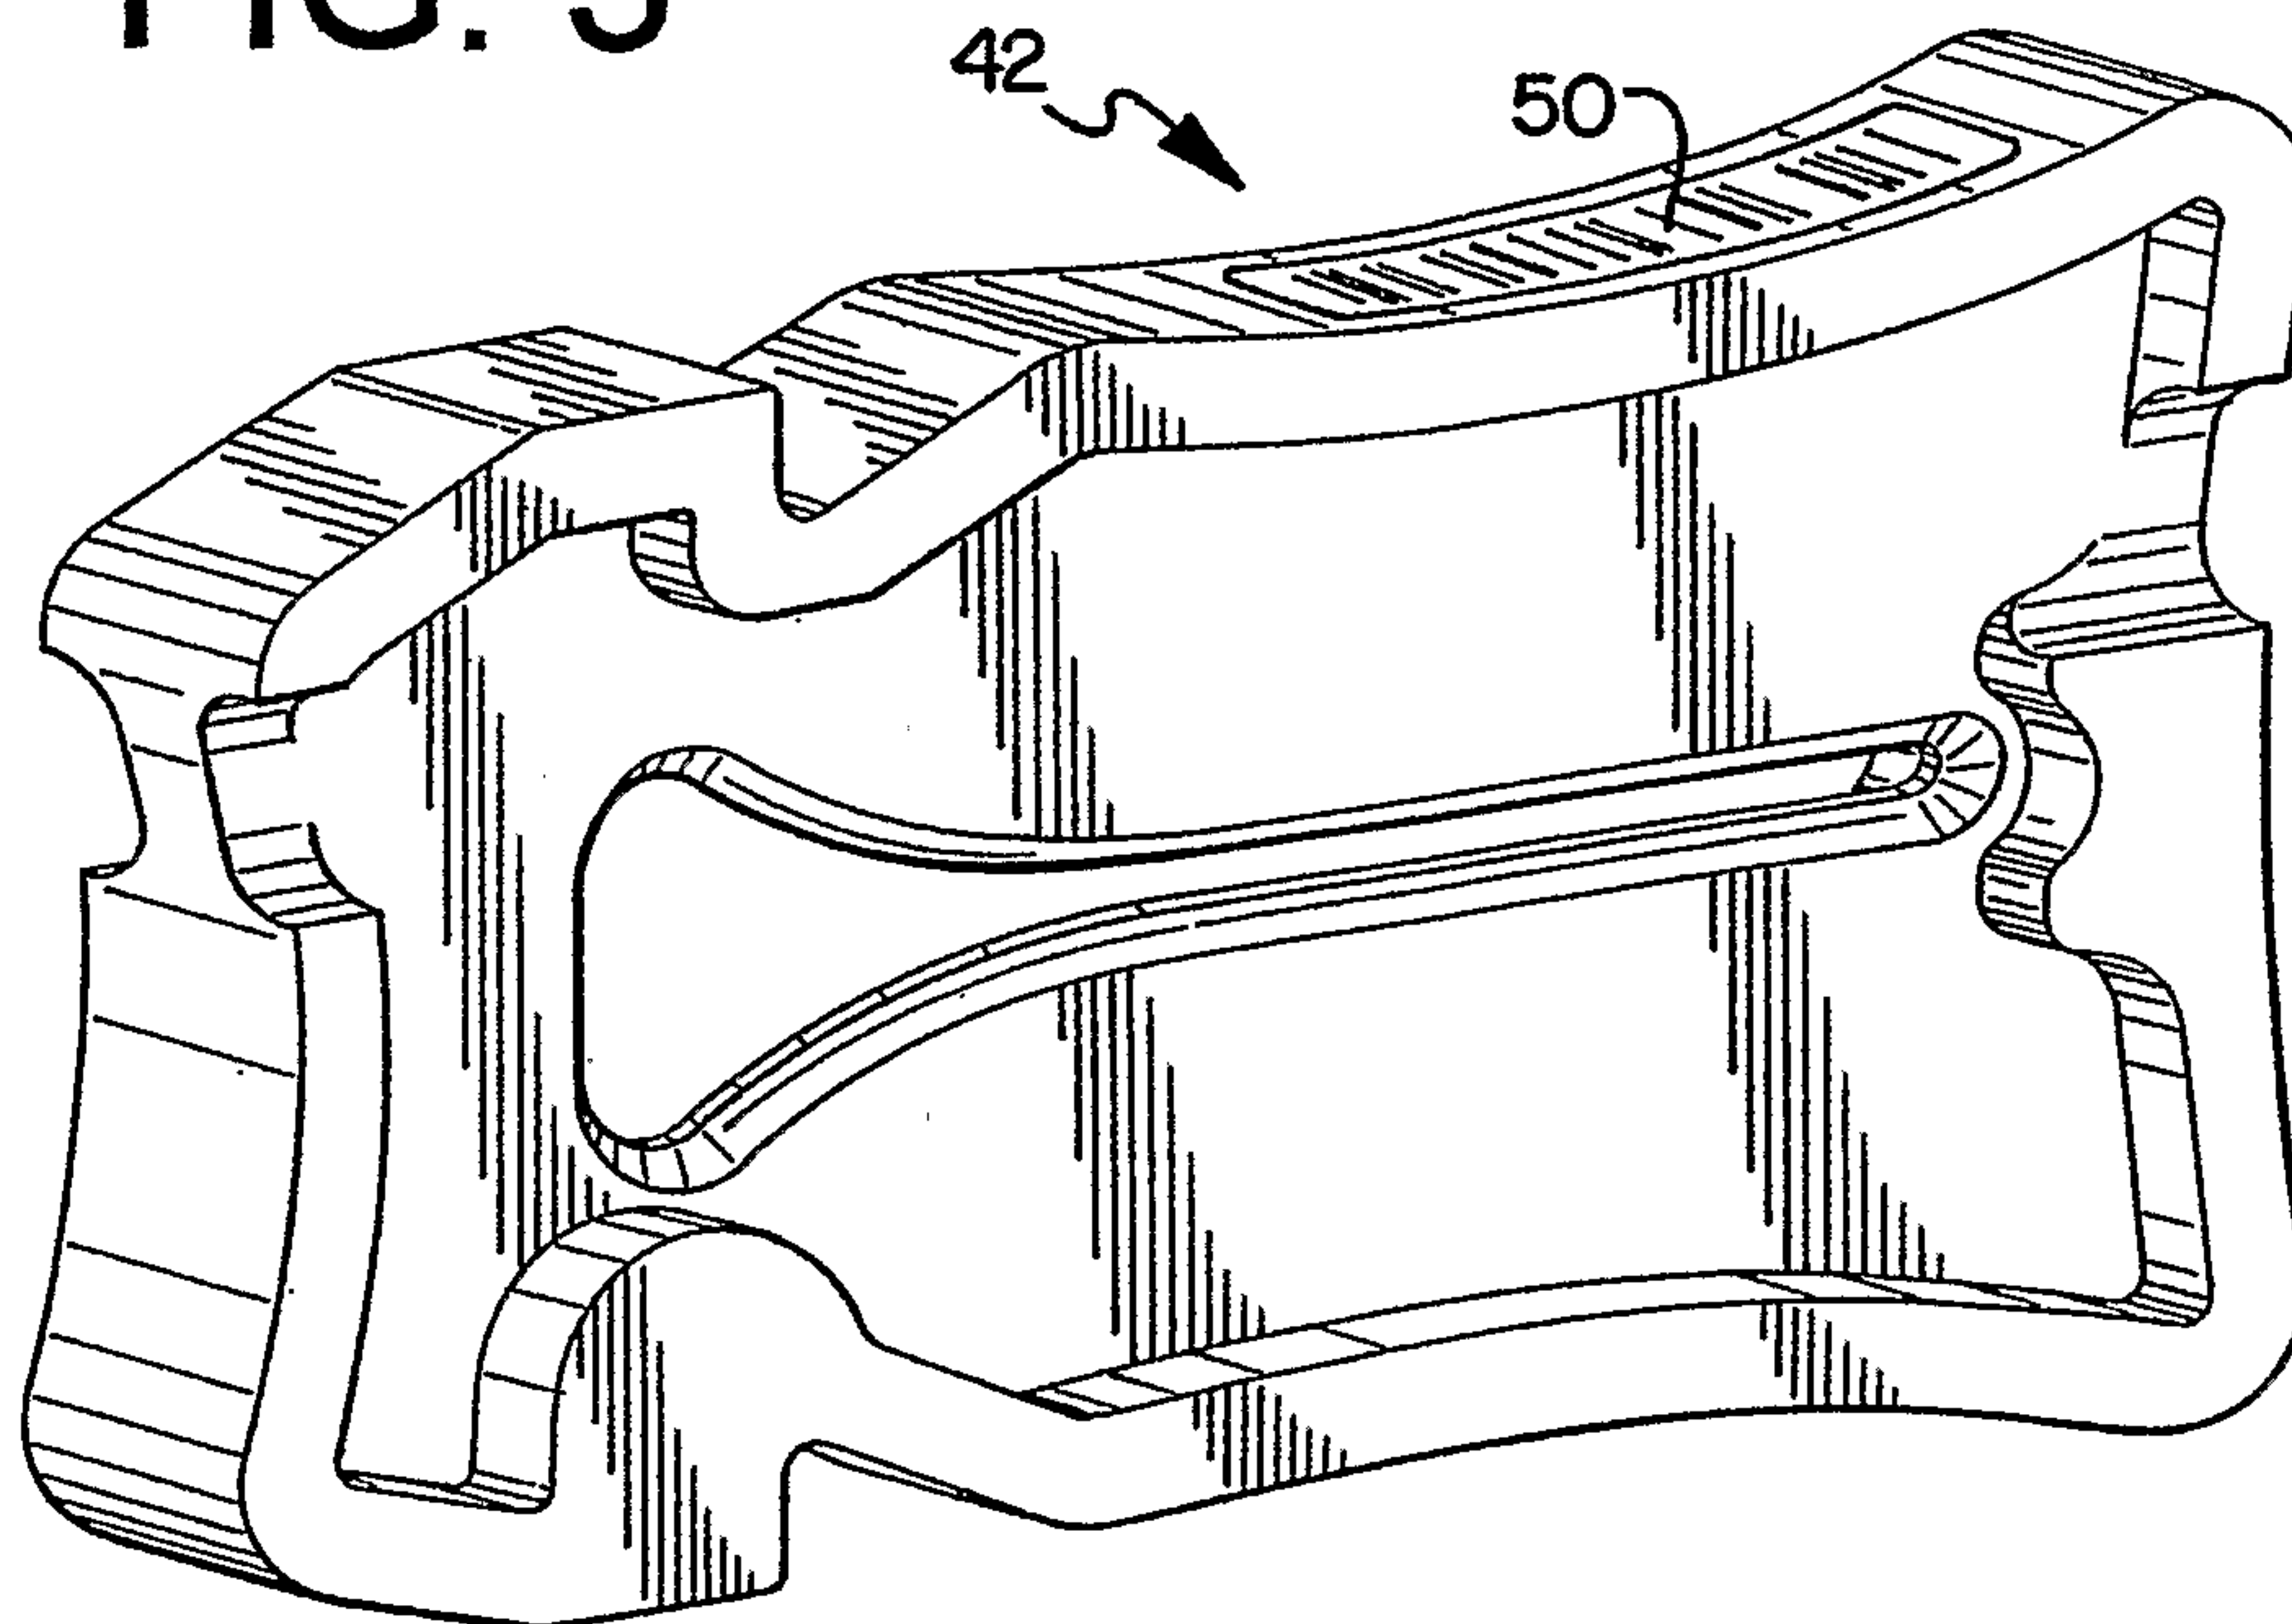


FIG. 4

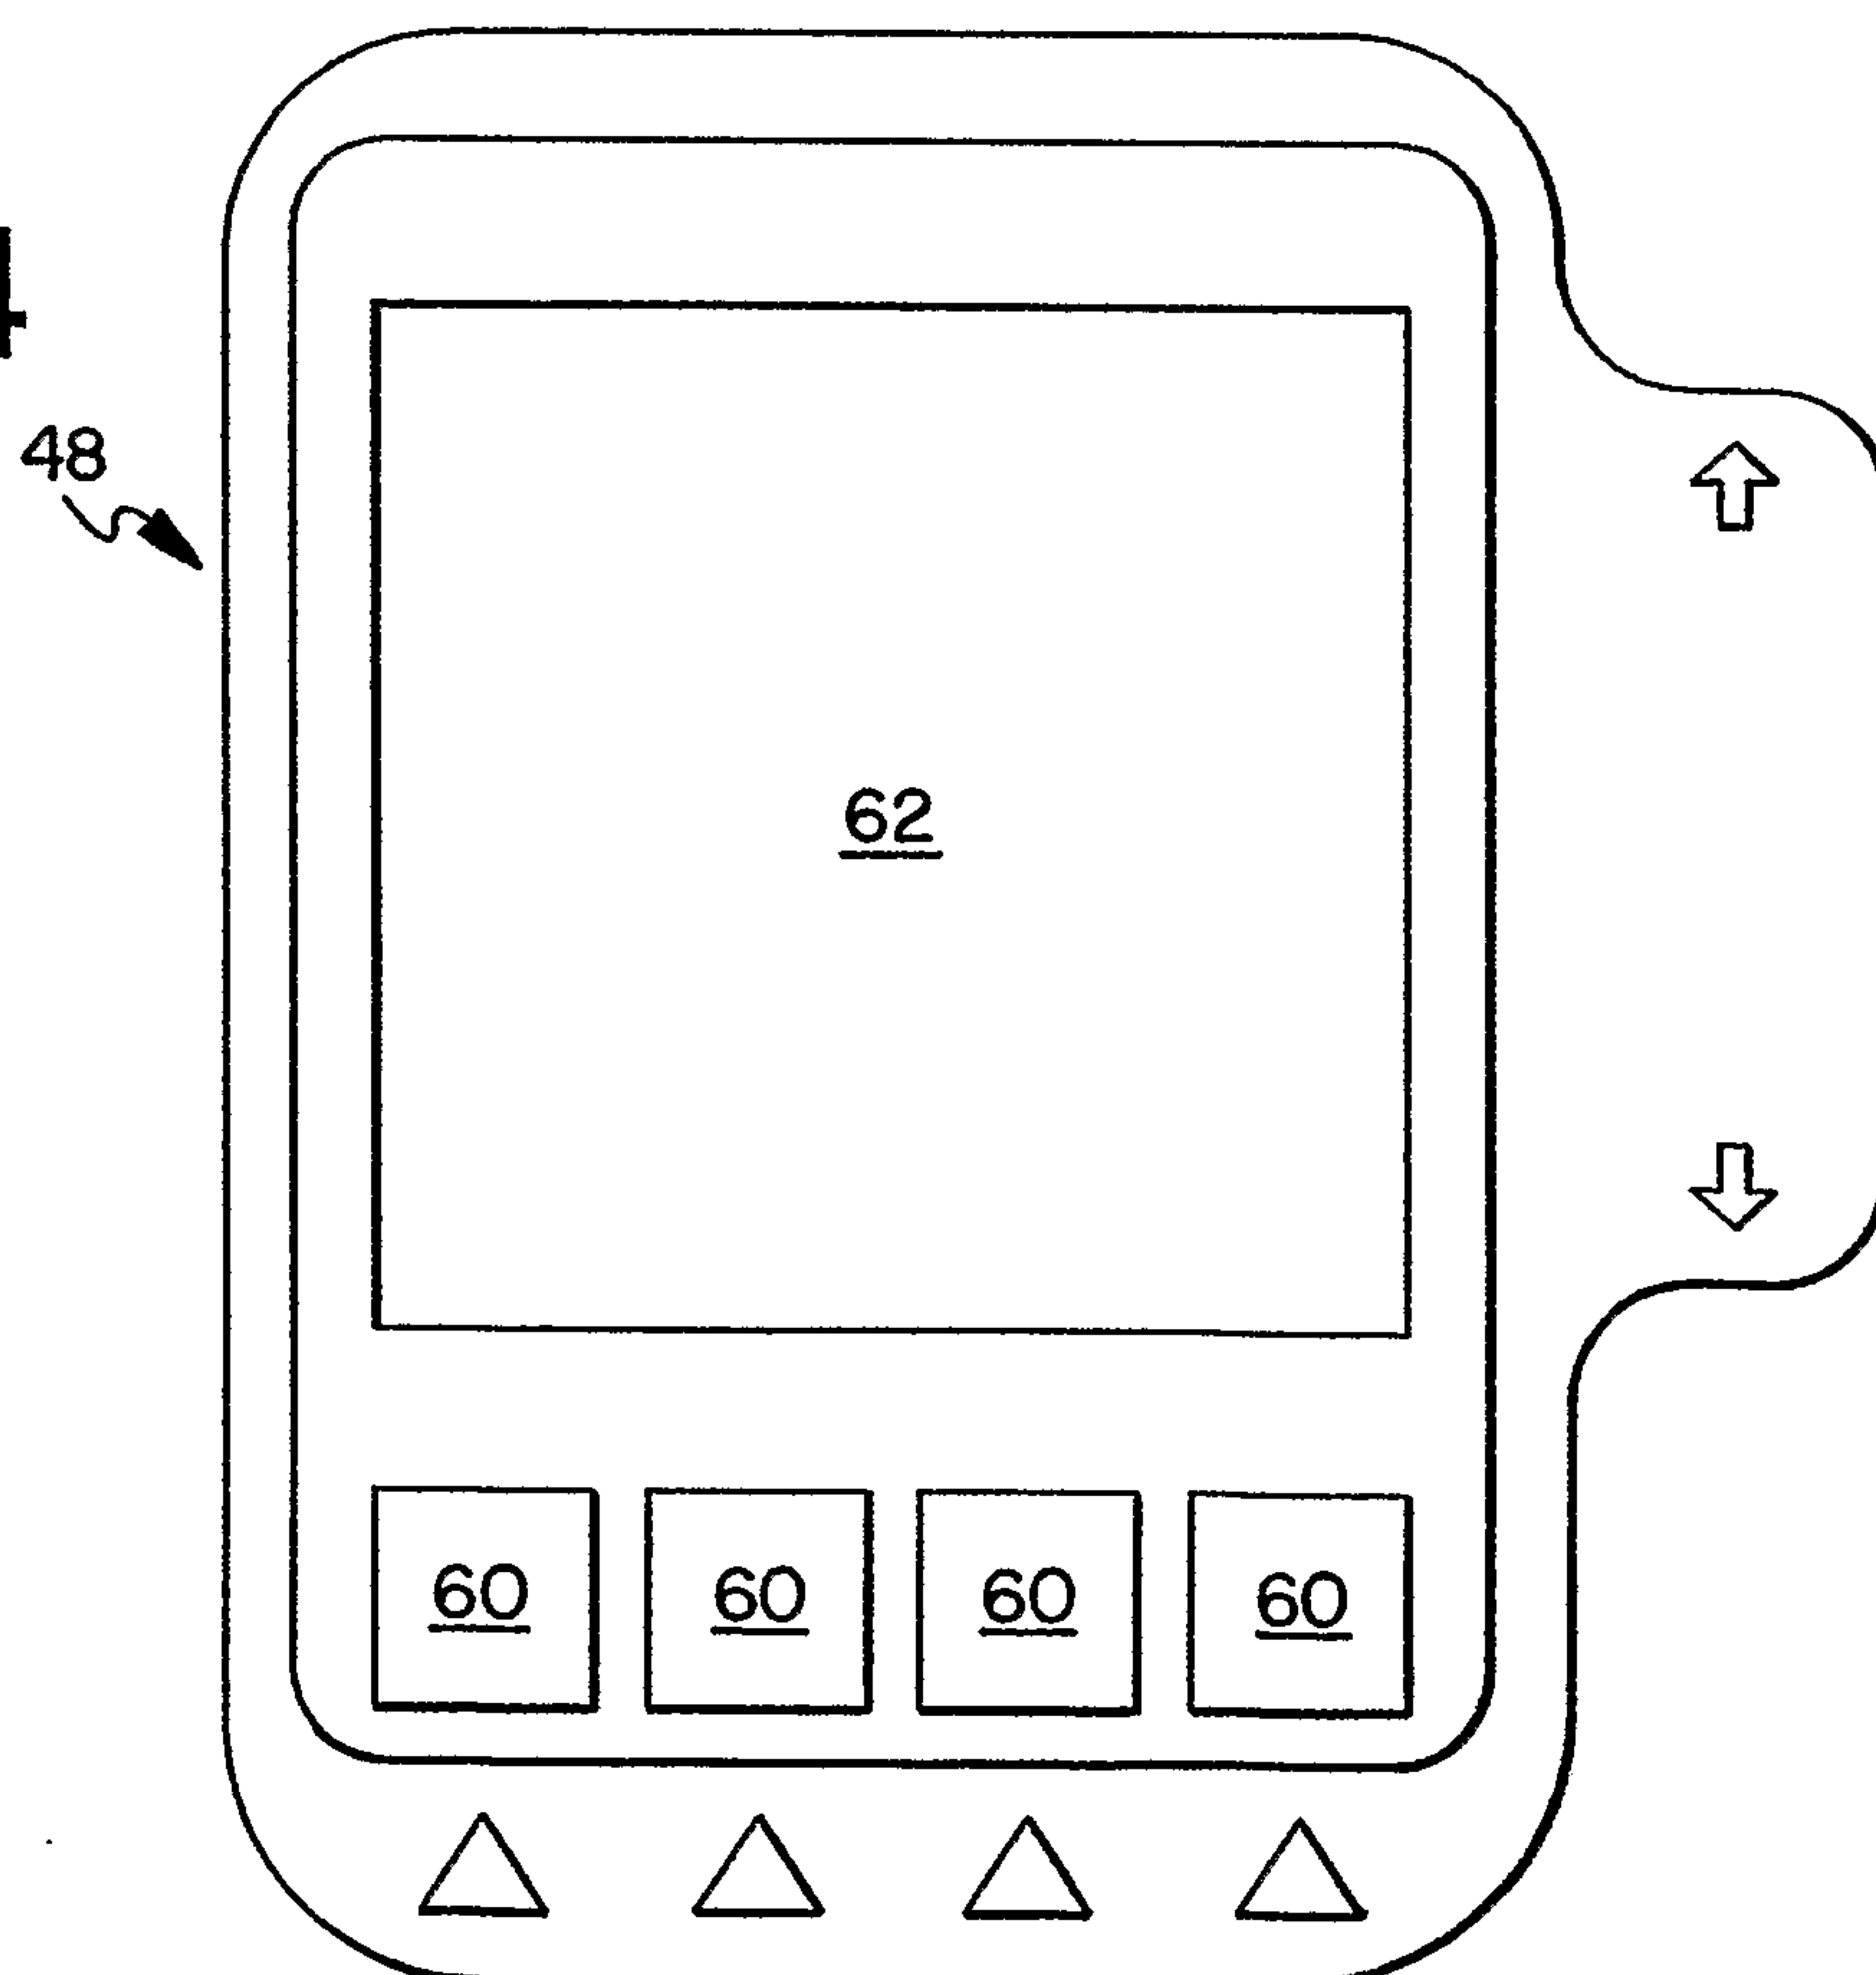

4/4

FIG. 5

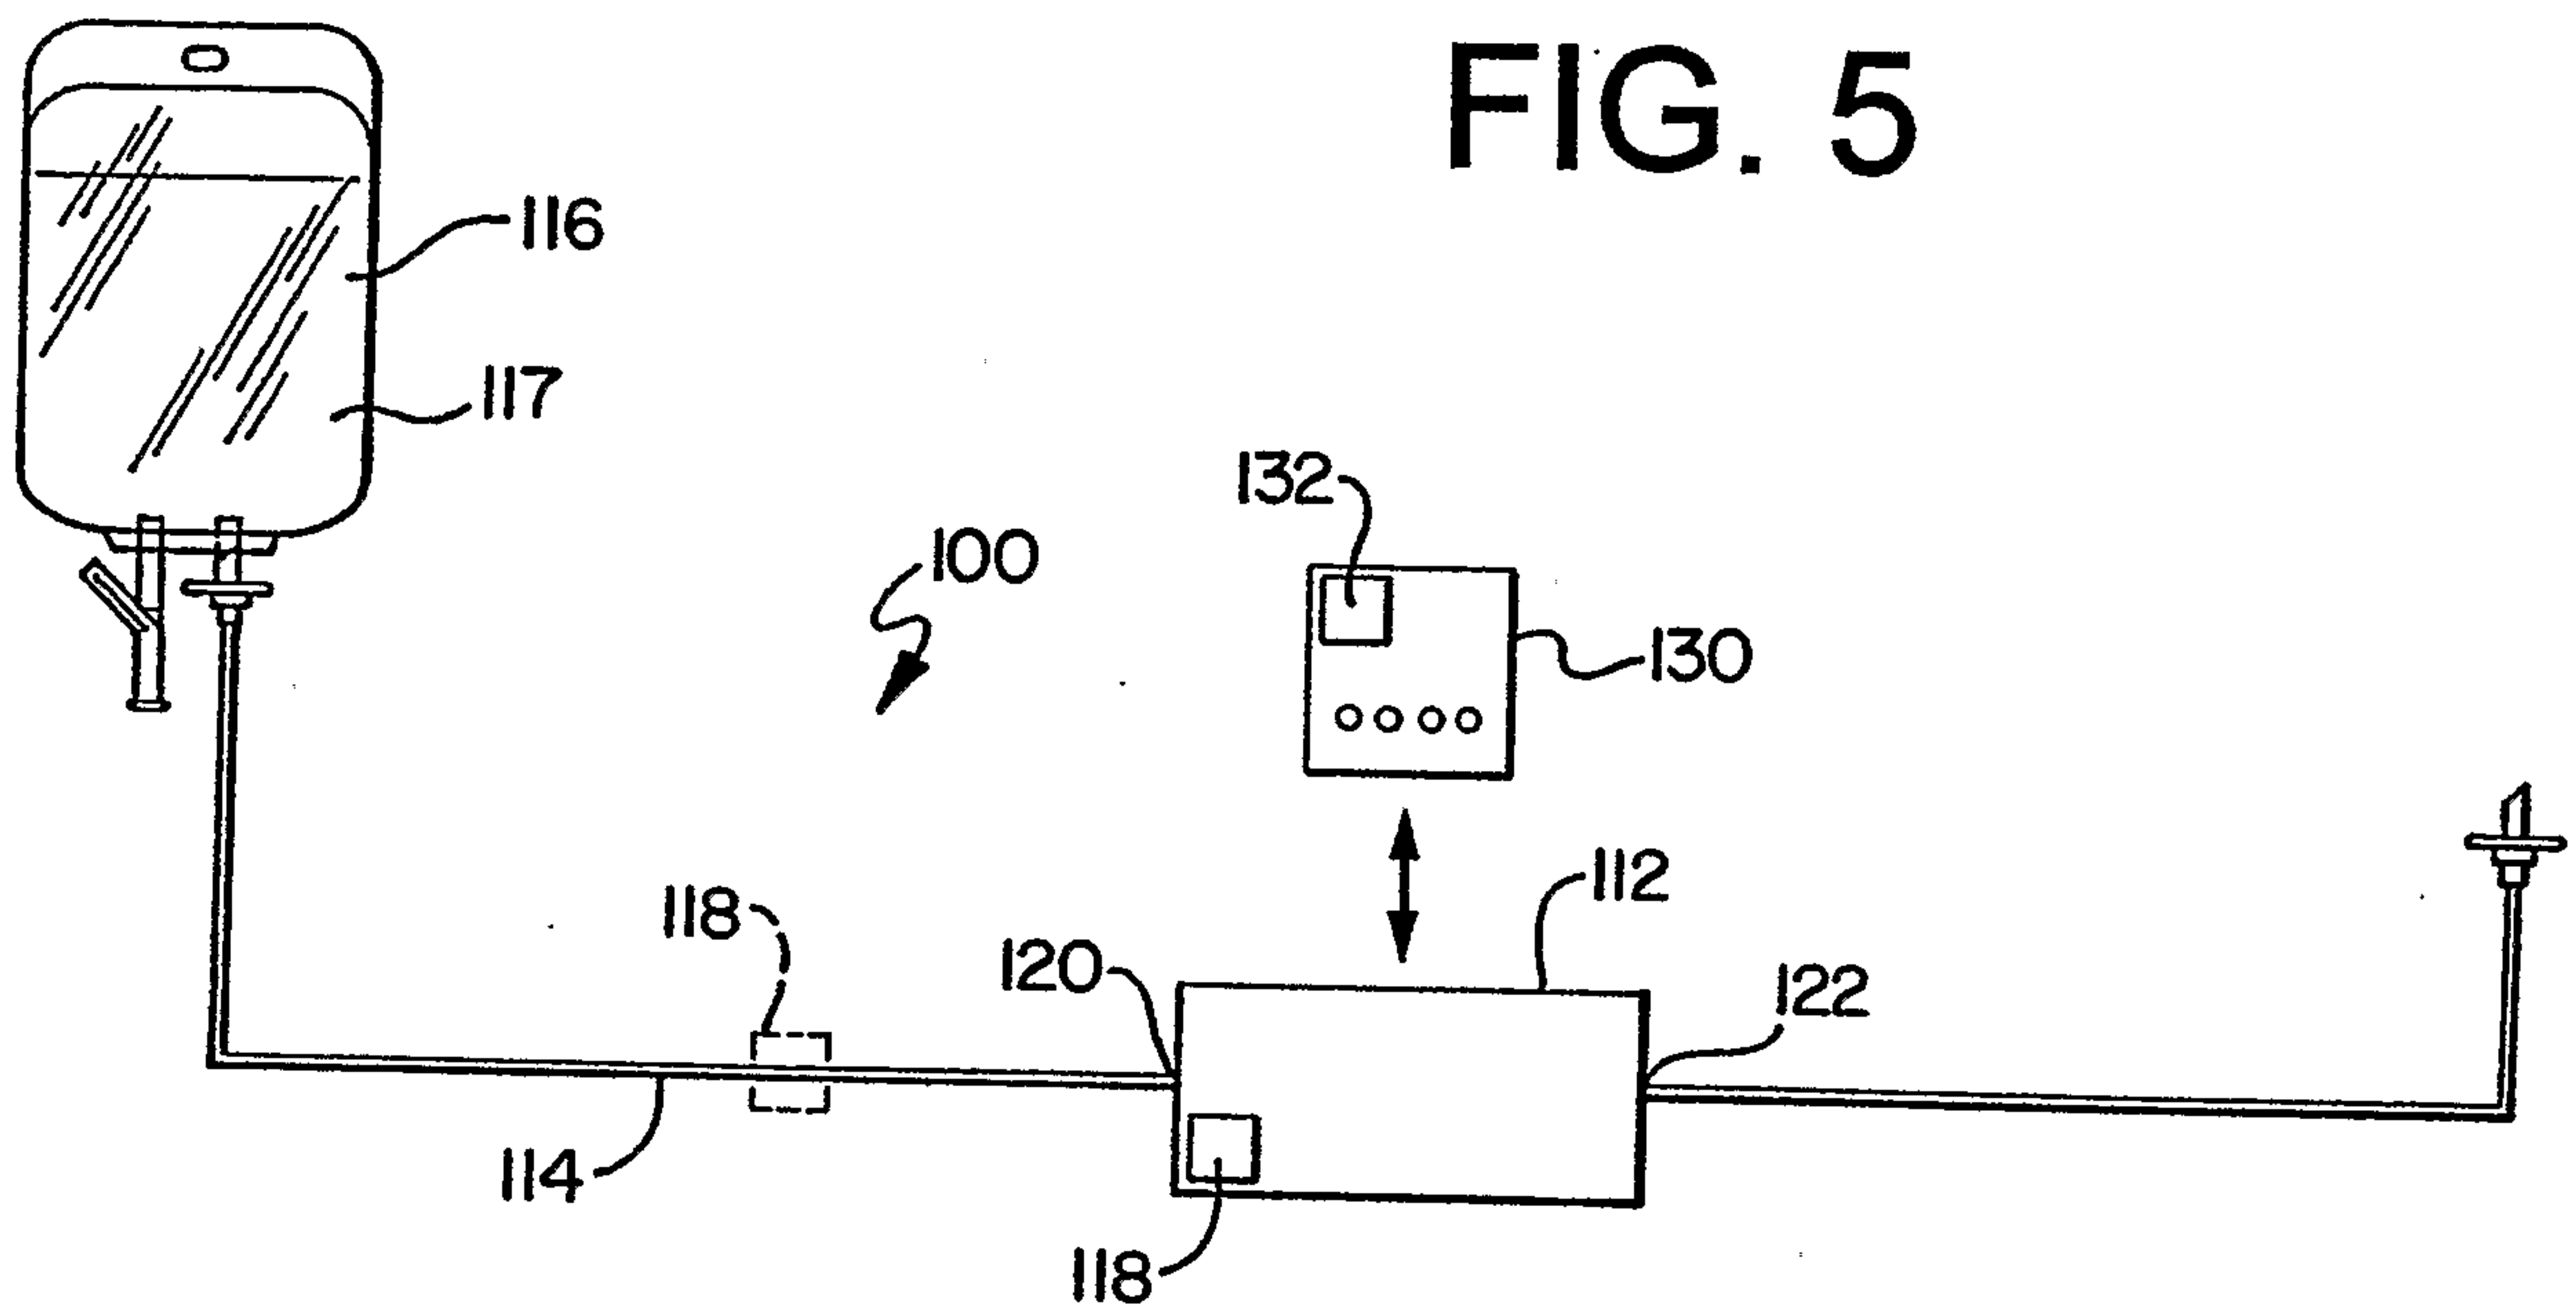


FIG. 6

