

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 September 2008 (12.09.2008)

PCT

(10) International Publication Number
WO 2008/109299 A2

- (51) International Patent Classification:
G06F 17/00 (2006.01)
- (21) International Application Number:
PCT/US2008/055037
- (22) International Filing Date:
26 February 2008 (26.02.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
- | | | |
|------------|---------------------------|----|
| 0703974.6 | 1 March 2007 (01.03.2007) | GB |
| 60/892,397 | 1 March 2007 (01.03.2007) | US |
| 0704235.1 | 5 March 2007 (05.03.2007) | GB |
| 0704227.8 | 5 March 2007 (05.03.2007) | GB |
| 0704246.8 | 5 March 2007 (05.03.2007) | GB |
| 0704225.2 | 5 March 2007 (05.03.2007) | GB |
| 11/682,281 | 5 March 2007 (05.03.2007) | US |
| 11/682,284 | 5 March 2007 (05.03.2007) | US |
- (71) Applicants (for all designated States except US): **SONY COMPUTER ENTERTAINMENT AMERICA INC.** [US/US]; 919 E. Hillsdale Blvd., Second Floor, Foster City, California 94404 (US). **SONY COMPUTER ENTERTAINMENT EUROPE LIMITED** [GB/GB]; 10 Great Marlborough Street, London W1F 7LP (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **GILLO, Tomas** [GB/GB]; 10 Great Marlborough Street, London W1F 7LP (GB). **GOODWIN, Mitchell** [GB/GB]; 10 Great Marlborough Street, London W1F 7LP (GB). **WAUGAMAN, Scott** [US/GB]; 10 Great Marlborough Street, London W1F 7LP (GB). **ZALEWSKY, Gary** [US/US]; 919 E. Hillsdale Blvd., Second Floor, Foster City, California 94404 (US). **VASS, Attila** [US/US]; 919 E. Hillsdale Blvd., Second Floor, Foster City, California 94404 (US).

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR COMMUNICATING WITH A VIRTUAL WORLD

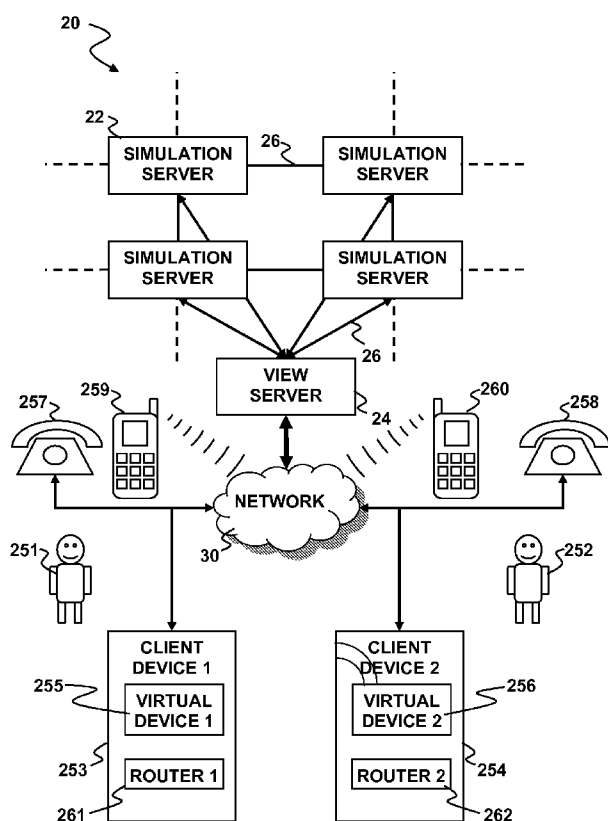


FIG. 2E

(57) Abstract: A system and method for communicating with a virtual world are disclosed. The virtual world may comprise a simulated public space and one or more private spaces. Each private space may be associated with a particular user. A user's interactions with the virtual world may be represented by one or more actions of an avatar. A communication device may be simulated in the virtual world. Communication may take place between the simulated communication device and a real communication device. The virtual world may be generated by one or more processors configured to simulate a communication device in the virtual world and communicate between the simulated communication device and a real communication device. Systems and methods for virtual world communication with avatars, custom avatar gestures, mapping of user emotional state to an avatar and routing of communications between virtual and real communication devices are also disclosed.



(74) **Agent:** ISENBERG, Joshua D.; JDI Patent, 809 Corporate Way, Fremont, California 94539 (US).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

SYSTEM AND METHOD FOR COMMUNICATING WITH A VIRTUAL WORLD

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of priority of commonly-assigned, co-pending United
5 Kingdom patent application no. 0703974.6, entitled “ENTERTAINMENT DEVICE”, filed
March 1, 2007, the entire disclosures of which are incorporated herein by reference.

This application claims the benefit of priority of commonly-assigned, co-pending United
Kingdom patent application no. 0704225.2, entitled “ENTERTAINMENT DEVICE AND
METHOD”, filed March 5, 2007, the entire disclosures of which are incorporated herein by
10 reference.

This application claims the benefit of priority of commonly-assigned, co-pending United
Kingdom patent application no. 0704235.1, entitled “ENTERTAINMENT DEVICE AND
METHOD”, filed March 5, 2007, the entire disclosures of which are incorporated herein by
reference.

15 This application claims the benefit of priority of commonly-assigned, co-pending United
Kingdom patent application no. 0704227.8, entitled “ENTERTAINMENT DEVICE AND
METHOD”, filed March 5, 2007, the entire disclosures of which are incorporated herein by
reference.

This application claims the benefit of priority of commonly-assigned, co-pending United
20 Kingdom patent application no. 0704246.8, entitled “ENTERTAINMENT DEVICE AND
METHOD”, filed March 5, 2007, the entire disclosures of which are incorporated herein by
reference.

This application claims the benefit of priority of co-pending United States Provisional patent
application no. 60/892.397, entitled “VIRTUAL WORLD COMMUNICATION SYSTEMS
25 AND METHODS”, filed March 1, 2007, the entire disclosures of which are incorporated
herein by reference.

This application is related to commonly-assigned, co-pending United States patent
application no. 11/682,281, to Tomas Gillo et al., entitled “SYSTEM AND METHOD FOR
COMMUNICATING WITH A VIRTUAL WORLD”, filed March 5, 2007, the entire
30 disclosures of which are incorporated herein by reference.

This application is related to commonly-assigned, co-pending United States patent application no. 11/682,284, to Tomas Gillo et al., entitled "SYSTEM AND METHOD FOR ROUTING COMMUNICATIONS AMONG REAL AND VIRTUAL COMMUNICATION DEVICES", filed March 5, 2007, the entire disclosures of which are incorporated herein by reference.

This application is related to commonly-assigned, co-pending United States patent application no. 11/682,287, to Tomas Gillo et al., entitled "SYSTEM AND METHOD FOR COMMUNICATING WITH AN AVATAR", filed March 5, 2007, the entire disclosures of which are incorporated herein by reference.

10 This application is related to commonly-assigned, co-pending United States patent application no. 11/682,292, to Tomas Gillo et al., entitled "MAPPING USER EMOTIONAL STATE TO AVATAR IN A VIRTUAL WORLD", filed March 5, 2007, the entire disclosures of which are incorporated herein by reference.

15 This application is related to commonly-assigned, co-pending United States patent application no. 11/682,298, to Tomas Gillo et al., entitled "AVATAR CUSTOMIZATION", attorney docket no. SCEA0701JDI05 filed March 5, 2007, the entire disclosures of which are incorporated herein by reference.

20 This application is related to commonly-assigned, co-pending United States patent application no. 11/682,299, entitled "AVATAR EMAIL AND METHODS FOR COMMUNICATING BETWEEN REAL AND VIRTUAL WORLDS", filed March 5, 2007, the entire disclosures of which are incorporated herein by reference.

FIELD OF THE INVENTION

This invention is related to interactive computer entertainment and more specifically to communication among users of a virtual world.

25 BACKGROUND OF THE INVENTION

A virtual world is a simulated environment in which users may interact with each other via one or more computer processors. Users may appear on a video screen in the form of representations referred to as avatars. The degree of interaction between the avatars and the simulated environment is implemented by one or more computer applications that govern such interactions as simulated physics, exchange of information between users, and the like.

The nature of interactions among users of the virtual world is often limited by the constraints of the system implementing the virtual world.

It is within this context that embodiments of the invention arise.

BRIEF DESCRIPTION OF THE DRAWINGS

- 5 The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1A is a screen shot illustrating an example of a world map representing a virtual world that may be used in conjunction with embodiments of the present invention.

- 10 FIG. 1B is a screen shot illustrating an example of a public space in a virtual world that may be used in conjunction with embodiments of the present invention.

FIG. 1C is a screen shot illustrating an example of a private space in a virtual world that may be used in conjunction with embodiments of the present invention.

FIG. 1D is a screen shot illustrating an example of a virtual communication device according to an embodiment of the present invention.

- 15 FIG. 1E is a schematic diagram of a virtual world system according to an embodiment of the present invention.

Figure 1F is a functional block diagram showing one implementation of a multimedia processing apparatus by which a user may perceive and interact with a virtual world according to an embodiment of the present invention.

- 20 FIG. 2A is a functional block diagram showing one implementation of the multimedia processing apparatus that may be used in conjunction with embodiments of the invention.

FIG. 2B shows an implementation of a multimedia processing system that may be used in conjunction with embodiments of the invention.

- 25 FIGs 2C-2D illustrate an image capture device including an array of microphones for use with embodiments of the invention.

FIG. 2E is a block diagram illustrating examples of call routing between real and virtual communication devices according to an embodiment of the present invention.

FIG. 2F is diagrammatically illustrates an example of communication between real and virtual communication devices in accordance with an embodiment of the present invention.

FIG. 3 is a block diagram illustrating a video game apparatus that may be used to interface with a virtual world according to an embodiment of the present invention.

- 5 FIG. 4 is a block diagram of a cell processor implementation of a video game apparatus according to an embodiment of the present invention.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

- Although the following detailed description contains many specific details for the purposes of illustration, anyone of ordinary skill in the art will appreciate that many variations and
10 alterations to the following details are within the scope of the invention. Accordingly, the exemplary embodiments of the invention described below are set forth without any loss of generality to, and without imposing limitations upon, the claimed invention.

- According to an embodiment of the present invention users may interact with a virtual world. As used herein the term virtual world means a representation of a real or fictitious
15 environment having rules of interaction simulated by means of one or more processors that a real user may perceive via one or more display devices and/or may interact with via one or more user interfaces. As used herein, the term user interface refers to a real device by which a user may send inputs to or receive outputs from the virtual world. The virtual world may be simulated by one or more processor modules. Multiple processor modules may be linked
20 together via a network. The user may interact with the virtual world via a user interface device that can communicate with the processor modules and other user interface devices via a network. Certain aspects of the virtual world may be presented to the user in graphical form on a graphical display such as a computer monitor, television monitor or similar display. Certain other aspects of the virtual world may be presented to the user in audible form on a
25 speaker, which may be associated with the graphical display.

- By way of example, the virtual world may comprise a simulated public space and one or more simulated private spaces. In some embodiments, such public and private spaces may be presented to the user via a graphic display that presents a schematic representation or map of the virtual world. By way of example, as shown in FIG. 1A, a world map **10** may indicate a
30 “home” location **11**. The home location **11** may be a private space within the virtual world that is exclusive to a particular user. Other users may “visit” the home location **11** only at the

invitation of the user associated with that location. The world map **10** may also show various other locations **12** that the user may visit, e.g., by selecting them with a cursor or similar graphical user interface. These locations may be sponsored by vendors and may be represented on the map by their respective corporate logos or other well-recognized symbols.

5 Such locations may be visited by an user of the virtual world. The virtual world may or may not have a fixed amount of virtual “real estate”. In preferred embodiments, the amount of virtual real estate is not fixed.

In certain embodiments of the present invention, the virtual world may have multiple public spaces referred to herein as “lobbies”. Each lobby may have associated with it a separate

10 chat channel so that users in the lobby may interact with one another. Each lobby may have the appearance of a lobby for a public building such as a hotel, office building, apartment building, theater or other public building. FIG. 1B depicts a screen shot of such a lobby. The lobby may contain items with which users may interact. Examples of such items include games. As may be seen from FIG. 1B, portions of the virtual world may be presented

15 graphically to the user in three-dimensional (3D) form. As used herein, the term three-dimensional (3D) form refers to a representation having the dimensions of length, width and depth (or at least the illusion of depth). The lobby may contain “screens” **13**, which are areas in spaces that can be used to show photos or canned or streaming video.

Within the virtual world, users may be represented by avatars **14**. Each avatar within the

20 virtual world may be uniquely associated with a different user. The name or pseudonym of a user may be displayed next to the avatar so that users may readily identify each other. A particular user’s interactions with the virtual world may be represented by one or more corresponding actions of the avatar. Different users may interact with each other in the public space via their avatars. An avatar representing a user could have an appearance

25 similar to that of a person, an animal or an object. An avatar in the form of a person may have the same gender as the user or a different gender. The avatar may be shown on the display so that the user can see the avatar along with other objects in the virtual world. Alternatively, the display may show the world from the point of view of the avatar without showing itself. The user’s (or avatar’s) perspective on the virtual world may be thought of as

30 being the view of a virtual camera. As used herein, a virtual camera refers to a point of view within the virtual world that may be used for rendering two-dimensional images of a 3D scene within the virtual world. Users may interact with each other through their avatars by

means of the chat channels associated with each lobby. Users may enter text for chat with other users via their user interface. The text may then appear over or next to the user's avatar, e.g., in the form of comic-book style dialogue bubbles, sometimes referred to as chat bubbles. Such chat may be facilitated by the use of a canned phrase chat system sometimes referred to as quick chat. With quick chat, a user may select one or more chat phrases from a menu.

In embodiments of the present invention, the public spaces are public in the sense that they are not uniquely associated with any particular user or group of users and no user or group of users can exclude another user from the public space. Each private space, by contrast, is associated with a particular user from among a plurality of users. A private space is private in the sense that the particular user associated with the private space may restrict access to the private space by other users. The private spaces may take on the appearance of familiar private real estate. For example, as seen in FIG. 1C a private space may be configured to resemble an apartment or private home. Virtual items may be included within the private space. Examples of virtual items include, but are not limited to, furniture **15**, decorations **16** and virtual communication devices **17**, such as a virtual radio or video screen.

In certain embodiments of the present invention, users of the virtual world, users may communicate by means of virtual communication devices. As used herein, the term virtual communication device generally refers to a virtual world simulation of a real world device using assets of the system that generates the virtual world. By way of example, as shown in FIG. 1D, a virtual communication device **18** may be presented on a display in a form that facilitates operation of the device by the user. In the example depicted in FIG. 1D, for instance, the virtual communication device has the appearance of a portable game console, e.g., a Sony Playstation Portable (PSP). Buttons on a real controller that the user uses to interact with the virtual world may be mapped to corresponding buttons **19** or other controls on the virtual communication device to facilitate interaction between the user and the virtual communication device.

A virtual communication device may have associated with it a position within the virtual world that may be fixed or movable. The communication device may be simulated by simulating an interface for the simulated communication device in the virtual world and presenting the simulated interface to a user for interaction therewith. By way of example, the virtual device may have a form or appearance in the virtual world by which it can be recognized by a user. This form or appearance may be configured to mimic that of a

corresponding real world device in a way that facilitates user interaction. For example, a virtual phone may be shown as having buttons which the user may operate by using the controller. The virtual phone may further be shown as having a speaker, a mouthpiece and perhaps a graphic display screen. The simulated communication device may be a simulated
5 hand-held communication device, such as a telephone, mobile telephone (e.g., cell phone or cordless phone), voice-over-internet-protocol (VoIP) phone, portable text message device, portable email device, portable game device, two-way radio or other hand-held device.

According to an embodiment of the present invention a virtual communication device may be simulated in the virtual world and communication may take place between the simulated
10 communication device and a real communication device. The real communication device may be a real hand-held communication device, such as a telephone, mobile telephone (e.g., cell phone or cordless phone), voice-over-internet protocol (VoIP) phone, portable text message device, portable email device, portable game device, two-way radio or other hand-held device. Preferably, the real communication device is configured to communicate with
15 other real communication devices via one or more communication channels that are independent of the virtual world. As used herein, the term “communication channel independent of the virtual world” means a channel of communication that does not require the existence of the virtual world in order for communication to take place over that channel. For example, a virtual telephone may be used to make a telephone call to a real cellular phone
20 (or vice versa) via communication assets provided by the virtual world. The real cellular phone, however, could still make calls to other real cellular phones or telephones even if the virtual world did not exist. In some embodiments, the real phone may produce a distinctive ringtone when receiving calls from a virtual phone. In alternative embodiments, the simulated and real communication devices may communicate with each other by means of
25 text messages and/or video images.

FIG. 1E is a block diagram illustrating an example of system **20** that may be used to simulate a virtual world. The system **20** includes simulation servers **22** and view servers **24**. Each simulation server **22** may include one or more processor modules that executes coded instructions that simulate some part of the virtual world. By way of example, each simulation
30 server may include one or more multiple core processors, e.g., a dual-core, quad-core or Cell processors. Although a limited number of simulation servers **22** and a single view server **24** are depicted in FIG. 1E, this configuration may be arbitrarily extended to any number of servers. The numbers of simulation servers **22** and view servers **24** may both be scaled. For

example one simulator server **22** may accommodate and many view servers **24**, or many simulation servers **22** may accommodate one view server **24**. Adding more simulation servers **24** may allow for a bigger and/or better simulation of the virtual world. Adding more view servers **24** allow the system **20** to handle more users. Of course, the system **20** may
5 accommodate both a bigger and better simulation and more users by adding more of both simulation servers **22** and view servers **24**. Theoretically the number of simulation servers **22** may be infinitely scalable. However, given a finite level of network bandwidth, the number of view servers **14** may be reasonably expected to reach a finite limit after a certain number of users due to computation and network bandwidth limitations.

10 For the purpose of example and without limitation of embodiments of the invention, examples will be described herein with respect to Cell processors. Cell processors are described in detail, e.g., in Cell Broadband Engine Architecture, copyright International Business Machines Corporation, Sony Computer Entertainment Incorporated, Toshiba Corporation August 8, 2005 a copy of which may be downloaded at <http://cell.scei.co.jp/>, the
15 entire contents of which are incorporated herein by reference. A typical Cell processor has a power processor unit (PPU) and up to 8 additional processors referred to as synergistic processing units (SPU). Each SPU is typically a single chip or part of a single chip containing a main processor and a co-processor. All of the SPUs and the PPU can access a main memory, e.g., through a memory flow controller (MFC). The SPUs can perform
20 parallel processing of operations in conjunction with a program running on the main processor. The SPUs have small local memories (typically about 256 kilobytes) that must be managed by software—code and data must be manually transferred to/from the local SPU memories. For high performance, this code and data must be managed from SPU software (PPU software involvement must be minimized). There are many techniques for managing
25 code and data from the SPU. Examples of such techniques are described e.g., in US Patent Application Number 11/238,077 to John P. Bates, Payton White and Attila Vass entitled “CELL PROCESSOR APPARATUS AND METHODS, filed September 27, 2005, US Patent Application number 11/238,095 to Richard B. Stenson and John P. Bates entitled “CELL PROCESSOR TASK AND DATA MANAGEMENT” filed September 27, 2005, US
30 Patent Application 11/238,086 to Tatsuya Iwamoto entitled “CELL PROCESSOR TASK AND DATA MANAGEMENT” filed September 27, 2005, US Patent Application number 11/238,087 to John P. Bates, Payton R. White, Richard B. Stenson, Howard Berkey, Attila Vass, Mark Cerny and John Morgan entitled SPU TASK MANAGER FOR CELL

PROCESSOR filed September 27, 2005, US Patent Application number 11/257,761 to Tatsuya Iwamoto entitled "SECURE OPERATION OF CELL PROCESSORS" filed October 24, 2005, US Patent Application number 11/461,390 to John P. Bates, Keisuke Inoue and Mark Cerny entitled CELL PROCESSOR METHODS AND APPARATUS, filed July 31,
5 2006, the entire contents of all of which are incorporated herein by reference.

The simulation servers **22** may communicate with each other and with the view servers **24** via high speed data transfer links **26**. By way of example, the data transfer links may be 10 gigabit per second Ethernet connections. The simulation servers **22** may be either remotely located with respect to each other or they may be located proximate each other. To optimize data transfer it may be desirable to locate the simulation servers **22** in fairly close physical
10 proximity, e.g., within the same room or on the same server rack. The view servers **24** receive simulation data from the simulation servers **22** and send view data to remotely distributed client devices **28** over a wide area network **30**, such as the Internet or other wide area network. The client devices **28** may be any suitable device that can communicate over
15 the network **30**. Communication over the network **30** may be slower than over the fast data links **26**.

By way of example, the client devices **28** may be video game console devices, such as the Sony PlayStation 3. Alternatively, the client devices **28** may be any computer device from handheld to workstation, etc. A handheld video game device, such as a PlayStation Portable
20 from Sony Computer Entertainment of Tokyo, Japan is one example among others of a handheld device that may be used as a client device **28** in embodiments of the present invention. The client devices **28** may send the view servers **24** instructions relating to their desired interaction with other clients' avatars and with the simulated environment. For example, a client user may wish to move his or her avatar to a different portion of the
25 simulated environment. Each client device **28** sends instructions to one of the view servers **24**. These instructions are relayed by the view servers to the simulation servers that perform the necessary computations to simulate the interactions.

Other devices **29** may also communicate with each other over the network **30**. Examples of such other devices include, telephones, cellular phones, voice over internet protocol (VoIP)
30 phones, personal computers, portable web browsers, portable email devices, text messaging devices, portable game devices and the like. Communication between such other devices **29** may be independent of the simulation servers **22** and view servers **26** that generate the virtual

world. Although the other devices **29** are not considered part of the system **20**, they may interact with it via the network **30**.

The users of the client devices **28** are often interested in things around them. The view servers **24** make sure that each client **28** receives relevant data about its surroundings in the proper order. The view servers **24** determine what the client needs based on its avatar's location, orientation, motion, etc. By way of example, each view server may generate the code and/or data that the client devices use to present views of the public spaces or private spaces.

To implement a complex simulated world, it may be desirable to establish peer-to-peer communication between clients and servers or between client devices and other client devices. For example, audio/video (A/V) chat among users in the same public space may be implemented by direct peer-to-peer communication among the users. Such peer-to-peer communication may reduce the load on the servers. Embodiments of the invention may make use of Peerlib to traverse network address translators (NATs) to establish peer-to-peer connections among users in the same public space. NAT traversal is described e.g., in US Patent Application number 11/245,853 to Yutaka Takeda, entitled "METHOD FOR PEER-TO-PEER COMMUNICATION TRAVERSING NETWORK ADDRESS TRANSLATORS OF TYPE SYMMETRIC" filed October 4, 2005, which is incorporated herein by reference.

FIG. 1F shows one implementation of a multimedia processing system **100** that may be used as a client device **28** and a user interface with the virtual world generated by the system **20**. The processing system **100** may include a composite apparatus capable of processing a plurality of contents, such as still images, moving images, music, broadcasts, and games, spread over a plurality of media. The processing of a plurality of contents includes presentation, recording, and other related tasks performed by the multimedia processing system **100**. By way of example, the multimedia processing system **100** includes a multimedia processing apparatus **102**, a display **104** (e.g., a monitor or television), and a controller **114**. Buttons on the controller **114** may be mapped to corresponding buttons **19** on the virtual controller **18** shown in FIG. 1D and described above.

The multimedia processing apparatus **102** may receive multimedia contents from various media sources, such as broadcast media, the Internet (or other network) media, an optical disk **110**, and a memory card **112**. Contents from the broadcast media may be received through a broadcast data channel **106**, while contents from the Internet media can be received through a

network data channel **108**. The broadcast and network data channels **106**, **108** may be either wireless or wired channels. The contents from the broadcast media and the Internet media can be recorded and stored by the multimedia processing apparatus **102**. The received contents can also be used by various functions (e.g., a game) of the multimedia processing apparatus **102** in addition to interaction with the virtual world.

The received multimedia contents may be displayed on the display **104**. The display may include a video monitor, such as a cathode ray tube (CRT) or flat screen for display of still or moving visual images. The display **104** may further include one or more audio speakers for presenting sounds to the user. The controller **114** allows the user to input various instructions related to multimedia processing, and to control functions of the multimedia processing apparatus **102**.

The system **100** may include audio and video inputs to facilitate user interaction with visual images and/or audible sounds presented by the display **104**. Such inputs may include a video image capture device **116**, such as a camera, and an audio signal capture device **118**, such as a microphone. The video image capture device **116** may be placed on top of or integrated into the display **104** and coupled to the multimedia processing apparatus **102**, e.g., by cables, or over-the-air connections, such as optical (e.g., infrared) or radiofrequency (e.g., Bluetooth) data links. It should be understood that the image capture device **116** may be placed in any other proximate location that will allow it to capture images that are located about in front of the display **104**. Techniques for capturing these movements and interactions can vary, but examples of such techniques are described in United Kingdom Applications GB 0304024.3 (PCT/GB2004/000693) and GB 0304022.7 (PCT/GB2004/000703), each filed on February 21, 2003, and each of which is hereby incorporated by reference. The image capture device **116** may be a digital camera, e.g. a USB 2.0 type camera. Such a camera may have a field of view of about 75 degrees, and an f-stop of about 1.5 and be capable of capturing images at a frame rate of up to about 120 frames per second. By way of example, the video image capture device may be an EyeToy Camera available from Logitech of Fremont, California. The media processing apparatus **102** may be a game console, television, digital video recorder (DVR), cable set-top-box, home media server or consumer electronic device and including any device capable of rendering itself subject to control of a user. In alternative embodiments, the image capture device may be a three-dimensional (3D) camera. As used herein, a 3D camera (or zed camera) refers to an image capture device configured to facilitate

determining the depth of objects in an image. In this context, the term “depth” refers a location of an object relative to a direction perpendicular to a plane of the image.

Figure 2A is a functional block diagram showing one implementation of the multimedia processing apparatus **102**. In the illustrated implementation, the multimedia processing apparatus **102** includes the controller **114**, video image capture device **116**, audio signal capture device **118**, a data input/output (I/O) unit **200**, a display output unit **202**, a display control unit **204**, a storage unit **208**, and a game/virtual world processor **206**. By way of example, the game/virtual world processor **206** may be or may include a parallel processor such as a cell processor having a power processing unit (PPU) coupled to one or more synergistic processing units (SPU). Cell processors are described, e.g., in US Patent Application No. 11/238,077, which is incorporated herein by reference. The multimedia processing apparatus **102** further includes programs and instructions for performing various functions, such as a data input function, a data retaining function, an image processing function, a rendering function, and other related functions.

The controller **114** may include a direction-determining unit **222** for determining one or a combination of four directions (i.e., an upward direction, a downward direction, a left direction, and a right direction) from the user input; and an instruction-determining unit **224** for determining an instruction from the user input. The instruction may include a command to present a multimedia content, to terminate the presentation, to invoke a menu screen, and to issue other related commands and/or instructions. Output of the controller **114**, video image capture device **116** and audio signal capture device **118** is directed to the display output unit **202**, the display control unit **204**, and the game/virtual world processor **206**.

In the illustrated implementations of Figures 1B and 2A, the direction-determining unit **222** and the instruction-determining unit **224** may be configured with a combination of buttons, circuits, and programs to actuate, sense, and determine the direction and the instruction. The buttons can include cross-shaped keys or joysticks. The button associated with an instruction for invoking a menu screen can be set in a toggle manner so that the menu screen can be toggled between a display mode and a non-display mode each time the button is pressed.

In one implementation, the direction-determining unit **222** may determine the diagonal movements of the button as a binary command in which the movement is ascertained to be in one of two directions. Thus, a diagonal movement between the up direction and the right direction can be ascertained to be in either the up or the right direction. In another

implementation, the direction-determining unit **222** may determine the diagonal movements of the button as an analog command in which the movement is ascertained to be in a particular direction up to the accuracy of the measurement. Thus, a diagonal movement between the up direction and the right direction can be ascertained to be in a northwesterly
5 direction. Directional movements may also be determined through interaction between the user, the video image capture device **116** and the display control **204** as described below.

The data I/O unit **200** may include a broadcast input unit **212** for inputting broadcast contents via the broadcast channel **106**; a network communication unit **214** for inputting and outputting data such as web contents via the network channel **108**; a disk reading unit **216** for
10 inputting data stored on a disk **110**; and a memory card reading unit **218** for inputting and outputting data to/from a memory card **112**. Output of the data I/O unit **200** may be directed to the display output unit **202**, the display control unit **204**, the game processor **206**, and the storage unit **208**.

The display output unit **202** may include a decoder **232**, a synthesizer **234**, an output buffer
15 **236**, and an on-screen buffer **238**. The decoder **232** decodes input data received from the data I/O unit **200** or the storage unit **208**. Thus, the input data may include broadcast contents, movies, and music. The synthesizer **234** processes the decoded input data based on user direction/instruction received from the controller **114**. The output of the synthesizer **234** is stored in the output buffer **236**. The on-screen buffer **238** may store image data of a menu
20 screen generated by the display control unit **204**. The output of the display output unit **202** is transmitted to the display **104**.

The display control unit **204** may include a menu manager **242**, an effects processor **244**, a contents controller **246**, and an image generator **248**. The menu manager **242** manages media items and multimedia contents received from the storage unit **208** and the data I/O unit **200**,
25 and shown on the menu screen. The effects processor **244** processes operation of icons and icon arrays on the menu screen. The effects processor **244** also manages various actions and effects to be displayed on the menu screen. The contents controller **246** controls processing of media items and multimedia contents, and handling of data from the data I/O unit, the storage unit **208**, and the game/virtual world processor **206**. The image generator **248**
30 operates to generate a menu screen including a medium icon array and a contents icon array.

The game/virtual world processor **206** executes game and/or virtual world programs using data read from the data I/O unit **200** or from the storage unit **208**. The game/virtual world

processor **206** executes a game program or facilitates user interaction with the virtual world based on user instructions received from the controller **114**. The display data of the executed game program or virtual world interaction is transmitted to the display output unit **202**.

In embodiments of the present invention, signals from the video image capture device **116** and audio signal capture device **118** allow a user to interact with and manipulate images shown on the display **104**. Specifically, embodiments of the invention may allow a user to “grab” and “drag” objects from one location to another on the display **104**. As shown in Figure 2B, the video image capture device **116** points at and captures an image I_U of a user U . The image I_U may then be shown on the display **104** in the background of other images through a technique known as alpha blending.

The term “alpha blending” refers generally to a convex combination of two colors allowing for transparency effects in computer graphics. The value alpha in the color code may range from 0.0 to 1.0, where 0.0 represents a fully transparent color, and 1.0 represents a fully opaque color. By way of example, the value of the resulting color when color Value1 is drawn over a background of color Value0 may be given by:

$$\text{Value} = \text{Value0}(1.0 - \text{alpha}) + \text{Value1}(\text{alpha})$$

The alpha component is used to blend to red, green and blue components equally, as in 32-bit RGBA, or, alternatively, there are three alpha values specified corresponding to each of the primary colors for spectral color filtering.

Once the user’s hand h is recognized, the effects processor may correlate the directional displacement of the user’s hand to directional input such as would normally be received from the controller **114**. Optionally a magnitude of the displacement can control the input speed.

In particular embodiments, the image I_U may include the user’s head H and hand h . It is noted that to facilitate user interaction with the image I_U the user’s image I_U may be presented on the screen as a mirror image of the user U . Thus, when the user U moves his hand h to the user’s left, an image I_h of the hand also moves to the user’s left. The effects processor **244** may be configured to recognize the user’s hand h and recognizes changes in the aspect ratio (ratio of height to width) of the hand image I_h . These changes in aspect ratio may be used to signal the controller **114** that the user has “grabbed” or “clicked” on an object **140** presented on the display. The effects processor **244** can then move the selected object with the motion of the image I_h of the user’s hand h . In some embodiments, the user may hold a deformable “C”-shaped object **142** that is colored to be more readily recognizable to

the effects processor **244** when interpreting the image from the video image capture device **116**. Deformation of the object **142**, referred to herein as a “clam” can provide a change in aspect ratio that is recognize as a command to “grab” or “click” an object in the display **104**.

It is often desirable for the effects processor **244** to be able to recognize whether the user **U** is using his left or right hand to manipulate the object **140** on the display **104**. For example, when manipulating an object on the display **104** with the left hand it is often desirable for object to appear to the left of the user’s head **H**. In such a case the controller may also include software that recognizes the users hand **h**, head **H**, his arm **A** and his chest **C** by their corresponding images **I_h**, **I_H**, **I_A**, and **I_C**. With this information, the controller **114** can determine whether the user **U** is using his left or right hand. For example, if the user’s hand **h** is on the left side of his head **H** and his arm **A** is not across his chest, it can be determined that the user **U** is using his left hand. Similarly, if the user’s hand **h** is on the left side of his head and his arm is across his chest, it can be determined that the user **U** is using his right hand.

In certain embodiments of the invention the image capture device **116** and audio signal capture device **118** may be combined into the same piece of equipment. For example, FIGs. 2C-2D depict an image capture device **120** that may be used with the multimedia processing system **100**. The device **120** includes an optical image capture device **122**, e.g., a digital camera (or 3D camera) and one or more microphones **124**. The microphones **124** may be arranged in an array and spaced apart from each other at known distances. By way of example and without loss of generality, the microphones **124** may be spaced in a linear array with adjacent microphones spaced about 2 centimeters apart center-to-center. Each microphone may have a resonant frequency of about 16 kilohertz. Such microphone arrays may be used to locate and track one or more sources of sound in conjunction with operation of the apparatus **102** and interaction with a virtual world. The use of such microphone arrays for sound source location and tracking is described, e.g., in US Patent Applications 11/381,724, 11/381,725 and 11/381,729 filed May 4, 2006, the entire disclosures of all of which are incorporated herein by reference.

In certain embodiments of the invention it is desirable for the microphones **124** to move with the image capture device **122**. For example, the microphones **124** may be mounted to a frame **126** that keeps the microphones in a fixed positional relationship with respect to the image capture device, e.g., with respect to a lens **128**. Although the microphones are depicted as

being arrayed in a horizontal linear arrangement, they may alternatively be oriented vertically or diagonally or arrayed in a two-dimensional arrangement.

In some embodiments, the device **120** may include a visible LED **130** and an infrared LED **132**. These may be used to illuminate objects in a field of view of the image capture device **122**. To facilitate capture of infrared images, the lens **128** may include a so-called “day-night” coating that transmits visible light and selected frequencies of the infrared (e.g., frequencies at around 940 nm).

By way of example, elements of the system **20** and apparatus **102** may be set up so that a user may direct his or her avatar to pick up virtual cell phone, dial number and make real call to a real or virtual phone. If the intended recipient of the call is another user of the virtual world, the system **20** and apparatus **102** may be suitably programmed to connect to that user’s virtual phone, e.g., via VoIP if that user happens to be online interacting with the virtual world at the time of the call. Elements of the system **20** and apparatus **102** may be configured to rout the call by default to the intended recipient’s virtual phone (if any). If the intended recipient is not online, the call may be re-routed to the recipient’s real communication device. Examples of real communication devices may include, but are not limited to phones (e.g., land line, cellular phone, or VoIP phone) or voice mail (which may be associated with a real or virtual phone) or any network device with VoIP capability including portable game devices and the like. Alternatively call may be routed by default to the user’s real communication device.

In such embodiments, elements of the system **20** and apparatus **102** may be used to enable intelligent two-way routing between the virtual world and real communication devices.

By way of example and without loss of generality, communication between real and virtual devices may be understood with respect to FIG. 2E and FIG. 2F. As shown in FIG. 2E, two or more users **251**, **252** may interact with a virtual world, e.g., over network **30** via the system **20**, described above with respect to FIG. 1E. Each user may interface with the system **20** over the network **30** via client devices **253**, **254**, which may be suitably configured, e.g., as described above with respect to FIG. 1F and 2A. Each client device **253**, **254** may include suitably configured hardware and/or software that generates a virtual communication devices **255**, **256**. Device avatars may represent the virtual communication devices in the virtual world. A device avatar may take on the appearance of a real device, e.g., as described above. Alternatively, the user may customize the device avatar so that it takes on an entirely arbitrary and/or fanciful appearance. The Each user **251**, **252** may also have access to real

communication devices, such as land line telephones **257, 258** and cell phones **259, 260**.

Those of skill in the art will recognize that embodiments of the present invention may be implemented with any number of users and any number of real and/or virtual communication devices.

5 Each client device **253, 254** may be provided with a configurable router **261, 262** to facilitate routing of calls among real devices and virtual devices. The routers **261, 262** may reside in software or hardware, on a server, peer-to-peer network, combination, etc. In the example depicted in FIG. 2E, the routers **261, 262** are located on the client devices **253, 254**, however this is not the only possible configuration. The routers **261, 262** may alternatively be located
10 anywhere, e.g., on the simulation servers **22**, view servers **24** or other devices connected to the network **30**. The routers **261, 262** may be accessed in a plurality of ways and from various devices, including, but not limited to, the virtual phone or communication device, real communication device, network web pages, and the like. Each router **261, 262** may be configured with one or more routing preferences to control the routing function. The routers
15 **261, 262** may implement routing preferences for either the source or the target of a communication. As used in the context of this embodiment, the “source” of a communication generally refers to the party originating a communication (e.g., the “caller” for telephone call or the “sender” for text message or email). As used in the context of this embodiment, the “target” of a communication generally refers to the intended recipient of the communication.
20 It is noted that the source or target need not be a user of the virtual world.

By way of example, suppose a first user **251** wishes to communicate with a second user **252**, e.g., using virtual communication device **255**. In this case, the first user **251** is the source of the call and the second user **252** is the target of the call. The first user’s router **261** may be configured to preferentially attempt to contact the second user **252** at virtual communication
25 device **256**. If the user is not online and using the virtual world, the first user’s router **261** may attempt to contact the second user at land line **258** and failing that, the router **261** may attempt to contact the second user **252** at his or her cell phone **260**. As an alternative example, it is noted that the second user’s router **260** may implement its own routing preference for reception of communications from the first user **251**. For example, the second
30 user’s router **262** may preferentially route calls from the first user **251** to the second user’s cell phone **260**, then to the second user’s land line **258** and then to the second user’s virtual device **256**.

In a preferred embodiment each user **251**, **252** may have one corresponding telephone number that is associated with each of that user's real and virtual communication devices. The routers **261**, **262** may route calls to a particular user's number among the user's different devices automatically. Such routing may be based on the user's preferences, the user's activity, or some combination of both. It is noted that the routers **261**, **262** may be programmed with different preferences depending on the identity of the source of the communication and/or on the identity of the target of the communication.

For example, in one mode the first user's router **261** may receive a call from a source who is calling a first user's number. In one mode, the first user **251** may provide the router **261** with information indicating that the first user **251** is online. Such information may be programmed into the multimedia processing apparatus **102**, e.g., using the controller **114**. Alternatively, the router **261** may check to see if the first user **251** is online. If so, the router may router **261** may route the "call" to the first user's virtual communication device **255**, which may be configured "ring" even if the first user **251** is online via the second user's client device **254**.

In another mode, the router **261** may be provided with information or may check to determine that the first user **251** is online and the target (e.g., the second user **252**) is offline. In such a case, the first user's router **261** may route the "call" to the second user's real communication device, e.g., land line **258** or cell phone **260**.

In another mode, the first user's router **261** may be provided information or determine that the first user **251** is online and the second user **252** is online. In such a case, a "text message" may be routed within the virtual world, e.g., to the second user's avatar OR the target second user's virtual device **256**.

In another mode, the router **261** may be provided information or may check to determine if the second user **252** is online. If the second user **252** is offline the "text message" may be routed to a real world device associated with the second user, e.g., land line **258** or cell phone **260**.

Many other permutations on the above examples are also possible. For example, in the above examples the source may place the call from within the virtual world OR within the virtual world through an avatar virtual device OR through any VOIP device or service or through any real telephone line and source.

In other configurations the above intelligent routing may take action based on user preferences so a user may want his real cell phone to ring when online not his avatar phone.

In other configurations the above intelligent routing may take action based on STATE CONTROLS so only in certain circumstances does the call route to the avatar or the real
5 phone depending on the application configuration. For example, if a target is involved in an online game and does not wish to be interrupted the call may be routed to the target's real or virtual voicemail. In yet another configuration, a call may be routed to virtual device but if the device does not ring instead of going to virtual voicemail call may be re-routed to a real device, such as a real phone.

10 As shown in FIG. 2F, embodiments of the present invention allow for a situation where the first user **251** calls the second user **252** using a real phone, e.g., land line **257** speaks into the phone and the first user's avatar **263** appears on the second user's virtual communication device **256** which is shown on the display **104** connected to the multimedia processing apparatus **102** belong to the second user **252**. The first user's name **266** may also be shown
15 on the display **104** proximate the first user's avatar **263**. The first user's spoken speech **265** may be translated to text through use of speech recognition software and/or hardware, which may be implemented on the apparatus **102**, the simulation servers **22**, view server **24** or other device. The resulting text may appear on the display **104** as text bubbles **264** proximate the first user's avatar **263**. An audio speaker **267** may play audible sounds **268** of the first user's
20 speech **265** during communication between the first and second users.

It is noted that the same routing procedure may be used for other types of messaging, e.g. text messaging or email. An advantage of this system is that real calls and/or text messages may be routed from one user to another in a way that can avoid long distance or other phone charges associated with real communication devices. The recipient's (or user's) real
25 telephone or text message device may be equipped with middleware to facilitate interaction with the virtual world supported by the system **20**.

In some embodiments, a user may be able to use a real communication device to access virtual world content. For example, a cellular phone, portable internet device, etc. may be used to make changes to the user's avatar, public space or private space. Alternatively, the
30 real communication device may be used to remotely access virtual communication device content. In particular, the real communication device may be used as an interface between the simulated communication device and a user. For example, suppose the virtual communication device is a virtual digital video recorder (DVR) located within the user's

private space. A user may access the virtual DVR to record a real or virtual event by way of a real cellular phone and electronic programming guide.

As mentioned above, communicating between the real and virtual communication devices may involve video communication. According to a particular embodiment, an image of the avatar may be displayed with the real communication device during the video
5 communication. The system that generates the virtual world may facilitate lip-synching of the avatar image to real or synthesized speech generated by the user associated with the avatar. For example, the user may record a voice message to be sent to the real device as part of a video message. The system may generate a video message of the avatar speaking the
10 voice message in which the avatar's lip movements are synchronized to the user's speech within the message. Alternatively, the user may enter text of the message into a virtual device. The system may then synthesize speech for the avatar from the text and then generate a video image of the avatar in which the avatar's lip movements are synchronized to the synthesized speech. In other embodiments, the user may record a sound and video message,
15 e.g., using the video image capture device **116** and audio signal capture device **118**.

In some embodiments, the avatars **14** may express emotion through animation, facial change, sound, particle or chat bubble change to communicate a specific emotion. Such expressions of emotion by the avatar (sometimes called "emotes") may be pre-programmed and may be triggered by user commands. In particular embodiments of the invention, emotions expressed
20 by the user during interaction with the virtual world may be mapped to emotion exhibited by the user's avatar. In certain embodiments, the user may select an emotional state that can be projected by the avatar. By way of example avatar emotes may be selected from a menu presented to the user by the apparatus **102**. If, for example, the user selects "happy", the user's avatar may be shown with a smile on its face. If the user selects "sad", the avatar may
25 be shown with a frown. Such menu-drive emotions may be somewhat awkward for a user to implement quickly. Therefore, in certain embodiments of the apparatus **102** may be configured to detect an emotional state of the user in real time and then appropriately change the features of the user's avatar to reflect that state. Such real time tracking of user emotional state can be particularly useful, e.g., for mapping user emotional state onto an avatar during
30 video communication in which an image of the user's avatar is presented to a real device.

By way of non-limiting example, the apparatus **102** may track user emotional state in real time by capturing one or more visual images of the user **U** and analyzing one or more facial features of the user using the image capture device **116**. The game/virtual world processor

206 may be programmed to analyze these images, e.g., using facial features such as the user's lips, eyes, eyelids and eyebrows, cheeks, teeth or nostrils, or body language features, e.g., stance, placement of arms or hands, to determine the user's emotional state. Such facial and/or body language analysis may be enhanced through the use of a 3D camera to generate the images.

Alternatively, user emotional stage may be tracked in real time through analysis of the user's voice stress as exhibited in user speech or other vocalizations detected by the audio signal capture device 118. Where the user communicates via text, emotional may be tracked by analysis of the text for certain words, phrases or language patterns that are indicative of emotional state. In addition, the user's emotional state may be tracked using other biometrics, such as electrocardiographic (EKG), electroencephalographic (EEG), galvanic skin response, or thermal imaging data. Such data may be obtained through appropriate sensors incorporated into the controller 114 and analyzed by appropriately configured software, hardware, or firmware incorporated into the processor 206. Thermal imaging data may also be obtained if the image capture device 116 includes an infrared imaging capability.

Once the user's emotional state has been determined various combinations of body language and facial features indicative of the emotional state may be reflected in emotes exhibited by animation of the avatar (e.g., a raised fist combined with bared teeth to indicate anger).

In some embodiments, users may wish to use customized gestures or "emotes" for their avatars. To facilitate this one or more custom gestures may be generated for the avatar. These custom gestures may then be associated with one or more user interface signals so that the user's avatar can perform the gesture on command. By way of example, the custom gesture may be generated through use of motion capture or performance capture techniques to record and digitize the user's bodily movements or mapping of the user's facial expression as the user performs the gesture. In some embodiments, the image capture device 116 may be used for this purpose. Alternatively, a commercial motion capture studio or performance capture studio may be used for this purpose.

In motion capture, the user or some other performer may wear markers near each joint to identify the motion by the positions or angles between the markers. Acoustic, inertial, LED, magnetic or reflective markers, or combinations of any of these, are tracked, optimally at least two times the rate of the desired motion, to submillimeter positions. The motion capture computer software records the positions, angles, velocities, accelerations and impulses,

providing an accurate digital representation of the motion. By way of example, an optical motion capture system may triangulate the 3D position of a marker between one or more cameras calibrated to provide overlapping projections. A passive optical system may use markers coated with a retroreflective material to reflect light back that is generated near the
5 cameras lens. The cameras sensitivity can be adjusted taking advantage of most cameras narrow range of sensitivity to light so only the bright markers will be sampled ignoring skin and fabric. Alternatively, an active optical system may be used in which the markers themselves are powered to emit their own light. Power may be sequentially provided to each marker may in phase with the capture system providing a unique identification of each
10 marker for a given capture frame at a cost to the resultant frame rate.

Performance capture differs from standard motion capture due to the interactive nature of the performance, capturing the body, the hands and facial expression all at the same time, as opposed to capturing data for reference motion and editing the motions together later.

Once the user's body movements and/or facial expression for the gesture have been digitized,
15 the digitized gesture may be used to generate coded instructions or other user interface signals for animation of the avatar so that it performs the gesture. The code or other user interface signals may be distributed to one or more other users, so that they can customize their avatars to perform the custom gesture. Customized avatar gestures may be combined with customized avatar clothing, footwear, hairstyles, ethnic characteristics and other custom
20 avatar features as a means of social identification with a particular group. In some embodiments it may be desirable to moderate the use of custom gestures, e.g., to avoid unnecessarily offending other users or breaking the law. As used herein moderating or moderation refers to enforcement of some degree of rules for acceptable behavior in the virtual world. Such moderation may be implemented by the view servers **24**, which may
25 analyze the custom gestures for rudeness or other indications of inappropriateness.

Moderating the display of the custom gesture may include restricting an ability of a particular user to make an avatar perform the custom gesture or an ability of the particular user to perceive the avatar performing the custom gesture based on predetermined criteria. Such predetermined criteria may include the age of the user or viewer of the gesture or a sensitivity
30 of the viewer to offense based on religious, ethnic or other affiliation of the viewer.

The systems and methods described above may be modified to implement communication using a virtual world according to an alternative embodiment of the invention. Specifically, an avatar may be associated with a source of an email. A user may generate an email within

the virtual world and associate one or more images of his or her avatar with the email. The email may be sent from the virtual world to a real a real device. The avatar images may be then be presented at email's destination, e.g., by self-extracting email attachment. The email may be generated, e.g., using a virtual communication device within the virtual world. By
5 way of example, and without limitation, the destination of the email may be a real communication device, e.g., any real device configured to receive email messages. The real communication device may be configured to communicate with other real communication devices via one or more communication channels that are independent of the virtual world.

By way of example, and without loss of generality, the virtual world may optionally comprise
10 a simulated public space configured to facilitate interaction among a plurality of users and one or more private spaces. Each private space is associated with a particular user of the plurality of users, e.g., as described above.

Recorded or synthesized speech may be associated with the email and presented with the one or more images at the destination. The avatar images may comprise an animation of the
15 avatar generated specifically for the email. The animation may be presented at the destination, e.g., by self-extracting email attachment. In addition, one or more gestures may be mapped to the animation of the avatar, e.g., as described above. The gestures may be mapped by recording audio and/or video of a source of the email message and mapping one or more features of the audio and/or video to one or more features of the avatar in the
20 animation.

In some embodiments a theme may be associated with virtual camera movements in the animation. By way of example, and without limitation, the theme may involve choice of virtual camera angle, tracking, panning, tilting, zoom, close-up, simulated lighting, and the like. The virtual camera position may be fixed or moving. In addition, the theme may
25 involve a choice of background scenery for the avatar.

In some embodiments, generating the email may involve tracking an emotional state of the source, e.g., as described above, and mapping the emotional state to the theme. For example, a serene or calm emotional state may be mapped to a theme characterized by fixed camera position or relatively slow virtual camera movement. An agitated or excited emotional state
30 may be mapped to a theme characterized by jarring camera movement, extreme close-ups, harsh camera angles, and the like.

Avatar email communications of the type described above may be implemented, e.g., by appropriate configuration of the system **20** of FIG. 1E and/or the multimedia apparatus **102** of FIG. 1F and FIG. 2A.

According to embodiments of the present invention, virtual world systems and methods of the type described above may be implemented using a console video game apparatus as a client device **28** and a user interface for interacting with the virtual world, e.g., as generated by elements of the system **20**. As depicted in FIG. 3, a console video game apparatus **300** may include a processor **301** and a memory **302** (e.g., RAM, DRAM, ROM, and the like). In addition, the video game apparatus **300** may have multiple processors **301** if parallel processing is to be implemented. The memory **302** includes data and game program code **304**, which may include portions that facilitate user interaction with a virtual world as described above. Specifically, the memory **302** may include inertial signal data **306** which may include stored controller path information as described above. The memory **302** may also contain stored gesture data **308**, e.g., data representing one or more gestures relevant to the game program **304**. Coded instructions executed on the processor **302** may implement a multi-input mixer **305**, which may be configured and function as described above.

The apparatus **300** may also include well-known support functions **310**, such as input/output (I/O) elements **311**, power supplies (P/S) **312**, a clock (CLK) **313** and cache **314**. The apparatus **300** may optionally include a mass storage device **315** such as a disk drive, CD-ROM drive, tape drive, or the like to store programs and/or data. The controller may also optionally include a display unit **316** and input unit **318** to facilitate interaction between the apparatus **300** and a user. The display unit **316** may be in the form of a cathode ray tube (CRT) or flat panel screen that displays text, numerals, graphical symbols or images. The user interface **318** may include a keyboard, mouse, joystick, light pen or other device. In addition, the user input **318** may include a microphone, video camera or other signal transducing device to provide for direct capture of a signal to be analyzed. The apparatus **300** may also include a network interface **319** to enable the device to communicate with virtual world servers and other similarly configured devices over a network, such as the internet. The processor **301**, memory **302**, user input **318**, network interface **319** and other components of the apparatus **300** may exchange signals (e.g., code instructions and data) with each other via a system bus **320** as shown in FIG. 3.

A microphone array **322** may be coupled to the system **300** through the I/O functions **311**. The microphone array may include between about 2 and about 8 microphones, preferably about 4 microphones with neighboring microphones separated by a distance of less than about 4 centimeters, preferably between about 1 centimeter and about 2 centimeters.

5 Preferably, the microphones in the array **322** are omni-directional microphones. An optional image capture unit **323** (e.g., a digital camera) may be coupled to the apparatus **300** through the I/O functions **311**. One or more pointing actuators **325** may be mechanically coupled to the camera to control pointing of the image capture unit. These actuators **325** may exchange signals with the processor **301** via the I/O functions **311**.

10 As used herein, the term I/O generally refers to any program, operation or device that transfers data to or from the apparatus **300** and to or from a peripheral device. Every data transfer may be regarded as an output from one device and an input into another. Peripheral devices include input-only devices, such as keyboards and mice, output-only devices, such as printers as well as devices such as a writable CD-ROM that can act as both an input and an
15 output device. The term “peripheral device” includes external devices, such as a mouse, keyboard, printer, monitor, microphone, game controller, camera, external Zip drive or scanner as well as internal devices, such as a CD-ROM drive, CD-R drive or internal modem or other peripheral such as a flash memory reader/writer, hard drive.

In certain embodiments of the invention, the apparatus **300** may include a controller **330**
20 coupled to the processor via the I/O functions **311** either through wires (e.g., a USB cable) or wirelessly, e.g., using infrared or radiofrequency (such as Bluetooth) connections. The controller **330** may have analog joystick controls **331** and conventional buttons **333** that provide control signals commonly used during playing of video games. Such video games may be implemented as processor readable data and/or instructions from the program **304**
25 which may be stored in the memory **302** or other processor readable medium such as one associated with the mass storage device **315**.

The joystick controls **331** may generally be configured so that moving a control stick left or right signals movement along the X axis, and moving it forward (up) or back (down) signals movement along the Y axis. In joysticks that are configured for three-dimensional movement,
30 twisting the stick left (counter-clockwise) or right (clockwise) may signal movement along the Z axis. These three axis - X Y and Z – are often referred to as roll, pitch, and yaw, respectively, particularly in relation to an aircraft.

In addition to conventional features, the controller **330** may include one or more inertial sensors **332**, which may provide position and/or orientation information to the processor **301** via an inertial signal. Orientation information may include angular information such as a tilt, roll or yaw of the controller **330**. By way of example, the inertial sensors **332** may include any number and/or combination of accelerometers, gyroscopes or tilt sensors. In a preferred embodiment, the inertial sensors **332** include tilt sensors adapted to sense orientation of the joystick controller with respect to tilt and roll axes, a first accelerometer adapted to sense acceleration along a yaw axis and a second accelerometer adapted to sense angular acceleration with respect to the yaw axis. An accelerometer may be implemented, e.g., as a MEMS device including a mass mounted by one or more springs with sensors for sensing displacement of the mass relative to one or more directions. Signals from the sensors that are dependent on the displacement of the mass may be used to determine an acceleration of the joystick controller **330**. Such techniques may be implemented by instructions from the game program **304** which may be stored in the memory **302** and executed by the processor **301**.

By way of example an accelerometer suitable as the inertial sensor **332** may be a simple mass elastically coupled at three or four points to a frame, e.g., by springs. Pitch and roll axes lie in a plane that intersects the frame, which is mounted to the joystick controller **330**. As the frame (and the joystick controller **330**) rotates about pitch and roll axes the mass will displace under the influence of gravity and the springs will elongate or compress in a way that depends on the angle of pitch and/or roll. The displacement and of the mass can be sensed and converted to a signal that is dependent on the amount of pitch and/or roll. Angular acceleration about the yaw axis or linear acceleration along the yaw axis may also produce characteristic patterns of compression and/or elongation of the springs or motion of the mass that can be sensed and converted to signals that are dependent on the amount of angular or linear acceleration. Such an accelerometer device can measure tilt, roll angular acceleration about the yaw axis and linear acceleration along the yaw axis by tracking movement of the mass or compression and expansion forces of the springs. There are a number of different ways to track the position of the mass and/or or the forces exerted on it, including resistive strain gauge material, photonic sensors, magnetic sensors, hall-effect devices, piezoelectric devices, capacitive sensors, and the like.

In addition, the joystick controller **330** may include one or more light sources **334**, such as light emitting diodes (LEDs). The light sources **334** may be used to distinguish one

controller from the other. For example one or more LEDs can accomplish this by flashing or holding an LED pattern code. By way of example, 5 LEDs can be provided on the joystick controller **330** in a linear or two-dimensional pattern. Although a linear array of LEDs is preferred, the LEDs may alternatively, be arranged in a rectangular pattern or an arcuate pattern to facilitate determination of an image plane of the LED array when analyzing an image of the LED pattern obtained by the image capture unit **323**. Furthermore, the LED pattern codes may also be used to determine the positioning of the joystick controller **330** during game play. For instance, the LEDs can assist in identifying tilt, yaw and roll of the controllers. This detection pattern can assist in providing a better user/feel in games, such as aircraft flying games, etc. The image capture unit **323** may capture images containing the joystick controller **330** and light sources **334**. Analysis of such images can determine the location and/or orientation of the joystick controller. Such analysis may be implemented by program code instructions **304** stored in the memory **302** and executed by the processor **301**. To facilitate capture of images of the light sources **334** by the image capture unit **323**, the light sources **334** may be placed on two or more different sides of the joystick controller **330**, e.g., on the front and on the back (as shown in phantom). Such placement allows the image capture unit **323** to obtain images of the light sources **334** for different orientations of the joystick controller **330** depending on how the joystick controller **330** is held by a user.

In addition the light sources **334** may provide telemetry signals to the processor **301**, e.g., in pulse code, amplitude modulation or frequency modulation format. Such telemetry signals may indicate which joystick buttons are being pressed and/or how hard such buttons are being pressed. Telemetry signals may be encoded into the optical signal, e.g., by pulse coding, pulse width modulation, frequency modulation or light intensity (amplitude) modulation. The processor **301** may decode the telemetry signal from the optical signal and execute a game command in response to the decoded telemetry signal. Telemetry signals may be decoded from analysis of images of the joystick controller **330** obtained by the image capture unit **323**. Alternatively, the apparatus **301** may include a separate optical sensor dedicated to receiving telemetry signals from the lights sources **334**. The use of LEDs in conjunction with determining an intensity amount in interfacing with a computer program is described, e.g., in US Patent Application Number 11/429,414, to Richard L. Marks et al., entitled "USE OF COMPUTER IMAGE AND AUDIO PROCESSING IN DETERMINING AN INTENSITY AMOUNT WHEN INTERFACING WITH A COMPUTER PROGRAM" (Attorney Docket No. SONYP052), filed May 4, 2006, which is incorporated herein by

reference in its entirety. In addition, analysis of images containing the light sources **334** may be used for both telemetry and determining the position and/or orientation of the joystick controller **330**. Such techniques may be implemented by instructions of the program **304** which may be stored in the memory **302** and executed by the processor **301**.

5 The processor **301** may use the inertial signals from the inertial sensor **332** in conjunction with optical signals from light sources **334** detected by the image capture unit **323** and/or sound source location and characterization information from acoustic signals detected by the microphone array **322** to deduce information on the location and/or orientation of the controller **330** and/or its user. For example, “acoustic radar” sound source location and
10 characterization may be used in conjunction with the microphone array **322** to track a moving voice while motion of the joystick controller is independently tracked (through the inertial sensor **332** and or light sources **334**). In acoustic radar a pre-calibrated listening zone is selected at runtime and sounds originating from sources outside the pre-calibrated listening zone are filtered out. The pre-calibrated listening zones may include a listening zone that
15 corresponds to a volume of focus or field of view of the image capture unit **323**. Examples of acoustic radar are described in detail in US Patent Application number 11/381,724, to Xiadong Mao entitled “METHODS AND APPARATUS FOR TARGETED SOUND DETECTION AND CHARACTERIZATION”, filed May 4, 2006, which is incorporated herein by reference.

20 Any number of different combinations of different modes of providing control signals to the processor **301** may be used in conjunction with embodiments of the present invention. Such techniques may be implemented by program code instructions **304** which may be stored in the memory **302** and executed by the processor **301** and may optionally include one or more instructions that direct the one or more processors to select a pre-calibrated listening zone at
25 runtime and filter out sounds originating from sources outside the pre-calibrated listening zone. The pre-calibrated listening zones may include a listening zone that corresponds to a volume of focus or field of view of the image capture unit **323**.

The program **304** may optionally include one or more instructions that direct the one or more processors to produce a discrete time domain input signal $x_m(t)$ from microphones $M_0 \dots M_M$,
30 of the microphone array **322**, determine a listening sector, and use the listening sector in a semi-blind source separation to select the finite impulse response filter coefficients to separate out different sound sources from input signal $x_m(t)$. The program **304** may also

include instructions to apply one or more fractional delays to selected input signals $x_m(t)$ other than an input signal $x_0(t)$ from a reference microphone M_0 . Each fractional delay may be selected to optimize a signal to noise ratio of a discrete time domain output signal $y(t)$ from the microphone array. The fractional delays may be selected to such that a signal from the reference microphone M_0 is first in time relative to signals from the other microphone(s) of the array. The program **304** may also include instructions to introduce a fractional time delay Δ into an output signal $y(t)$ of the microphone array so that: $y(t+\Delta) = x(t+\Delta)*b_0 + x(t-1+\Delta)*b_1 + x(t-2+\Delta)*b_2 + \dots + x(t-N+\Delta)b_N$, where Δ is between zero and ± 1 . Examples of such techniques are described in detail in US Patent Application Number 11/381,729, to Xiadong Mao, entitled "ULTRA SMALL MICROPHONE ARRAY" filed May 4, 2006, the entire disclosures of which are incorporated by reference.

The program **304** may include one or more instructions which, when executed, cause the system **300** to select a pre-calibrated listening sector that contains a source of sound. Such instructions may cause the apparatus to determine whether a source of sound lies within an initial sector or on a particular side of the initial sector. If the source of sound does not lie within the default sector, the instructions may, when executed, select a different sector on the particular side of the default sector. The different sector may be characterized by an attenuation of the input signals that is closest to an optimum value. These instructions may, when executed, calculate an attenuation of input signals from the microphone array **322** and the attenuation to an optimum value. The instructions may, when executed, cause the apparatus **300** to determine a value of an attenuation of the input signals for one or more sectors and select a sector for which the attenuation is closest to an optimum value. Examples of such a technique are described, e.g., in US Patent Application 11/381,725, to Xiadong Mao, entitled "METHODS AND APPARATUS FOR TARGETED SOUND DETECTION" filed May 4, 2006, the disclosures of which are incorporated herein by reference.

Signals from the inertial sensor **332** may provide part of a tracking information input and signals generated from the image capture unit **323** from tracking the one or more light sources **334** may provide another part of the tracking information input. By way of example, and without limitation, such "mixed mode" signals may be used in a football type video game in which a Quarterback pitches the ball to the right after a head fake head movement to the left. Specifically, a game player holding the controller **330** may turn his head to the left and

make a sound while making a pitch movement swinging the controller out to the right like it was the football. The microphone array **320** in conjunction with “acoustic radar” program code can track the user’s voice. The image capture unit **323** can track the motion of the user’s head or track other commands that do not require sound or use of the controller. The
5 sensor **332** may track the motion of the joystick controller (representing the football). The image capture unit **323** may also track the light sources **334** on the controller **330**. The user may release of the “ball” upon reaching a certain amount and/or direction of acceleration of the joystick controller **330** or upon a key command triggered by pressing a button on the controller **330**.

- 10 In certain embodiments of the present invention, an inertial signal, e.g., from an accelerometer or gyroscope may be used to determine a location of the controller **330**. Specifically, an acceleration signal from an accelerometer may be integrated once with respect to time to determine a change in velocity and the velocity may be integrated with respect to time to determine a change in position. If values of the initial position and velocity
15 at some time are known then the absolute position may be determined using these values and the changes in velocity and position. Although position determination using an inertial sensor may be made more quickly than using the image capture unit **323** and light sources **334** the inertial sensor **332** may be subject to a type of error known as “drift” in which errors that accumulate over time can lead to a discrepancy **D** between the position of the joystick
20 **330** calculated from the inertial signal (shown in phantom) and the actual position of the joystick controller **330**. Embodiments of the present invention allow a number of ways to deal with such errors.

For example, the drift may be cancelled out manually by re-setting the initial position of the controller **330** to be equal to the current calculated position. A user may use one or more of
25 the buttons on the controller **330** to trigger a command to re-set the initial position. Alternatively, image-based drift may be implemented by re-setting the current position to a position determined from an image obtained from the image capture unit **323** as a reference. Such image-based drift compensation may be implemented manually, e.g., when the user triggers one or more of the buttons on the joystick controller **330**. Alternatively, image-based
30 drift compensation may be implemented automatically, e.g., at regular intervals of time or in response to game play. Such techniques may be implemented by program code instructions **304** which may be stored in the memory **302** and executed by the processor **301**.

In certain embodiments it may be desirable to compensate for spurious data in the inertial sensor signal. For example the signal from the inertial sensor **332** may be oversampled and a sliding average may be computed from the oversampled signal to remove spurious data from the inertial sensor signal. In some situations it may be desirable to oversample the signal and
5 reject a high and/or low value from some subset of data points and compute the sliding average from the remaining data points. Furthermore, other data sampling and manipulation techniques may be used to adjust the signal from the inertial sensor to remove or reduce the significance of spurious data. The choice of technique may depend on the nature of the signal, computations to be performed with the signal, the nature of game play or some
10 combination of two or more of these. Such techniques may be implemented by instructions of the program **304** which may be stored in the memory **302** and executed by the processor **301**.

The processor **301** may perform analysis of inertial signal data **306** as described above in response to the data **306** and program code instructions of a program **304** stored and retrieved
15 by the memory **302** and executed by the processor module **301**. In addition, the processor may implement certain virtual world simulation functions described above as part of the program **304**. Specifically, the program **304** may all or part of various methods for communicating with a virtual world and/or methods for interaction with a three-dimensional virtual world and/or avatar email communication as described above. Code portions of the
20 program **304** may conform to any one of a number of different programming languages such as Assembly, C++, JAVA or a number of other languages. The processor module **301** forms a general-purpose computer that becomes a specific purpose computer when executing programs such as the program code **304**. Although the program code **304** is described herein as being implemented in software and executed upon a general purpose computer, those
25 skilled in the art will realize that the method of task management could alternatively be implemented using hardware such as an application specific integrated circuit (ASIC) or other hardware circuitry. As such, it should be understood that embodiments of the invention can be implemented, in whole or in part, in software, hardware or some combination of both.

In one embodiment, among others, the program code **304** may include a set of processor
30 readable instructions that direct the one or more processors to analyze signals from the inertial sensor **332** to generate position and/or orientation information and utilize the information during play of a video game, during communication with a virtual world or

during interaction with a three-dimensional virtual world. The program code **304** may optionally include processor executable instructions including one or more instructions which, when executed cause the image capture unit **323** to monitor a field of view in front of the image capture unit **323**, identify one or more of the light sources **334** within the field of view, detect a change in light emitted from the light source(s) **334**; and in response to detecting the change, triggering an input command to the processor **301**. The use of LEDs in conjunction with an image capture device to trigger actions in a game controller is described e.g., in US Patent Application number 10/759,782 to Richard L. Marks, filed January 16, 2004 and entitled: METHOD AND APPARATUS FOR LIGHT INPUT DEVICE, which is incorporated herein by reference in its entirety.

The program code **304** may optionally include processor executable instructions including one or more instructions which, when executed, use signals from the inertial sensor and signals generated from the image capture unit from tracking the one or more light sources as inputs to a game system, e.g., as described above. The program code **304** may optionally include processor executable instructions including one or more instructions which, when executed compensate for drift in the inertial sensor **332**.

Although embodiments of the present invention are described in terms of examples related to a video game controller **330** games, embodiments of the invention, including the system **300** may be used on any user manipulated body, molded object, knob, structure, etc, with inertial sensing capability and inertial sensor signal transmission capability, wireless or otherwise.

By way of example, embodiments of the present invention may be implemented on parallel processing systems. Such parallel processing systems typically include two or more processor elements that are configured to execute parts of a program in parallel using separate processors. By way of example, and without limitation, FIG. 4 illustrates a type of cell processor **400** according to an embodiment of the present invention. The cell processor **400** may be used as the processor **301** of FIG. 3 or in the simulation servers **22** or view servers **24** of FIG. 1E. In the example depicted in FIG. 4, the cell processor **400** includes a main memory **402**, power processor element (PPE) **404**, and a number of synergistic processor elements (SPEs) **406**. In the example depicted in FIG. 4, the cell processor **400** includes a single PPE **404** and eight SPE **406**. In such a configuration, seven of the SPE **406** may be used for parallel processing and one may be reserved as a back-up in case one of the other seven fails. A cell processor may alternatively include multiple groups of PPEs (PPE groups)

and multiple groups of SPEs (SPE groups). In such a case, hardware resources can be shared between units within a group. However, the SPEs and PPEs must appear to software as independent elements. As such, embodiments of the present invention are not limited to use with the configuration shown in FIG. 4.

- 5 The main memory **402** typically includes both general-purpose and nonvolatile storage, as well as special-purpose hardware registers or arrays used for functions such as system configuration, data-transfer synchronization, memory-mapped I/O, and I/O subsystems. In embodiments of the present invention, a video game program **403** may be resident in main memory **402**. The video program **403** may include inertial, image and acoustic analyzers and
10 a mixer configured as described with respect to FIGs. 4, 5A, 5B or 5C above or some combination of these. The program **403** may run on the PPE. The program **403** may be divided up into multiple signal processing tasks that can be executed on the SPEs and/or PPE.

- By way of example, the PPE **404** may be a 64-bit PowerPC Processor Unit (PPU) with associated caches L1 and L2. The PPE **404** is a general-purpose processing unit, which can
15 access system management resources (such as the memory-protection tables, for example). Hardware resources may be mapped explicitly to a real address space as seen by the PPE. Therefore, the PPE can address any of these resources directly by using an appropriate effective address value. A primary function of the PPE **404** is the management and allocation of tasks for the SPEs **406** in the cell processor **400**.

- 20 Although only a single PPE is shown in FIG. 4, some cell processor implementations, such as cell broadband engine architecture (CBEA), the cell processor **400** may have multiple PPEs organized into PPE groups, of which there may be more than one. These PPE groups may share access to the main memory **402**. Furthermore the cell processor **400** may include two or more groups SPEs. The SPE groups may also share access to the main memory **402**. Such
25 configurations are within the scope of the present invention.

- Each SPE **406** includes a synergistic processor unit (SPU) and its own local storage area **LS**. The local storage **LS** may include one or more separate areas of memory storage, each one associated with a specific SPU. Each SPU may be configured to only execute instructions (including data load and data store operations) from within its own associated
30 local storage domain. In such a configuration, data transfers between the local storage **LS** and elsewhere in the system **400** may be performed by issuing direct memory access (DMA)

commands from the memory flow controller (MFC) to transfer data to or from the local storage domain (of the individual SPE). The SPU are less complex computational units than the PPE **404** in that they do not perform any system management functions. The SPU generally have a single instruction, multiple data (SIMD) capability and typically process data and initiate any required data transfers (subject to access properties set up by the PPE) in order to perform their allocated tasks. The purpose of the SPU is to enable applications that require a higher computational unit density and can effectively use the provided instruction set. A significant number of SPEs in a system managed by the PPE **404** allow for cost-effective processing over a wide range of applications.

- Each SPE **406** may include a dedicated memory flow controller (MFC) that includes an associated memory management unit that can hold and process memory-protection and access-permission information. The MFC provides the primary method for data transfer, protection, and synchronization between main storage of the cell processor and the local storage of an SPE. An MFC command describes the transfer to be performed. Commands for transferring data are sometimes referred to as MFC direct memory access (DMA) commands (or MFC DMA commands).

Each MFC may support multiple DMA transfers at the same time and can maintain and process multiple MFC commands. Each MFC DMA data transfer command request may involve both a local storage address (LSA) and an effective address (EA). The local storage address may directly address only the local storage area of its associated SPE. The effective address may have a more general application, e.g., it may be able to reference main storage, including all the SPE local storage areas, if they are aliased into the real address space.

To facilitate communication between the SPEs **406** and/or between the SPEs **406** and the PPE **404**, the SPEs **406** and PPE **404** may include signal notification registers that are tied to signaling events. The PPE **404** and SPEs **406** may be coupled by a star topology in which the PPE **404** acts as a router to transmit messages to the SPEs **406**. Alternatively, each SPE **406** and the PPE **404** may have a one-way signal notification register referred to as a mailbox. The mailbox can be used by an SPE **406** to host operating system (OS) synchronization.

The cell processor **400** may include an input/output (I/O) function **408** through which the cell processor **400** may interface with peripheral devices, such as a microphone array **412** and optional image capture unit **413** and a game/virtual world controller **730**. The controller unit

730 may include an inertial sensor 732, and light sources 734. In addition an Element Interconnect Bus 410 may connect the various components listed above. Each SPE and the PPE can access the bus 410 through a bus interface units BIU. The cell processor 400 may also includes two controllers typically found in a processor: a Memory Interface Controller
5 MIC that controls the flow of data between the bus 410 and the main memory 402, and a Bus Interface Controller BIC, which controls the flow of data between the I/O 408 and the bus 410. Although the requirements for the MIC, BIC, BIUs and bus 410 may vary widely for different implementations, those of skill in the art will be familiar their functions and circuits for implementing them.

10 The cell processor 400 may also include an internal interrupt controller IIC. The IIC component manages the priority of the interrupts presented to the PPE. The IIC allows interrupts from the other components the cell processor 400 to be handled without using a main system interrupt controller. The IIC may be regarded as a second level controller. The main system interrupt controller may handle interrupts originating external to the cell
15 processor.

In embodiments of the present invention, certain computations that facilitate interaction with the virtual world, may be performed in parallel using the PPE 404 and/or one or more of the SPE 406. Such computations may be run as one or more separate tasks that different SPE 406 may take as they become available.

20 While the above is a complete description of the preferred embodiment of the present invention, it is possible to use various alternatives, modifications and equivalents. Therefore, the scope of the present invention should be determined not with reference to the above description but should, instead, be determined with reference to the appended claims, along with their full scope of equivalents. Any feature described herein, whether preferred or not,
25 may be combined with any other feature described herein, whether preferred or not. In the claims that follow, the indefinite article “A”, or “An” refers to a quantity of one or more of the item following the article, except where expressly stated otherwise. The appended claims are not to be interpreted as including means-plus-function limitations, unless such a limitation is explicitly recited in a given claim using the phrase “means for.”

WHAT IS CLAIMED IS:

- 1 1. A method for communicating with a virtual world, wherein the virtual world comprises a
2 simulated public space configured to facilitate interaction among a plurality of users and
3 one or more private spaces, wherein each private space is associated with a particular user
4 of the plurality of users, the method comprising:
5 simulating a communication device in the virtual world; and
6 communicating between the simulated communication device and a real communication
7 device.
- 1 2. The method of claim 1 wherein the real communication device is configured to
2 communicate with other real communication devices via one or more communication
3 channels that are independent of the virtual world.
- 1 3. The method of claim 1 wherein simulating the communication device comprises
2 simulating an interface for the simulated communication device in the virtual world and
3 presenting the simulated interface to a user for interaction therewith.
- 1 4. The method of claim 1 wherein the public space is configured to resemble a lobby.
- 1 5. The method of claim 1 wherein one or more of the private spaces include one or more
2 private spaces configured to resemble an apartment.
- 1 6. The method of claim 1 wherein the simulated communication device is a simulated hand-
2 held communication device.
- 1 7. The method of claim 6 wherein the simulated hand-held communication device is a
2 simulated telephone, mobile telephone, text message device, email device or two-way
3 radio.
- 1 8. The method of claim 1 wherein the real communication device is a real hand-held
2 communication device.
- 1 9. The method of claim 8 wherein the real hand-held communication device is a real
2 telephone, mobile telephone, text message device, email device or two-way radio.

- 1 10. The method of claim 1 wherein communicating between the simulated communication
2 device and the real communication device comprises making a telephone call between a
3 real telephone and a simulated telephone.
- 1 11. The method of claim 1 wherein communicating between the simulated communication
2 device and the real communication device comprises sending one or more text messages
3 between the simulated and real communication devices.
- 1 12. The method of claim 1 further comprising associating an avatar with a particular user of
2 the virtual world and representing the particular user's interactions with the virtual world
3 by one or more corresponding actions of the avatar.
- 1 13. The method of claim 1 wherein communicating between the simulated communication
2 device and the real communication device comprises accessing virtual communication
3 device content using the real communication device.
- 1 14. The method of claim 1 wherein the virtual world is a three-dimensional virtual world.
- 1 15. The method of claim 1 wherein communicating between the simulated communication
2 device and a real communication device comprises using the real communication device
3 as an interface between the simulated communication device and a user.
- 1 16. The method of claim 1 wherein communicating between the simulated communication
2 device and a real communication device comprises determining whether an intended
3 recipient of the communication is a user of the virtual world, determining whether the
4 intended recipient is interacting with the virtual world at the time of the communication,
5 and, if the intended recipient is interacting with the virtual world at the time of the
6 communication, contacting the intended recipient via a simulated communication device
7 that is simulated on a real device that the intended recipient is using to interact with the
8 virtual world.
- 1 17. The method of claim 1 wherein communicating between the simulated communication
2 device and a real communication device comprises determining whether an intended
3 recipient of the communication is a user of the virtual world, determining whether the
4 intended recipient is interacting with the virtual world at the time of the communication,
5 and, if intended recipient is not interacting with the virtual world at the time of the

6 communication, leaving a message with the intended recipient on a real communication
7 device or a simulated communication device that is simulated on a real device that the
8 intended recipient is using to interact with the virtual world.

1 18. The method of claim 1 wherein communicating between the simulated communication
2 device and a real communication device comprises determining whether an intended
3 recipient of the communication is a user of the virtual world, determining whether the
4 intended recipient is interacting with the virtual world at the time of the communication,
5 and, if the intended recipient is not interacting with the virtual world at the time of the
6 communication, contact the intended recipient via a real communication device, wherein
7 the real communication device is configured to communicate with other real
8 communication devices via one or more communication channels that are independent of
9 the virtual world.

1 19. A method for communicating with a virtual world, wherein the virtual world comprises a
2 simulated public space configured to facilitate interaction among a plurality of users and
3 one or more private spaces, wherein each private space is associated with a particular user
4 of the plurality of users, the method comprising:
5 associating an avatar with a particular user of the virtual world and representing the
6 particular user's interactions with the virtual world by one or more corresponding actions
7 of the avatar; and
8 communicating between the virtual world and a real communication device, wherein the
9 real communication device is configured to communicate with other real communication
10 devices via one or more communication channels that are independent of the virtual
11 world.

1 20. The method of claim 19 wherein communicating between the real world and the virtual
2 world comprises changing one or more properties associated with the avatar, public space
3 or private space via the real device.

1 21. The method of claim 19 wherein communicating between the virtual world and a real
2 communication device comprises communicating between the real communication device
3 and a simulated communication device in the virtual world.

1 22. The method of claim 21 wherein communicating between the real communication device
2 and the simulated communication device comprises sending one or more text messages
3 between the real communication device and the simulated communication device.

1 23. The method of claim 21 wherein communicating between the virtual world and the real
2 communication device comprises establishing voice communication between the
3 simulated communication device and the real communication device.

1 24. The method of claim 23 wherein establishing voice communication between the
2 simulated and real communication devices comprises making a telephone call between a
3 simulated telephone and a real telephone.

1 25. The method of claim 24 wherein the real telephone is configured to produce a distinctive
2 ringtone when receiving a telephone call from the simulated communication device,
3 wherein the distinctive ringtone is different from an ordinary ringtone that the real
4 telephone makes when receiving telephone calls from elsewhere.

1 26. The method of claim 21 wherein the simulated communication device is a simulated
2 video recorder.

1 27. The method of claim 26 wherein communicating between the real communication device
2 and the simulated communication device comprises using the real communication device
3 as an interface between the simulated video recorder and a user.

1 28. The method of claim 26 wherein using the real communication device as an interface
2 comprises setting the simulated video recorder to record a real or simulated video event
3 using the real communication device.

1 29. The method of claim 28 wherein the real communication device is a phone, cell phone,
2 portable game player, personal digital assistant or portable email device.

1 30. The method of claim 21 wherein communicating between the real and virtual
2 communication devices comprises video communication.

1 31. The method of claim 30 wherein video communication comprises displaying an image of
2 the avatar with the real communication device during the video communication.

1 32. The method of claim 31, further comprising lip-synching the avatar to real or synthesized
2 speech generated by the particular user associated with the avatar.

1 33. The method of claim 32, further comprising mapping emotion expressed by the user to
2 emotion exhibited by the avatar.

1 34. The method of claim 33 wherein mapping emotion expressed by the user comprises
2 capturing one or more visual images of the user and analyzing one or more facial features
3 of the user.

1 35. The method of claim 34 wherein capturing one or more visual images of the user during
2 the video communication and analyzing one or more facial features of the user comprises
3 the use of a 3D camera.

1 36. The method of claim 33 wherein mapping emotion expressed by the user comprises
2 analyzing a voice stress of the user.

1 37. The method of claim 33 wherein mapping emotion expressed by the user comprises
2 analyzing biometric data indicative of the user's emotional state during a user portion of
3 the video communication.

1 38. The method of claim 37 wherein the biometric data comprises electrocardiographic
2 (EKG), electroencephalographic (EEG), galvanic skin response, or thermal imaging data.

1 39. The method of claim 33 wherein mapping emotion expressed by the user comprises
2 tracking an emotional state of the user in real time during a user portion of the video
3 communication.

1 40. A system for communicating with a virtual world, comprising
2 one or more processors configured to generate a virtual world, wherein the virtual world
3 comprises a simulated public space configured to facilitate interaction among a plurality
4 of users and one or more private spaces, wherein each private space is associated with a
5 particular user of the plurality of users, the one or more processors being further
6 configured to:
7 simulate a communication device in the virtual world; and

8 communicate between the simulated communication device and a real communication
9 device.

1 41. The system of claim 40 wherein the real communication device is configured to
2 communicate with other real communication devices via one or more communication
3 channels that are independent of the virtual world.

1 42. The system of claim 40 wherein the public space is configured to resemble a lobby.

1 43. The system of claim 40 wherein one or more of the private spaces include one or more
2 private spaces configured to resemble an apartment.

1 44. The system of claim 40 wherein the simulated communication device is a simulated hand-
2 held communication device.

1 45. The system of claim 44 wherein the simulated hand-held communication device is a
2 simulated telephone, mobile telephone, text message device, email device or two-way
3 radio.

1 46. The system of claim 40 wherein the real communication device is a real hand-held
2 communication device.

1 47. The system of claim 46 wherein the real hand-held communication device is a real
2 telephone, mobile telephone, text message device, email device or two-way radio.

1 48. The system of claim 40 wherein the simulated communication device is a simulated
2 telephone configured to communicate with a real telephone.

1 49. The system of claim 40 wherein the simulated communication device is a simulated text
2 messaging device configured to communicate with a real text messaging device by way
3 of one or more text messages.

1 50. The system of claim 40 wherein the simulated communication device is configured to:
2 determine whether an intended recipient of a communication is a user of the virtual
3 world,
4 determine whether the intended recipient is interacting with the virtual world at the
5 time of the communication, and,
6 if the intended recipient is interacting with the virtual world at the time of the

7 communication, contact the intended recipient via a simulated communication device that
8 is simulated on a real device that the intended recipient is using to interact with the virtual
9 world.

1 51. The system of claim 40 wherein the simulated communication device is configured to
2 determine whether an intended recipient of the communication is a user of the virtual
3 world,
4 determine whether the intended recipient is interacting with the virtual world at the
5 time of the communication, and,
6 if the intended recipient is not interacting with the virtual world at the time of the
7 communication, leave a message with the intended recipient on a real communication
8 device or a simulated communication device that is simulated on a real device that the
9 intended recipient is using to interact with the virtual world.

1 52. The system of claim 40 wherein the simulated communication device is configured to
2 determine whether an intended recipient of the communication is a user of the virtual
3 world,
4 determine whether the intended recipient is interacting with the virtual world at the
5 time of the communication, and,
6 if the intended recipient is not interacting with the virtual world at the time of the
7 communication, contact the intended recipient via a real communication device, wherein
8 the real communication device is configured to communicate with other real
9 communication devices via one or more communication channels that are independent of
10 the virtual world.

1 53. The system of claim 40 wherein the one or more processors are further configured to
2 associate an avatar with a particular user of the virtual world and represent the particular
3 user's interactions with the virtual world by one or more corresponding actions of the
4 avatar.

1 54. The system of claim 40 wherein the one or more processors are configured such that the
2 real communication can access virtual communication device content.

1 55. The system of claim 40 wherein the virtual world is a three-dimensional virtual world.

1 56. The system of claim 40 wherein the one or more processors are configured such that the
2 real communication device can be used as an interface between the simulated
3 communication device and a user.

1 57. The system of claim 40 wherein the one or more processors comprises a cell processor.

1 58. The system of claim 40 wherein the real communication device is a telephone, cellular
2 phone, personal digital assistant, camera, voice recorder, portable email device, portable
3 internet access device, portable game device or personal computer.

1 59. The system of claim 40, further comprising a user interface coupled to the one or more
2 processors, wherein the user interface is configured to facilitate interaction between the
3 user and the virtual world.

1 60. A system for communicating with a virtual world, comprising:
2 one or more processors configured to generate a virtual world, wherein the virtual world
3 comprises a simulated public space configured to facilitate interaction among a plurality
4 of users and one or more private spaces, wherein each private space is associated with a
5 particular user of the plurality of users, the one or more processors being further
6 configured to:
7 associate an avatar with a particular user of the virtual world and represent the particular
8 user's interactions with the virtual world by one or more corresponding actions of the
9 avatar; and
10 communicate between the virtual world and a real communication device, wherein the
11 real communication device is configured to communicate with other real communication
12 devices via one or more communication channels that are independent of the one or more
13 processors that generate virtual world.

1 61. The system of claim 60 wherein the one or more processors are configured to change one
2 or more properties associated with the avatar, public space or private space in response to
3 signals generated by the real device.

1 62. The system of claim 60 wherein the one or more processors are configured to facilitate
2 communication between the real communication device and a simulated communication
3 device in the virtual world.

- 1 63. The system of claim 62 wherein the one or more processors are configured to facilitate
2 communication between the real communication device and the simulated
3 communication by way of one or more text messages.
- 1 64. The system of claim 62 wherein the one or more processors are configured to facilitate
2 communication between the real communication device and the simulated
3 communication by way of voice communication between the simulated communication
4 device and the real communication device.
- 1 65. The system of claim 64 wherein the voice communication between the simulated and real
2 communication devices comprises a telephone call between a simulated telephone and a
3 real telephone.
- 1 66. The system of claim 65 wherein the real telephone is configured to produce a distinctive
2 ringtone when receiving a telephone call from the simulated communication device,
3 wherein the distinctive ringtone is different from an ordinary ringtone that the real
4 telephone makes when receiving telephone calls from elsewhere.
- 1 67. The method of claim 62 wherein the simulated communication device is a simulated
2 video recorder.
- 1 68. The system of claim 67 wherein the one or more processors are configured such that the
2 real communication device may be used as an interface between the simulated video
3 recorder and a user.
- 1 69. The system of claim 67 wherein the one or more processors are configured such that the
2 real communication device may be used to set the simulated video recorder to record a
3 real or simulated video event.
- 1 70. The system of claim 69 wherein the real communication device is a telephone, cellular
2 phone, personal digital assistant, camera, voice recorder, portable email device, portable
3 internet access device, portable game device or personal computer.
- 1 71. The system of claim 70 wherein communicating between the real and virtual
2 communication devices comprises video communication.

1 72. The system of claim 71 wherein video communication comprises displaying an image of
2 the avatar with the real device during the video communication.

1 73. The system of claim 72, wherein the one or more processors are configured to lip-synch
2 the avatar to real or synthesized speech generated by the particular user.

1 74. The system of claim 73, further comprising means for mapping emotion expressed by the
2 user to emotion exhibited by the avatar.

1 75. The system of claim 74 wherein the means for mapping emotion expressed by the user
2 comprises means for capturing one or more visual images of the user and means for
3 analyzing one or more facial features of the user.

1 76. The system of claim 75 wherein the means for capturing one or more visual images of the
2 user during the video communication comprises a 3D camera.

1 77. The system of claim 76 wherein mapping emotion expressed by the user comprises
2 analyzing a voice stress of the user.

1 78. The system of claim 76 wherein the means for mapping emotion expressed by the user
2 comprises means for analyzing biometric data indicative of the user's emotional state
3 during a user portion of the video communication.

1 79. The system of claim 78 wherein the biometric data comprises electrocardiographic
2 (EKG), electroencephalographic (EEG), galvanic skin response, or thermal imaging data.

1 80. The system of claim 74 wherein the means for mapping emotion expressed by the user
2 comprises means for tracking an emotional state of the user in real time during a user
3 portion of the video communication.

1 81. The system of claim 60 wherein the one or more processors are configured such that the
2 real communication can access virtual communication device content.

1 82. The system of claim 60 wherein the virtual world is a three-dimensional virtual world.

1 83. The system of claim 60 wherein the one or more processors are configured such that the
2 real communication device can be used as an interface between the simulated
3 communication device and a user.

- 1 84. The system of claim 60 wherein the one or more processors comprises a cell processor.
- 1 85. The system of claim 60 wherein the real communication device is a telephone, cellular
2 phone, personal digital assistant, camera, voice recorder, portable email device, portable
3 internet access device, portable game device or personal computer.
- 1 86. The system of claim 60, further comprising a user interface coupled to the one or more
2 processors, wherein the user interface is configured to facilitate interaction between the
3 user and the virtual world.
- 1 87. A method for user interaction with a three-dimensional virtual world, wherein the virtual
2 world comprises one or more public spaces and one or more private spaces, wherein the
3 user is represented in the virtual world by an avatar, wherein the user can manipulate the
4 avatar via a user interface, the method comprising:
5 a) detecting an emotional state of the user via the interface; and
6 b) mapping the user's emotional state to one or more features of the avatar that are
7 perceptible by other users, whereby the other users may perceive the user's emotional
8 state through perception of the avatar.
- 1 88. The method of claim 87 wherein the one or more features comprise one or more facial
2 features of the avatar.
- 1 89. The method of claim 87 wherein the one or more features comprise one or more body
2 language features of the avatar.
- 1 90. The method of claim 87 wherein the one or more features comprise one or more facial
2 and body language features of the avatar.
- 1 91. The method of claim 87 wherein detecting the emotional stage of the user comprises
2 tracking one or more facial features of the user.
- 1 92. The method of claim 91 wherein tracking one or more facial features comprises using a
2 3D camera to track the one or more facial features.
- 1 93. The method of claim 87 wherein detecting the emotional state of the user includes
2 tracking one or more body language features of the user.

- 1 94. The method of claim 87 wherein detecting the emotional stage of the user comprises
2 analyzing a voice stress of the user.
- 1 95. The method of claim 87 wherein detecting the emotional stage of the user comprises
2 analyzing text generated by the user.
- 1 96. The method of claim 87 wherein detecting the emotional stage of the user comprises
2 analyzing a biometric of the user.
- 1 97. The method of claim 96 wherein the biometric comprises electrocardiographic (EKG),
2 electroencephalographic (EEG), galvanic skin response, or thermal imaging data.
- 1 98. A method for user interaction with a three-dimensional virtual world, wherein the virtual
2 world comprises one or more public spaces and one or more private spaces, wherein the
3 user is represented in the virtual world by an avatar, wherein the user can manipulate the
4 avatar via a user interface, the method comprising:
5 generating a custom gesture for the avatar; and
6 associating the gesture with one or more user interface signals.
- 1 99. The method of claim 98, further comprising: distributing the user interface signals to one
2 or more other users, whereby the other users can customize their avatars to perform the
3 custom gesture.
- 1 100. The method of claim 98 wherein generating the custom gesture includes motion
2 capture or performance capture of a performer performing the gesture.
- 1 101. The method of claim 100 wherein the performer is the user.
- 1 102. The method of claim 98, further comprising moderating the display of the custom
2 gesture by the avatar in the virtual world.
- 1 103. The method of claim 102 wherein moderating the display of the custom gesture
2 includes restricting an ability of a particular user to make an avatar perform the custom
3 gesture or an ability of the particular user to perceive the avatar performing the custom
4 gesture based on predetermined criteria.

- 1 104. The method of claim 103 wherein the predetermined criteria include an age of the
2 user, the age of a viewer of the gesture or a sensitivity of the viewer to offense based on
3 religious, ethnic or other affiliation of the viewer.
- 1 105. The method of claim 98, further comprising customizing one or more other features of
2 the avatar custom avatar features to identify the user and/or avatar with a particular social
3 group.
- 1 106. The method of claim 105 wherein customizing one or more other features of the
2 avatar includes customizing the avatar's clothing, footwear, hairstyles or ethnic
3 characteristics.
- 1 107. A method for routing communications among real and virtual communication
2 devices, the method comprising: associating a user of the virtual world with a virtual
3 communication device and one or more real communication devices; and
4 implementing a routing preference for reception of communications targeted to the user
5 among the virtual communication device and the one or more real communication
6 devices.
- 1 108. The method of claim 107 wherein the user implements the routing preference.
- 1 109. The method of claim 107 wherein a source of the communication implements the
2 routing preference.
- 1 110. The method of claim 107 wherein the routing preference is based on the user's
2 preferences.
- 1 111. The method of claim 107 wherein the routing preference is based on the user's
2 activities.
- 1 112. The method of claim 107 wherein the routing preference depends on an identity of a
2 source of the communication.
- 1 113. The method of claim 107 wherein the routing preference depends on an identity of a
2 target of the communication.

- 1 114. The method of claim 107 wherein the routing preference is based on one or more
2 STATE CONTROLS that only route the communication to the real or virtual
3 communication device in predetermined circumstances.
- 1 115. The method of claim 107, further comprising routing a communication targeting the
2 user according to the routing preference.
- 1 116. The method of claim 115, wherein routing the communication comprises determining
2 whether the user is “online” in the virtual world and routing the communication to the
3 virtual communication device if the user is online.
- 1 117. The method of claim 115, wherein routing the communication comprises determining
2 whether the user is “online” in the virtual world and routing the communication to one or
3 more of the real communication devices if the user is not online.
- 1 118. The method of claim 115, wherein routing the communication comprises determining
2 whether the user is “online” in the virtual world and routing a text message to either the
3 virtual communication device or an avatar associated with the user if the user is online.
- 1 119. The method of claim 115 wherein the communication targeting the user originates
2 from within the virtual world.
- 1 120. The method of claim 107 wherein communicating between the simulated
2 communication device and a real communication device comprises transmitting a
3 communication from a source to a target, wherein an avatar is associated with the source,
4 the method further comprising, displaying the avatar in the virtual world to the target
5 during the communication.
- 1 121. The method of claim 120 wherein the communication originates at a real
2 communication device.
- 1 122. The method of claim 120, further comprising presenting speech from the source to the
2 target during the communication.
- 1 123. The method of claim 120, further comprising presenting text from the source to the
2 target during the communication.

1 124. The method of claim 123 wherein presenting text from the source comprises
2 translating spoken speech from the source to text and presenting the resulting text to the
3 target.

1 125. The method of claim 124 wherein presenting the resulting text avatar comprises
2 displaying the resulting text in one or more text bubbles proximate the avatar.

1 126. A system for routing communications among real and virtual communication devices,
2 comprising: one or more processors configured to generate a virtual world, wherein the
3 one or more processors are configured to generate a virtual communication device and
4 implement a configurable router adapted to facilitate routing of a communication among
5 one or more real communication devices and the virtual communication device.

1 127. The system of claim 126 wherein the router is accessible from the virtual
2 communication device or one or more real communication devices.

1 128. The system of claim 127 wherein the one or more real communication devices
2 comprise one or more network web pages.

1 129. The system of claim 126 wherein the router is configured to route communications
2 based on a user associated with the virtual communication device.

1 130. The system of claim 126 wherein the router is configured to route communications
2 based on a source of the communication.

1 131. The system of claim 126 wherein the router is configured to route communications
2 based on one or more preferences of a user associated with the virtual communication
3 device.

1 132. The system of claim 126 wherein the router is configured to route communications
2 based on one or more activities of a user associated with the virtual communication
3 device.

1 133. The system of claim 126 wherein the router is configured to route communications
2 based on an identity of a source of the communication.

1 134. The system of claim 126 wherein the router is configured to route communications
2 based on an identity of a target of the communication.

1 135. The system of claim 126 wherein the router is configured to route communications
2 based on one or more STATE CONTROLS that only route the communication to the real
3 or virtual communication device in predetermined circumstances.

1 136. The system of claim 126, wherein the router is configured to determine whether the
2 user is "online" in the virtual world and route the communication to the virtual
3 communication device if the user is online.

1 137. The system of claim 126, wherein the router is configured to determine whether the
2 user is "online" in the virtual world and route the communication to one or more of the
3 real communication devices if the user is not online.

1 138. The system of claim 126, wherein the router is configured to determine whether the
2 user is "online" in the virtual world and route a text message to either the virtual
3 communication device or an avatar associated with the user if the user is online.

1 139. The system of claim 126, wherein the router is configured to transmit a
2 communication from a source to a target, and display the avatar in the virtual world to the
3 target during the communication, wherein the avatar is associated with the source.

1 140. The system of claim 139, wherein the one or more processors are configured to
2 present speech from the source to the target during the communication.

1 141. The system of claim 139, wherein the one or more processors are configured to
2 present text from the source to the target during the communication.

1 142. The system of claim 141, wherein the one or more processors are configured to
2 translate spoken speech from the source to text and presenting the resulting text to the
3 target.

1 143. The method of claim 142 wherein presenting the resulting text avatar comprises
2 displaying the resulting text in one or more text bubbles proximate the avatar.

- 1 144. A method for communicating using a virtual world, comprising:
2 associating an avatar with a source of an email;
3 generating an email within the virtual world;
4 associating one or more images of an avatar with the email;
5 sending the email to a real device;
6 and presenting the one or more images at a destination of the email.
- 1 145. The method of claim 144, further comprising associating recorded or synthesized
2 speech with the email and presenting the speech with the one or more images at the
3 destination.
- 1 146. The method of claim 144, wherein associating one or more images comprises
2 generating an animation of the avatar.
- 1 147. The method of claim 146, wherein presenting the one or more images comprises
2 presenting the animation at the destination.
- 1 148. The method claim 146, wherein associating one or more images comprises further
2 comprises mapping one or more gestures to the animation of the avatar.
- 1 149. The method of claim 148, wherein mapping one or more gestures comprises recording
2 audio and/or video of a source of the email message and mapping one or more features of
3 the audio and/or video to one or more features of the avatar in the animation.
- 1 150. The method of claim 146, further comprising associating a theme with virtual camera
2 movements in the animation.
- 1 151. The method of claim 150 wherein the theme comprises a fixed position of a virtual
2 camera.
- 1 152. The method of claim 150 wherein the theme comprises movement of a virtual camera.
- 1 153. The method of claim 150, wherein generating the email comprises tracking an
2 emotional state of the source and mapping the theme to emotional state.
- 1 154. The method of claim 144 wherein generating an email comprises using a virtual
2 communication device within the virtual world.

1 155. The method of claim 144 wherein the virtual world comprises a simulated public
2 space configured to facilitate interaction among a plurality of users and one or more
3 private spaces, wherein each private space is associated with a particular user of the
4 plurality of users.

1 156. The method of claim 144 wherein the destination is a real communication device.

1 157. The method of claim 156 wherein the real communication device is configured to
2 communicate with other real communication devices via one or more communication
3 channels that are independent of the virtual world.

1 158. A system communicating using a virtual world, comprising:
2 one or more processors configured to:
3 generate a virtual world;
4 associate an avatar with a source of an email;
5 generate an email within the virtual world;
6 associate one or more images of an avatar with the email;
7 send the email to a real device;
8 and present the one or more images at a destination of the email.

9
1 159. The system of claim 158 wherein the virtual world comprises a simulated public
2 space configured to facilitate interaction among a plurality of users and one or more
3 private spaces, wherein each private space is associated with a particular user of the
4 plurality of users.

1 160. The system of claim 158, wherein the one or more processors are configured to
2 generate associate recorded and/or synthesized speech with the email and present the
3 speech with the one or more images at the destination.

1 161. The system of claim 158, wherein the one or more processors are configured to
2 generate an animation of the avatar.

1 162. The system of claim 161, wherein the one or more processors are configured to
2 present the animation at the destination.

1 163. The system of claim 162, wherein the one or more processors are configured to map
2 one or more gestures to the animation of the avatar.

1 164. The system of claim 163, wherein the one or more processors are configured to
2 generate record audio and/or video of a source of the email message and map one or more
3 features of the audio and/or video to one or more features of the avatar in the animation.

1 165. The system of claim 161, wherein the one or more processors are configured to
2 associate a theme with virtual camera movements in the animation.

1 166. The system of claim 165 wherein the theme comprises a fixed position of a virtual
2 camera.

1 167. The system of claim 165 wherein the theme comprises movement of a virtual camera.

1 168. The system of claim 165, wherein the one or more processors are configured to track
2 an emotional state of the source and map the theme to emotional state.

1 169. The system of claim 158 wherein the one or more processors are configured to
2 generate a virtual communication device within the virtual world and allow a user to
3 generate the email with the virtual communication device.

1/11

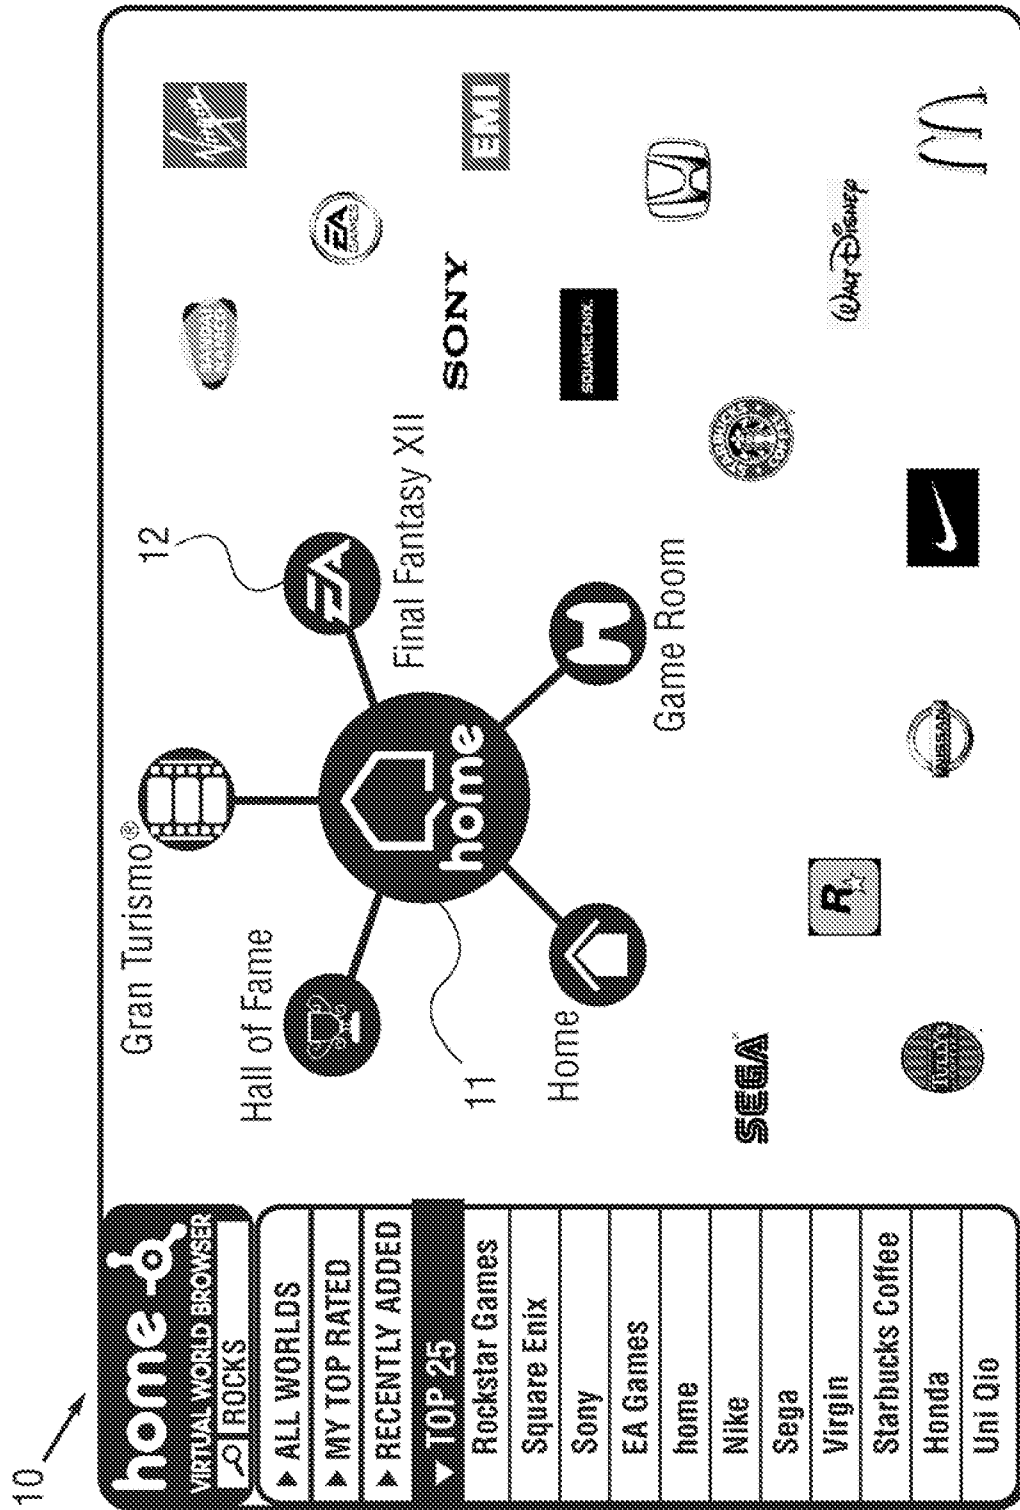


Fig. 1A

2/11

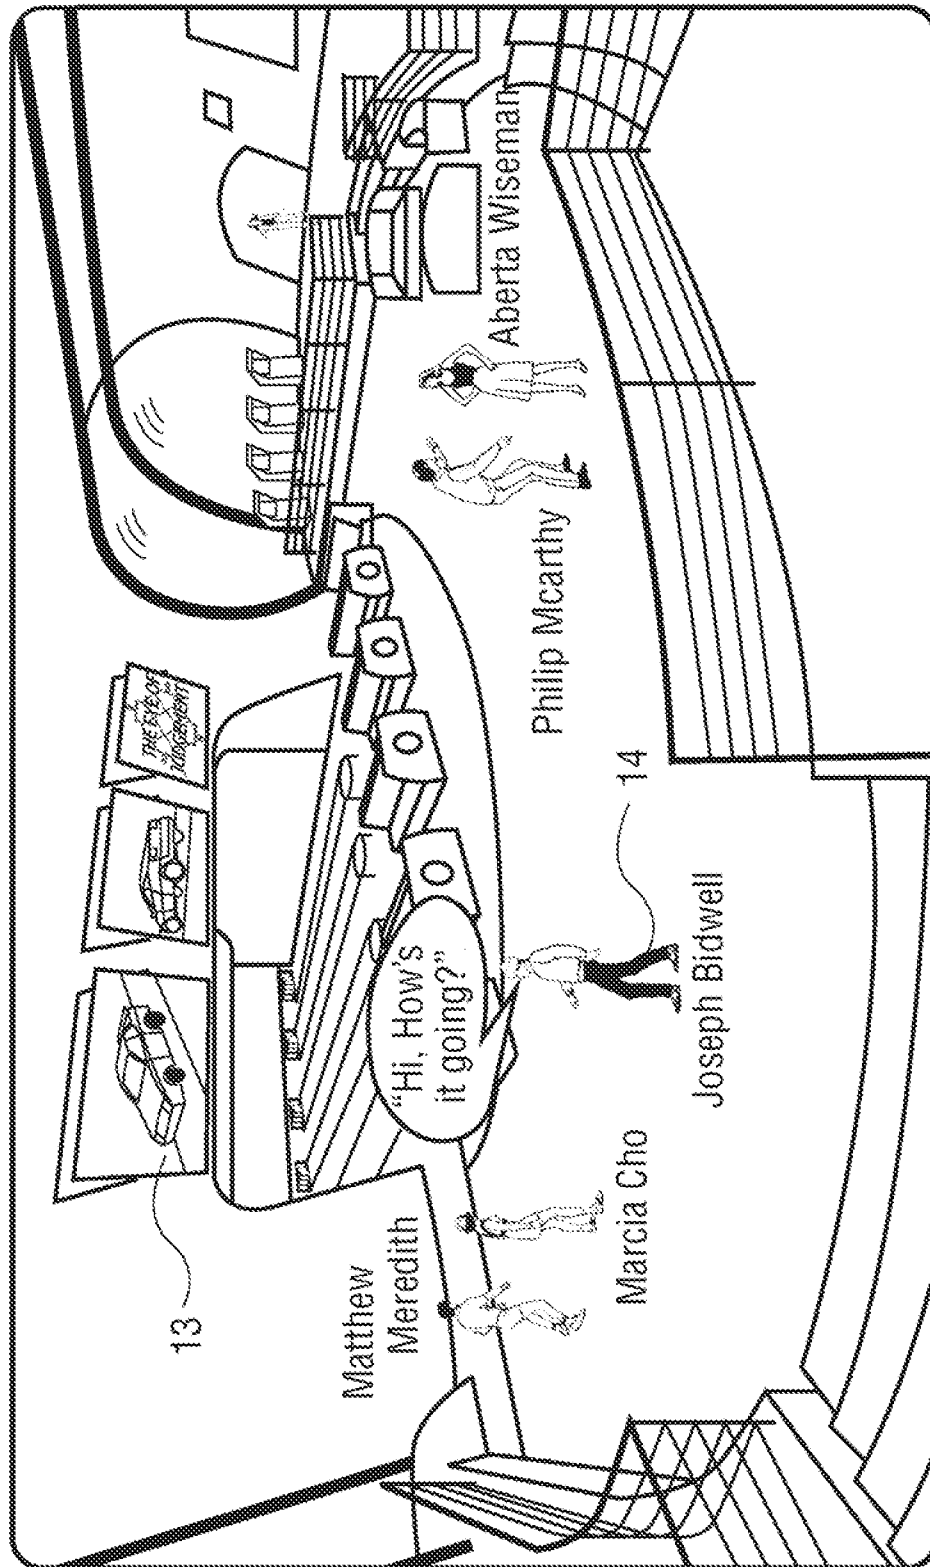


Fig. 1B

3/11

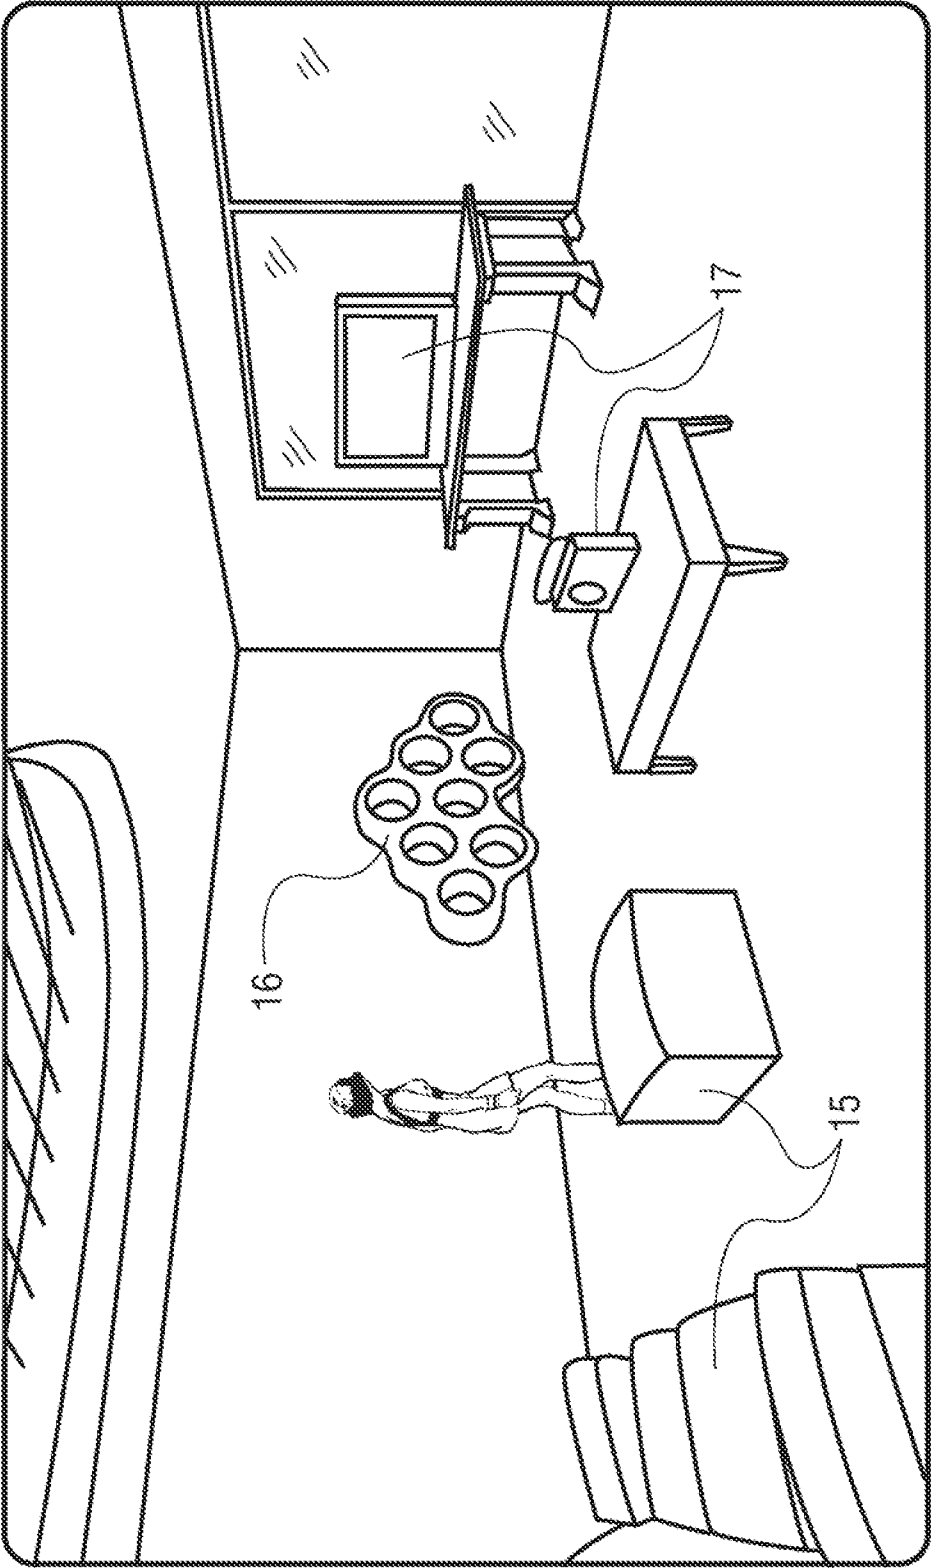


Fig. 1C

4/11

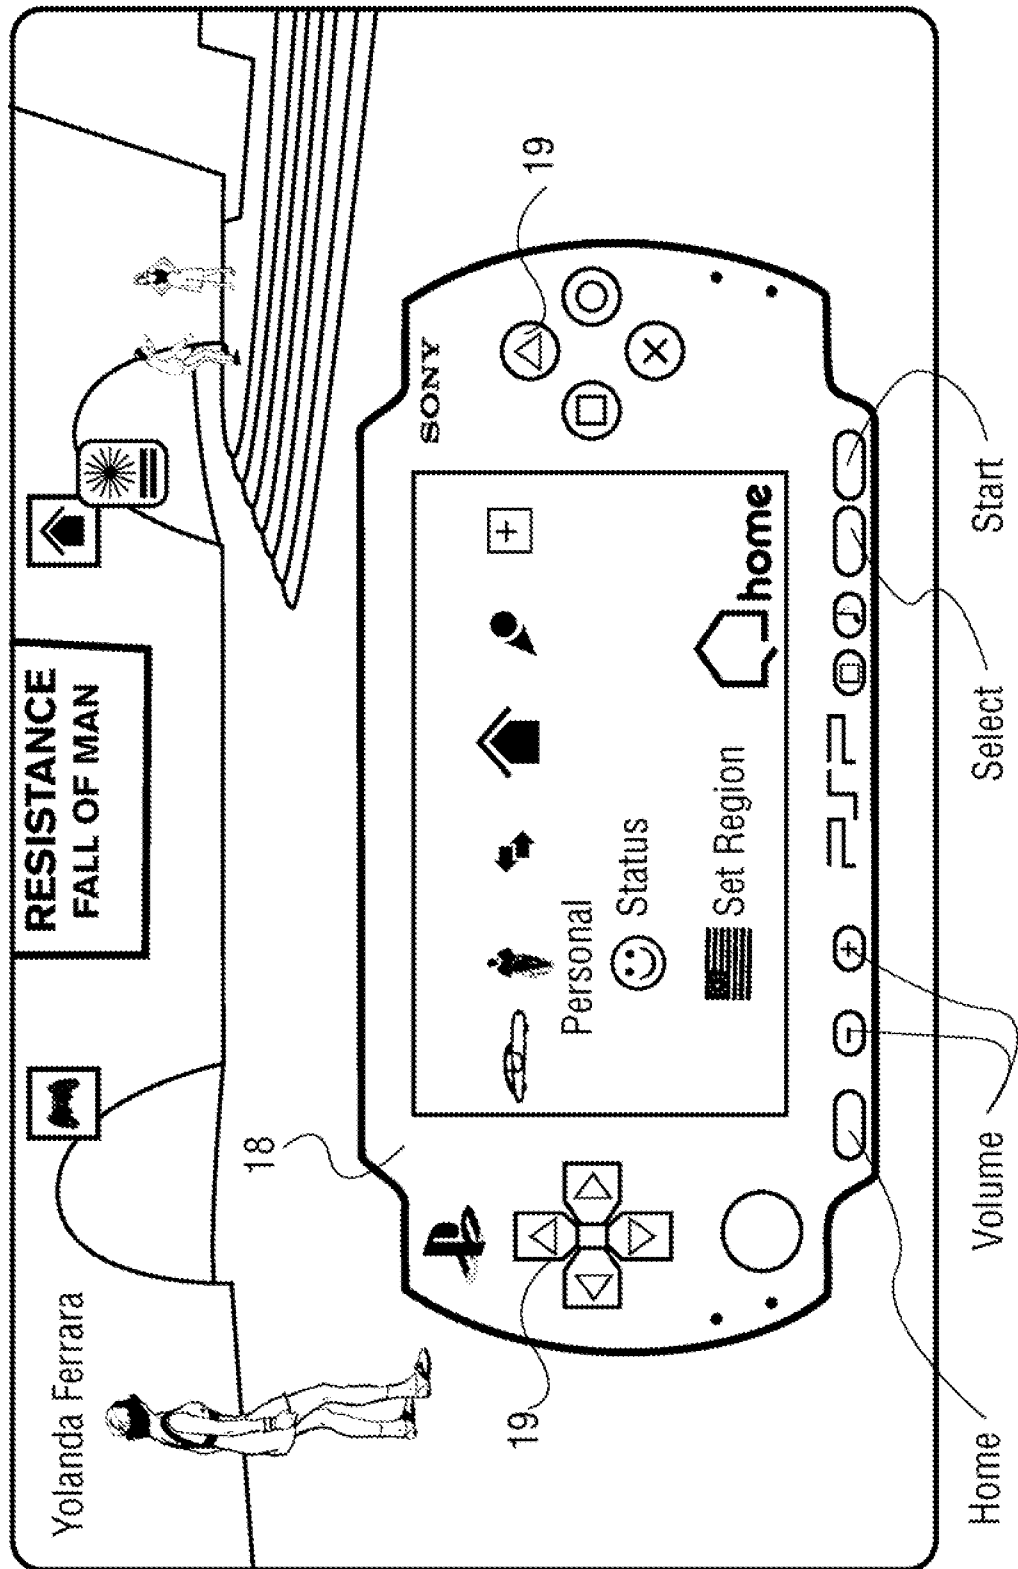


Fig. 1D

5/11

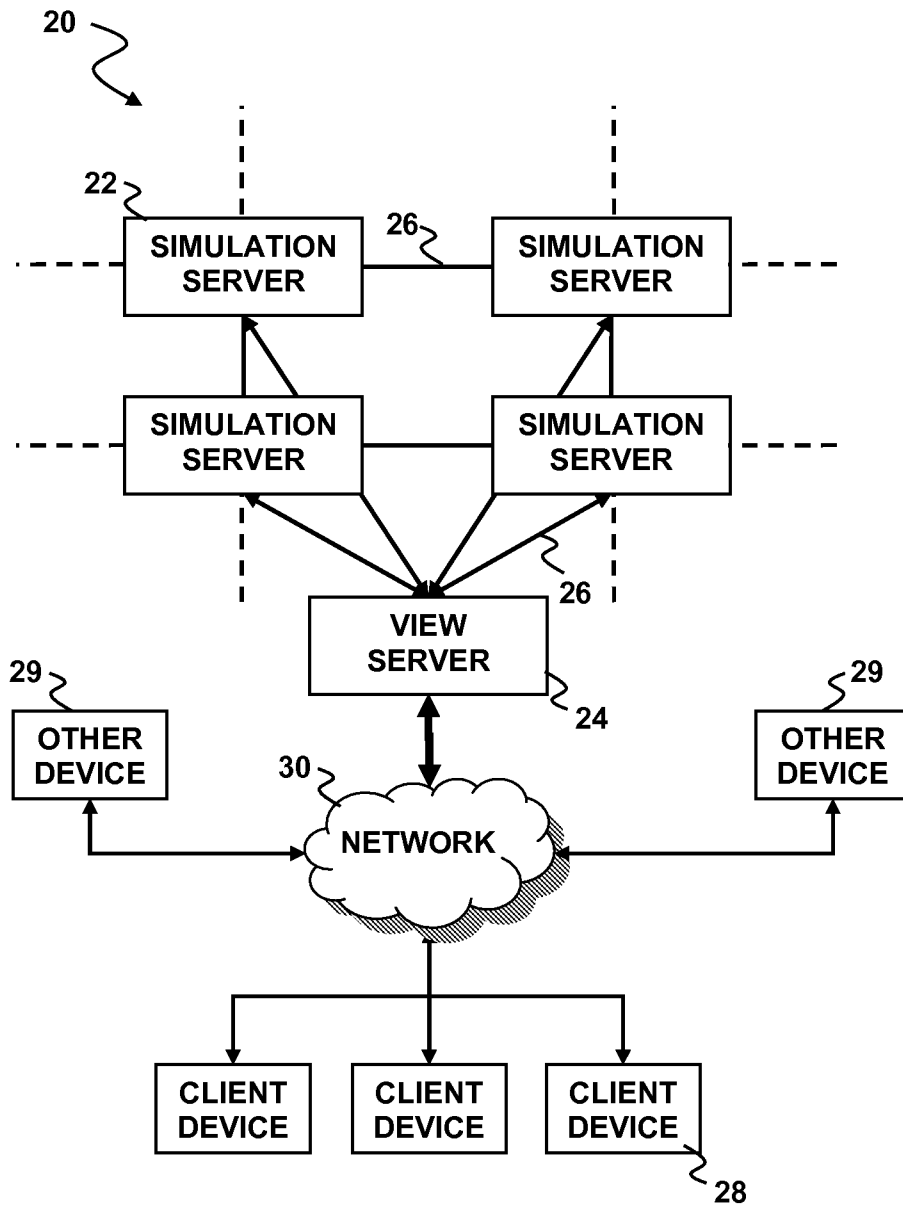


FIG. 1E

6/11

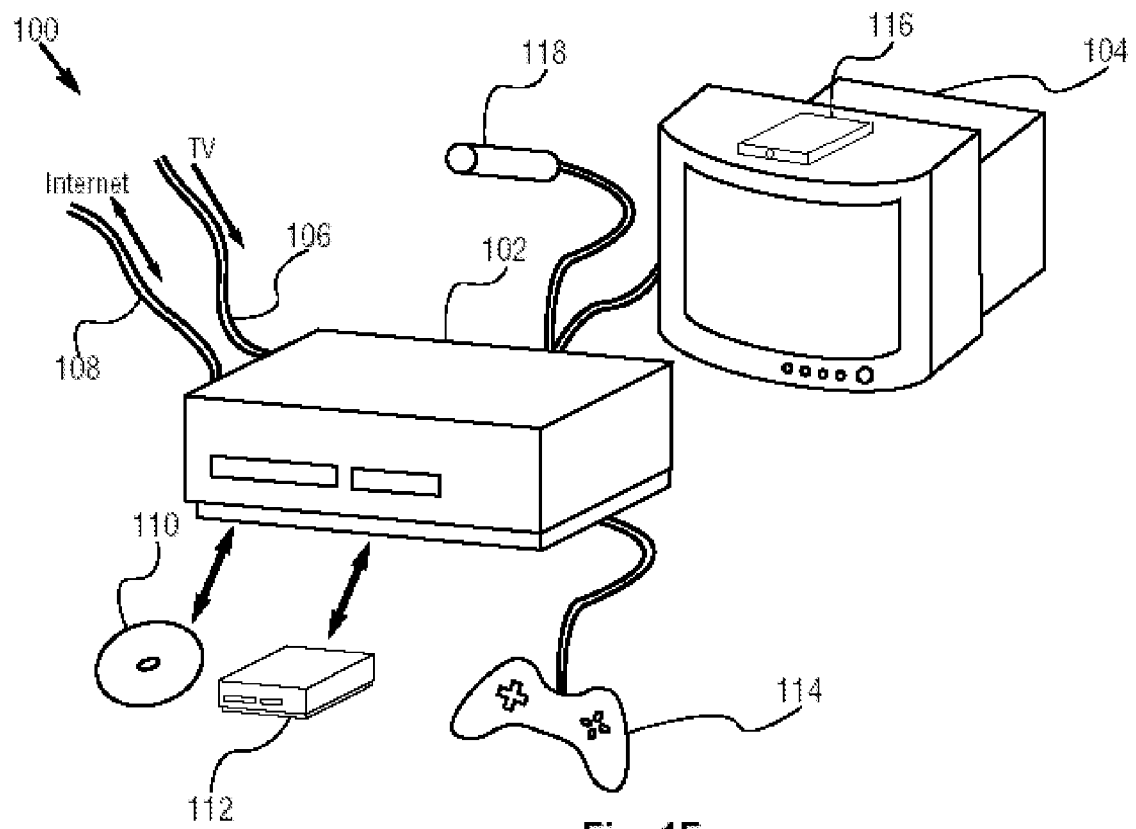


Fig. 1F

7/11

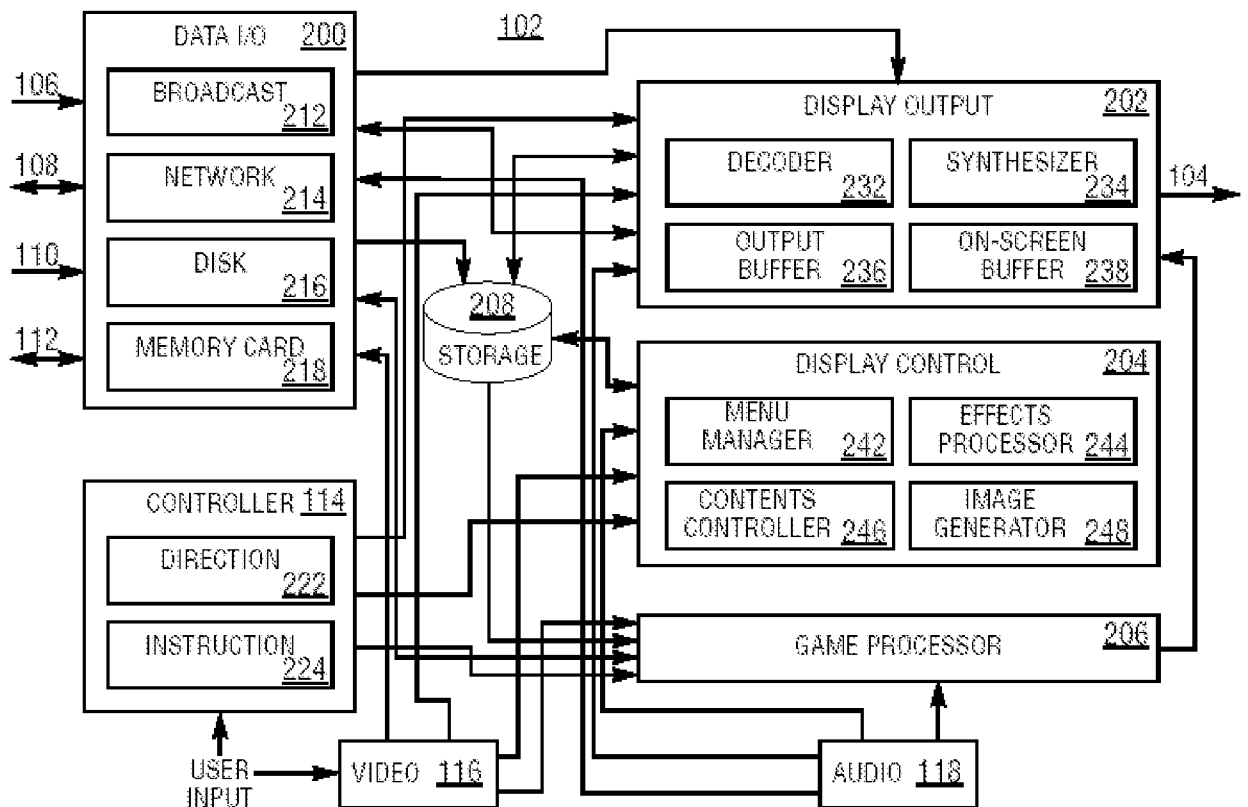


FIG. 2A

8/11

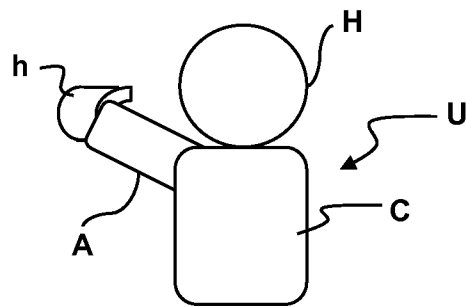
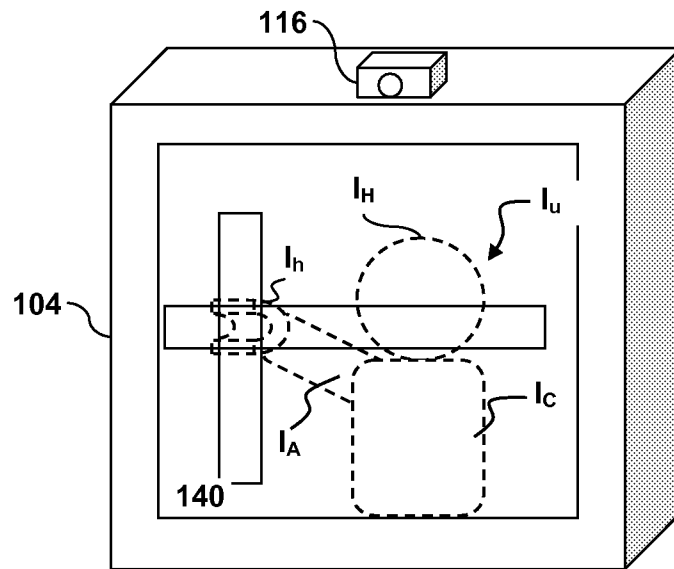


FIG. 2B

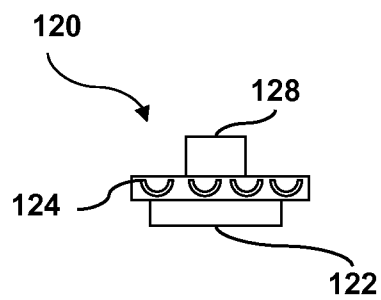


FIG. 2C

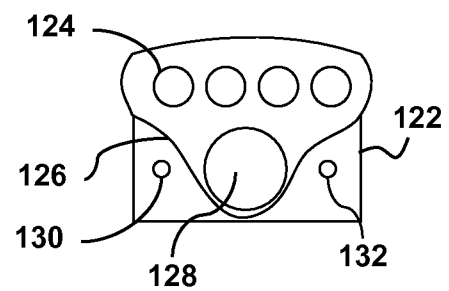


FIG. 2D

9/11

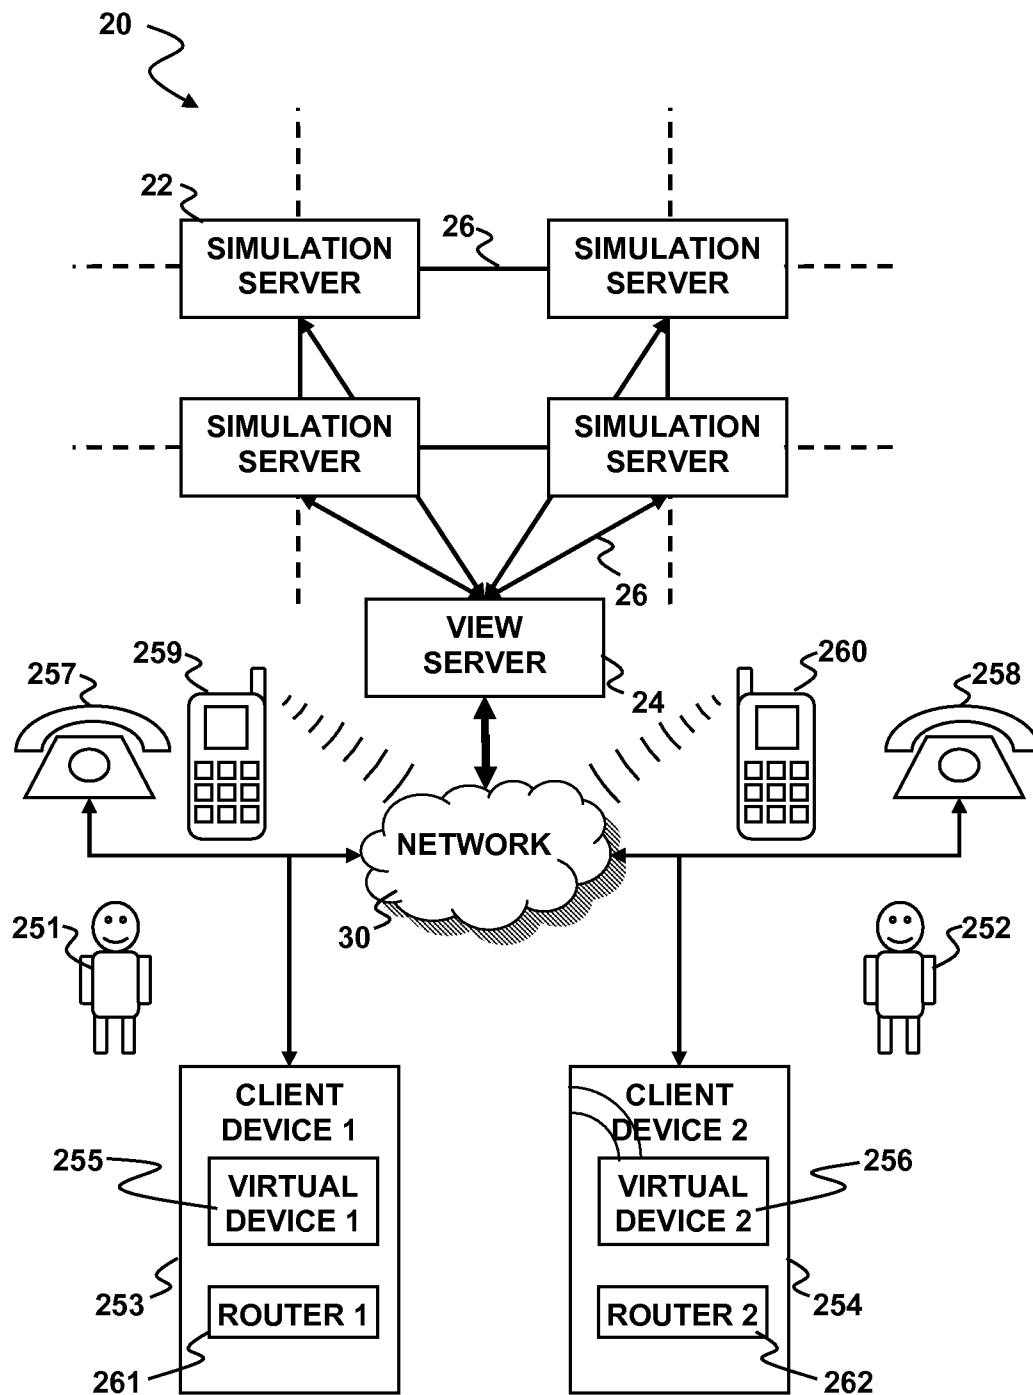


FIG. 2E

10/11

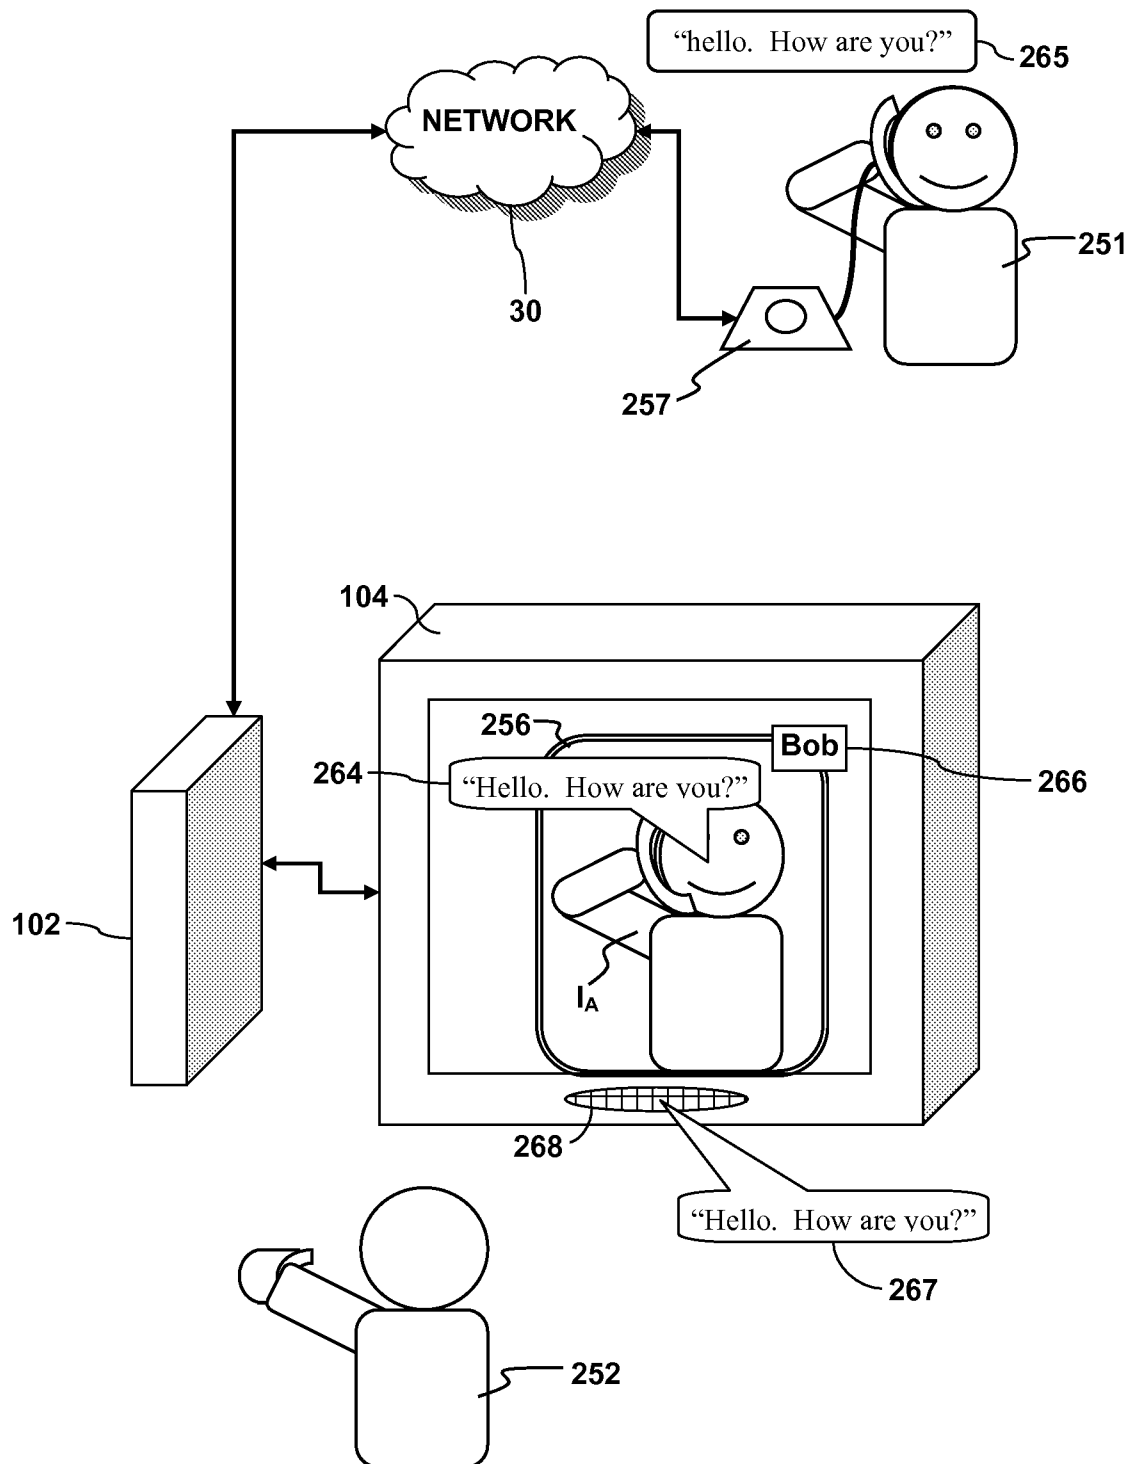


FIG. 2F

11/11

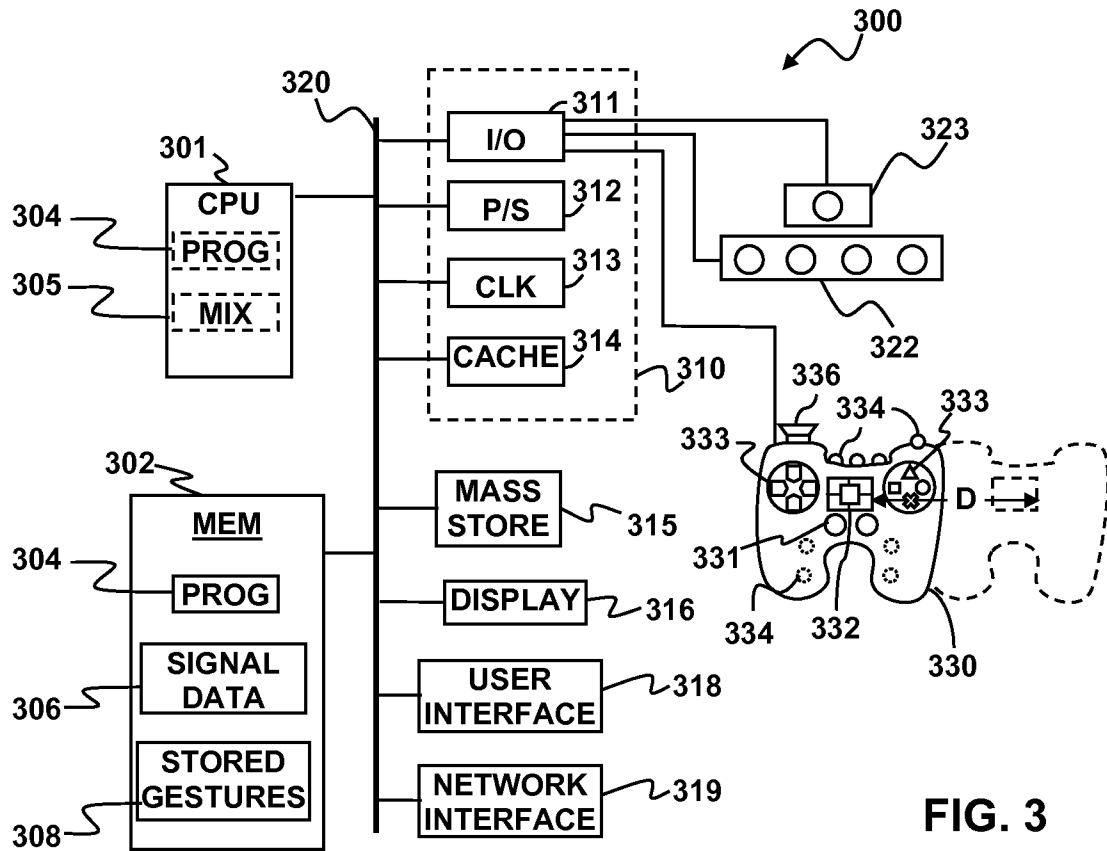


FIG. 3

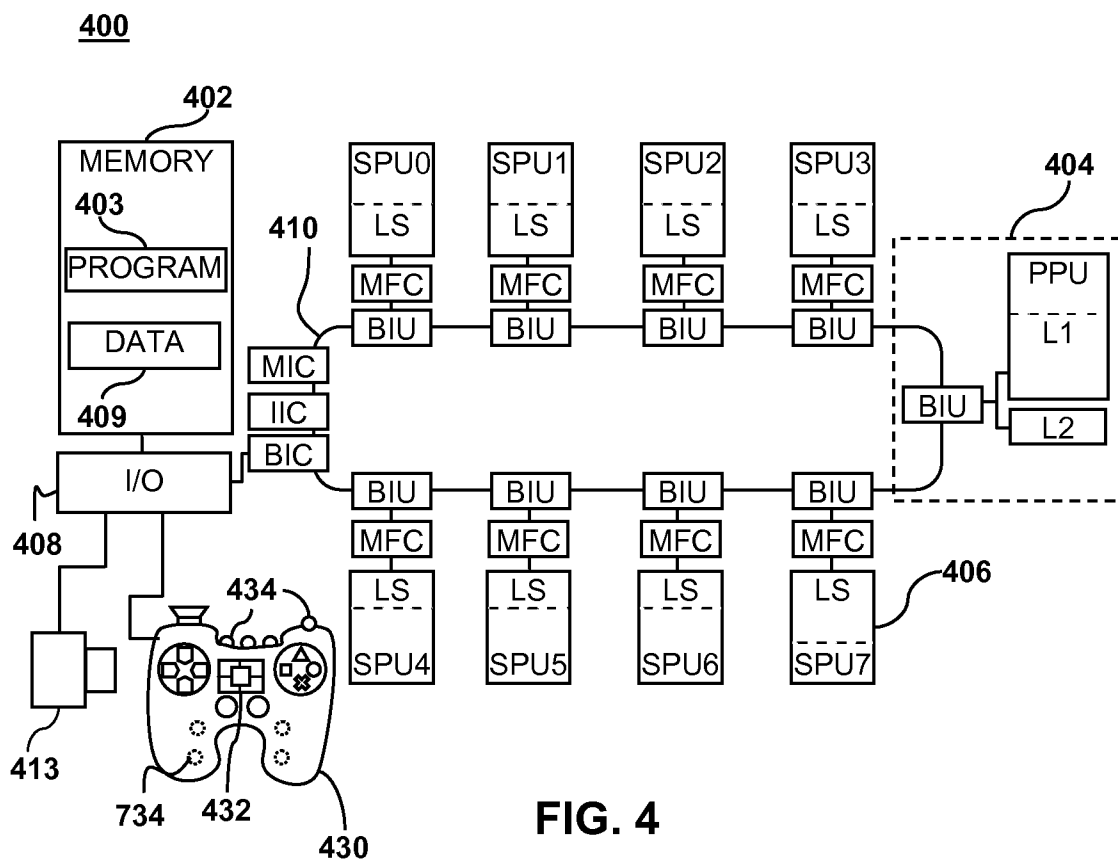


FIG. 4