



(51) International Patent Classification:

A61L 15/22 (2006.01) A61L 15/60 (2006.01)  
A61L 15/44 (2006.01) A61L 26/00 (2006.01)

(21) International Application Number:

PCT/US2013/065297

(22) International Filing Date:

16 October 2013 (16.10.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:


61/714,502 16 October 2012 (16.10.2012) US

(71) Applicant: SURMODICS, INC. [US/US]; 9924 West  
74th Street, Eden Prairie, Minnesota 55344-3523 (US).

(72) Inventors: FULLER, Shawn; 2323 Arthur Street NE, Minneapolis, Minnesota 55418 (US). CLASEMAN, Bryan, A.; 2649 Cardinal Way, Buffalo, Minnesota 55313 (US). SLAGER, Joram; 2701 Joppa Avenue, St. Louis Park, Minnesota 55416 (US). MISSLING, Jeffrey, J.; 6634 Addie Lane, Eden Prairie, Minnesota 55346 (US). MAHARAJ, Gary; 10561 East Riverview Drive, Eden Prairie, Minnesota 55347 (US). OPPERMAN, Gary, W.; 2740 Florida Avenue S., St. Louis Park, Minnesota 55426 (US). LOCKWOOD, Nathan; 2546 Fillmore Street Northeast, Minneapolis, Minnesota 55418 (US). HERGENROTHER, Robert, W.; 10423 Brown Farm Circle, Eden Prairie, Minnesota 55347 (US). OLSON, Charles; 6510 Manchester Lane, Eden Prairie, Minnesota 55346 (US).

[Continued on next page]

(54) Title: WOUND PACKING DEVICE AND METHODS

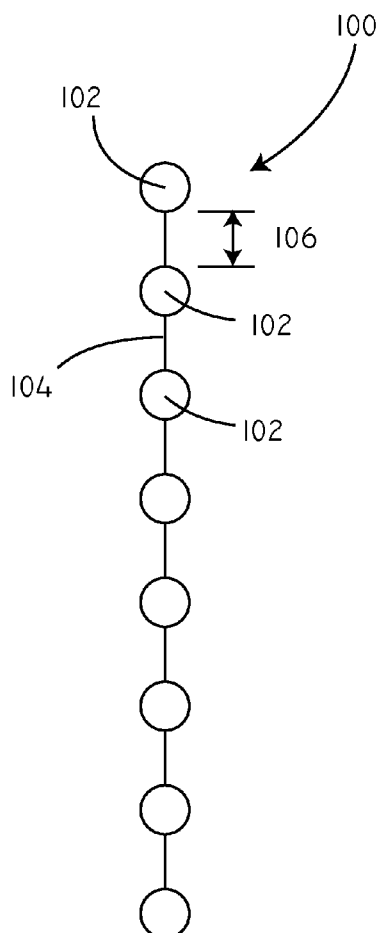

(57) Abstract: Embodiments of the invention include wound packing devices and methods of making and using the same. In an embodiment, the invention includes a wound packing device including a plurality of spacing elements capable of absorbing exudate, wherein the surface of the spacing elements resist colonization by microorganisms. The wound packing device can also include a connector connecting the plurality of spacing elements to one another. Other embodiments are also included herein.



(74) **Agent: DEFFNER, Mark, E.;** Pauly, Devries Smith & Deffner, L.L.C., 121 South 8th Street, Suite 900, Minneapolis, Minnesota 55402 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

**Published:**

- with international search report (Art. 21(3))

## WOUND PACKING DEVICE AND METHODS

This application is being filed as a PCT International Patent application on October 16, 2013 in the name of SurModics, Inc., a U.S. national corporation, applicant  
5 for the designation of all countries and Shawn Fuller, a U.S. Citizen; Bryan A. Claseman, a U.S. Citizen; Joram Slager, a Citizen of the Netherlands; Jeffrey J. Missling, a U.S. Citizen; Gary Maharaj, a U.S. Citizen; Gary W. Opperman, a U.S. Citizen; Nathan A. Lockwood, a U.S. Citizen; Robert W. Hergenrother, a U.S. Citizen; and Charles Olson, a U.S. Citizen, inventors for all designated states, and claim priority to U.S. Provisional  
10 Patent Application No. 61/714,502, filed October 16, 2012, the content of which is herein incorporated by reference in its entirety.

### **Field of the Invention**

15 The present invention relates to wound packing devices and methods of making and using the same.

### **Background of the Invention**

Wound care is critical to ensure optimal healing of wounds and prevent infection.  
20 Wound healing includes sequential phases of inflammation, proliferation, and remodeling. Specific types of wounds require special care in order to reach optimal results. By way of example, in the context of deep wounds, abscesses and/or infections can occur deep in the wound bed if the outermost portion of the wound heals over too quickly.

25 Materials used to treat wounds include creams, foams, gels, ointments, pads, pastes, powders, or other materials. Some of these may include an antimicrobial that can be released into the wound bed.

### **Summary of the Invention**

30 Embodiments of the invention include wound packing devices and methods of making and using the same. In an embodiment, the invention includes a wound packing

device including a plurality of spacing elements capable of absorbing exudate. The surface of the spacing elements can be configured to resist colonization by microorganisms. The wound packing device can also include a connector connecting the plurality of spacing elements to one another.

5           In an embodiment, the invention includes a wound packing device including a plurality of spacing elements, wherein the surface of the spacing elements resist colonization by microorganisms. The wound packing device can also include a container, the plurality of spacing elements disposed within the container.

10           In an embodiment, the invention includes a method of making a wound packing device. The method can include forming a plurality of spacing elements, the spacing elements comprising a surface that resists colonization by microorganisms. The method can further include mounting the plurality of spacing elements on a connector.

15           In an embodiment, the invention can include a wound packing kit. The kit can include a plurality of spacing elements, the plurality of spacing elements configured to absorb exudate. The spacing elements can include a surface that resists colonization by microorganisms. The kit can further include a connector connecting the plurality of spacing elements to one another; the connector comprising a fitting to allow for the number of spacing elements connected to one another by the connector to be modified by an end user.

20           In an embodiment, the invention can include a method of treating wounds. The method can include dispensing a wound packing device from a sterile package. The wound packing device can include a plurality of spacing elements, the spacing elements comprising a surface that resists colonization by microorganisms, the plurality of spacing elements configured to absorb exudate, and a connector connecting the plurality of  
25 spacing elements to one another. The method can further include inserting the wound packing device into a wound bed.

30           This summary is an overview of some of the teachings of the present application and is not intended to be an exclusive or exhaustive treatment of the present subject matter. Further details are found in the detailed description and appended claims. Other aspects will be apparent to persons skilled in the art upon reading and understanding the following detailed description and viewing the drawings that form a part thereof, each of

which is not to be taken in a limiting sense. The scope of the present invention is defined by the appended claims and their legal equivalents.

### **Brief Description of the Figures**

5           The invention may be more completely understood in connection with the following drawings, in which:

FIG. 1 is a schematic view of a wound packing device in accordance with various embodiments of the invention.

10           FIG. 2 is a schematic view of a wound packing device in accordance with various embodiments of the invention.

FIG. 3 is a schematic view of a wound packing device in accordance with various embodiments of the invention.

FIG. 3A is a schematic view of a wound packing device in accordance with various embodiments of the invention.

15           FIG. 4 is a schematic view of a wound packing device in accordance with various embodiments of the invention.

FIG. 5 is a schematic view of a wound packing device in accordance with various embodiments of the invention.

20           FIG. 6 is a schematic view of a wound packing device in accordance with various embodiments of the invention.

FIG. 7 is a cross-sectional schematic view of a spacing element in accordance with various embodiments herein.

FIG. 8 is a cross-sectional schematic view of a spacing element in accordance with various embodiments herein.

25           FIG. 9 is a cross-sectional schematic view of a spacing element in accordance with various embodiments herein.

FIG. 10 is a cross-sectional schematic view of a spacing element in accordance with various embodiments herein.

30           FIG. 11 is a cross-sectional schematic view of a spacing element in accordance with various embodiments herein.

FIG. 12 is a cross-sectional schematic view of a connector in accordance with various embodiments herein.

FIG. 13 is a cross-sectional schematic view of a connector in accordance with various embodiments herein.

5        FIG. 14 is a cross-sectional schematic view of a connector in accordance with various embodiments herein.

FIG. 15 is a schematic view of a spacing element in accordance with various embodiments herein.

10       FIG. 16 is a schematic view of a spacing element in accordance with various embodiments herein.

FIG. 17 is a schematic view of a connector segment and a spacing element in accordance with various embodiments herein.

FIG. 18 is a schematic view of connector segments and spacing elements attached to one another in accordance with various embodiments herein.

15       FIG. 19 is a schematic view of a wound packing device in accordance with various embodiments of the invention.

FIG. 20 is a schematic view of a plurality of spacing elements disposed within a container in accordance with various embodiments of the invention.

20       FIG. 21 is a schematic view of a plurality of spacing elements disposed with a packing material inside of a container in accordance with various embodiments of the invention.

25       While the invention is susceptible to various modifications and alternative forms, specifics thereof have been shown by way of example and drawings, and will be described in detail. It should be understood, however, that the invention is not limited to the particular embodiments described. On the contrary, the intention is to cover modifications, equivalents, and alternatives falling within the spirit and scope of the invention.

### **Detailed Description of the Invention**

30       The embodiments of the present invention described herein are not intended to be exhaustive or to limit the invention to the precise forms disclosed in the following

detailed description. Rather, the embodiments are chosen and described so that others skilled in the art can appreciate and understand the principles and practices of the present invention.

All publications and patents mentioned herein are hereby incorporated by  
5 reference. The publications and patents disclosed herein are provided solely for their disclosure. Nothing herein is to be construed as an admission that the inventors are not entitled to antedate any publication and/or patent, including any publication and/or patent cited herein.

Embodiments of the invention include wound packing devices that are effective  
10 for wound care management. In particular embodiments herein include a wound packing device including a plurality of spacing elements capable of absorbing exudate. Further, the surface of the spacing elements resist colonization by microorganisms. The wound packing device also includes a connector in some embodiments that serves to connect the plurality of spacing elements to one another.

15 The terms “absorbent” or “absorbing” materials as used herein includes materials that are capable of adsorbent, adsorbing, retention or retaining of a fluid.

Referring now to FIG. 1, a schematic view of a wound packing device 100 is shown in accordance with various embodiments of the invention. The wound packing device 100 includes a plurality of spacing elements 102 and a connector 104 connecting  
20 the plurality of spacing elements 102 to one another. In some embodiments, the wound packing device 100 can include from about 4 to 50 spacing elements 102. However, it will be appreciated that other numbers of spacing elements 102 can be included in other embodiments. The spacing elements 102 can be of various shapes and sizes. In some embodiments, the surface of the spacing elements 102 can be substantially smooth. In  
25 other embodiments, the surface of the spacing elements 102 can be textured. In some embodiments the surface of the spacing elements 102 can include grooves. The spacing elements 102 can be sized such that their major dimension is from about 0.5 mm to about 25 mm. For example, in some embodiments the major diameter of the spacing elements 102 can be from about 0.5 mm to about 2.5 mm. In some embodiments, the surface of  
30 the spacing elements 102 is deformable. In other embodiments, the surface of the spacing elements 102 is substantially rigid.

The distance 106 between adjacent spacing elements 102 along connector 104 in some embodiments can be at least equal to the largest dimension of the spacing elements 102. In some embodiments, the distance 106 between adjacent spacing elements along the connector is at least equal to the diameter of the spacing elements 102. In various  
5   embodiments, the distance 106 between adjacent spacing elements can be greater than 0.5 mm, 1.0 mm, 2.0 mm, 3.0 mm, 4.0 mm, 5.0 mm, 10 mm, 15 mm, 20 mm, or in some cases even greater than 25 mm. In yet other embodiments, distances 106 between spacing elements 102 can vary along the total length of the wound packing device 100. That is, the connectors 104 can be of various sizes along a single wound packing device  
10   100. In some embodiments the connector has a diameter of about 0.1 mm to about 2 mm. In some embodiments the connector has a length of about 5 cm to about 200 cm.

The surface of the spacing elements and/or the connector can be configured to resist colonization by microorganisms. In some embodiments, the surface of the spacing elements and/or connector can have antimicrobial activity. In some embodiments, the  
15   surface of the spacing elements and/or connector can include silver ions or graphene. In some embodiments, the surface of the spacing elements and/or connector can include quaternary amines. In some embodiments, the surface of the spacing elements and/or connector can include tobramycin.

In certain embodiments, the surface of the spacing elements and/or connector can  
20   include aminoglycoside antibiotics, such as tobramycin, vancomycin, amikacin, gentamicin, kanamycin, neomycin, netilmicin, paromomycin, streptomycin, and apramycin. Other active agents on or in the surface of the spacing elements can include, for example, various modified aryls, and cationic steroidal antibiotics.

Additional suitable active agents on or in the surface include, for example,  
25   antimicrobial peptides such as those taught in U.S. Patent Nos. 5,714,577 (Antimicrobial peptides); 5,945,507 (Antimicrobial peptides); 6,835,713 (Virus derived antimicrobial peptides); and 6,887,847 (Virus derived antimicrobial peptides), all of which are incorporated by reference in their entirety.

In some embodiments the spacing element comprises a polymer selected from the  
30   group consisting of polyamide, poly(methyl methacrylate), poly(ether blocked amides)

(PEBAX), polyurethane, silicone, nylon, fluoropolymers and combinations thereof. In certain embodiments the spacing elements can be composed of a medical grade polymer.

The plurality of spacing elements 102 can be capable of absorbing exudate from a wound bed. In some embodiments, each spacing element 102 can be capable of

5 absorbing an amount of exudate equal to at least the weight of the spacing element 102.

In some embodiments, each spacing element 102 can be capable of absorbing an amount of exudate that is equal to a multiple of the weight of the spacing element 102. For example, in some embodiments each spacing element 102 can be capable of absorbing an amount of exudate that is equal to at least 2 times, 3 times, 4 times, or 5 times the weight  
10 of the spacing element 102.

In some embodiments, the plurality of connectors 104 can also be capable of absorbing exudate from a wound bed. In some embodiments, each connector 104 can be capable of absorbing an amount of exudate equal to at least the weight of the connector 104. In some embodiments, each connector 104 can be capable of absorbing an amount  
15 of exudate that is equal to a multiple of the weight of the connector 104. For example, in some embodiments each connector 104 can be capable of absorbing an amount of exudate that is equal to at least 2 times, 3 times, 4 times, or 5 times the weight of the connector 104.

The connector 104 can be flexible. For example, the connector 104 can bend  
20 freely in some embodiments so that the wound packing device 100 can assume a bunched or compacted configuration. The wound packing device 100 is sufficiently flexible to be bent into a U-shape. Referring now to FIG. 2, a schematic view of the wound packing device 100 is shown with the connector 104 bent in several places such that the wound packing device is curved and the spacing elements 102 are no longer in a straight line. In  
25 some embodiments the spacing elements 102 cannot be in the same plane due to the orientation of the bent connectors 104.

In some embodiments, the wound packing device can include a structural feature in order to secure the wound packing device to something else, secure an end of the wound packing device back onto itself or secure the wound packing device to another  
30 wound packing device. By way of example, an end of the wound packing device can include a loop of material that can be used to attach the wound packing device to

something else, another wound packing device or back onto itself. Referring now to FIG. 3, a schematic view of a wound packing device 300 is shown in accordance with various embodiments of the invention. The wound packing device 300 includes a plurality of spacing elements 302 and a connector 304. The wound packing device 300 also includes a loop 308 of material which can be used to affix the end of the wounding packing device 300 to something else. By way of example, a user can pass a suture through the loop 308 in order to secure the wound packing device 300 to something else. For example, suture material can be passed through loop 308 to secure the wound packing device 300 for easy removal from a wound. Alternatively, the loop 308 can be passed over the other end of the wound packing device so that the two opposite ends of the wound packing device 300 are held adjacent to one another.

In yet other embodiments a first wound packing device can be attached to a second wound packing device to extend the length of the wound packing device. The attachment can be achieved using a spacing element coupling device. Referring now to FIG. 3A, a schematic view of a wound packing device 350 is shown in accordance with various embodiments of the invention. The wound packing device 350 includes spacing elements 302 and connectors 304. The wound packing device 350 includes a spacing element coupling device 352. By way of example, one end of the spacing element coupling device 352 can be appropriately sized to slip over connector 304 and retain the spacing element 302 on one end of a first wound packing device and the other unoccupied end of the spacing element coupling device 352 can slip over the spacing element 302 of a second wound packing device, resulting in an extended wound packing device 350. The spacing element coupling device 352 can be similar in function to metal light pull chain extenders used to extend light pull chains on household light pull switches.

In some embodiments, the wound packing device can include a reservoir to retain wound exudate. In some embodiments, the reservoir is an external structure separate from other components of the wound packing device. In other embodiments, the reservoir is a structure disposed within the spacing elements or the connector. Referring now to FIG. 4, a schematic view of a wound packing device 400 is shown in accordance with various embodiments of the invention. The wound packing device 400 includes a

plurality of spacing elements 402 and a connector 404. The wound packing device 400 also includes a reservoir 410. The reservoir 410 can define an interior volume that can retain exudate material. By way of example, in some embodiments the connector 404 can include a lumen or channel that can be in fluid communication with the reservoir 410, and exudate can pass through the connector 404 into the reservoir 410.

The spacing elements can be disposed along the connector in series with one another. In some embodiments, the spacing elements can be disposed along the connector such that one or more spacing elements are disposed in parallel with one or more other spacing elements. The connector can be one continuous piece or it can include multiple segments or branches. Referring now to FIG. 5, a schematic view of a wound packing device in accordance with various embodiments of the invention is shown. The wound packing device 500 can include a plurality of spacing elements 502 and connectors 504. The connector 504 can include a first branch 512, a second branch 514, and a third branch 516, that intersect one another at a point 518 on the connector 504.

Wound packing devices herein can include one or more fittings to facilitate attachment and/or removal of segments that include spacing elements so that the total amount of spacing elements or the volume of spacing elements can be easily adjusted. Referring now to FIG. 6, a wound packing device 600 is shown in accordance with various embodiments of the invention. The wound packing device 600 can include a plurality of spacing elements 602 and a connector 604. The connector 604 can include a first branch 612, a second branch 614, and a third branch 616. The wound packing device 600 can include fittings 620. Manipulation of the fittings 620 can allow the branches to be easily removed, or reattached after being removed. The fittings 620 can take on various forms. In some embodiments the fittings 620 can include a pair of threaded elements that fit together. In some embodiments, the fittings 620 can include a compression tube fitting (e.g. SWAGELOK fitting), a luer taper fitting, threaded fittings or the like. Other fittings include couplers, 3-way joints (e.g. "T's), 4-way joints (e.g. crosses) and end caps

Referring now to FIG. 7, a cross-sectional schematic view of a spacing element 700 is shown in accordance with various embodiments herein. The spacing element 700

can include a core portion 702 of material that can be effective to absorb exudate. In some embodiments, the spacing element 700 is swellable. In some embodiments, the spacing element 700 can be comprised of a porous material for the core portion 702. In some embodiments, the spacing element 700 includes a fluid sequestering material. The  
5 spacing element 700 can define a central channel or lumen 704. The connector (not shown in this view) can pass through the lumen 704.

Materials of the core portion can include hydrophilic absorbent polymers such as polyacrylic acid, polyacrylamides, polysaccharides (e.g. alginates), terpolymers (for example copolymers of lactide, glycolide and caprolactone), hydrogels, PEG, PVA,  
10 poly(vinyl pyrrolidone) (PVP), poly(hydroxyethylmethacrylate), hyaluronic acid and the like. In some embodiments, the hydrophilic absorbent polymers may be crosslinked. In some embodiments, the core portion can include a polyurethane foam. In other embodiments, the core portion can include hygroscopic agents that promote absorption of water.

15 In some embodiments, the surface of the spacing elements can be chemically modified in order to change the characteristics of the surface of the spacing elements. By way of example, in some embodiments, a modifying compound can be covalently bonded to the surface of the spacing elements. It will be appreciated that there are many different techniques through which a modifying compound could be covalently bonded to the  
20 surface of the spacing elements. One approach can be to use a compound with a thermoreactive group which can covalently bond to the surface after being activated by application of heat. Another exemplary approach can be to use a compound with a photoreactive group which can covalently bond to the surface after being activated.

Photoreactive groups respond to specific applied external stimuli to undergo  
25 active specie generation with resultant covalent bonding to an adjacent chemical surface. For example, in an embodiment, a photoreactive group can be activated and can abstract a hydrogen atom from an alkyl group. A covalent bond can then form between the compound with the photoreactive group and the compound with the C-H bond. Suitable photoreactive groups are described in U.S. Pat. Nos. 5,002,582; 5,637,460; 5,714,360;  
30 and 6,077,698, the disclosures of which are incorporated herein by reference. Further examples of such agents are described in U.S. Publ. Pat. App. No. 2012/0046384, the

content of which is herein incorporated by reference. One example of such a modification would be to provide the surface with lubricious characteristics. This can be achieved by modifying the surface of the spacing elements to have highly hydrophilic properties, such as that provided by PVP or polyacrylamide. As such, a photo-PVP compound (a compound including a photoreactive group and PVP) or a photo-polyacrylamide (a compound including a photoreactive group and polyacrylamide) could be used to modify the surface of the spacing element. Methods for the preparation of photo-PVP are described in U.S. Patent No. 5,414,075, the content of which is herein incorporated by reference. Methods for the preparation of photo-polyacrylamide are described in U.S. Patent No. 6,007,833, the content of which is herein incorporated by reference.

Exemplary photoreactive groups that can be pendent from the coatings, materials, or surfaces of the wound packing device, include those described in U.S. Patent No. 5,414,075 and in U.S. Patent Application No. 13/490,994 (to Swan et al. and filed June 7, 2012), the disclosures of which is incorporated herein by reference.

This material includes a chemical backbone having attached to it one or more first latent reactive groups and one or more second latent reactive groups, each of the first and second latent reactive groups being attached to the backbone in such a manner that, upon activation of the latent reactive groups in the presence of a support surface, a) the first latent reactive groups are capable of covalently bonding to the support surface, and b) upon bonding of the first latent reactive groups to the surface, the second latent reactive groups are; i) restricted from reacting with either a spacer or the support surface, ii) capable of reverting to their inactive state, and iii) upon reverting to their inactive state, are thereafter capable of being reactivated in order to later bind a target molecule, thereby attaching the target molecule to the surface.

In a particularly preferred embodiment, the chemical backbone of such a multifunctional reagent is a single tetrahedral carbon atom. Attached to the central carbon, in this embodiment, are four identical latent reactive groups, in the form of photoreactive groups, each attached via identical spacer chains. Upon exposure to a suitable light source, each of the latent reactive groups are subject to activation.


By virtue of conformational and/or steric constraints that the reagent imposes on itself (hence "restrained"), both by the tetrahedral nature of the central carbon, as well as the physical-chemical nature of the spacer chains themselves (e.g., their length, reactivity, and flexibility), the reagent is restricted, in that a maximum of three of the four activated  
5 latent reactive groups on any given preferred reagent molecule are able to attach to the support surface. The remaining unreacted group(s) are thus able to revert to their inactive state. In a subsequent step, the unreacted group(s) can be reactivated in the presence of a target molecule, in order to covalently bond the target molecule to the surface.

The reagent of the present invention involves a chemical backbone having  
10 attached to it one or more first latent reactive groups capable of attaching to a surface, and one or more second latent reactive groups capable of attaching to a target molecule intended for immobilization. Chemically, the first and second latent reactive groups, and respective spacers, can be the same or different.

In situations in which all latent reactive groups and spacers are chemically, or at  
15 least functionally, the same, the distinction between first and second latent reactive groups may actually be accomplished at the time of the first activation step, i.e., those groups that are activated and attach to the surface will be considered "first" latent reactive groups, and those that remain unreacted (whether or not they have been activated) will be considered "second" latent reactive groups.

The first and second latent reactive groups are preferably attached to the backbone  
20 by spacer chains in such a manner that, upon activation of the latent reactive groups in the presence of a support surface, the first latent reactive groups are capable of covalently bonding to the surface. The second latent reactive groups are thereby conformationally restricted, thus preventing reaction with either their spacers, other restricted reagents of  
25 the same type, or the support surface. In addition, after the first activation step and removal of the activating stimulus (e.g., illumination source), the second latent reactive groups are capable of reverting to their inactive state and can thereafter be activated (or reactivated, as the case may be) to covalently bond a target molecule.

The following diagram depicts the concept of the preferred tetrahedral core  
30 structure, as exemplified by the empirical formula  $X(Y)_4(Z)_4$ , shown below as Formula I:

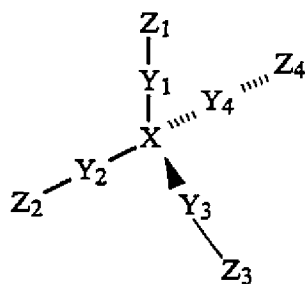

FORMULA I

In Formula I:

X	= the chemical backbone;
Y <sub>1</sub> , Y <sub>2</sub> , Y <sub>3</sub> , Y <sub>4</sub>	= optional spacers; and
Z <sub>1</sub> , Z <sub>2</sub> , Z <sub>3</sub> , Z <sub>4</sub>	= latent reactive groups.

In an embodiment, the invention provides a core molecule containing four dimethyleneoxy groups bonded as spacers to a central tetrahedral carbon atom, the carbon atom serving in this instance as the chemical backbone. The backbone, spacers, and latent reactive groups are described herein, for the sake of simplicity, as being distinct portions of the reagent of the present invention. In the chemical synthesis of a reagent however, these portions will rarely be provided as three independent precursors. Instead, and most often, the portion referred to herein as the spacer will be formed as the result of the reaction between two molecules, one that contains the core molecule and another that contains the latent reactive group.

By virtue of the physical and chemical properties of the photoreactive groups and the methylene group spacers, together with the conformational restrictions provided by the tetrahedral carbon backbone, the reagent is able to attach up to three of its photoreactive groups to a surface upon photoactivation. Being conformationally restricted, and thus unable to interact with the support surface or the spacers, any remaining photoreactive group(s) are able to return to their inactive states upon removal of light, once again being capable of activation by subsequent illumination.

In addition to reagents of the particularly preferred embodiment, containing a central carbon atom, reagents of the present invention can be prepared having any suitable chemical (e.g., organic and/or inorganic) backbone structure, including those that


employ a single atom, such as silicon, nitrogen, phosphorus, and any other atom with four or more bonds nonplanar with respect to one another.

Also, molecules having conformationally restricted ring structures (such as inositol, i.e., hexahydroxy cyclohexane) can be derivatized with latent reactive groups in a manner analogous to that described herein for pentaerythritol, to provide latent reactive groups in both axial and equatorial positions. Other polyhydroxylated compounds such as mono- and di-saccharides, and cyclodextrins, are suitable as well, in that they offer alternative opportunities to create other multisubstituted reagents having varying placements and densities of latent reactive groups.

Contact with a support surface and activation of the latent reactive groups will result in covalent bond formation through at least one latent reactive group, with at least one other latent reactive group being conformationally restricted and thus unable to react at the surface.

Spacers useful in the reagent of the present invention can be bonded to the tetrahedral atom and can be of any suitable length and structure. A "spacer", as used herein, refers to that region of a reagent between a latent reactive group and a chemical backbone. The use of spacers is optional, and would not be necessary, for instance, for such compounds as acylated derivatives of tetraphenylmethane having the structure shown below as Formula II:

FORMULA II

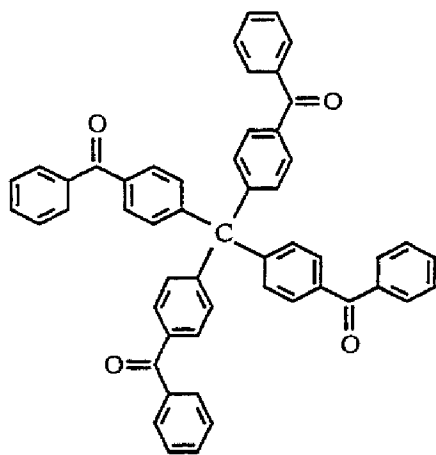

A "latent reactive group", as used herein, refers to a chemical group that responds to an applied external energy source in order to undergo active specie generation, resulting in covalent bonding to an adjacent chemical structure (e.g., an abstractable

hydrogen). Preferred groups are sufficiently stable to be stored under conditions in which they retain such properties. See, e.g., U.S. Pat. No. 5,002,582, the disclosure of which is incorporated herein by reference. Latent reactive groups can be chosen that are responsive to various portions of the electromagnetic spectrum, with those responsive to ultraviolet and visible portions of the spectrum (referred to herein as "photoreactive") being particularly preferred.

Photoreactive aryl ketones such as acetophenone and benzophenone, or their derivatives, are preferred, since these functional groups, typically, are readily capable of undergoing the activation/inactivation/reactivation cycle described herein. Benzophenone is a particularly preferred photoreactive group, since it is capable of photochemical excitation with the initial formation of an excited singlet state that undergoes intersystem crossing to the triplet state. The excited triplet state can insert into carbon-hydrogen bonds by abstraction of a hydrogen atom (from a support surface, for example), thus creating a radical pair. Subsequent collapse of the radical pair leads to formation of a new carbon-carbon bond. If a reactive bond (e.g., carbon-hydrogen) is not available for bonding, the ultraviolet light-induced excitation of the benzophenone group is reversible and the molecule returns to ground state energy level upon removal of the energy source. Hence, photoreactive aryl ketones are suitable.


A linking agent suitable for use in the present material is described in U.S. Patent No. 5,714,360, the disclosure of which is incorporated herein by reference.

A chemical linking agent including a di- or higher functional photoactivatable charged compound can be employed. This linking agent provides at least one group that is charged under the conditions of use in order to provide improved water solubility. The agent further provides two or more photoactivatable groups in order to allow the agent to be used as a cross-linking agent in aqueous systems. In an embodiment, the charge is provided by the inclusion of one or more quaternary ammonium radicals, and the photoreactive groups are provided by two or more radicals of an aryl ketone such as benzophenone.

In a preferred embodiment, the invention provides a linking agent of the general formula: X-Y-X; wherein each X, independently, is a radical containing a photoreactive group and Y is a radical containing, inter alia, one or more charged groups. In such an

embodiment, the number and/or type of charged group(s) is sufficient to provide the molecule with sufficient aqueous solubility to allow the agent to be used (i.e., applied to a surface and activated) in a solvent system having water as a major component.

In an embodiment, Y contains one or more nitrogen-containing (e.g., quaternary ammonium) groups. For example, Y contains a linear or heterocyclic radical selected from the group consisting of:

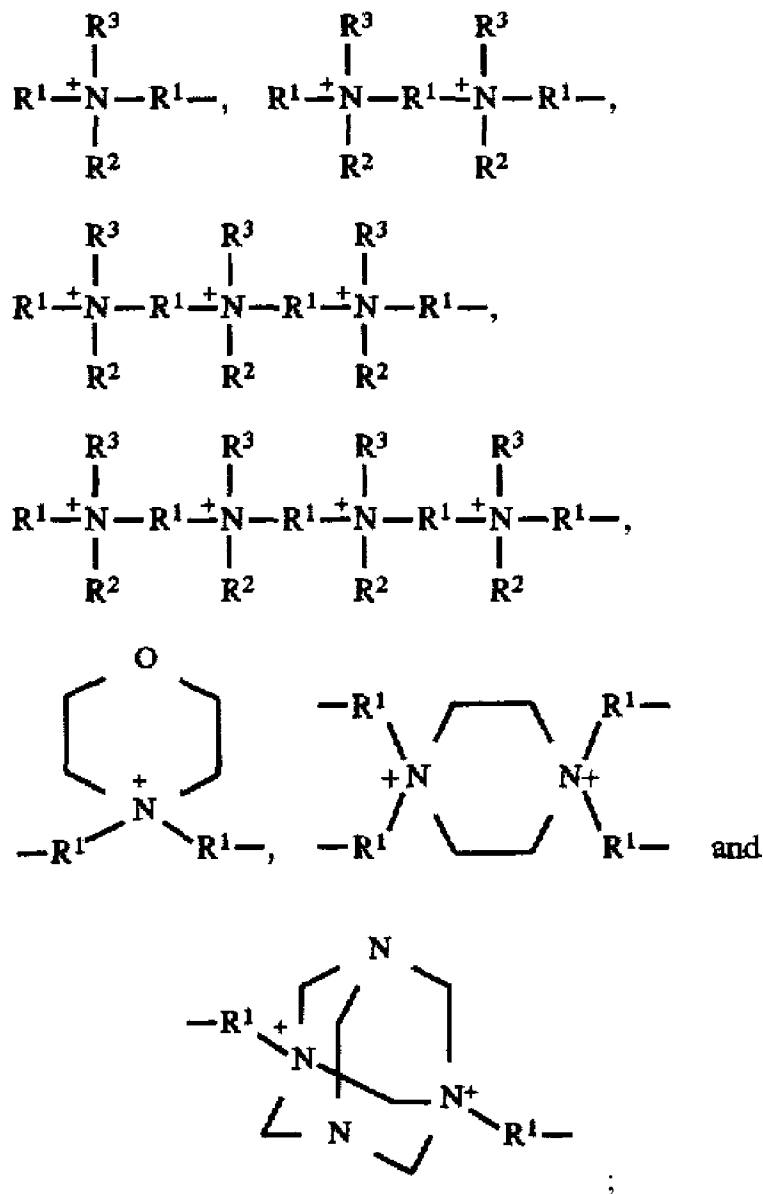

wherein each  $\text{R}^1$  independently is a radical containing an alkylene, oxyalkylene, cycloalkylene, arylene, or aralkylene group, each  $\text{R}^2$  independently is a radical containing an alkyl, oxyalkyl, cycloalkyl, aryl, or aralkyl group, and each  $\text{R}^3$  independently is either

a non-bonding pair of electrons, a hydrogen atom, or a radical of the same definition as  $R^2$ , in which the  $R^1$ ,  $R^2$  and  $R^3$  groups can contain noninterfering heteroatoms such as O, N, S, P and the like, and/or noninterfering substituents such as halo (e.g., Cl) and the like.

In an embodiment, one or more  $R^2$  radicals contains an aralkyl group in the form of a photoactivatable aryl ketone. These groups, in addition to the two photoactivatable groups provided by the above-defined X groups, can be used to provide the "triphoto", "tetraphoto" and higher order photoactivatable groups described herein. The use of three or more total photoreactive groups provides the linking agent with further ability to cross-link the agent to a target molecule and/or to a surface.

In yet another preferred embodiment, the  $R^2$  and  $R^3$  groups of the above linear radicals can, in effect, be fused (e.g., an  $R^2$  and an  $R^3$  on a single N atom, or a suitable combination of  $R^2/R^3$  groups on adjacent N atoms) in order to form heterocyclic structures other than those exemplified above. The specific choice and relationship between R groups in a linking agent of the present invention is not critical, so long as the linking agent provides two or more photoactivatable groups and retains sufficient water solubility for its intended use.

#### Linking Agent

A water-soluble, linking agent suitable for use as the present device is described in U.S. Patent Application No. 13/074537 (Kurdyumov et al.; filed 3/29/2011), the disclosure of which is incorporated herein by reference.

The linking agent can have the formula  $\text{Photo}^1\text{-LG-Photo}^2$ , wherein  $\text{Photo}^1$  and  $\text{Photo}^2$ , independently, represent at least one photoreactive group and LG represents a linking group. In one embodiment, one or more photoreactive groups include an aryl ketone. In a more particular embodiment, one or more photoreactive groups include benzophenone.

In one embodiment, the linking group includes one or more silicon atoms or one or more phosphorus atoms, wherein each photoreactive group is independently bonded to the linking group by a covalent linkage that includes at least one heteroatom. In one embodiment, at least one heteroatom is selected from oxygen, nitrogen, selenium, sulfur,

or a combination thereof. In one embodiment, at least one photoreactive group, heteroatom and linking group form an ether or an amine.

In a more particular embodiment, the linking group includes one silicon atom covalently bonded to at least two photoreactive groups. In another embodiment, the linking group includes at least two silicon atoms. In another embodiment, the linking group has the formula Si-Y-Si, wherein Y represents a linker that can be null, an amine, ether, linear or branched C<sub>1</sub>-C<sub>10</sub> alkyl, or a combination thereof. In one embodiment, Y is selected from O, CH<sub>2</sub>, OCH<sub>2</sub>CH<sub>2</sub>O and O(CH<sub>2</sub>CH<sub>2</sub>O)<sub>n</sub>, wherein n is an integer between 1 and 5, between 1 and 10, between 1 and 15, between 1 and 20, between 1 and 25, or between 1 and 30.

In another embodiment, the linking group includes one or more phosphorester bonds and/or one or more phosphoramidate bonds wherein one or more phosphorester and/or one or more phosphoramidate bonds form a covalent bond with at least one photoreactive group, such that the linking group includes at least two photoreactive groups. In one embodiment, the linking group is covalently attached to three photoreactive groups, wherein each photoreactive group is covalently bonded to the linking group by a phosphorester or phosphoramidate bond. In another embodiment, the linking group includes at least one phosphorus atom with a phosphorus-oxygen double bond (P=O), wherein at least one photoreactive group is bonded to at least one phosphorus atom. In yet another embodiment, the linking group includes one phosphorus atom with a phosphorus-oxygen double bond (P=O), wherein at least two or three photoreactive groups are covalently bonded to the phosphorus atom. In another embodiment, the linking group includes at least two phosphorus atoms, wherein at least one phosphorus atom includes a phosphorus-oxygen double bond (P=O), and at least one or at least two photoreactive groups are covalently bonded to each phosphorus atom.


The linking agent includes one or more photoreactive groups and a linking group, wherein each photoreactive group is independently attached to the linking group by a linkage. In other embodiments, the linking agent includes two or more photoreactive groups. In still other embodiments, the linking agent includes three or more photoreactive groups.

The linking agent includes one or more photoreactive groups attached to a linking group. The linking agent can be represented by the formula Photo<sup>1</sup>-LG-Photo<sup>2</sup>, wherein Photo<sup>1</sup> and Photo<sup>2</sup> independently represent at least one photoreactive group and LG represents a linking group. The term "linking group" as used herein, refers to a segment or group of molecules configured to connect two or more molecule to each another, wherein the linking group is capable of degrading under one or more conditions. In one embodiment, the linking group includes at least one silicon atom. In another embodiment, the linking group includes at least one phosphorus atom.

The term "linking group" as used herein, refers to a moiety configured to connect one molecule to another, wherein the linking group is capable of cleavage under one or more conditions. The term "biodegradable" as used herein, refers to degradation in a biological system, and includes for example, enzymatic degradation or hydrolysis. It should be noted that the term "degradable" as used herein includes both enzymatic and non-enzymatic (or chemical) degradation. It is also understood that hydrolysis can occur in the presence of or without an acid or base. In one embodiment, the linking agent is water soluble. In another embodiment, the linking agent is not water soluble.


In addition to providing a bond, the linking group can function as a spacer, for example, to increase the distance between the photoreactive groups of the linking agent. For example, in some instances it may be desirable to provide a spacer to reduce steric hindrance that may result between the photoreactive groups, which could interfere with the ability of the photoreactive groups to form covalent bonds with a support surface, or from serving as a photoinitiator for polymerization. As described herein, it is possible to vary the distance between the photoreactive groups, for example, by increasing or decreasing the spacing between one or more photoreactive groups.

As described herein, one or more photoreactive groups can be bonded to a linking group by a linkage. In one embodiment, the linkage between the photoreactive group and the linking group includes at least one heteroatom, including, but not limited to oxygen, nitrogen, selenium, sulfur or a combination thereof. In one embodiment, a photoreactive group, linking group and heteroatom form an ether (R<sup>1</sup>-O-R<sup>2</sup>), wherein R<sup>1</sup> is a photoreactive group and R<sup>2</sup> is a linking group. In another embodiment, a photoreactive group, linking group and heteroatom form an amine,




wherein  $\text{R}^1$  is a photoreactive group,  $\text{R}^2$  is a linking group, and  $\text{R}^3$  is hydrogen, aryl or alkyl, a photoreactive group, or a hydroxyl or salt thereof. In one embodiment,  $\text{R}^3$  is cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. The stability of the ether and/or amine linkage can be influenced depending upon the size (e.g., chain length, branching, bulk, etc.) of the substituents. For example, bulkier substituents will generally result in a more stable linkage (i.e., a linking agent that is slower to degrade in the presence of water and/or acid).


In one embodiment, the linking group includes one or more silicon atoms. In a particular embodiment, the linking group includes one silicon atom (which can be referred to as a monosilane) covalently bonded to at least two photoreactive groups. In another embodiment, the linking group includes at least two silicon atoms (which can be referred to as a disilane). In one embodiment, the linking group can be represented by the formula  $\text{Si-Y-Si}$ , wherein Y represents a linker that can be null (e.g., the linking group includes a direct Si-Si bond), an amine, ether, linear or branched  $\text{C}_1\text{-C}_{10}$  alkyl, or a combination thereof. In one embodiment, Y is selected from O,  $\text{CH}_2$ ,  $\text{OCH}_2\text{CH}_2\text{O}$ ,  $\text{O}(\text{CH}(\text{CH}_3)\text{CH}_2\text{O})_n$ , and  $\text{O}(\text{CH}_2\text{CH}_2\text{O})_n$ , wherein n is an integer between 1 and 5, between 1 and 10, between 1 and 15, between 1 and 20, between 1 and 25, or between 1 and 30. One embodiment of a disilane linking agent is shown below

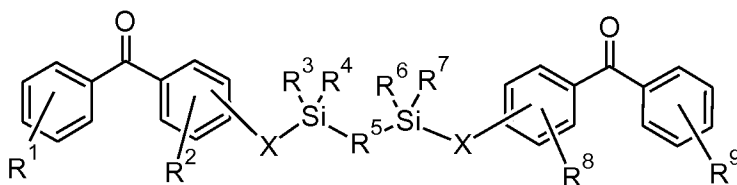

wherein  $\text{R}^1$ ,  $\text{R}^2$ ,  $\text{R}^8$  and  $\text{R}^9$  can be any substitution, including, but not limited to H, alkyl, halide, hydroxyl, amine, or a combination thereof;  $\text{R}^3$ ,  $\text{R}^4$ ,  $\text{R}^6$  and  $\text{R}^7$  can be alkyl, aryl or a combination thereof;  $\text{R}^5$  can be any substitution, including but not limited to O, alkyl or a combination thereof; and each X, independently, can be O, N, Se, S, or alkyl, or a combination thereof. One specific embodiment is shown below:

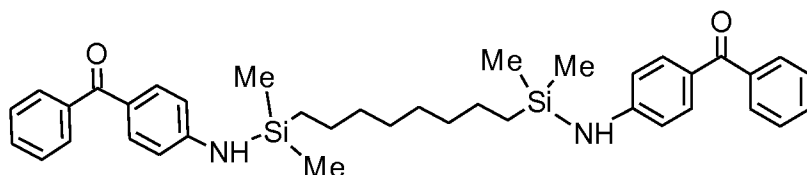

In one embodiment, the linking agent can be represented by the formula

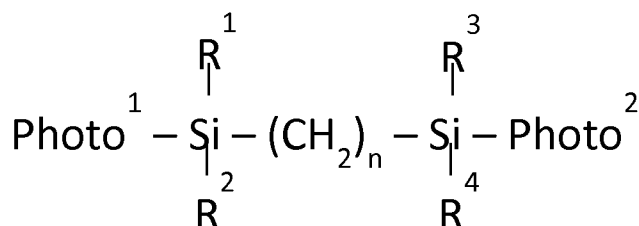


wherein Photo<sup>1</sup> and Photo<sup>2</sup>, independently, represent one or more photoreactive groups


and n is an integer between 1 and 10, wherein the linking agent comprises a covalent linkage between at least one photoreactive group and the linking group, wherein the covalent linkage between at least one photoreactive group and the linking group is interrupted by at least one heteroatom. In general, a longer hydrocarbon chain between the two silicon atoms will tend to increase the flexibility of the linking agent and may

facilitate crosslinking between a greater number of polymers than a linking agent with a shorter carbon chain, since the photoreactive groups can react with polymers located farther apart from one another. In the formula shown above, R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup>, R<sup>4</sup> are independently alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In a more particular embodiment, R<sup>1</sup>-R<sup>4</sup> are independently phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof. In another embodiment, R<sup>1</sup>-R<sup>4</sup> can also be, independently, a photoreactive group. In yet another embodiment, R<sup>1</sup>-R<sup>4</sup> can also be, independently, hydroxyl or salt thereof. In one embodiment, the hydroxyl salt includes a counterion that is lithium, sodium, potassium, or a combination thereof.

In another embodiment, the linking agent can be represented by the formula

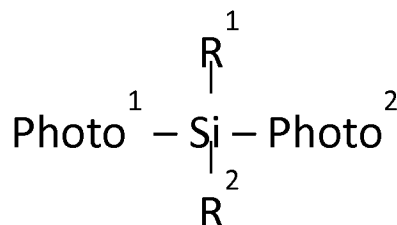

wherein Photo<sup>1</sup> and Photo<sup>2</sup>, independently, represent one or more photoreactive group, wherein the linking agent comprises a covalent linkage between at least one photoreactive group and the linking group, wherein the covalent linkage between at least one photoreactive group and the linking group is interrupted by at least one heteroatom;  
 5 R<sup>1</sup> and R<sup>2</sup> are independently alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In a more particular embodiment, R<sup>1</sup> and R<sup>2</sup> are independently phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof. R<sup>1</sup> and R<sup>2</sup> can also be, independently, a photoreactive group, wherein the linking agent comprises a covalent linkage between at  
 10 least one photoreactive group and the linking group, wherein the covalent linkage between at least one photoreactive group and the linking group is interrupted by at least one heteroatom; or hydroxyl or salt thereof. In one embodiment, the hydroxyl salt includes a counterion that is lithium, sodium, potassium, or a combination thereof. One embodiment of a monosilane linking agent is shown below

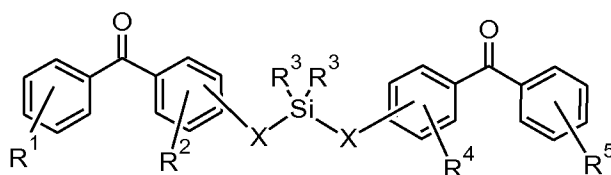


15 in which R<sup>1</sup> and R<sup>5</sup> can be any substitution, including, but not limited to H, halogen, amine, hydroxyl, alkyl, or a combination thereof; R<sup>2</sup> and R<sup>4</sup> can be any substitution, except OH, including, but not limited to H, alkyl or a combination thereof; R<sup>3</sup> can be alkyl, aryl or a combination thereof; and X, independently, can be O, N, Se, S, alkyl or a  
 20 combination thereof.

In another embodiment, the linking group includes one or more phosphorous atoms. In one embodiment, the linking group includes one phosphorus atom (which can also be referred to as a mono-phosphorus linking group). In another embodiment, the linking agent includes two phosphorus atoms (which can also be referred to as a bis-  
 25 phosphorus linking group). In one embodiment, the linking group comprises at least one phosphorus atom with a phosphorus-oxygen double bond (P=O), wherein at least one or two photoreactive groups are bonded to the phosphorus atom. In another embodiment, the linking group comprises one phosphorus atom with a phosphorus-oxygen double bond (P=O), wherein two or three photoreactive groups are covalently bonded to the


phosphorus atom. In another embodiment, the linking group comprises at least two phosphorus atoms, wherein at least one phosphorus atom includes a phosphorus-oxygen double bond (P=O), and at least one or two photoreactive groups are covalently bonded to each phosphorus atom.

5 In a more particular embodiment, the linking agent can be represented by the formula:

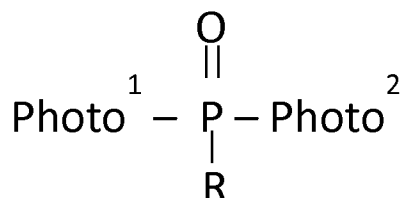

wherein Photo<sup>1</sup> and Photo<sup>2</sup>, independently, represent one or more photoreactive groups, wherein the linking agent comprises a covalent linkage between at least one  
 10 photoreactive group and the linking group, wherein the covalent linkage between at least one photoreactive group and the linking group is interrupted by at least one heteroatom and R is alkyl or aryl, a photoreactive group, hydroxyl or salt thereof, or a combination thereof. In one embodiment, the hydroxyl salt includes a counterion that is lithium, sodium, potassium, or a combination thereof. In a more particular embodiment, R is  
 15 cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In a more particular embodiment, R is phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof.


In another embodiment, the linking agent can be represented by formula:

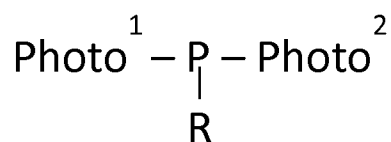

20 wherein Photo<sup>1</sup> and Photo<sup>2</sup> independently, represent one or more photoreactive groups, wherein the linking agent comprises a covalent linkage between at least one photoreactive group and the linking group, wherein the covalent linkage between at least one photoreactive group and the linking group is interrupted by at least one heteroatom and R is alkyl or aryl, a photoreactive group (wherein the covalent linkage between the  
 25 photoreactive group and the linking group may be interrupted by at least one heteroatom),

hydroxyl or salt thereof, or a combination thereof. In one embodiment, the hydroxyl salt includes a counterion that is lithium, sodium, potassium, or a combination thereof. In a more particular embodiment, R is cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In one embodiment, R is phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof.

In another embodiment, the linking agent can be represented by the formula:

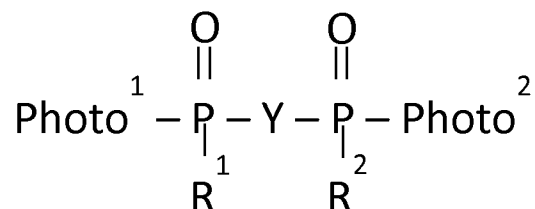

wherein Photo<sup>1</sup> and Photo<sup>2</sup>, independently, represent one or more photoreactive groups, wherein the linking agent comprises a covalent linkage between at least one

photoreactive group and the linking group, wherein the covalent linkage between at least one photoreactive group and the linking group is interrupted by at least one heteroatom;

Y represents a linker that can be N or O (e.g., pyrophosphate), linear or branched C<sub>1</sub>-C<sub>10</sub> alkyl, or a combination thereof; and R<sup>1</sup> and R<sup>2</sup> are independently alkyl, aryl, a

photoreactive group (wherein the covalent linkage between the photoreactive group and the linking group can be interrupted by at least one heteroatom), hydroxyl or salt thereof,

or a combination thereof. In one embodiment, Y is selected from O, CH<sub>2</sub>, OCH<sub>2</sub>CH<sub>2</sub>O, O(CH(CH<sub>3</sub>)CH<sub>2</sub>O)<sub>n</sub>, and O(CH<sub>2</sub>CH<sub>2</sub>O)<sub>n</sub>, wherein n is an integer between 1 and 5,

between 1 and 10, between 1 and 15, between 1 and 20, between 1 and 25, or between 1 and 30. In one embodiment, the hydroxyl salt counterion is lithium, sodium, potassium,


or a combination thereof. In a more particular embodiment, R<sup>1</sup> and R<sup>2</sup> are independently, cyclic, linear or branched hydrocarbon, saturated or unsaturated, aromatic or

heteroaromatic, or a combination thereof. In one embodiment, R<sup>1</sup> and R<sup>2</sup> are


independently phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof. In general, a longer hydrocarbon chain between the two phosphorus atoms will tend to

increase the flexibility of the linking agent and may facilitate crosslinking between a greater number of polymers than a linking agent with a shorter carbon chain, since the reactive photoreactive groups can react with polymers located farther apart from one

another. In one embodiment, Y can be O, CH<sub>2</sub>, OCH<sub>2</sub>CH<sub>2</sub>O, O(CH<sub>2</sub>(CH<sub>3</sub>)CH<sub>2</sub>O)<sub>n</sub>, and O(CH<sub>2</sub>CH<sub>2</sub>O)<sub>n</sub> wherein n is an integer between 1 and 5, between 1 and 10, between 1 and 15, between 1 and 20, between 1 and 25, or between 1 and 30. One embodiment is shown below

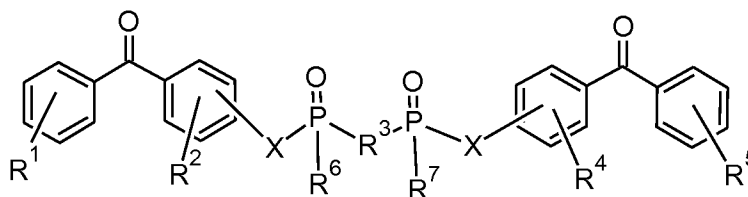


in which R<sup>1</sup>, R<sup>2</sup>, R<sup>4</sup> and R<sup>5</sup> can be any substitution, including but not limited to H, alkyl, halogen, amine, hydroxyl, or a combination thereof; R<sup>3</sup> can be any substitution, including but not limited to O, alkyl, or a combination thereof; R<sup>6</sup> and R<sup>7</sup> can be alkyl, aryl or a combination thereof; and each X can independently be O, N, Se, S, alkyl, or a combination thereof. In one embodiment, the linking agent includes one or more phosphorester bonds and one or more phosphoramidate bonds, and can be represented by the formula:

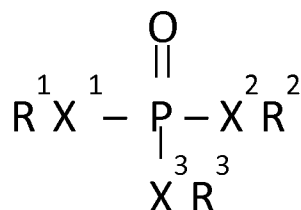


wherein X and X<sup>2</sup> are, independently, O, N, Se, S or alkyl; R<sup>1</sup> and R<sup>2</sup> are independently, one or more photoreactive groups, and X<sup>3</sup> is O, N, Se, S, alkyl or aryl; R<sup>3</sup> is alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In a more particular embodiment, R<sup>3</sup> is phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof. R<sup>3</sup> can also be a photoreactive group or a hydroxyl or salt thereof. In one embodiment, the hydroxyl salt counterion is lithium, sodium, potassium, or a combination thereof.

In one embodiment, the linking agent comprises a triphosphorester, which can be represented by the formula.

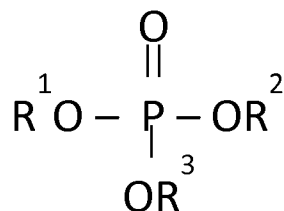

wherein  $\text{R}^1$  and  $\text{R}^2$  are independently, one or more photoreactive groups, and  $\text{R}^3$  is alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In a more particular embodiment,  $\text{R}^3$  is phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof.  $\text{R}^3$  can also be a photoreactive group or a hydroxyl or salt thereof. In one embodiment, the hydroxyl salt counterion is lithium, sodium, potassium, or a combination thereof.

In another embodiment, the linking agent comprises a triphosphoramidate, which can be represented by the formula.

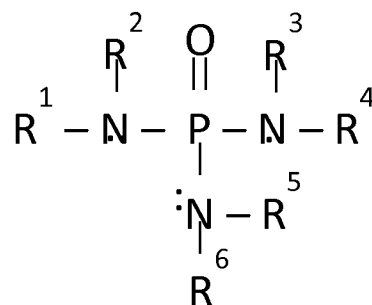

10

wherein  $\text{R}^1$ - $\text{R}^6$  are independently, a photoreactive group, a hydroxyl or salt thereof, alkyl or aryl, or a combination thereof, wherein at least two of  $\text{R}^1$ - $\text{R}^6$  are, independently, a photoreactive group. In one embodiment, the hydroxyl salt counterion is lithium, sodium, potassium, or a combination thereof. In a more particular embodiment,  $\text{R}^1$ - $\text{R}^6$  are independently cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In a more particular embodiment,  $\text{R}^1$ - $\text{R}^6$  are, independently, phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof.

15

The linking agent can be formed using any suitable reaction pathway. In one embodiment, the linking agent is formed by reacting a functionalized linking element with one or more, typically two or more photoreactive groups. As used herein, the term “linking element” refers to the linking group component of the linking agent before it is bonded to one or more photoreactive groups. The term “functionalized linking element”

20

is used to indicate that the linking element includes one or more reactive functional groups. In one embodiment, the linking element includes one or more halogen functional groups. The term “halogen” refers to fluorine, chlorine, bromine, or iodine functional groups. In another embodiment, the linking element includes one or more

5 trifluoromethanesulfonate (CF<sub>3</sub>SO<sub>3</sub>-) functional groups.


In one embodiment, the linking element includes one or more silicon atoms. In one embodiment, the linking element includes one or more halogen substituents, such as fluorine, chlorine, bromine, iodine, and combinations thereof. In another embodiment, the linking element includes at least two halogen substituents. In another embodiment,

10 the linking element includes one or more trifluoromethanesulfonate (triflate) substituents. In another embodiment, the linking element includes at least two triflate substituents. In a more particular embodiment, the linking element includes one silicon atom with at least two halogen or triflate substituents. In another embodiment, the linking element includes at least two silicon atoms. In a more particular embodiment, the linking element includes

15 two silicon atoms, wherein each silicon atom includes at least one halogen or triflate substituent. In one embodiment, the linking element can be represented by the formula Si-Y-Si, wherein Y represents a linker that can be null, an amine, ether, linear or branched C<sub>1</sub>-C<sub>10</sub> alkyl, or a combination thereof, wherein each silicon atom includes at least one halogen or triflate substituent. In one embodiment, Y is selected from O, CH<sub>2</sub>,

20 OCH<sub>2</sub>CH<sub>2</sub>O, O(CH(CH<sub>3</sub>)CH<sub>2</sub>O)<sub>n</sub>, and O(CH<sub>2</sub>CH<sub>2</sub>O)<sub>n</sub>, wherein n is an integer between 1 and 5, between 1 and 10, between 1 and 15, between 1 and 20, between 1 and 25, or between 1 and 30.


In one embodiment, the linking element can be represented by the formula

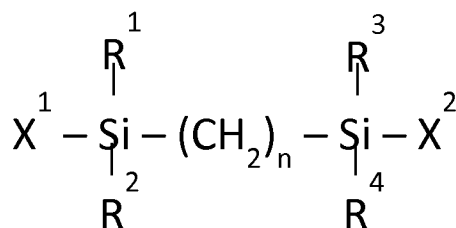

25 wherein X<sup>1</sup> and X<sup>2</sup> are independently halogen, such as fluorine, chlorine, bromine, iodine; trifluoromethanesulfonate; or a combination thereof and n is an integer between 1 and 10. R<sub>1</sub>-R<sub>4</sub> are independently alkyl or aryl, including, but not limited to cyclic, linear

or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In a more particular embodiment,  $R^1$ - $R^4$  are independently phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof. In another embodiment,  $R^1$ - $R^4$  can also be, independently, halogen. In yet another embodiment,  $R^1$ - $R^4$  can also be, independently, hydroxyl or salt thereof. In one embodiment, the hydroxyl salt includes a counterion that is lithium, sodium, potassium, or a combination thereof.

In another embodiment, the linking element can be represented by the formula




wherein  $X^1$  and  $X^2$  are independently halogen; such as fluorine, chlorine, bromine, and iodine; or trifluoromethanesulfonate;  $R^1$  and  $R^2$  are independently alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In a more particular embodiment,  $R^1$  and  $R^2$  are independently phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof.  $R^1$  and  $R^2$  can also be, independently, halogen, hydroxyl or hydroxyl salt. In one embodiment, the hydroxyl salt includes lithium, sodium, potassium, or a combination thereof as a counterion.

In another embodiment, the linking element includes one or more phosphorous atoms. In one embodiment, the linking element comprises at least one phosphorus atom with a phosphorus-oxygen double bond ( $\text{P}=\text{O}$ ), wherein at least one halogen or trifluoromethanesulfonate substituent is bonded to at least one phosphorus atom. In another embodiment, the linking element comprises one phosphorus atom with a phosphorus-oxygen double bond ( $\text{P}=\text{O}$ ), wherein two or three halogen or trifluoromethanesulfonate substituents are, independently, covalently bonded to the phosphorus atom. In another embodiment, the linking element comprises at least two phosphorus atoms, wherein at least one phosphorus atom includes a phosphorus-oxygen double bond ( $\text{P}=\text{O}$ ), and at least one or two halogen or trifluoromethanesulfonate

substituents are covalently bonded to each phosphorus atom. In a more particular embodiment, the linking element comprises two phosphorus atoms.

In a more particular embodiment, the linking element can be represented by the formula




5

wherein  $\text{X}^1$  and  $\text{X}^2$  are independently halogen; such as fluorine, chlorine, bromine, and iodine; or trifluoromethanesulfonate; and R is alkyl or aryl, halogen, hydroxyl or a hydroxyl salt, or a combination thereof. In one embodiment, the hydroxyl salt includes a counterion that is lithium, sodium, potassium, or a combination thereof. In a more particular embodiment, R is cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In a more particular embodiment, R is phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof.

10

In another embodiment, the linking element can be represented by formula:




15

wherein  $\text{X}^1$  and  $\text{X}^2$  are independently halogen, such as fluorine, chlorine, bromine, and iodine; or trifluoromethanesulfonate and R is alkyl or aryl, halogen, trifluoromethanesulfonate, hydroxyl or salt thereof, or a combination thereof. In one embodiment, the hydroxyl salt includes a counterion that is lithium, sodium, potassium, or a combination thereof. In a more particular embodiment, R is cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In one embodiment,  $\text{R}^1$  and  $\text{R}^2$  are independently phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof.

20

In another embodiment, the linking element can be represented by the formula:

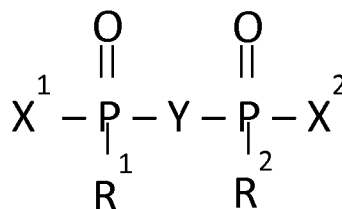

wherein  $\text{X}^1$  and  $\text{X}^2$  are independently halogen, such as fluorine, chlorine, bromine, and iodine; or trifluoromethanesulfonate, Y represents a linker that can be null, an amine, an ether, linear or branched  $\text{C}_1$ - $\text{C}_{10}$  alkyl, or a combination thereof; and  $\text{R}^1$  and  $\text{R}^2$  are independently alkyl, aryl, halogen, hydroxyl or salt thereof, or a combination thereof. In one embodiment, Y is selected from O,  $\text{CH}_2$ ,  $\text{OCH}_2\text{CH}_2\text{O}$ ,  $\text{O}(\text{CH}(\text{CH}_3)\text{CH}_2\text{O})_n$ , and  $\text{O}(\text{CH}_2\text{CH}_2\text{O})_n$ , wherein n is an integer between 1 and 5, between 1 and 10, between 1 and 15, between 1 and 20, between 1 and 25, or between 1 and 30. In one embodiment, the hydroxyl salt counterion is lithium, sodium, potassium, or a combination thereof. In a more particular embodiment,  $\text{R}^1$  and  $\text{R}^2$  are independently, cyclic, linear or branched hydrocarbon, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof. In one embodiment,  $\text{R}^1$  and  $\text{R}^2$  are independently phenyl, methyl, ethyl, isopropyl, t-butyl, or a combination thereof.

#### Water-Soluble, Degradable Linking Agent

A water-soluble, degradable linking agent suitable for use in the present polymeric medical device is described in U.S. Patent Application Nos. 61/285,345 and 61/358,464, the disclosure of which is incorporated herein by reference.

Described in this section is a linking agent that includes a core molecule with one or more charged groups; and one or more photoreactive groups covalently attached to the core molecule by one or more degradable linkers. In one embodiment, the linking agent includes a non-polymeric core molecule. In one embodiment, the non-polymeric core molecule is a hydrocarbon, including a hydrocarbon that is linear, branched, cyclic, or a combination thereof; aromatic, non-aromatic, or a combination thereof; monocyclic, polycyclic, carbocyclic, heterocyclic, or a combination thereof; benzene or a derivative thereof. In one embodiment, one or more degradable linkers comprise an amide, an ester, a thiocarbamate, or a combination thereof. In one embodiment, one or more

photoreactive group is an aryl ketone, including, for example, acetophenone, benzophenone, anthraquinone, anthrone, anthrone-like heterocycles, substituted derivatives thereof, or a combination thereof. In one embodiment, one or more charged groups are negatively charged, including, for example, an organic acid selected from  
5 sulfuric acid, sulfonic acid, carboxylic acid, phosphoric acid, phosphonic acid, or a combination thereof. In another embodiment, one or more charged groups are positively charged, for example, a quaternary ammonium salt.


Described herein is a water-soluble, degradable linking agent. The degradable linking agent includes one or more photoreactive groups, one or more charged groups,  
10 and one or more degradable linkers configured to operably attach one or more photoreactive groups to one or more negatively charged groups. In one embodiment, the linking agent includes a core having one or more charged groups attached directly or indirectly thereto and one or more photoreactive groups attached to the non-polymeric core by one or more degradable linkers.

The degradable linking agent includes one or more photoreactive groups attached to one or more charged groups by a degradable linker. In a more particular embodiment, the degradable linking agent includes a core molecule to which the charged groups and the photoreactive groups can be independently attached. In one embodiment, the degradable linking agent includes a non-polymeric core molecule. The term "degradable  
20 linker" as used herein, refers to a segment configured to connect one part of the linking agent to another, wherein the linker is capable of cleavage under one or more conditions. The term degradable as used herein also encompasses "biodegradable linkers." The term "biodegradable" as used herein, refers to degradation in a biological system, and includes for example, enzymatic degradation or hydrolysis. It should be noted that the term  
25 "degradable" as used herein includes both enzymatic and non-enzymatic (or chemical) degradation. In one embodiment, the degradable linker comprises one or more degradable linkages such as an amide, an ester, a thiocarbamate, or combinations thereof.

In addition to providing a degradable segment, the degradable linker can function as a spacer, to increase the distance between one or more photoreactive groups and the  
30 core molecule. For example, in some instances it may be desirable to provide a spacer to reduce steric hindrance that may result between the core molecule and one or more

photoreactive groups that could interfere with the ability of one or more photoreactive groups to form covalent bonds with a support surface, or from serving as a photoinitiator for polymerization. As described herein, it is possible to vary the distance between the photoreactive groups, for example, by increasing or decreasing the spacing between one or more photoreactive groups.

A degradable linking agent can be represented by the formula:

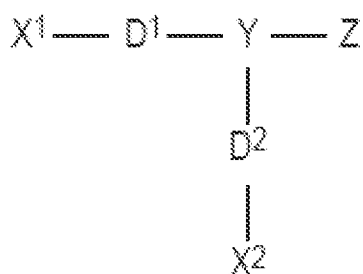


wherein  $X^1$  and  $X^2$  include, independently, one or more photoreactive groups, for example, an aryl ketone photoreactive group, including, but not limited to, aryl ketones such as acetophenone, benzophenone, anthraquinone, anthrone, anthrone-like heterocycles, their substituted derivatives or a combination thereof;  $D^1$  and  $D^2$  are, independently, degradable segments, including, for example, degradable segments that include an amide, an ester, a thiocarbamate, or a combination thereof; Y represents a core molecule, which can be either polymeric or non-polymeric, including, but not limited to a hydrocarbon, including a hydrocarbon that is linear, branched, cyclic, or a combination thereof; aromatic, non-aromatic, or a combination thereof; monocyclic, polycyclic, carbocyclic, heterocyclic, or a combination thereof; benzene or a derivative thereof; or a combination thereof; and Z represents one or more charged groups, including, for example, one or more negatively charged groups such as an organic acid salt, including but not limited to sulfuric acid, sulfonic acid, carboxylic acid, phosphoric acid, phosphonic acid, or a combination thereof; one or more positively charged groups, for example, a quaternary ammonium salt, or a combination thereof.

In the formula shown above, the two or more photoreactive groups ( $X^1$  and  $X^2$ ) are discrete. As used herein, the term “discrete” means that the two or more photoreactive groups are distinct from each other, as compared to a bifunctional photoreactive agent, that can include two or more photoreactive moieties, such as a

conjugated cyclic diketone wherein each ketone group of the diketone is adapted to serve as a photoreactive moiety capable of being activated in order to provide a free radical. It is also understood that the first and second photoreactive groups and/or the first and second degradable linkers may or may not be the same. For example, in one  
5 embodiment, the photoreactive groups ( $X^1$  and  $X^2$ ) are the same or identical. In another embodiment, the photoreactive groups ( $X^1$  and  $X^2$ ) are not the same. In one embodiment, the degradable linker ( $D^1$  and  $D^2$ ) are the same or identical. In another embodiment, the degradable linker ( $D^1$  and  $D^2$ ) are not the same. In one embodiment, the photoreactive groups include one or more first photoreactive groups adapted to attach the linking agent  
10 to a surface and one or more second photoreactive groups adapted to initiate photopolymerization.

In one embodiment, the degradable linker is a biodegradable linker that includes an amide bond (also referred to as a peptide bond, or peptide linker). A peptide bond can be cleaved by amide hydrolysis (the addition of water) by enzymatic and non-enzymatic  
15 reactions. Proteolysis refers to amide hydrolysis catalyzed by an enzyme. The term “protease” refers to an enzyme that conducts proteolysis. Examples of enzymes capable of hydrolyzing a peptide bond include, but are not limited to, acylase, amidohydrolase, deaminase, trypsin, and alpha-chymotrypsin.

A nonlimiting example of a degradable linker with a peptide bond can be  
20 represented by formula I:

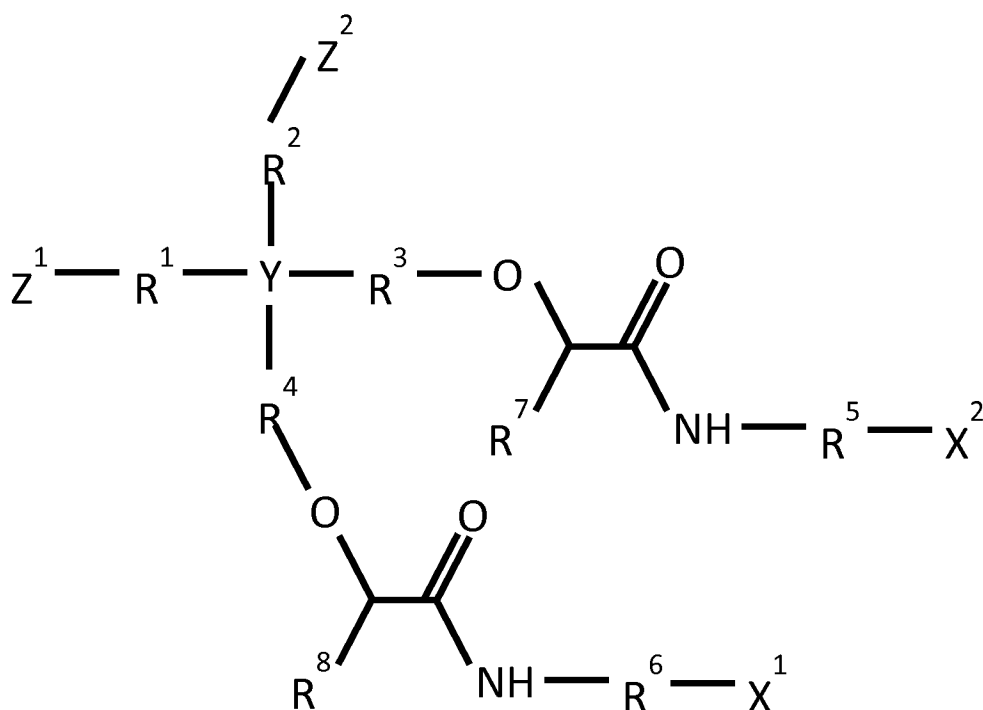


I.


wherein X<sup>1</sup> and X<sup>2</sup> include, independently, one or more photoreactive groups, including, but not limited to, aryl ketone photoreactive groups, such as acetophenone, benzophenone, anthraquinone, anthrone, anthrone-like heterocycles, their substituted derivatives or a combination thereof; Y represents a core molecule, which can be polymeric or non-polymeric, including for example, non-polymeric molecules such as a hydrocarbon, including linear, branched or cyclic; aromatic or non-aromatic; monocyclic, polycyclic, carbocyclic or heterocyclic; benzene or a derivative thereof; or combinations thereof; Z<sup>1</sup> and Z<sup>2</sup> represent, independently, one or more charged groups, including positively and negatively charged groups, for example a negatively charged group that includes an organic acid salt, including but not limited to sulfuric acid, sulfonic acid, carboxylic acid, phosphoric acid, phosphonic acid, or a combination thereof; one or more positively charged groups, for example, a quaternary ammonium salt; or a combination thereof. R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup>, and R<sup>4</sup> are, independently, spacer elements that can be null, a heteroatom, alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof; R<sup>5</sup> and R<sup>6</sup> are, independently, spacer elements that can be null, alkyl or aryl, including, but not limited to cyclic, linear or

branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof; and  $R^7$  and  $R^8$  are, independently substituents that can be hydrogen, alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof.

- 5 More specific examples of a degradable linker that includes a degradable amide bond include those shown in formulae II and III:

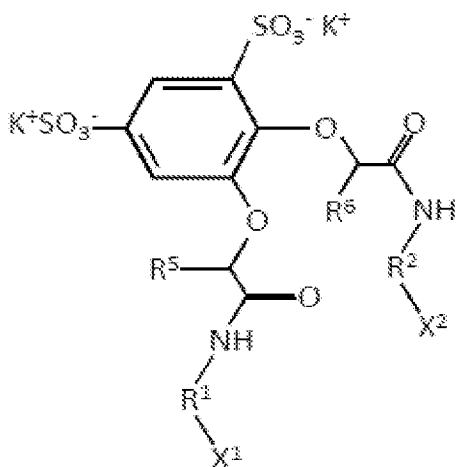


II.

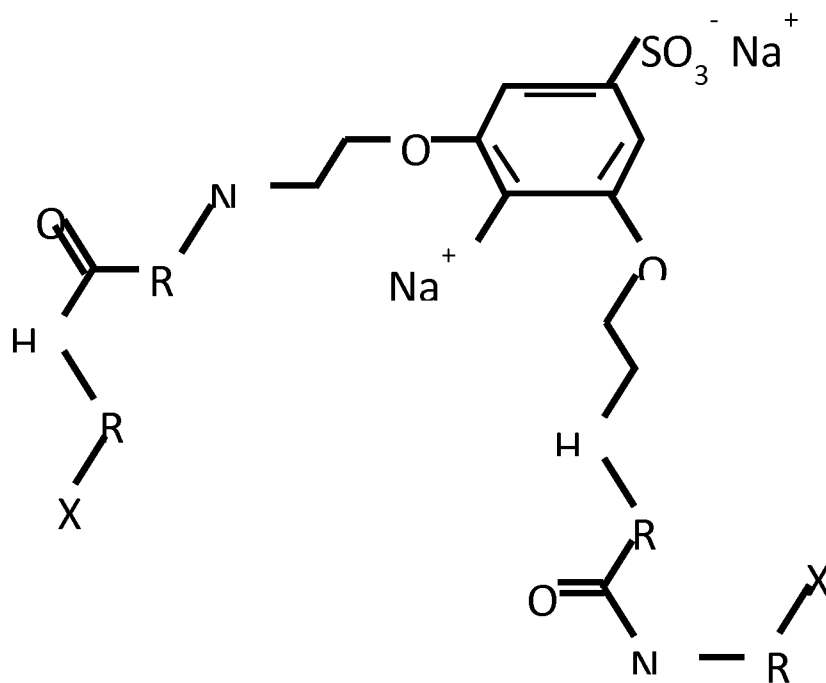

III.

wherein  $X^1$  and  $X^2$  include, independently, one or more photoreactive groups, including, but not limited to aryl ketone photoreactive groups, such as acetophenone, benzophenone, anthraquinone, anthrone, anthrone-like heterocycles, their substituted derivatives or a combination thereof; and  $R^1$ ,  $R^2$ ,  $R^3$ , and  $R^4$  are, independently, spacer elements, which can be null, alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof; and  $R^5$  and  $R^6$  are, independently substituents that can be hydrogen, alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof.


More specific examples of linkers with degradable peptide bonds are shown in formula IV, below, wherein  $R^1$  and  $R^2$  are, independently, substituents that can be hydrogen, alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof; and  $R^3$  and  $R^4$  are, independently, spacer elements, which can be null, alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof.

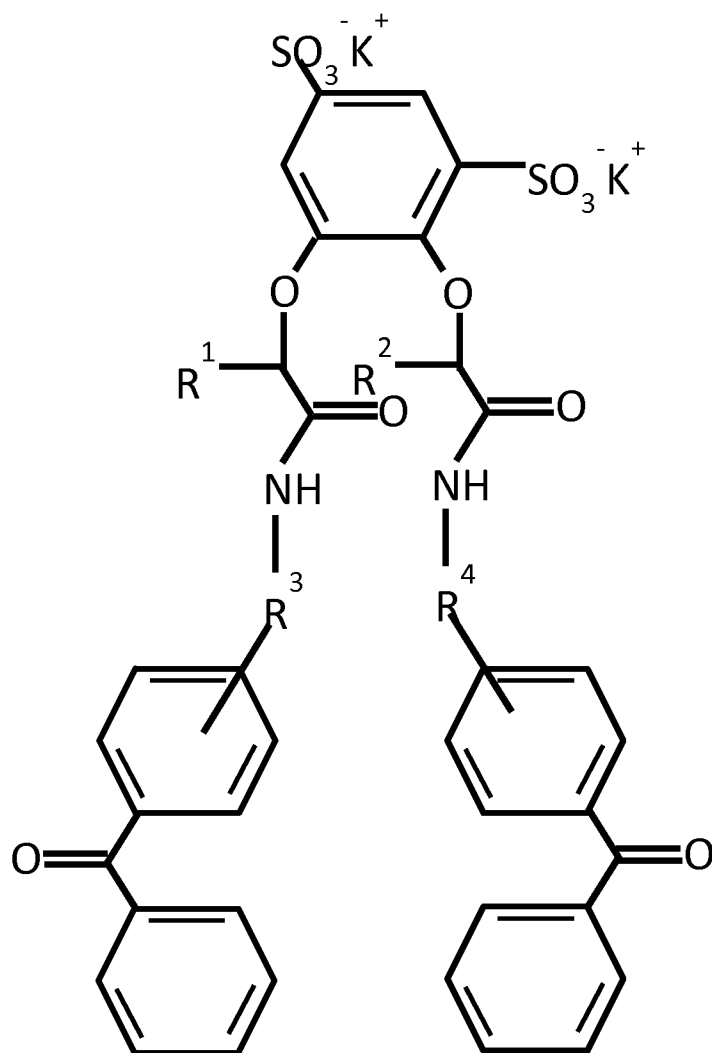


IV.

In another embodiment, the degradable linking agent includes one or more ester bonds. Esters can be hydrolyzed to the parent carboxylic acid and an alcohol under acidic or basic conditions. An example of a linker with a degradable ester bond is shown

5 in formula V and VI.

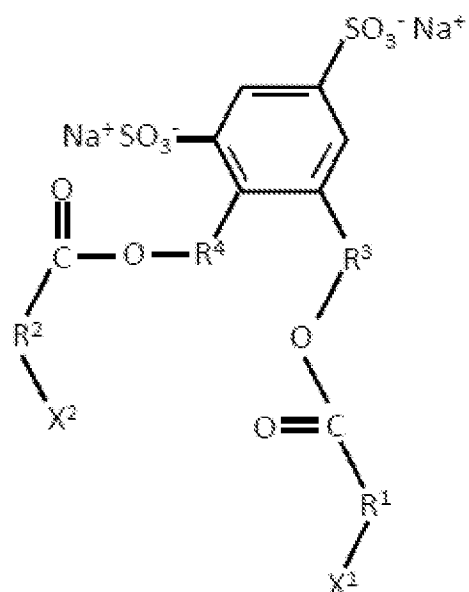

V.

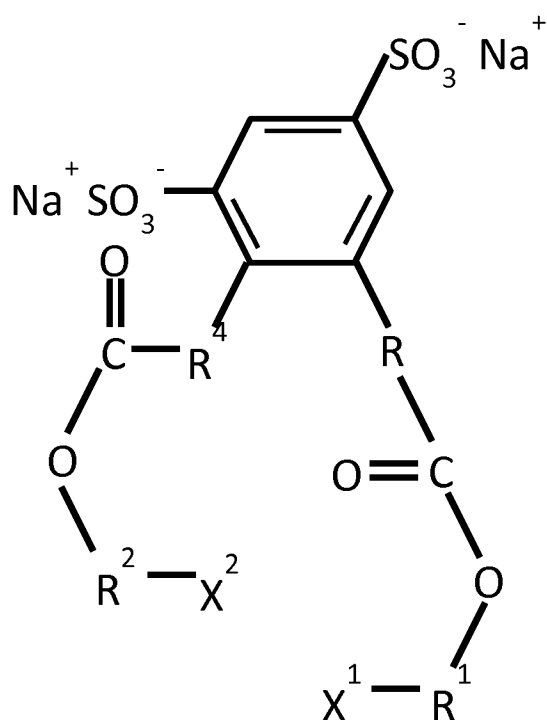


VI.

- 5 wherein  $X^1$  and  $X^2$  include, independently, one or more photoreactive groups, including but not limited to aryl ketone photoreactive groups, such as acetophenone, benzophenone,

anthraquinone, anthrone, anthrone-like heterocycles, their substituted derivatives or a combination thereof; and  $R^1$ ,  $R^2$ , are, independently, spacer elements, which can be null, alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof.  $R^3$  and  $R^4$  are,  
 5 independently, spacer elements, which can be null, a heteroatom, including, but not limited to O, N or S, alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof.

In another embodiment, the degradable linking agent includes one or more thiocarbamate bonds. Thiocarbamates are carbamates in which the  $C=O$  group has been  
 10 replaced by a  $C=S$  group. One example of a degradable linker with a thiocarbamate bond can be represented by formula VII:

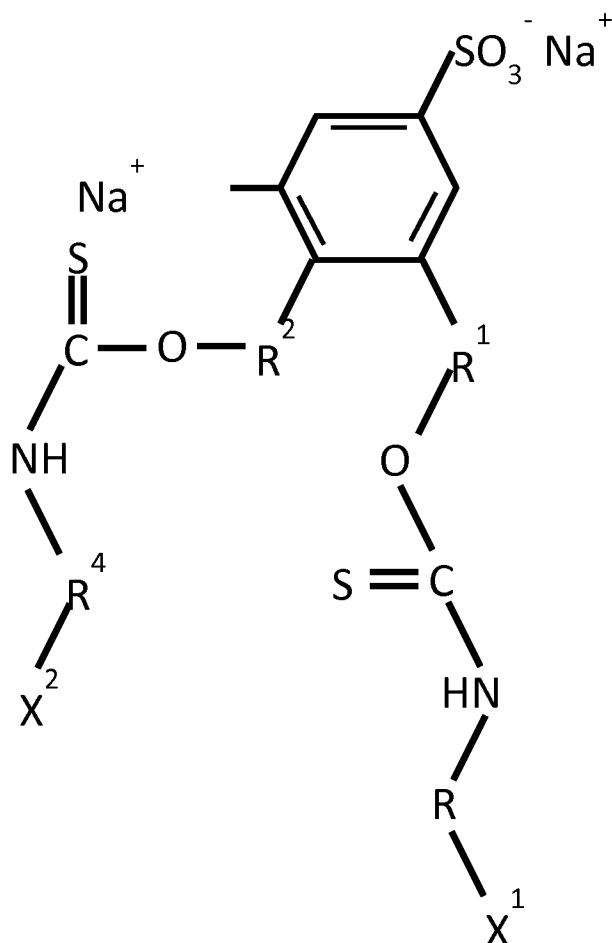

VII.

wherein  $X^1$  and  $X^2$  include, independently, one or more photoreactive groups, including but not limited to aryl ketone photoreactive groups, such as acetophenone, benzophenone,

anthraquinone, anthrone, anthrone-like heterocycles, their substituted derivatives or a combination thereof;  $R^1$  and  $R^2$  are, independently, spacer elements, which can be null, a heteroatom, including, but not limited to O, N or S, alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof; and  $R^3$  and  $R^4$  are, independently, spacer elements, which can be null, alkyl or aryl, including, but not limited to cyclic, linear or branched, saturated or unsaturated, aromatic or heteroaromatic, or a combination thereof.

In some embodiments, a separate material can be disposed in a layer over the first material or portion. Referring now to FIG. 8, a cross-sectional schematic view of a spacing element 800 is shown in accordance with various embodiments herein. The spacing element 800 can include an inner portion 802 including a first material. The inner portion 802 can define a central lumen 804. The spacing element 800 can also include an outer portion 806 including a second material. The outer portion 806 can be continuous or discontinuous over the surface of the spacing element 800 (for example, the outer portion can have discontinuities such as pores or openings). The outer portion 806 can include a water permeable material. The outer portion 806 can include a lubricious coating. In some embodiments the outer portion 806 can include a layer of flashspun high-density polyethylene fibers. In some embodiments the outer portion 806 can include a layer of expanded polytetrafluoroethylene (ePTFE). In some embodiments, the outer portion 806 can include a layer of graphene. In some embodiments, the outer portion 806 can include a layer of graphene with a modifying compound covalently bonded thereto. For example, a linking agent can be covalently bonded to the graphene and to another compound having desired functional properties thereby providing the graphene surface with those properties.

In some embodiments, the spacing elements can define a volume that can be filled with another components, can be inflated with air or a liquid, or that can be used to retain absorbed exudate (for example, as a fluid sequestering agent), and/or and antimicrobial agent. In some embodiments, the interior of the spacing elements is hollow. Referring now to FIG. 9, a cross-sectional schematic view of a spacing element 900 in accordance with various embodiments herein is shown. The spacing element 900 can include an outer layer 922 and an inner layer 924 that are separate from one another in cross-section

such that they define a volume 928. The inner layer 924 can define a central lumen 926. In some embodiments, the outer layer 922 can include a material with elastomeric properties (for example, but not limited to, polyurethane) such that it can expand in size in response to the volume being filled with a fluid (such as air or a liquid) or other matter (such as a dispersion).

In some embodiments, the spacing element can define a volume that can be filled with a material that aids in absorbing exudate. Referring now to FIG. 10, a cross-sectional schematic view of a spacing element 1000 in accordance with various embodiments herein is shown. The spacing element 1000 can include an outer layer 1022 and an inner layer 1024 that are separate from one another in cross-section such that they define a volume 1028. The inner layer 1024 can define a central lumen 1026. In this embodiment, a plurality of hollow fibers 1030 are disposed within the volume 1028. In some embodiments, the hollow fibers can be a polysulfone polymer.

In some embodiments, the spacing elements can include one or more interior volumes other than the central lumen. Referring now to FIG. 11 a cross-sectional schematic view of a spacing element 1100 is shown in accordance with various embodiments herein. The spacing element 1100 is shown including a portion 1102 surrounding a central lumen 1104. The spacing element 1100 can further include a plurality of interior volumes 1132 that can be used to store exudate or can be filled with another material.

In addition, various other elements can be disposed within spacing elements. By way of example, in some embodiments a radio frequency identification device (RFID) can be disposed within a spacing element. In some embodiments a metal, such as a ferrous metal, can be disposed within a spacing element. In some embodiments a radiopaque material can be disposed within a spacing element. These exemplary elements, disposed within spacing elements, can be useful for detection and/or retrieval of wound packing devices from wounds.

Referring now to FIG. 12, a cross-sectional schematic view of a connector 1200 is shown in accordance with various embodiments herein. The connector 1200 can include a wall member 1202. The wall member 1202 can define a central lumen 1204. However,

in other embodiments, the connector 1200 is solid in cross-sectional. In some embodiments, a material can be disposed within the lumen of the connector.

Referring now to FIG. 13, a cross-sectional schematic view of a connector 1300 in accordance with various embodiments herein. The connector 1300 can include a wall member 1302 defining a central lumen 1304. A material 1334 can be disposed within the lumen 1304. By way of example, the material 1334 can include absorbent materials. In some embodiments the material 1334 can include superabsorbent materials. In some embodiments, calcium chloride can be disposed within the lumen 1304.

In some embodiments, the connector can be in fluid communication with one or more of the spacing elements such that fluid from one or more spacing elements can be transferred to the connector. In some embodiments the lumen of the connector is accessible from an end of the connector providing fluid communication between one or more of the spacing elements and the end of the connector. Exemplary fluid communication can provide for a negative pressure, or a suction, to remove exudate from the wound. Additionally, the wound can be covered, for example, with an adhesive film, such as a transparent dressing (TEGADERM™ Dressing, available from 3M Company, St. Paul, MN) to impart negative pressure over the entire aspect of the wound, and not just on the wound exudate.

Other embodiments can include applying a gas-impermeable wound dressing barrier over the wound and wound packing device. The method can further include regulating the negative pressure applied to the wound bed via the connector(s) and/or spacer(s) and for the degree of exudate removal achieved. The magnitude of negative pressure applied can also be further optimized for a particular tissue response and wound healing.

In yet other embodiments, the method can include putting a wound dressing that is a gas-permeable sterile barrier over the wound and previously placed wound packing device. The method can further include regulating the magnitude of vacuum or negative pressure applied to the connector(s) and spacer(s). In this example, the resulting pressure throughout the wound bed will be essentially atmospheric pressure or slightly less, and the degree of exudate removal may be independently controlled and optimized.

In some embodiments, the connector can include a core and a layer of a material disposed over the core. Referring now to FIG. 14, a cross-sectional schematic view is shown of a connector 1400 in accordance with various embodiments herein. The connector 1400 can include a core 1436 and a layer 1402 disposed over the core 1436. In some embodiments, layer 1402 is a porous sleeve. In some embodiments layer 1402 can include a lubricious coating. In some embodiments layer 1402 can include a layer of flashspun high-density polyethylene fibers. In some embodiments layer 1402 can include a layer of polytetrafluoroethylene (PTFE).

It will be appreciated that spacing elements in accordance with embodiments herein can take on various shapes and sizes. By way of example, the spacing elements can be spherical, ovoid, toroidal, cubic, or the like. Referring now to FIG. 15, a schematic view is shown of a spacing element 1502 in accordance with various embodiments herein. The spacing element is shown attached to a connector 1504. Referring now to FIG. 16, a schematic view is shown of a spacing element 1602 in accordance with various embodiments herein. In this view, the spacing element 1602 is shown attached to a connector 1604.

Referring now to FIG. 17, a schematic view is shown of a connector 1704 and spacing element 1702 in accordance with various embodiments herein. The spacing element can include an aperture 1738. An end portion 1740 of the connector 1704 can fit within the aperture 1738 of an adjacent spacing element. In some embodiments, the end portion of a connector segment can be retained within the aperture of an adjacent spacing element. By way of example, a friction-fit retention mechanism can be used to retain the end portion of the connector segment within the aperture. In this manner, multiple connector segment and spacing element pairs can be attached together to form a wound packing device.

Referring now to FIG. 18, a schematic view is shown of connector segments and spacing elements attached to one another to form a wound packing device 1800 in accordance with various embodiments herein. This embodiment can allow for customization of size of the wound packing device 1800. In specific, a first connector segment and spacing element pair 1802 is attached to a second connector segment and spacing element pair 1804, which in turn is attached to another connector segment and

spacing element pair 1806. In actual use, any desired number of connector segment and spacing element pairs can be attached together. For example, in some embodiments from three to sixty pairs can be attached together.

In some embodiments, indicia can be disposed on portions of the wound packing device. By way of example, indicia, such as specific coloration, letters, numbers, embossed surface characterizations, or combinations thereof can be disposed on spacing elements. Such indicia can be useful for various purposes. The indicia can allow an end user to more easily track the number of spacing elements being used, or to more quickly identify a default number of spacing elements by sight and/or feel. For example, every

10<sup>th</sup> spacing element can be a different color in some embodiments. In some embodiments, a material can be used to form color on the spacing element that will change with time so as to indicate to a user when the device should be exchanged for a new device. In some embodiments, the color is configured to change with time. In some embodiments, the color is configured to change with the amount of exudate absorbed.

Referring now to FIG. 19, a schematic view is shown of a wound packing device 1900 in accordance with various embodiments herein. The wound packing device 1900 includes a plurality of spacing elements 1902 attached together with a connector 1904. The wound packing device 1900 can also include a first colored spacing element 1940 and a second colored spacing element 1942. In some embodiments, the first colored spacing element 1940, second colored spacing element 1942, and other spacing elements 1902 are all different colors. In some embodiments, the first colored spacing element 1940 and the second colored spacing element 1942 are the same color. In yet other embodiments the first colored spacing element 1940 and second colored spacing element 1942 can have an embossed surface, whereas other spacing elements 1902 can have a smooth surface.

In some embodiments, spacing elements can be disposed together within a container, such as a bag, to form a wound packing device. Referring now to FIG. 20, a schematic view is shown of wound packing device 2000 including a plurality of spacing elements 2002 disposed within a container 2044. In some embodiments the container 2044 can be a water permeable bag. The container can enclose a space 2046 and the spacing elements 2002 can be within the space 2046. In some embodiments, the spacing

elements 2002 can be attached to one another with a connector. In other embodiments, the connector can be absent.

In some embodiments, other materials can be packed along with the spacing elements and/or connector. By way of example, in some embodiments, the spacing elements can be packed with a paste inside of a bag or container. In some embodiments, the spacing elements are removed from the container before insertion into a wound bed, in other embodiments the spacing elements stay in the container and the combination is inserted into the wound bed. Referring now to FIG. 21, a schematic view is shown of a wound packing device 2100 including plurality of spacing elements 2102 disposed with a packing material 2150 inside of a container 2148. In some embodiments, the container 2148 can include an egress neck 2152 which can be opened to form an orifice through which the materials can be dispensed out of the container 2148 and into a wound bed. In yet other embodiments the egress neck 2152 can be an extended cannula through which the wound packing device 2100 can be delivered into a deep wound or fistula.

In some embodiments, wound packing kits are included. By way of example, kits can include a plurality of spacing elements, the spacing elements comprising a surface that resists colonization by microorganisms, the plurality of spacing elements configured to absorb exudate. The kits can also include a connector for connecting the plurality of spacing elements to one another. The connector comprising a fitting to allow for the number of spacing elements connected to one another by the connector to be modified by an end user.

### Methods

In some embodiments, a method of making a wound packing device is included. The method can include forming a plurality of spacing elements. It will be appreciated that are many different techniques that can be used to form spacing elements in accordance with embodiments herein. In some embodiments, the spacing elements can be molded, sprayed, dipped, and the like. In some cases, depending on the polymers used, the composition will also include a solvent. In other embodiments, the composition can be solventless before forming into a spacing element. In some embodiments, manufacturing can include a number of steps. For example, the inner region or core of

the spacing element can be formed in a first operation and then a layer of material can be disposed on top of the inner region. The method can also include an operation of mounting a plurality of spacing elements on a connector. Mounting can include forming the spacing elements in place on the connector. Mounting can also include threading the spacing elements onto the connector. In some embodiments, an adhesive can be used to retain the spacing elements in place on the connector. In other embodiments, spacing elements can be retained in place through a friction fit. In some embodiments, the method can include an operation of inflating the spacing elements.

In some embodiments, a method of treating wounds is included. The method can include dispensing a wound packing device from a sterile package. In some embodiments, dispensing can include removing a portion of spacing elements from a multi-segment package, such that other portions remain unopened and sterile. In some embodiments, dispensing can include counting the number of spacing elements. In some embodiments dispensing can include cutting the connector, or otherwise separating a portion of the connector, in order to prepare a desired number of spacing elements for insertion into a wound bed. The method can further include inserting the wound packing device into a wound bed. In some embodiments, the method can further include putting a wound dressing over the wound packing device. In some embodiments, the method can also include attaching a vacuum system (or another device that can generate a negative air pressure) to the wound packing device. By way of example, a vacuum system can be put in fluid communication with the connector, which can transfer exudate away from the spacing devices.

It should be noted that, as used in this specification and the appended claims, the singular forms "a," "an," and "the" include plural referents unless the content clearly dictates otherwise. Thus, for example, reference to a composition containing "a compound" includes a mixture of two or more compounds. It should also be noted that the term "or" is generally employed in its sense including "and/or" unless the content clearly dictates otherwise.

It should also be noted that, as used in this specification and the appended claims, the phrase "configured" describes a system, apparatus, or other structure that is constructed or configured to perform a particular task or adopt a particular configuration

to. The phrase "configured" can be used interchangeably with other similar phrases such as arranged and configured, constructed and arranged, constructed, manufactured and arranged, and the like.

5 All publications and patent applications in this specification are indicative of the level of ordinary skill in the art to which this invention pertains. All publications and patent applications are herein incorporated by reference to the same extent as if each individual publication or patent application was specifically and individually indicated by reference.

10 The invention has been described with reference to various specific and preferred embodiments and techniques. However, it should be understood that many variations and modifications may be made while remaining within the spirit and scope of the invention.

**The Claims Are:**

1. A wound packing device comprising:  
a plurality of spacing elements, wherein the surface of the spacing elements resist colonization by microorganisms;  
a connector connecting the plurality of spacing elements to one another; and  
wherein the plurality of spacing elements are capable of absorbing exudate.
2. The wound packing device of any of claims 1 and 3-68, the surface of the spacing elements exhibiting antimicrobial activity.
3. The wound packing device of any of claims 1-2 and 4-68, the surface of the spacing elements comprising silver ions.
4. The wound packing device of any of claims 1-3 and 5-68, the surface of the spacing elements comprising quaternary amines.
5. The wound packing device of any of claims 1-4 and 6-68, the surface of the spacing elements comprising tobramycin.
6. The wound packing device of any of claims 1-5 and 7-68, comprising from 4 to 50 spacing elements.
7. The wound packing device of any of claims 1-6 and 8-68, wherein the distance between adjacent spacing elements along the connector is at least equal to the largest dimension of the spacing elements.
8. The wound packing device of any of claims 1-7 and 9-68, wherein the distance between adjacent spacing elements along the connector is at least equal to the diameter of the spacing elements.

9. The wound packing device of any of claims 1-8 and 10-68, the spacing elements disposed along the connector in series with one another.

10. The wound packing device of any of claims 1-9 and 11-68, the spacing elements disposed along the connector such that one or more spacing elements are disposed in parallel with one or more other spacing elements.

11. The wound packing device of any of claims 1-10 and 12-68, the spacing elements comprising a substantially spherical shape.

12. The wound packing device of any of claims 1-11 and 13-68, the spacing elements comprising a substantially ovoid shape.

13. The wound packing device of any of claims 1-12 and 14-68, the spacing elements comprising an irregular shape.

14. The wound packing device of any of claims 1-13 and 15-68, the spacing elements comprising a grooved surface.

15. The wound packing device of any of claims 1-14 and 16-68, the spacing elements comprising a deformable surface.

16. The wound packing device of any of claims 1-15 and 17-68, each spacing element having a diameter of about 0.5 mm to about 25 mm.

17. The wound packing device of any of claims 1-16 and 18-68, each spacing element capable of absorbing an amount of exudate equal to at least the weight of the spacing element.

18. The wound packing device of any of claims 1-17 and 19-68, wherein the spacing elements are swellable.

19. The wound packing device of any of claims 1-18 and 20-68, wherein the spacing elements are hollow.

20. The wound packing device of any of claims 1-19 and 21-68, the spacing element comprising a polymer.

21. The wound packing device of any of claims 1-20 and 22-68, the polymer selected from the group consisting of polyacrylic acid and polysaccharides.

22. The wound packing device of any of claims 1-21 and 23-68, the spacing elements defining a central lumen, the connector passing through the lumen of the spacing elements.

23. The wound packing device of any of claims 1-22 and 24-68, the spacing elements comprising a core and an outer layer disposed on the outside surface of the core, the outer layer comprising a water permeable material.

24. The wound packing device of any of claims 1-23 and 25-68, the spacing element comprising a plurality of pores.

25. The wound packing device of any of claims 1-24 and 26-68, the spacing element comprising a fluid sequestering agent.

26. The wound packing device of any of claims 1-25 and 27-68, the connector comprising a flexible material.

27. The wound packing device of any of claims 1-26 and 28-68, further comprising a porous sleeve disposed over the connector.

28. The wound packing device of any of claims 1-27 and 29-68, the connector configured to directly absorb exudate.

29. The wound packing device of any of claims 1-28 and 30-68, the connector comprising a diameter of about 0.1 mm to about 2 mm.

30. The wound packing device of any of claims 1-29 and 31-68, the connector comprising a length of about 5 cm to about 200 cm.

31. The wound packing device of any of claims 1-30 and 32-68, wherein the wound packing device is sufficiently flexible to be bent into a U-shape.

32. The wound packing device of any of claims 1-31 and 33-68, the connector comprising a polymer selected from the group consisting of polyamide and poly(methyl methacrylate).

33. The wound packing device of any of claims 1-32 and 34-68, wherein the connector is in fluid communication with one or more of the spacing elements such that fluid from the one or more spacing elements can be transferred to the connector.

34. The wound packing device of any of claims 1-33 and 35-68, the connector comprising a lumen.

35. The wound packing device of any of claims 1-34 and 36-68, wherein the lumen of the connector is in fluid communication with one or more of the spacing elements such that fluid from the one or more spacing elements can be transferred to the lumen of the connector.

36. The wound packing device of any of claims 1-35 and 37-68, wherein the lumen of the connector is accessible from an end of the connector providing fluid communication between one or more of the spacing elements and the end of the connector.

37. The wound packing device of any of claims 1-36 and 38-68, further comprising calcium chloride disposed within the connector.

38. The wound packing device of any of claims 1-37 and 39-68, the end of the connector comprising a fitting to facilitate connection with another structure.

39. The wound packing device of any of claims 1-38 and 40-68, an end of the connector comprising a loop to fit over a spacing element.

40. The wound packing device of any of claims 1-39 and 41-68, the fitting comprising a compression tube fitting, a luer fitting or taper fitting.

41. The wound packing device of any of claims 1-40 and 42-68, further comprising a fluid reservoir in fluid communication with one or more spacing elements.

42. The wound packing device of any of claims 1-41 and 43-68, the fluid reservoir disposed inside of a spacing element.

43. The wound packing device of any of claims 1-42 and 44-68, the fluid reservoir disposed outside of the spacing elements.

44. The wound packing device of any of claims 1-43 and 45-68, further comprising a fluid reservoir in fluid communication with the connector.

45. The wound packing device of any of claims 1-44 and 46-68, further comprising a lubricious coating disposed on the spacing elements.

46. The wound packing device of any of claims 1-45 and 47-68, further comprising a lubricious coating disposed on the connector.

47. The wound packing device of any of claims 1-46 and 48-68, further comprising a layer of flashspun high-density polyethylene fibers disposed over the spacing elements and connector.

48. The wound packing device of any of claims 1-47 and 49-68, further comprising a polytetrafluoroethylene layer disposed over the spacing elements and connector.

49. The wound packing device of any of claims 1-48 and 50-68, further comprising a layer of graphene disposed over the spacing elements.

50. The wound packing device of any of claims 1-49 and 51-68, further comprising a layer of graphene disposed over the spacing elements, further comprising a modifying agent covalently bonded to the graphene.

51. The wound packing device of any of claims 1-50 and 52-68, further comprising an RFID device.

52. The wound packing device of any of claims 1-51 and 53-68, the connector comprising a plurality of segments that are interconnected to one another.

53. The wound packing device of any of claims 1-52 and 54-68, the plurality of segments interconnected to one another through a friction fit mechanism.

54. The wound packing device of any of claims 1-53 and 55-68, wherein the spacing elements are inflatable.

55. The wound packing device of any of claims 1-54 and 56-68, wherein an antimicrobial agent is disposed within the inflatable spacing elements.

56. The wound packing device of any of claims 1-55 and 57-68, further comprising hollow fibers disposed within the spacing elements.

57. The wound packing device of any of claims 1-56 and 58-68, the hollow fibers comprising a polysulfone polymer.

58. The wound packing device of any of claims 1-57 and 59-68, the spacing elements comprising a polyurethane foam.

59. The wound packing device of any of claims 1-58 and 60-68, further comprising an inflatable balloon.

60. The wound packing device of any of claims 1-59 and 61-68, further comprising a paste, the paste disposed around the spacing elements.

61. The wound packing device of any of claims 1-60 and 62-68, the paste, spacing elements, and connector disposed together within a container.

62. The wound packing device of any of claims 1-61 and 63-68, further comprising a metal within the spacing elements or the connector.

63. The wound packing device of any of claims 1-62 and 64-68, the metal comprising a ferrous metal.

64. The wound packing device of any of claims 1-63 and 65-68, wherein the spacing elements are colored, including at least two different colors amongst the beads.

65. The wound packing device of any of claims 1-64 and 66-68, wherein the color of the spacing elements changes according to the amount of exudate absorbed.

66. The wound packing device of any of claims 1-65 and 67-68, further comprising indicia on the spacing elements to distinguish one from another.

67. The wound packing device of any of claims 1-66 and 68, further comprising a modifying agent covalently bonded to the surface of the spacing elements.

68. The wound packing device of any of claims 1-67, further comprising a radiopaque material.

69. A wound packing device comprising:  
a plurality of spacing elements, wherein the surface of the spacing elements resist colonization by microorganisms; and  
a container, the plurality of spacing element disposed within the container.

70. The wound packing device of any of claims 69 and 71, the container comprising a bag.

71. The wound packing device of any of claims 69-70, wherein the bag is fluid permeable.

72. A method of making a wound packing device comprising:  
forming a plurality of spacing elements, the spacing elements comprising a surface that resists colonization by microorganisms; and  
mounting a plurality of spacing elements on a connector.

73. The method of any of claims 72 and 74, wherein the steps of forming and mounting comprise molding the plurality of spacing elements onto the connector.

74. The method of any of claims 72-73, further comprising inflating the spacing elements.

75. A wound packing kit comprising:

a plurality of spacing elements, the spacing elements comprising a surface that resists colonization by microorganisms, the plurality of spacing elements configured to absorb exudate;

a connector connecting the plurality of spacing elements to one another; the connector comprising a fitting to allow for the number of spacing elements connected to one another by the connector to be modified by an end user.

76. A method of treating wounds comprising:

dispensing a wound packing device from a sterile package, the wound packing device comprising a plurality of spacing elements, the spacing elements comprising a surface that resists colonization by microorganisms, the plurality of spacing elements configured to absorb exudate, and a connector connecting the plurality of spacing elements to one another; and

inserting the wound packing device into a wound bed.

77. The method of any of claims 76 and 78, further comprising counting the number of spacing elements put in a wound bed.

78. The method of any of claims 76-77, further comprising inflating the spacing elements.

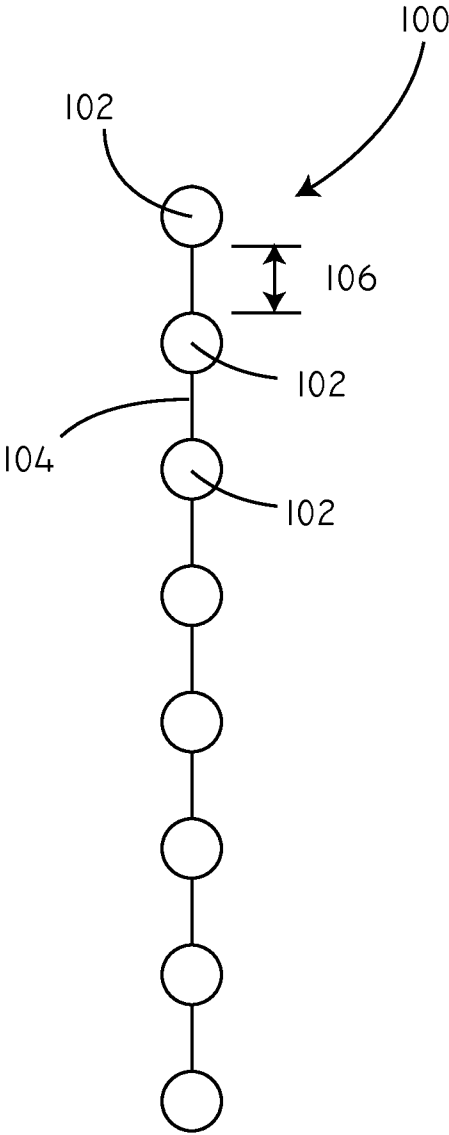


FIG. 1

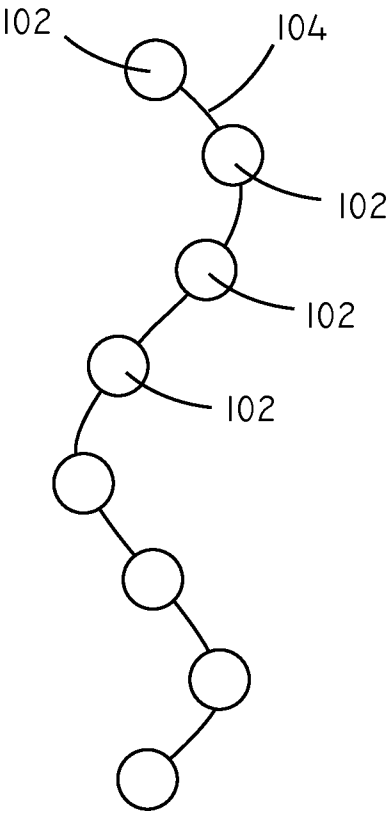


FIG. 2

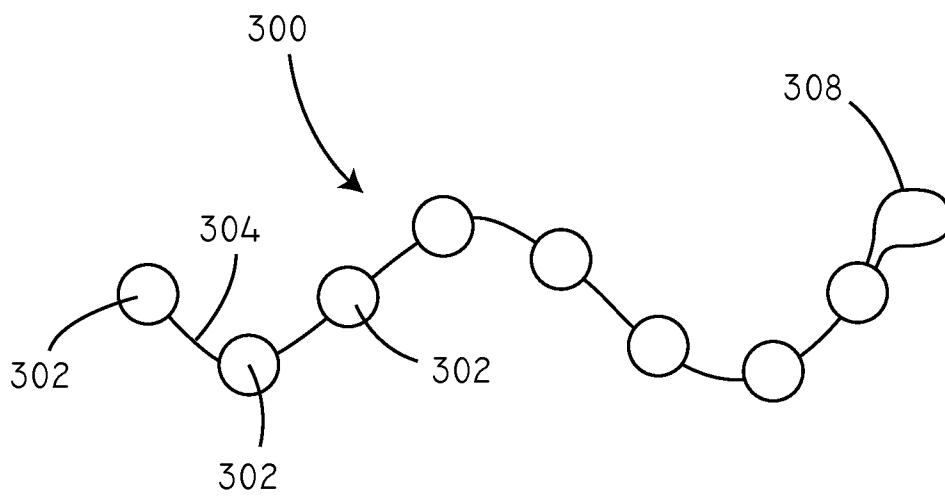


FIG. 3

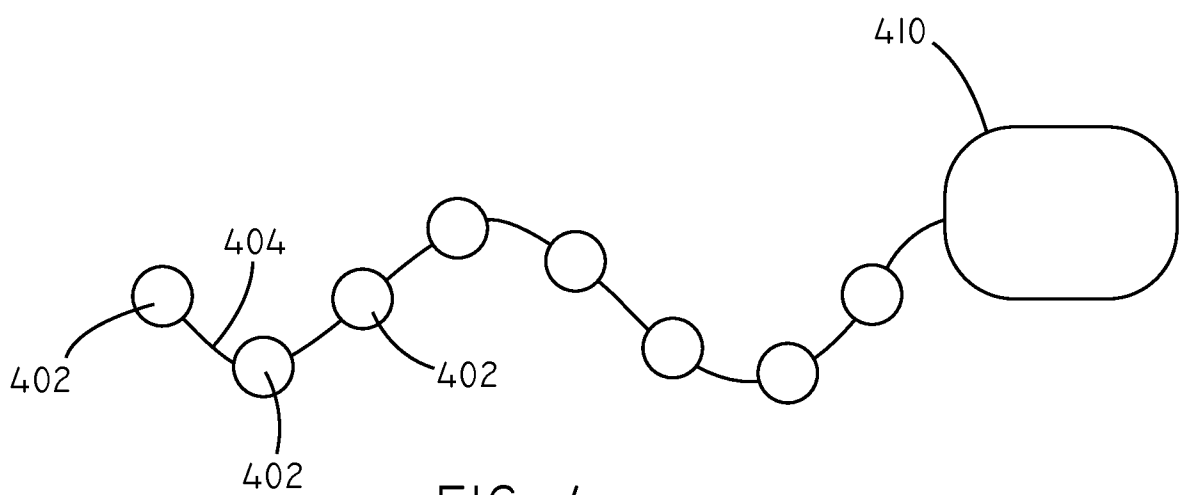


FIG. 4

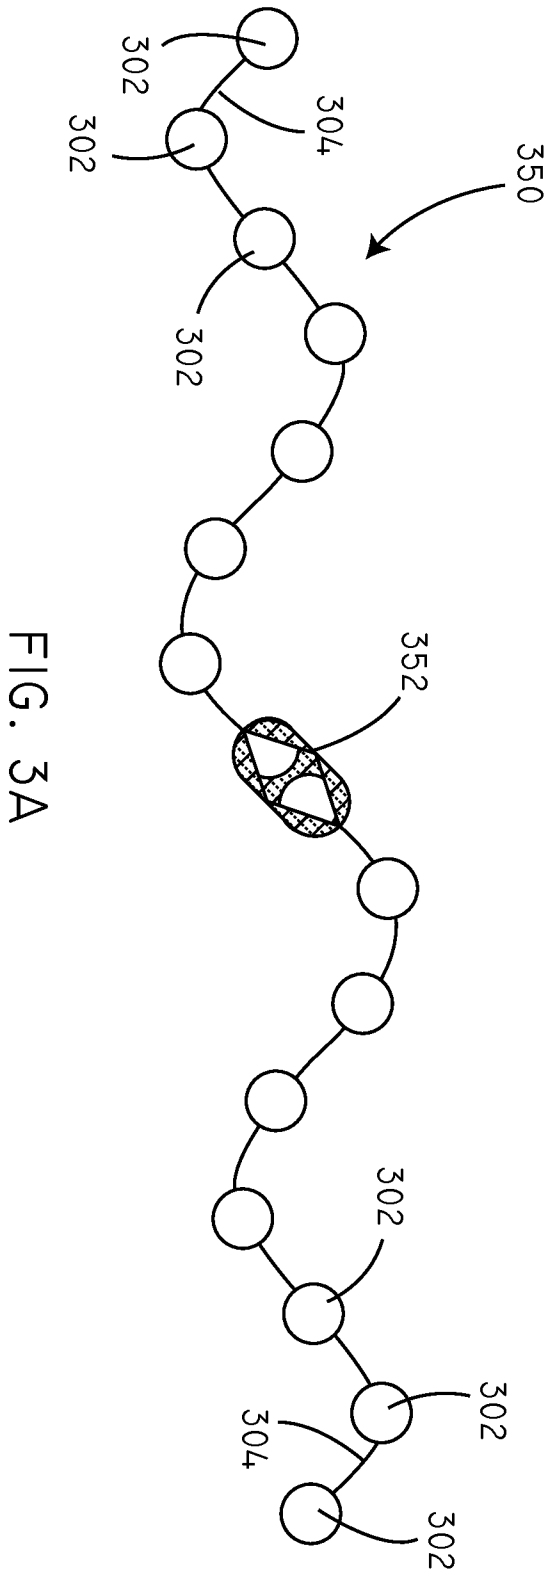


FIG. 3A

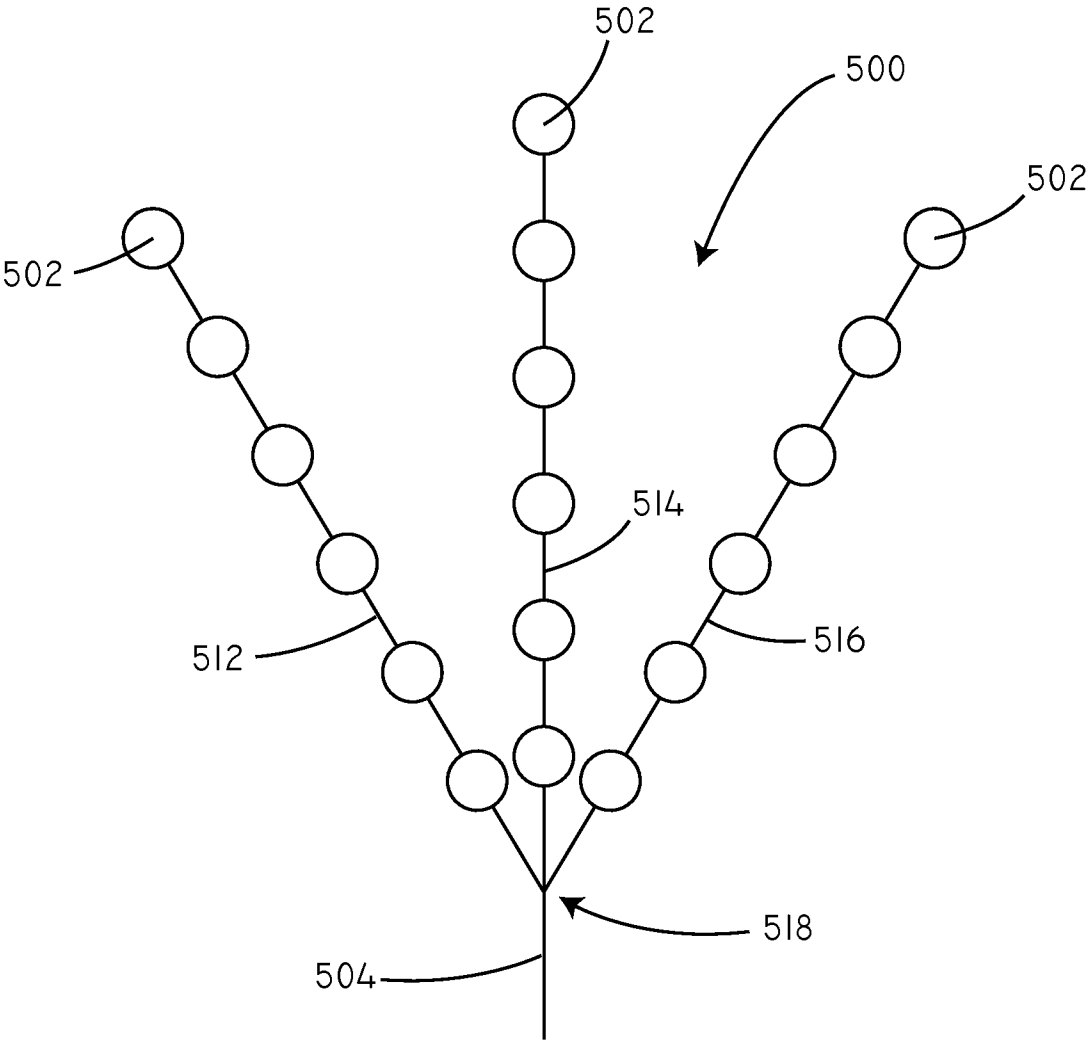


FIG. 5

5/12

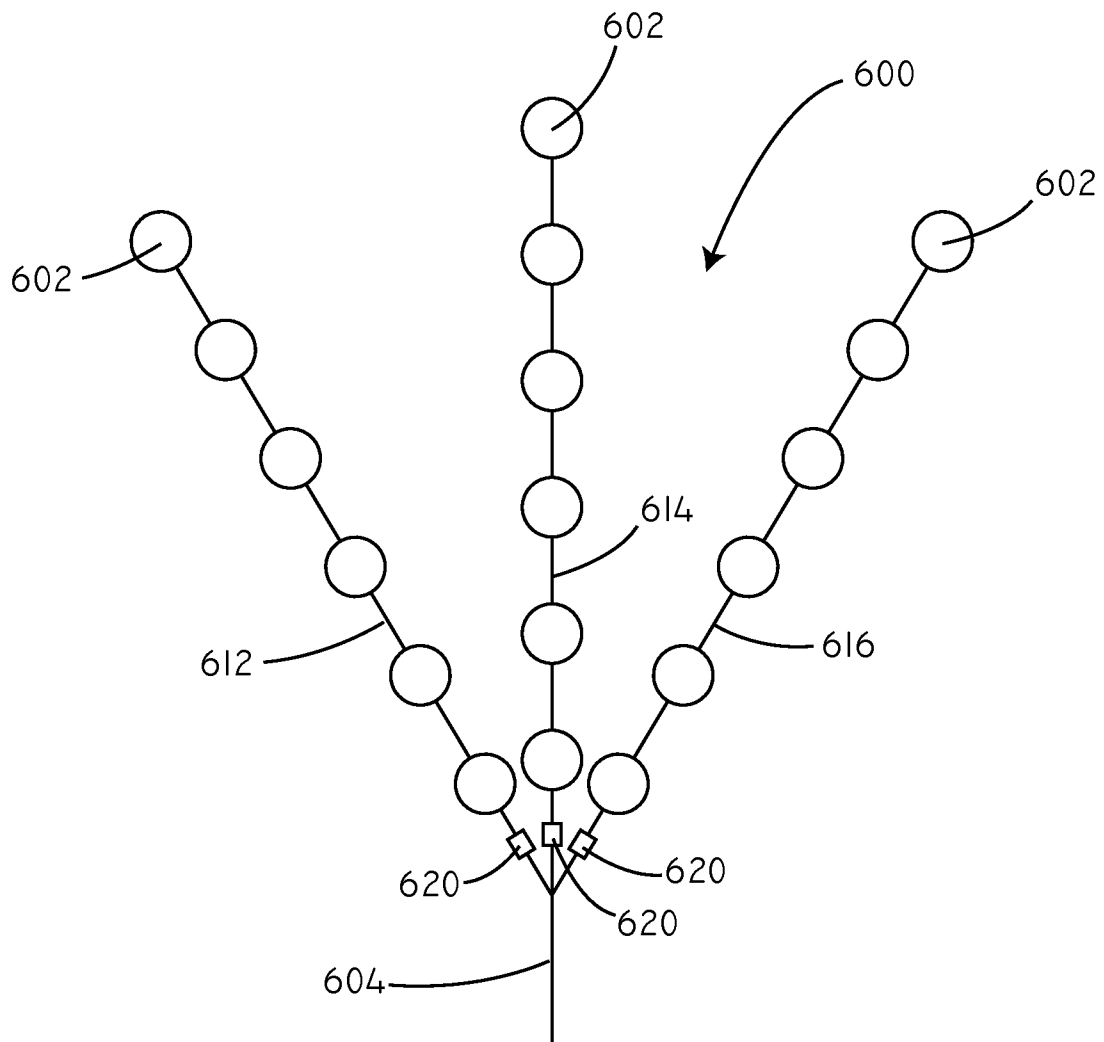


FIG. 6

6/12

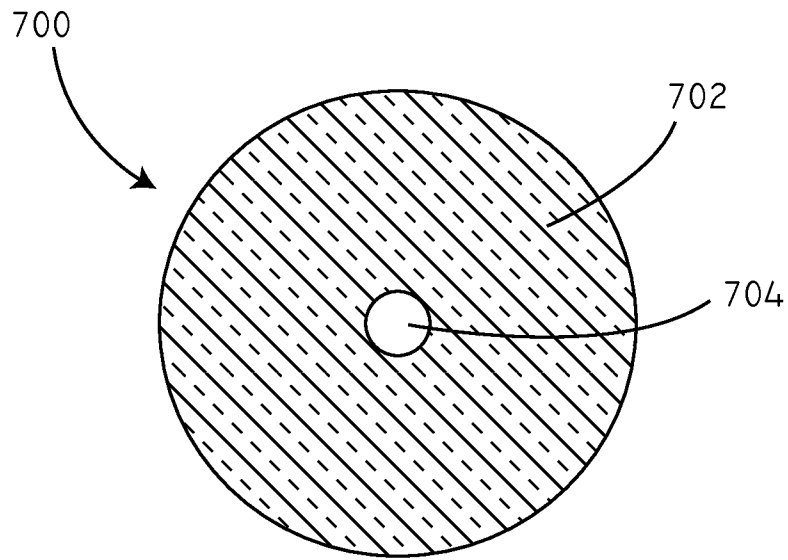


FIG. 7

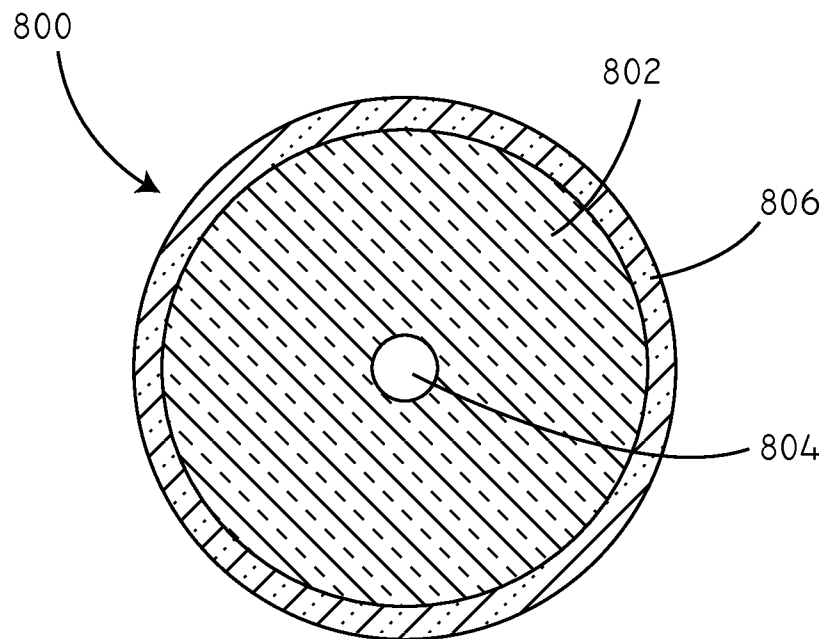


FIG. 8

7/12

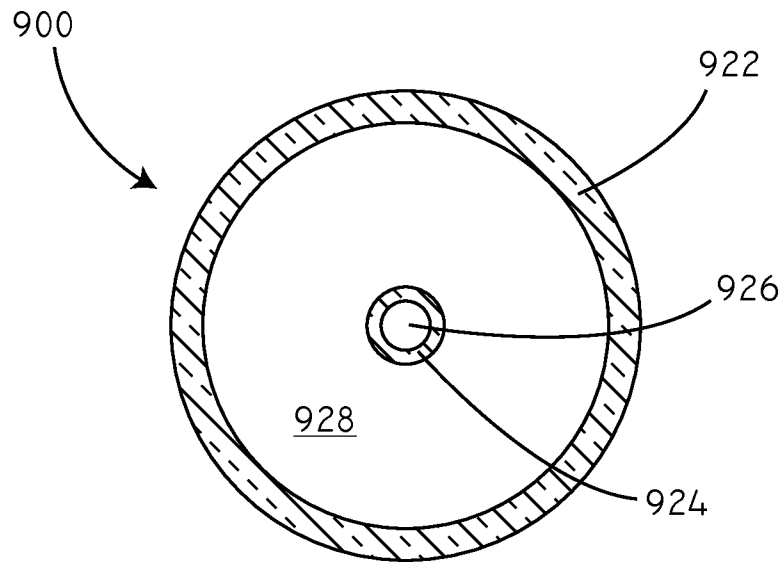


FIG. 9

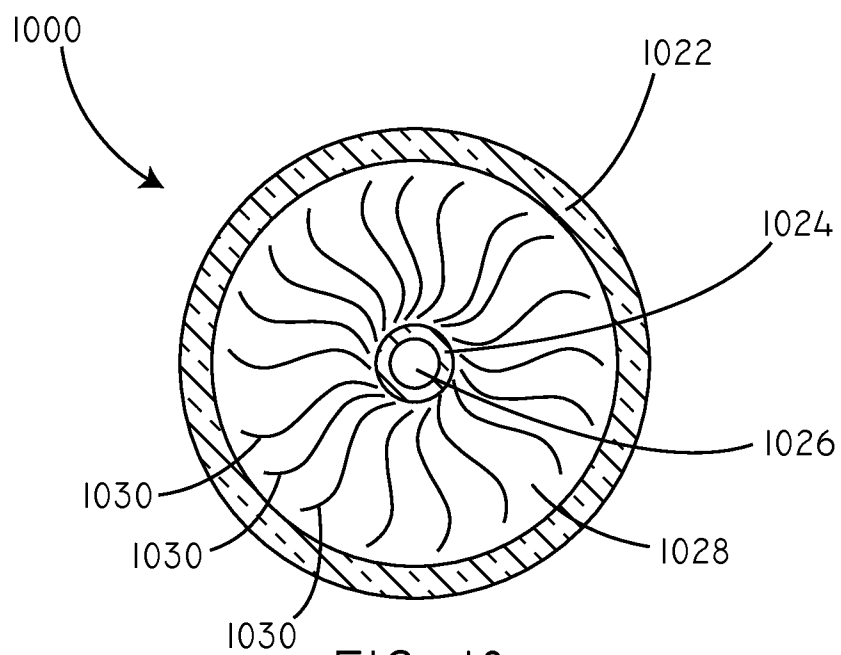


FIG. 10

8/12

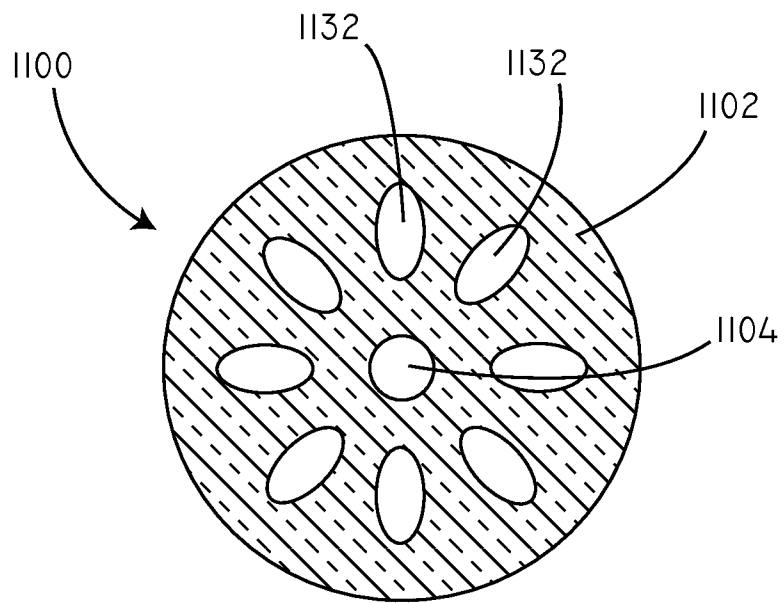


FIG. 11

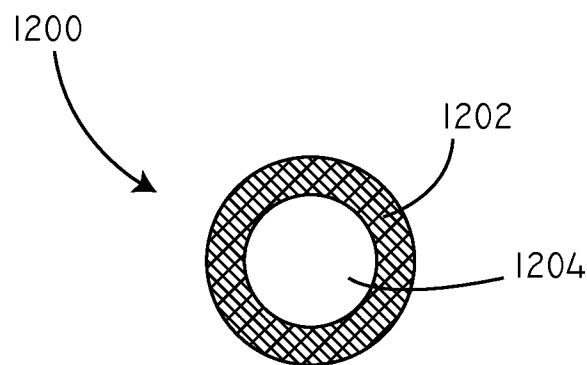


FIG. 12

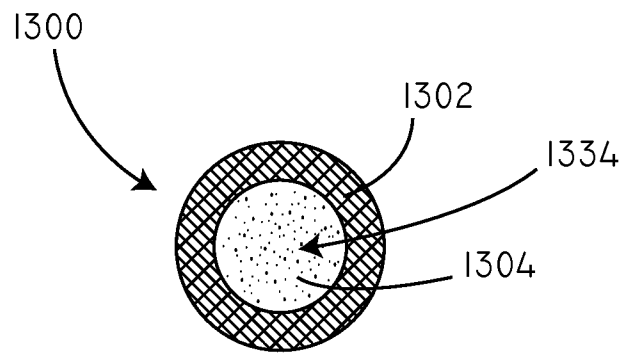


FIG. 13

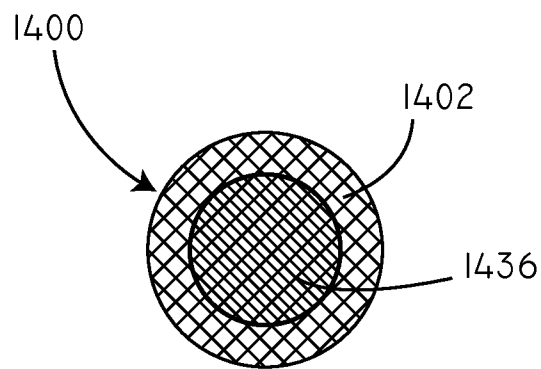


FIG. 14

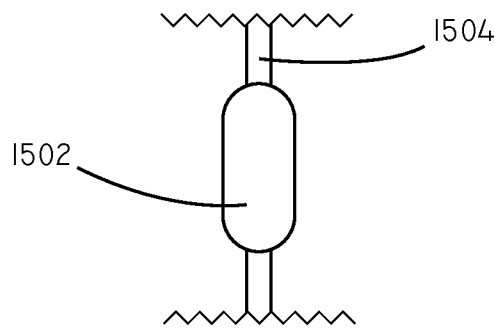


FIG. 15

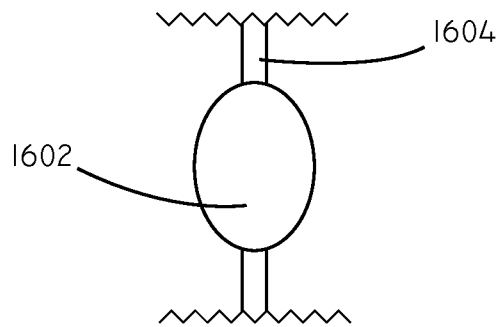


FIG. 16

11/12

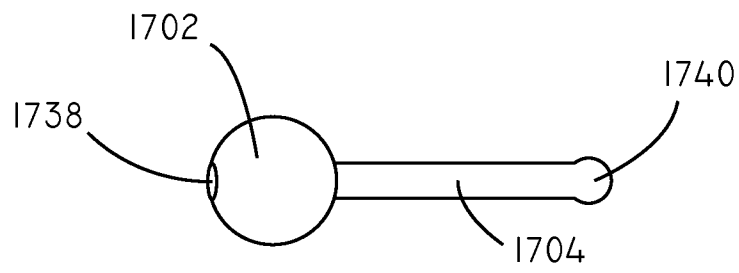


FIG. 17

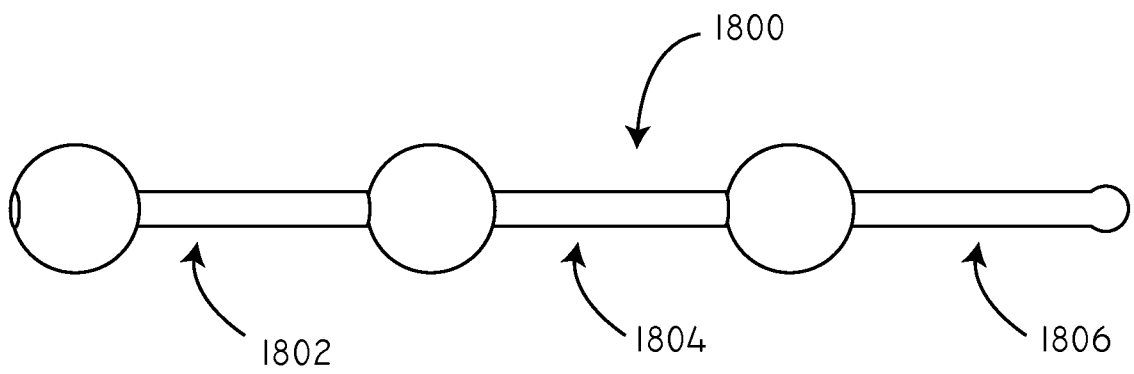


FIG. 18

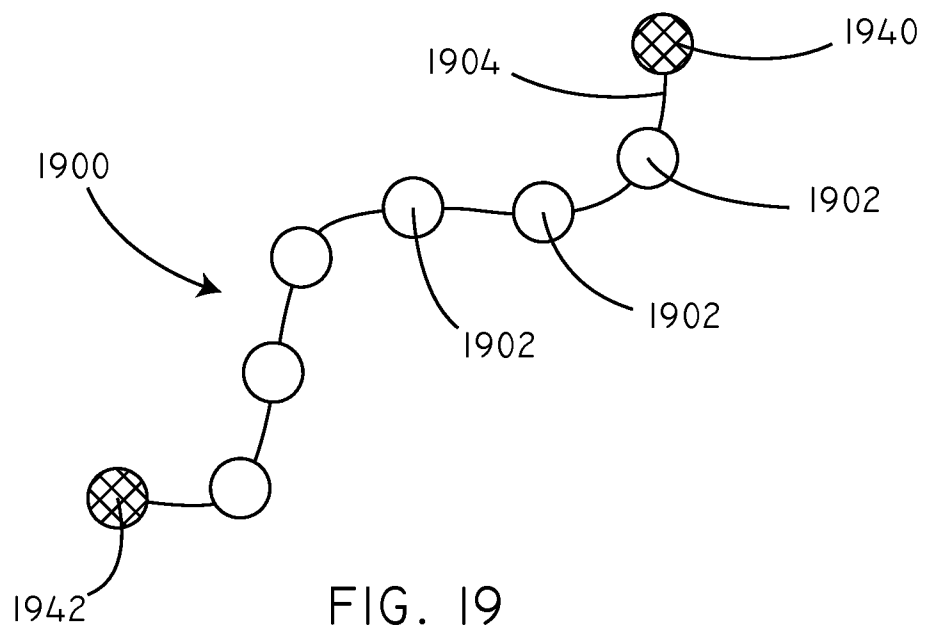


FIG. 19

12/12

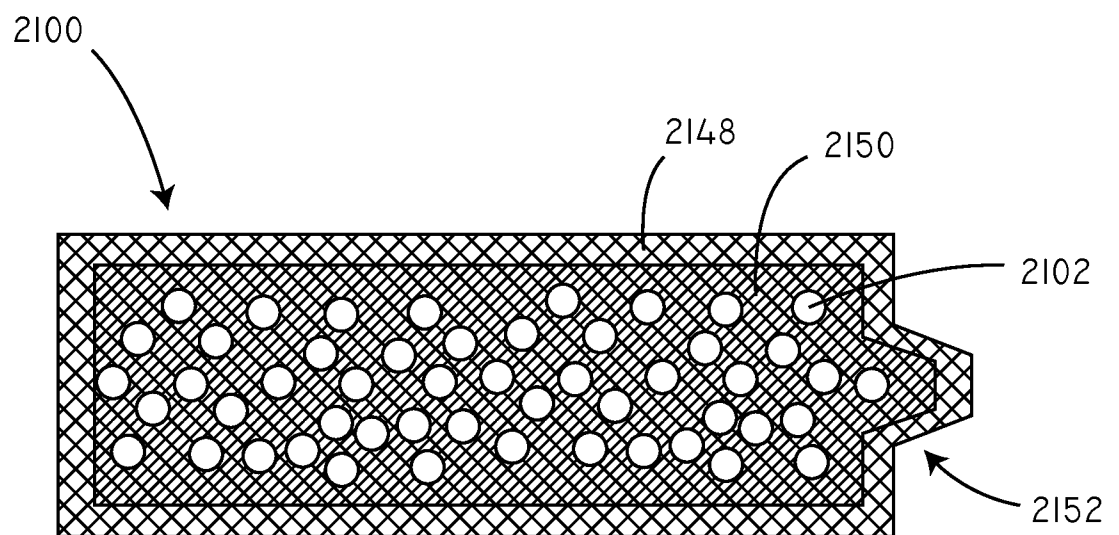
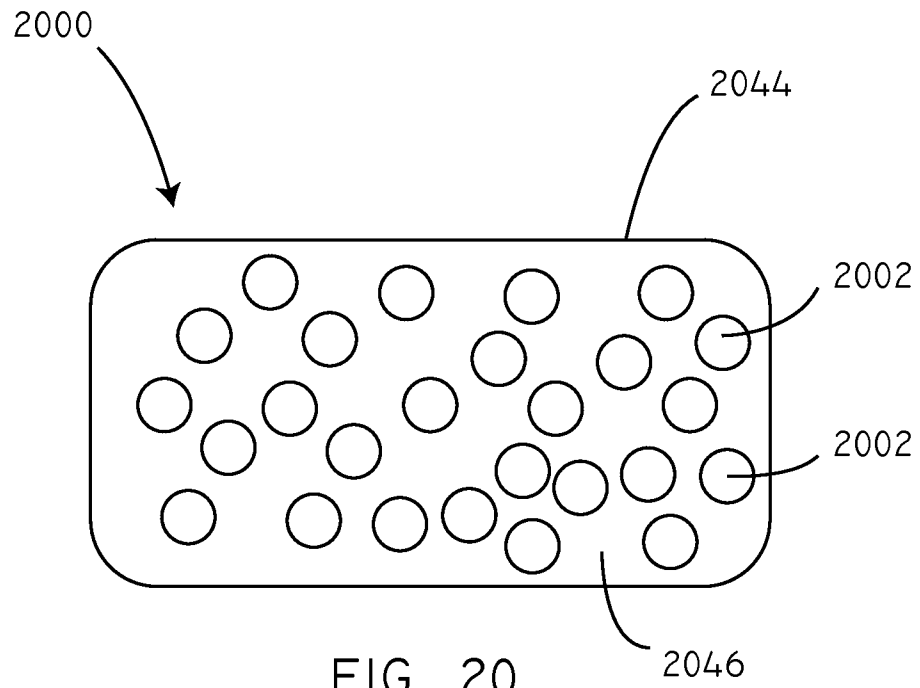


FIG. 21

## INTERNATIONAL SEARCH REPORT

International application No

PCT/US2013/065297

## A. CLASSIFICATION OF SUBJECT MATTER

INV. A61L15/22 A61L15/44 A61L15/60 A61L26/00  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>GB 2 376 632 A (JOHNSON &amp; JOHNSON MEDICAL LTD [GB]) 24 December 2002 (2002-12-24)</p> <p>page 2 - page 10; examples ----- -/-</p>	<p>1-3,6-9, 11,12, 15-18, 20,22, 24-26, 29-32, 58,62, 69-73, 75-77</p>



Further documents are listed in the continuation of Box C.



See patent family annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 December 2013

Date of mailing of the international search report

03/01/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Messemanne, Jasmine

## INTERNATIONAL SEARCH REPORT

International application No

PCT/US2013/065297

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008/006083 A2 (SURMODICS INC [US]; KLOKE TIM M [US]; KEOUGH STEVEN J [US]; LOCKWOOD N) 10 January 2008 (2008-01-10)  claims -----	1,2, 4-21,23, 25-27, 29-37, 39-51, 53-57, 59-66, 68-78
X	WO 2008/135551 A2 (COLOPLAST AS [DK]; BOUGHERARA CHAABANE [DK]; GAVELIN PATRIK [SE]; LAM) 13 November 2008 (2008-11-13)  pages 3-7; claims; example 3 -----	1-3, 6-13, 15-18, 20-22, 24-26, 28-32, 38,52, 58,67, 69,72, 73,75-77

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/065297

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2376632	A	24-12-2002	EP 1399197 A1 24-03-2004
			GB 2376632 A 24-12-2002
			US 2005251082 A1 10-11-2005
			WO 03000302 A1 03-01-2003
WO 2008006083	A2	10-01-2008	US 2008188819 A1 07-08-2008
			US 2012021038 A1 26-01-2012
			WO 2008006083 A2 10-01-2008
WO 2008135551	A2	13-11-2008	NONE