

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199937938 B2
(10) Patent No. 752437

(54) Title
Sewer system

(51)⁶ International Patent Classification(s)
E03D 005/00 E03F 001/00

(21) Application No: 199937938 (22) Application Date: 1999 .07 .01

(30) Priority Data

(31) Number (32) Date (33) Country
981512 1998 .07 .01 FI

(43) Publication Date : 2000 .01 .20
(43) Publication Journal Date : 2000 .01 .20
(44) Accepted Journal Date : 2002 .09 .19

(71) Applicant(s)
Evac International Oy

(72) Inventor(s)
Bjorn Von Varfalva Palffy; Bengt Ohlsson; Ake Nilsson

(74) Agent/Attorney
CALLINAN LAWRIE,Private Bag 7,KEW VIC 3101

(56) Related Art
US 4034421
WO 98/55706

ABSTRACT

Sewer System


A suction toilet system including at least one, preferably
at least two, toilet means provided with a separate sanitary
5 trap (2) and connected to a separate sewer pipe (3), and
pressure reducing means for generating reduced pressure in
the sewer pipe(s). The pressure reducing means comprises a
separate pressure reducing device for the or each toilet
means whereby, for the or each toilet means, the associated
10 pressure reducing device (4) is connected to an associated
branch sewer pipe (3) in a manner allowing waste to be drawn
from the toilet means (1) and transported through the sewer
pipe (3), without hindrance from valves or other temporarily
sealing means, past the pressure reducing device (4) and
15 onwards to a disposal system under atmospheric pressure.

(With Figure 1)

AUSTRALIA
PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT
ORIGINAL



TO BE COMPLETED BY APPLICANT

Name of Applicant: EVAC INTERNATIONAL OY

Actual Inventor(s): BJORN VON VARFALVA PALFFY, BENGT OHLSSON, AKE NILSSON

Address for Service: CALLINAN LAWRIE, 711 High Street, Kew, 3101, Victoria, Australia

Invention Title: SEWER SYSTEM

The following statement is a full description of this invention, including the best method of performing it known to me:-

SEWER SYSTEM

This invention relates to a sewer system.

5 There are three basic types of known sewer systems in commercial use. The first and most frequently used system is the conventional gravity sewer system in which waste water flows by gravity through downwardly inclined soil or sewer pipes. The second type of system is the pressure sewer system in which overpressure is used to transport waste water through small-bore sewer pipes. This system is not widely used, although it has some
10 advantages over the first system, such as the use of pipes having small dimensions and the possibility of laying pipes having upward pipe runs. The third known sewer system is the vacuum sewer system which is based on lowering the pressure in the sewer pipe to about one half of atmospheric pressure. The pressure difference between atmospheric pressure and the reduced pressure in the sewer pipe is used to transport the sewage. The vacuum sewer system
15 has achieved large use in ships, aircraft and trains. Principally, it has the same advantages as the pressure sewer system. Its disadvantages are that it is relatively costly and that the sanitary units connected to the sewer must be separated from the sewer system by a normally closed discharge valve, which may cause flooding problems.

20 This invention relates to a low vacuum sewer system, i.e. a type of sewer system technically between the gravity sewer system and the vacuum sewer system, which today has very little, if any, commercial use. Such a system is particularly intended for the transportation of waste from a toilet which is connected, as in a gravity sewer system, to a sewer via a sanitary or water trap. To empty such a toilet, a relatively low vacuum is
25 generated in the sewer pipe. In some known systems of this type, a sluice device has been used as an interface between the vacuum area and a collecting container under atmospheric pressure. However



such sluice devices have poor operational reliability because of leakage caused by deposits on the sealing surfaces of the sluice device. Patent publication SE 358196 describes a known low vacuum system where the generation of a low pressure requires a check valve in the sewer pipe. It has been found that such a check valve does not function satisfactorily over a long run period of time. Furthermore, it is difficult to prevent dirt from being drawn into the evacuating ducts. These difficulties seem to have been sufficiently great as to be detrimental in the marketing of such devices according to the Swedish patent publication. In general, known systems of this kind have been of such a basic design that their operational reliability has suffered. In general they have been marketed substantially only as individual toilet units for summer cottages, holiday homes or the like.

An aim of the present invention is to develop a toilet system for buildings with several toilets, in particular, but not exclusively, for multi-family houses, hotels, hospitals or the like. The aim is to provide a simple and operationally reliable toilet system that neither requires expensive technical solutions typical of vacuum toilet systems nor requires conventional sewer piping with downwardly inclined, large diameter sewage tubes. On the contrary, the sewer pipes should have a relatively small bore and it should be possible to have pipe sections laid horizontally for substantial distances and even to have some short pipe sections laid in an upwards direction.

Another aim of the present invention is to provide a toilet system in which the water consumption of the toilets is reduced so much that it becomes economically profitable to separate the toilet waste systems from other waste water sewers and to subject the toilet waste to biological treatment. This requires the amount of water from each toilet flush not to exceed 2 litres, preferably not to exceed 1 litre. This ensures that the dry substance contents of the toilet waste will be relatively high making

it economically feasible to treat the toilet waste separately from other waste water.

A third aim of the present invention is to obtain an operationally reliable low cost suction system for toilet emptying, in which waste liquid drawn from a toilet may flow freely
5 from the vacuum area to an area under atmospheric pressure without passing check valves or other flow hindering means.

A fourth aim is that a system according to the invention should be capable of being easily installed to enable the replacement of the normal gravity sewer system in buildings,
10 whereby the discharge end of the system should be directly connectable to the normal sewer of the building or to a special sewer network for toilet waste.

According to the present invention there is provided a suction toilet system including at least one, preferably a plurality of, toilet means provided with a separate sanitary trap, a
15 branch sewer pipe connected at one end to the sanitary trap and at an opposite end to a disposal system under atmospheric pressure, and pressure reducing means for generating reduced pressure in the branch sewer pipe, wherein the pressure reducing means includes an air driven vacuum generator connected to the branch sewer pipe at said opposite end thereof in a manner allowing waste to be drawn from said at least one the toilet means and
20 transported through the branch sewer pipe past the pressure reducing device and onwards to the disposal system without hindrance from valves or other temporarily sealing means. It is important for the application of the invention that each toilet means (i.e. a toilet or other sanitary unit) has its own sanitary trap, its own separate branch sewer pipe and its own separate pressure reducing device or vacuum generator. Reduced pressure is created only
25 intermittently, i.e. separately for each desired emptying of a toilet means. The pressure reducing device or vacuum generator must allow free flow of waste from the reduced pressure or vacuum section of the sewer system to a section under atmospheric pressure. Suitable designs for this purpose are described below. The branch sewer pipes of each toilet may be joined to a common pipe downstream of the pressure reducing device of each toilet.

30 For practical use it is important that occasional small amounts of liquid may flow out of a toilet without starting the normal emptying cycle based on vacuum generation. Thus, it should be possible to empty a glass of water into a toilet bowl without any special measures being required.



Since reduced pressure is generated separately for each emptying function, it is important that the volume of each branch sewer pipe within which the pressure has to be lowered is not too large. On the other hand, a certain
5 minimum reduced pressure or vacuum volume is required to achieve a sufficient vacuum capacity to ensure a reliable emptying function. In order to provide a suitable volume, it is recommended that the length of the branch sewer pipe between each sanitary trap and the associated pressure
10 reducing device be from 2 to 50 m, preferably from 5 to 15 m. Toilet emptying through suction requires relatively small-bore sewer pipes. The inner diameter of the sewer pipe should therefore advantageously be no more than 65 mm, preferably no more than 55 mm.

15 An air driven ejector, preferably a so-called on-line ejector integral with the branch sewer pipe itself, has been shown to be suitable in a system according to the invention. The working medium for such an ejector is advantageously supplied in the form of pressurised gas, preferably
20 pressurised air. In order to achieve a sufficiently rapid pressure reduction, the ejector should preferably be supplied for some seconds with working medium having a flow of from 700 to 2000 l/min (litres per minute), preferably from 1000 to 1500 l/min. The unit l/min relates to a volume
25 that is calculated at a temperature of 20°C and at atmospheric pressure. The dynamic pressure in the supply of working medium to the ejector is advantageously from 7 to 40 kPa, preferably from 10 to 30 kPa.

An on-line ejector of the type referred to is useful
30 because it allows toilet waste to pass easily through the ejector. An ejector of a suitable type is described in EP-A-0659948. This known type of ejector is intended to generate a considerably stronger vacuum (lower absolute pressure) than that which is required in a system according
35 to the invention, but a modification of the performance of the ejector can be made by reducing the flow of the working medium. The best operational reliability is usually

obtained by connecting the ejector an angle to the sewer pipe, so that the sewer pipe immediately before and after the ejector forms an angle of at least 120°, preferably at least 135°.

5 For the same reasons as described in EP-A-0659948, it is recommended that there is a safety device, e.g. a relief valve, upstream of the on-line ejector. The provision of such a safety device prevents the pressure of the working medium of the ejector from being transmitted in a back-flow
10 to the toilet means on occurrence of flow disturbances downstream of the ejector. The safety device may also include a pressure sensor that rapidly shuts off the flow of working medium to the ejector if the pressure in the branch sewer pipe upstream of the ejector exceeds a given threshold
15 value.

The ejector may be supplied with working medium by a blower or the like installed as a ventilator of, for example, the space where the sanitary unit in question is situated. The exhaust air from the ventilator may then be
20 used as the working medium for the ejector, provided that the ventilator is of sufficiently high power. Another suitable source for the working medium of the ejector is exhaust air from a central vacuum cleaning system, if such a system is available.

25 Instead of using an on-line ejector or other pressure reducing device (vacuum generator) allowing through-flow, a pressure reducing device may be arranged off-line, e.g. in a branch line connected to the branch sewer pipe. To prevent waste liquid, moisture or dirt from being drawn into
30 the pressure reducing device, it is recommended to shut off the pressure reducing device at an early stage of the toilet emptying process. In this case means are required to maintain the reduced pressure even after shutting off the pressure reducing device. Such means may be provided by
35 designing the sewer as a stand pipe having its lower end in a water trap of a sufficiently large volume. When reduced

pressure is created in the sewer, part of the liquid in the water trap is drawn up into the stand pipe to form a water column maintaining reduced pressure in the sewer pipe even when the reduced pressure device has been shut off. Since
5 the "vacuum" or reduced pressure in a system according to the invention is about 3 to 20% of atmospheric pressure (the absolute pressure thus being 97 to 80% of the atmospheric pressure), the vertical dimension of the stand pipe does not need to be more than about 2 m. For most practical
10 applications a stand pipe height of about 1 m is sufficient.

By dimensioning the sanitary trap of the toilet means and flush water supply so that the amount of flush water used at each toilet emptying does not exceed 2 litres, or preferably is around 1 litre, the advantage is achieved that
15 the amount of liquid in the toilet waste is so small that separating the toilet waste from other waste water becomes profitable.

Embodiments of the invention will now be described, by way of example only, with particular reference to the
20 accompanying schematic drawings, in which:

Figure 1 shows a single toilet and sewer connection of a toilet system according to the invention;

Figure 2 shows a toilet system for a building, the system having a number of toilets with associated
25 sewer connections; and

Figure 3 shows a single toilet having a pressure reducing device comprising a stand pipe.

In the drawings, reference numeral 1 indicates a toilet with a sanitary of water trap 2 at its outlet duct.
30 A branch sewer pipe 3 with an inner diameter of about 50 mm is connected to the toilet 1. The branch sewer pipe 3 leads to an air driven ejector 4, which, when air of suitable pressure is supplied by a blower 10 through a feed pipe 7,

rapidly reduces the pressure in the pipe 3 to a vacuum of about 10% (i.e. the absolute pressure in the pipe is about 90% of atmospheric pressure). This pressure reduction in the pipe 3 causes the liquid in the water trap 2 and waste
5 and water in the toilet to be rapidly passed out into the branch sewer pipe 3 by the pressure of the ambient air.

As long as the air flow in the feed pipe 7 is maintained, the ejector 4 continues to create a reduced pressure in the pipe 3 and after one or a few seconds all
10 waste from the toilet 1 reaches the ejector. The waste passes through the ejector and flows into a second part 9 of the sewer pipe downstream of the ejector 4. The pressure is somewhat above atmospheric pressure in part 9 because the working medium of the ejector is blown out here. The higher
15 pressure gives the waste that has passed the ejector 4 an extra push forward in the pipe 9 where it flows out into a collecting duct or sewer 5. The pipe 9 preferably has a somewhat larger bore than the pipe 3, the cross-sectional area of the bore of the pipe 9 preferably being from 70 to
20 100% larger than that of the pipe 3.

The length of the pipe 3 between the toilet 1 and the ejector 4 is about 6 m. The angle between the end of the pipe 3 and the pipe part 9 is about 150°, which is an advantageous value for ejectors of the type shown. Upstream
25 of the ejector 4, at a distance of about 1 m or less therefrom, there is a safety device 8, such as a sensitive safety valve, or alternatively, a device that stops the blower 10, should the pressure in pipe 3 rise above a threshold value. The safety device 8 may also have both
30 these functions at the same time. If clogging or the like causes a substantial obstacle to flow in the pipe 9, the suction effect of the ejector 4 ceases and pressure from the working medium of the ejector propagates as a back-flow into the branch sewer pipe 3. This could result in nasty-smelling air and water being blown into the toilet 1 through
35 the water trap 2. The object of the safety device 8 is to eliminate such incidents.

The blower 10 also functions as a ventilator for the toilet room 12. The blower 10 is connected to a ventilating pipe 13 that draws air from the toilet room 12. Alternatively, the blower may be the blower of a central vacuum cleaning system or the like. The blower may even be placed in or behind the wall of the toilet room 12.

The emptying of a toilet is started by operating a flush button 6 in the toilet room 12. Then the blower 10 starts and the ejector 4 generates a reduced pressure in the pipe 3, which causes the contents of the toilet 1 to be drawn into the pipe 3. Simultaneously, flush water is supplied from a flush water container 14 to flush the inner surface of the toilet bowl. Flush water is supplied by opening a flush water valve (not shown). This normally takes place at the same time as the blower 10 is activated. The flush water valve stays open at least during the initial phase of emptying the toilet 1. Upon closing the flush valve, the blower 6 continues to operate the ejector 4 until all the waste from the toilet has passed the ejector 4. The time is controlled by an adjustable time relay (not shown). Upon stopping the blower 10, the flush water valve again opens to fill the water trap of the toilet with clean water.

Figure 2 shows a house 15 with a total of five toilets 1 on three different floors. Each toilet 1 has its own ejector 4 provided with a blower 10 which, as described with reference to Figure 1, creates a reduced pressure in the branch sewer pipe 3 of the toilet. The branch sewer pipes 3 from the toilets 1 are joined to a common vertical sewer pipe 9, which is connected to a main sewer line 5 for separate treatment of the toilet waste. Other sanitary units in the house such as wash basins 17 and shower cabins 18 have their own sewer pipes 16, which are connected to a communal sewer pipe 19. The upper end of the sewer pipe 9 is connected to a ventilation pipe 20, which opens outside the roof of the house 15. The sewer pipes 16 can be joined to the same ventilation pipe or have their own ventilation pipe or pipes (not shown).

In the embodiment shown in Figure 2, the safety device 8 shown in Figure 1 is not required. This is because the vertical sewer pipe 9 is connected to the ventilation pipe 20 and thus no overpressure can develop downstream of the ejector 4. Thus, there is no risk of pressure shocks penetrating towards the toilets 1.

If the toilets are each provided with a flush water container 14 of the standard type which has a much larger volume than is required according to the invention, a part of the flush water container may, as shown in Figure 1, be used to house the blower that is needed to drive the ejector 4. Thereby a simple installation is obtained with all necessary parts in or near the toilet.

Figure 3 shows pressure reduction off-line, i.e. on the side of the flow duct of the sewer pipe. The toilet 1 is connected to a branch sewer pipe 3 in the same manner as in Figure 1 and Figure 2. Vacuum or pressure reduction is created by an electric blower 10 in a branch pipe 21 branching from the pipe 3. The pipe 21 may be connected to a duct that corresponds to the ventilation pipe 20 in Figure 2. The pressure reduction created by the blower 10 is able to lift the liquid in a large water trap 22 arranged in front of a sewer duct 5 under atmospheric pressure. The liquid is lifted a distance H which, at a vacuum of 10%, is typically about 1 m. Even after the blower 10 ceases operation the water column in the pipe 21 maintains the necessary vacuum in the pipe 3 for a sufficient length of time to ensure that the toilet 1 is emptied and its waste is transported to the lower part of the pipe 21.

The invention has been specifically described with reference to toilets although it may have application to other sanitary devices, e.g. bidets, water closets, waste disposal units or the like, having waste to be disposed of.

The invention is not limited to the embodiment disclosed, but several modifications thereof are feasible,

Where the terms “comprise”, “comprises”, “comprised” or “comprising” are used in this specification, they are to be interpreted as specifying the presence of the stated features, integers, steps or components referred to, but not to preclude the presence or addition of one or more other feature, integer, step, component or group thereof.

A 10x10 grid of dots forming the letters 'S', 'E', 'E', 'S'.

The claims defining the invention are as follows:

1. A suction toilet system including at least one, preferably a plurality of, toilet means provided with a separate sanitary trap, a branch sewer pipe connected at one end to the sanitary trap and at an opposite end to a disposal system under atmospheric pressure, and pressure reducing means for generating reduced pressure in the branch sewer pipe, wherein the pressure reducing means includes an air driven vacuum generator connected to the branch sewer pipe at said opposite end thereof in a manner allowing waste to be drawn from said at least one the toilet means and transported through the branch sewer pipe past the pressure reducing device and onwards to the disposal system without hindrance from valves or other temporarily sealing means.

2. The system according to claim 1, wherein the inner diameter of the branch sewer pipe associated with the or each toilet means is no more than 65 mm, preferably no more than 55 mm.

3. The system according to claim 1 or 2, wherein, for the toilet means, the length of the branch sewer pipe between the associated sanitary trap and the air driven vacuum generator is from 2 to 50 m, preferably from 5 to 15 m.

4. The system according to any one of the preceding claims, wherein the air driven vacuum generator includes an air driven ejector with a feed system arranged to supply the air driven ejector with pressurized gas or air for, at the most, some seconds with a flow of from 700 to 2000 l/min, preferably from 1000 to 1500 l/min.

5. The system according to claim 4, wherein the dynamic pressure in the feed system supplying air to the air driven ejector is from 7 to 40 kPa, preferably from 10 to 30 kPa.

6. The system according to claim 4 or 5, wherein the air driven ejector is a so-called on-line ejector integral with the branch sewer pipe, the branch sewer pipe having an upstream portion connected at an angle to an inlet of the ejector and a downstream portion so that the sewer pipe immediately before and after the on-line ejector forms an angle of at least 120°, preferably of at least 135°.

7. The system according to claim 6, wherein a safety device, e.g. a safety valve, is provided in the branch sewer pipe between the sanitary trap and the on-line ejector for preventing the formation of overpressure in this part of the branch sewer pipe.



8. The system according to any one of claims 4 to 7, wherein, for the air driven ejector, the device for supplying air to the ejector includes the pressure side of a blower or the like, the suction side of which is, preferably, arranged to draw air from the space where the associated toilet means is situated, or is formed of the vacuum unit of a central vacuum cleaning system or the like.

9. The system according to claim 1, wherein the air driven vacuum generator is, in a manner known per se, off-line, i.e. arranged at a distance from and connected to the branch sewer pipe, and in that the vacuum part of the branch sewer pipe is, at its downstream end, closed by a water trap, which, in a manner known per se, during the generation of vacuum in the sewer pipe, forms a water column corresponding to the level of vacuum, the water column having a vertical height of at the most 2 m, preferably about 1 m.

10. The system according to any one of the preceding claims, wherein the sanitary trap and flush water supply to the toilet means are so dimensioned that the amount of water emptied into the branch sewer pipe after each flush does not exceed 2 litres, preferably does not exceed 1 litre.

Dated this 25th day of July, 2002.

20

EVAC INTERNATIONAL OY

By their Patent Attorneys:

CALLINAN LAWRIE

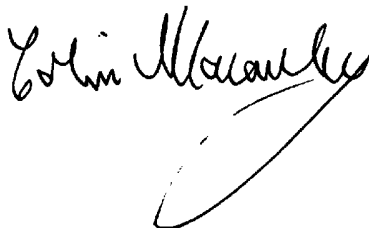


Fig. 1

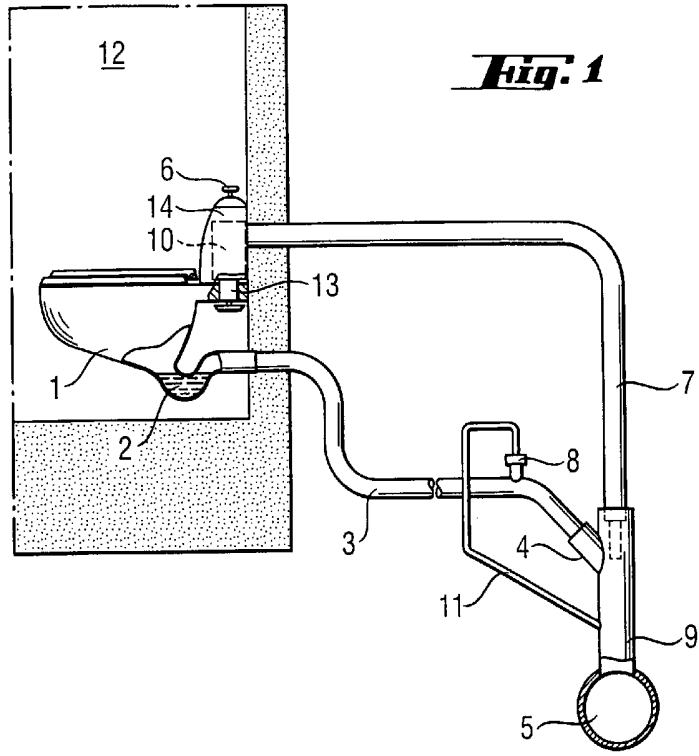


Fig. 3

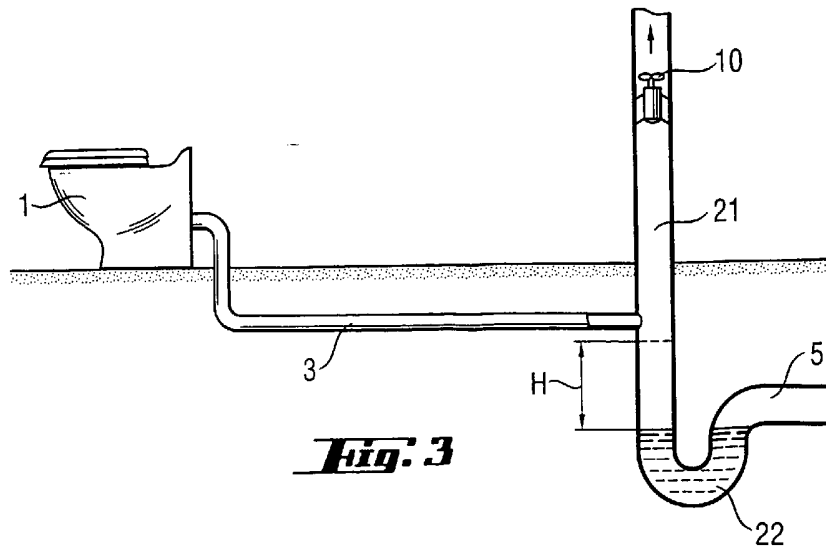


Fig. 2