

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/183793 A1

(43) International Publication Date
12 December 2013 (12.12.2013)

WIPO | PCT

(51) International Patent Classification:

B65D 81/02 (2006.01) B65D 55/02 (2006.01)
B65D 43/16 (2006.01) G03G 21/18 (2006.01)

Taiji; c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, 1468501 (JP).

(21) International Application Number:

PCT/JP2013/066409

(74) Agent: YAMADA Ryuichi; TOKO International Patent Office, Toranomon Sugai Bldg. 2F, 18-16, Toranomon 3-chome, Minato-ku, Tokyo, 1050001 (JP).

(22) International Filing Date:

7 June 2013 (07.06.2013)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English


(30) Priority Data:

2012-131295 8 June 2012 (08.06.2012) JP

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PACKING MEMBER AND CARTRIDGE PACKED IN THE PACKING MEMBER

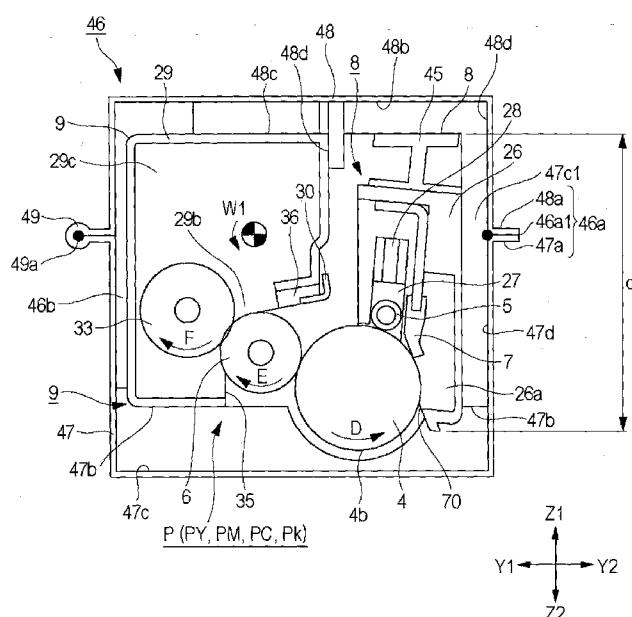

(57) Abstract: A packing member for packing a cartridge which is detachably mountable to an image forming apparatus includes: a frame portion including an opening as an entrance for the cartridge, a first recessed portion for accommodating the cartridge, and a limiting portion, provided in the first recessed portion, for limiting a position of the cartridge with respect to the direction crossing a limiting portion of the cartridge; and a cap portion, provided rotatably connected to the frame portion by a hinge portion, for openably covering the opening. The limiting portion limits the position of the cartridge so that the cartridge is located in a position where a grip portion of the cartridge is remoter from the hinge portion than the center line of the cartridge with respect to the crossing direction and a direction crossing an entering direction in which the cartridge enters the frame portion.

Fig. 1



Published:

— *with international search report (Art. 21(3))*

DESCRIPTION

[TITLE OF THE INVENTION]

PACKING MEMBER AND CARTRIDGE PACKED IN
5 THE PACKING MEMBER

[TECHNICAL FIELD]

[0001] The present invention relates to a packing member for packing a cartridge detachably mountable to 10 an image forming apparatus and relates to the cartridge packed in the packing member.

[0002] Examples of the image forming apparatus may include an electrophotographic copying machine, an electrophotographic printer (e.g., a laser beam 15 printer, an LED printer or the like), a facsimile machine, a word processor, and the like. Further, the cartridge includes, e.g., an electrophotographic photosensitive member as an image bearing member, or is a cartridge prepared by integrally assembling the 20 electrophotographic photosensitive member with a developing means acting on the electrophotographic photosensitive member into a unit, which is detachably mountable to the image forming apparatus.

[0003] Further, the packing member is used for 25 protecting the cartridge from external vibration and impact when the cartridge is transported.

[BACKGROUND ART]

[0004] An electrophotographic image forming apparatus, such as a printer, using an electrophotographic process electrically charges uniformly the electrophotographic photosensitive member as the image bearing member and then forms a latent image by selective exposure of the electrophotographic photosensitive member to light. Then, the latent image is developed with the developer to be visualized as a developer image. The developer image is then transferred onto a recording material (medium).

[0005] By applying heat and pressure to the transferred developer image, the developer image is fixed on the recording material, so that an image is recorded.

[0006] Such a conventional electrophotographic image forming apparatus was accompanied with supply of the developer and maintenance of various process devices.

[0007] As a means for facilitating such a developer supplying operation and maintenance, all or a part of the electrophotographic photosensitive image, a charging means, the developing means, a cleaning means and the like are integrally assembled, as a process cartridge, in a frame. A process cartridge type in which the process cartridge is detachably mountable to the electrophotographic image forming apparatus is employed.

[0008] According to the process cartridge type, the

maintenance of the process cartridge can be performed in the form of replacement by a user himself (herself), and therefore it was possible to remarkably improve productivity. With respect to such a detachably 5 mountable, the user replaces the cartridge. In this case, in general, the cartridge is taken out from an electrophotographic image forming apparatus main assembly and then is replaced with a new cartridge.

[0009] Here, the fresh cartridge shipped from a 10 manufacturing factory is packed in the packing member for protecting the cartridge from vibration and impact during transportation. Further, at the time when the new cartridge is mounted in the apparatus main assembly, the packing member is unpacked and then a 15 grip portion of the cartridge is gripped to take out the cartridge from the packing member. Then, the cartridge is mounted in the apparatus main assembly.

[0010] As the packing member for packing the 20 cartridge and for protecting the cartridge from the vibration and impact during transportation, various packing members as described in Japanese Patent No. 3639834 and Japanese Laid-Open Patent Application (JP-A) Hei 4-114173.

[0011] Of these packing members, according to a 25 constitution in JP-A Hei 4-114173, the packing member is a member prepared by extrusion (molding) along an outer configuration of the cartridge. The packing

member is provided with many projections and recesses, by which the cartridge is supported. Further, openings at end portions of the packing member are covered with a cap (cover) molded correspondingly to the outer 5 configuration of the cartridge.

[0012] However, constitutions of Japanese Patent No. 3639834 and JP-A Hei 4-114173 involve the following problem.

[0013] In order to fix the cartridge relative to the 10 packing member, at each of end portions of the electrophotographic photosensitive member of the cartridge with respect to an axial direction of the photosensitive member, a cap as a separate member is provided, so that positional limitation of the 15 cartridge with respect to the axial direction is made. For that reason, the constitution of the packing member complicated, and a cost was increased. Further, when the cartridge is taken out from the packing member, the cap of the packing member is slid from a 20 side-surface opening of the packing member in the axial direction, thus being separated from the packing member. Then, the cartridge is slid in the axial direction, and thus is taken out from the packing member. That is, in order for the user to take out the 25 cartridge from the packing member, complicate steps are required to be performed.

[SUMMARY OF THE INVENTION]

[0014] A principal object of the present invention is to provide a packing member capable of protecting a cartridge from vibration and impact during 5 transportation.

[0015] Another object of the present invention is to provide the cartridge packed in the packing member.

[0016] According to an aspect of the present invention, there is provided a packing member for 10 packing a cartridge which is detachably mountable to an image forming apparatus and which includes a grip portion provided, for gripping the cartridge, in a position deviated from a center line passing through a center of the cartridge with respect to a direction 15 crossing a longitudinal direction of the cartridge, the packing member comprising: (i) a frame portion including an opening as an entrance for the cartridge, a first recessed portion for accommodating the cartridge, and a limiting portion, provided in the 20 first recessed portion, for limiting a position of the cartridge with respect to the direction crossing the longitudinal direction; and (ii) a cap portion, provided rotatably connected to the frame portion by a hinge portion, for openably covering the opening, 25 wherein the limiting portion limits the position of the cartridge so that the cartridge is located in a position where the grip portion is remoter from the

hinge portion than the center line of the cartridge with respect to the direction crossing the longitudinal direction of the cartridge and a direction crossing an entering direction in which the 5 cartridge enters the frame portion.

[0017] According to another aspect of the present invention, there is provided a packing member for packing a cartridge which is detachably mountable to an image forming apparatus and which includes a first 10 frame including a grip portion for gripping the cartridge and includes a second frame connected to the first frame the packing member comprising: (i) a frame portion including an opening as an entrance for the cartridge, a first recessed portion for accommodating the cartridge, and a limiting portion, provided in the 15 first recessed portion, for limiting a position of the cartridge with respect to a direction crossing a longitudinal direction of the cartridge; and (ii) a cap portion, provided rotatably connected to the frame portion by a hinge portion, for openably covering the opening, wherein the limiting portion limits the 20 position of the cartridge so that the grip portion is located in a position remoter from the hinge portion than the second frame with respect to the direction crossing the longitudinal direction of the cartridge and a direction crossing an entering direction in 25 which the cartridge enters the frame portion.

[0018] According to another aspect of the present invention, there is provided a cartridge, packed in a packing member, detachably mountable to an image forming apparatus, wherein the cartridge includes a 5 grip portion provided, for gripping the cartridge, in a position deviated from a center line passing through a center of the cartridge with respect to a direction crossing a longitudinal direction of the cartridge, and wherein the packing member comprises: (i) a frame 10 portion including an opening as an entrance for the cartridge, a first recessed portion for accommodating the cartridge, and a limiting portion, provided in the first recessed portion, for limiting a position of the cartridge with respect to the direction crossing the 15 longitudinal direction; and (ii) a cap portion, provided rotatably connected to the frame portion by a hinge portion, for openably covering the opening, wherein the limiting portion limits the position of the cartridge so that the cartridge is located in a 20 position where the grip portion is remoter from the hinge portion than the center line of the cartridge with respect to the direction crossing the longitudinal direction of the cartridge and a direction crossing an entering direction in which the 25 cartridge enters the frame portion.

[0019] According to a further aspect of the present invention, there is provided a cartridge, packed in a

packing member, detachably mountable to an image forming apparatus wherein the cartridge includes a first frame including a grip portion for gripping the cartridge and includes a second frame connected to the 5 first frame and wherein the packing member comprises:

(i) a frame portion including an opening as an entrance for the cartridge, a first recessed portion for accommodating the cartridge, and a limiting portion, provided in the first recessed portion, for 10 limiting a position of the cartridge with respect to a direction crossing a longitudinal direction of the cartridge; and (ii) a cap portion, provided rotatably connected to the frame portion by a hinge portion, for openably covering the opening, wherein the limiting 15 portion limits the position of the cartridge so that the grip portion is located in a position remoter from the hinge portion than the second frame with respect to the direction crossing the longitudinal direction of the cartridge and a direction crossing an entering 20 direction in which the cartridge enters the frame portion.

[0020] These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following 25 description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[0021] Figure 1 is a schematic sectional view showing a packing state of a cartridge in a packing member in 5 Embodiment 1.

[0022] Figure 2 is a schematic sectional view showing an example of an image forming apparatus main assembly in Embodiment 1.

[0023] Figure 3 is a schematic sectional view showing 10 an example of the cartridge in Embodiment 1.

[0024] Parts (a) and (b) of Figure 4 are schematic perspective views each showing an example of the cartridge in Embodiment 1.

[0025] Figure 5 is a schematic sectional view showing 15 a state of an image forming apparatus in which the cartridge is detachably mountable to the apparatus main assembly in Embodiment 1.

[0026] Figure 6 is a schematic sectional view showing an operation in which the cartridge is demounted from 20 and mounted in a cartridge tray in Embodiment 1.

[0027] Figure 7 is a schematic perspective view showing an example of a developing device in Embodiment 1.

[0028] Parts (a) and (b) of Figure 8 are schematic 25 perspective views each showing the packing member in Embodiment 1.

[0029] Parts (a) and (b) of Figure 9 are schematic

perspective views each showing a state in which the cartridge is detachably from the packing member in Embodiment 1.

[0030] Figure 10 is a schematic perspective view 5 showing a cartridge packing state of the packing member in Embodiment 1.

[0031] Parts (a) and (b) of Figure 11 are schematic sectional views each showing the cartridge and the cartridge packing state of the packing member in 10 Embodiment 1.

[0032] Figure 12 is a schematic sectional view showing an unpacked state of the packing member in which the cartridge is packed in Embodiment 1.

[0033] Parts (a) and (b) of Figure 13 are schematic 15 perspective views each showing an example of a developing device in Embodiment 2.

[0034] Figure 14 is a schematic sectional view showing a state in which the developing device is detachably mountable to the apparatus main assembly in 20 Embodiment 2.

[0035] Figure 15 is a schematic sectional view showing a packing member in which the developing device is packed in Embodiment 2.

25 [DESCRIPTION OF EMBODIMENTS]
(Embodiment 1)

[0036] Embodiment 1 of the present invention will be

described with reference to Figures 2 to 12.

[0037] Incidentally, in the following embodiments, as an electrophotographic image forming apparatus, a full-color electrophotographic image forming apparatus 5 to which four cartridges are detachably mountable is described as an example.

[0038] However, the number of the cartridges to be mounted in the image forming apparatus is not limited to four but may appropriately be set as desired.

10 **[0039]** For example, in the case of an image forming apparatus for forming a monochromatic image, the number of the cartridges to be mounted in the image forming apparatus is one. Further, in the following embodiments, as an example of the image forming apparatus, a printer is exemplified.

15 **[0040]** However, the image forming apparatus is not limited to the printer. The present invention is also applicable to, e.g., other image forming apparatuses such as a copying machine, a facsimile machine and a 20 multi-function machine having functions of these machines in combination.

<General structure of image forming apparatus>

[0041] First, Figure 2 is a schematic sectional view of the image forming apparatus in this embodiment.

25 **[0042]** As shown in Figure 2, an image forming apparatus 1 is a four color-based full-color laser printer using the electrophotographic image forming

process and effects color image formation on a recording material S. The image forming apparatus 1 is of a process cartridge type in which the process cartridge is detachably mountable to an apparatus main assembly 2 and a color image is formed on the recording material S.

[0043] Here, with respect to the image forming apparatus 1, the side (surface) on which an openable door 3 is provided is referred to as a front side (surface), and a side (surface) opposite to the front side (surface) is referred to as a rear side (surface). Further, a right side when the image forming apparatus 1 is viewed from the front surface is referred to as a driving side, and a left side is referred to as a non-driving side.

[0044] In the apparatus main assembly 2, four cartridges P consisting of a first cartridge PY, a second cartridge PM, a third cartridge PC and a fourth cartridge PK are provided and arranged in a horizontal direction. The respective first to fourth cartridges (PY to PK) have the same electrophotographic process mechanism but contains developers (toners) different in color from one another. To the first to fourth cartridges P (PY to PK), a rotational driving force is transmitted from a drive output portion (not shown) of the apparatus main assembly 2. Further, to the first to fourth cartridges P (PY to PK), bias voltages

(charging bias, developing bias and the like) are supplied from the apparatus main assembly 2 (not shown).

[0045] Each of the first to fourth cartridges P (PY to PK) includes a first frame including an electrophotographic photosensitive member (hereinafter referred to as a photosensitive drum) 4, and including a charging means and a cleaning means which are used as process means acting on the photosensitive drum 4.

10 The first frame is referred to as a cleaning unit 8.

[0046] Further, each of the first to fourth cartridges P (PY to PK) includes a developing device 9 which is a second frame including a developing means for developing an electrostatic latent image on the 15 photosensitive drum 4.

[0047] The cleaning unit 8 and the developing device 9 are connected with each other. As the charging means, a charging roller 5 is used. As the cleaning means, a cleaning blade 7 is used. As the developing means, a 20 developer carrying member (hereinafter referred to as a developing roller) 6 is used. A more specific constitution of the cartridges will be described below.

[0048] The first process cartridge PY accommodates the toner of yellow (Y) in its developing (device) 25 frame 29 and forms the toner image of yellow on the surface of the photosensitive drum 4. The second process cartridge PM accommodates the toner of magenta

(M) in its developing frame 29 and forms the image of magenta on the surface of the photosensitive drum 4. The process third cartridge PC accommodates the toner of cyan (C) in its developing frame 29 and forms the 5 toner image of cyan on the surface of the photosensitive drum 4. The fourth process cartridge PK accommodates the toner of black (K) in its developing frame 29 and forms the toner image of black on the surface of the photosensitive drum 4.

10 [0049] As shown in Figure 2, above the first to fourth process cartridges P (PY, PM, PC, PK), a laser scanner unit LB as an exposure means is provided. This laser scanner unit LB outputs laser light Z correspondingly to image information. Then, the laser 15 light Z passes through an exposure window portion 10 of each cartridge P, so that the surface of the photosensitive drum 4 is subjected to scanning exposure to the laser light Z.

16 [0050] Under the first to fourth cartridges P (PY, PM, PC, PK), an intermediary transfer belt unit 11 as a transfer member is provided. This intermediary transfer belt unit 11 includes a driving roller 13, a turn roller 14 and a tension roller 15, and includes a transfer belt 12 extended and stretched by the rollers. 20 The photosensitive drum 4 of each of the first to fourth process cartridges P (PY to PK) is contacted to an upper surface of the transfer belt 12 at its lower

surface. A resultant contact portion is a primary transfer portion. Inside the transfer belt 12, primary transfer rollers 16 are provided opposed to the associated photosensitive drums 4. Oppositely to the 5 turn roller 14, a secondary transfer roller 17 is provided in contact with the transfer belt 12. A resultant contact portion between the transfer belt 12 and the secondary transfer roller 17 is a secondary transfer portion.

10 [0051] Below the intermediary transfer belt unit 11, a sheet feeding unit 18 is provided. This sheet feeding unit 18 includes a sheet feeding tray 19 in which sheets of the recording material S are stacked, and includes a sheet feeding roller 20 and the like.

15 [0052] In an upper left side of the apparatus main assembly 2 in Figure 2, a fixing unit 21 and a sheet discharging unit 22 are provided. At an upper surface of the apparatus main assembly 2, a sheet discharge tray 23 is defined.

20 [0053] On the recording material S, the toner image is fixed by the fixing means provided in the fixing unit 21, and then the recording material S is discharged onto the discharge tray 23.

<Image forming operation>

25 [0054] Next, an operation for forming a full-color image is as follows. The photosensitive drums 4 of the first to fourth cartridges P (PY to PK) are

rotationally driven at a predetermined speed (in an arrow D direction in Figure 3 and in a counterclockwise direction in Figure 2). The transfer belt 12 is also rotationally driven in the same 5 direction (arrow C direction in Figure 2) as the rotational direction of the photosensitive drums 4 (at their contact portions) at a speed corresponding to the speed of the photosensitive drums 4.

[0055] The laser scanner unit LB is also driven. In 10 synchronism with the drive of the laser scanner unit LB, the surface of the photosensitive drum 4 of each cartridge P is electrically charged to a predetermined polarity and a predetermined potential by the charging roller 5. The scanner unit LB scans and exposes the 15 surface of each photosensitive drum 4 with the laser light Z depending on an associated signal. As a result, the electrostatic latent image depending on the image signal for the associated color is formed on the surface of each photosensitive drum 4. The thus formed 20 electrostatic latent image is developed by the developing roller 6 which is rotationally driven (in an arrow E direction in Figure 3 or in the clockwise direction in Figure 2) at a predetermined speed.

[0056] By the electrophotographic image forming 25 process operation as described above, on the photosensitive drum 4 of the first cartridge PY, a yellow toner image corresponding to a yellow component

for the full-color image is formed. Then, the toner image is primary-transferred onto the transfer belt 12.

[0057] Similarly, on the photosensitive drum 4 of the second cartridge PM, a magenta toner image 5 corresponding to a magenta component for the full-color image is formed. Then, the toner image is primary-transferred superposedly onto the yellow toner image which has already been transferred on the transfer belt 12.

10 **[0058]** Similarly, on the photosensitive drum 4 of the third cartridge PC, a cyan toner image corresponding to a cyan component for the full-color image is formed. Then, the toner image is primary-transferred superposedly onto the yellow and magenta toner images 15 which have already been transferred on the transfer belt 12.

[0059] Similarly, on the photosensitive drum 4 of the fourth cartridge PK, a black toner image corresponding to a black component for the full-color image is 20 formed. Then, the toner image is primary-transferred superposedly onto the yellow, magenta and cyan toner images which have already been transferred on the transfer belt 12.

[0060] In this way, unfixed toner images of yellow, 25 magenta, cyan and black for the four color-based full-color image are formed on the transfer belt 12.

[0061] On the other hand, at predetermined control

timing, sheets of the recording material S are separated and fed one by one. The recording material S is introduced into a secondary transfer portion which is a contact portion between the secondary transfer 5 roller 17 and the transfer belt 12 with predetermined control timing. As a result, in a process in which the recording material S is conveyed to the secondary transfer portion, the four color toner images superposed on the transfer belt 12 are collectively 10 transferred onto the surface of the recording material S.

<Structure of cartridge>

[0062] Parts (a) and (b) of Figure 4 are schematic perspective views of each cartridge P (PY, PM, PC, PK) 15 as seen from different angles (directions). In the following description, the respective cartridges P (PY to PK) have the same constitution, and therefore are collectively described as the cartridge P.

[0063] The cartridge P has a substantially 20 rectangular parallelopiped shape extending in a direction of a rotational axis a of the photosensitive drum 4 as a longitudinal direction (arrow X direction), and includes the cleaning unit f, the developing device 9, a driving-side cover member 24 and a 25 non-driving-side cover member 25.

[0064] Part (a) of Figure 4 is the schematic perspective view of the cartridge P as seen from the

driving side, and (b) of Figure 4 is the schematic perspective view as seen from the non-driving side. The cartridge P has a two-frame structure in which the driving-side cover member 24 and the non-driving-side 5 cover member 25 which are fixed on the cleaning unit 8 support rotatably the developing device 9 about a swing center (axis a indicated by a chain line in (a) of Figure 4) of the developing device 9. Incidentally, the developing device 9 is urged in a certain 10 direction (arrow W1 direction in Figure 3) by a spring (not shown) or the like although specifically described later.

[0065] As shown in Figure 3, the cleaning unit (drum unit) 8 is constituted by the photosensitive drum 4, 15 the charging roller 5, a cleaning container 26 including the cleaning blade 7, and a grip portion 45. As shown in (a) and (b) of Figure 4, the photosensitive drum 4 is rotatably supported by the driving-side cover member 24 and the non-driving-side 20 cover member 25, and obtains a driving force of a motor (not shown) of the apparatus main assembly 2 from drum driving coupling 4a, and thus is rotationally driven (in the arrow D direction in Figure 3).

25 **[0066]** As shown in Figure 3, the charging roller 5 is rotatably supported at its end portions by charging roller bearings 27 of the cleaning container 26 and is

driven by rotation of the photosensitive drum 4 in contact with the surface of the photosensitive drum 4. At this time, in order to uniformly charge the surface of the photosensitive drum 4, the charging roller 5 is urged against the photosensitive drum 4 by a charging roller urging spring 28 at each of the end portions thereof. The cleaning blade 7 is fixed on the cleaning container 26, and an elastic rubber end portion thereof is disposed in contact with the photosensitive drum 4 in a direction counterdirectionally to the rotational direction (the arrow D direction in Figure 3). During image formation, the cleaning blade 7 scrapes off a transfer residual toner remaining on the photosensitive drum 4 to clean the surface of the photosensitive drum 4. At this time, the end of the cleaning blade 7 is contacted to the surface of the photosensitive drum 4 at predetermined pressure in order to scrape off the transfer residual toner completely.

[0067] Further, the transfer residual toner scraped off from the surface of the photosensitive drum 4 by the cleaning blade 7 is accommodated as a waste (residual) toner in a residual toner accommodating portion 26a of the cleaning container 26. For that purpose, on the cleaning container 26, a residual toner collecting sheet member 70 for preventing the residual toner from leaking out from a gap between

itself and the photosensitive drum 4 or the cleaning blade 7 is fixed with respect to the longitudinal direction of the photosensitive drum 4. Further, at each of longitudinal end portions of the cleaning 5 blade 7, a cleaning blade end portion seal member (not shown) is provided.

[0068] The grip portion 45 is a portion where a user grips the cartridge P, and is mounted integrally with or as a separate part from the cleaning container 26. 10 However, depending on the constitution of the image forming apparatus 1, in some cases, a mounting and demounting attitude, described later, of the cartridge P relative to the apparatus main assembly 2 is different from that in this embodiment. In that case, 15 the grip portion 45 may also be provided on the developing frame 29.

[0069] In this embodiment, the cartridge P is the substantially rectangular parallelopiped. Of six sides, a side 58 includes an exposed portion 4b for 20 permitting transfer of the toner image from the photosensitive drum 4 onto the intermediary transfer belt unit 11 described above. A side 59 opposite from the side 58 includes the above-described grip portion 45.

25 **[0070]** Further, as shown in (a) and (b) of Figure 4, the cartridge P includes the following portions as portions where its positions in a packing member 46

are limited when the cartridge P is packed in the packing member 46 described later. That is, first portions-to-be-limited 24b, 25b, 24g and 25g are positionally limited relative to the packing member 46 with respect to a vertically downward direction (Z2 direction) and horizontal direction (Y1 and Y2 directions). Further, movement of a second portion-to-be-limited 26c is limited relative to the packing member 46 with respect to a vertically upward direction (Z1 direction). Further movement of third portion-to-be-limited 24f and 25f is limited with respect to a longitudinal direction of the cartridge P (i.e., an axial direction of the photosensitive drum 4, X1 and X2 directions). Incidentally, with respect to the positional limitation of the cartridge P in the packing member 46 by using the above-described respective portion-to-be-limited will be specifically described later.

<Mounting and demounting constitution of cartridge>

20 [0071] Next, a mounting and demounting operation of the cartridge P with respect to the apparatus main assembly 2 will be described.

25 [0072] Figure 5 is a schematic sectional view showing a state in which a cartridge tray 43 is pulled out from the apparatus main assembly 2 and thus the cartridge P is detachably mountable to the cartridge tray 43. Figure 6 is a schematic sectional view for

illustrating an operation by which the cartridge P is demounted from and mounted into the cartridge tray 43.

[0073] As shown in Figure 5, inside the apparatus main assembly 2, the cartridge tray 43 in which the cartridges P are mountable is provided. The cartridge tray 43 is constituted so as to be linearly movable (pullable and pushable) in G1 and G2 directions which are substantially the horizontal direction with respect to the apparatus main assembly 2. Further, the cartridge tray 43 is capable of being in a mounted position, and in a pulled-out position where the cartridge tray 43 is pulled out from the mounted position.

[0074] First, the mounting operation for mounting the cartridge P into the apparatus main assembly 2 will be described. The openable door 3 is opened, and then the cartridge tray 43 is moved in G1 direction indicated by an arrow in Figure 5 to be moved to the pulled-out position. In this state, the cartridge P is mounted in the cartridge tray 43 from an arrow H1 direction to be held. The cartridge tray 43 holding the cartridge P is moved in an arrow G2 direction shown in Figure 6, so that the cartridge tray 43 is moved to the mounted position. Then, the openable door 3 is closed, so that the mounting operation of the cartridge P into the apparatus main assembly 2 is completed.

[0075] Then, the demounting operation of the

cartridge P from the apparatus main assembly 2 will be described. Similarly as in the mounting operation of the cartridge P into the apparatus main assembly 2 described above, the cartridge tray 43 is moved to the 5 pulled-out position. In this state, the cartridge P is demounted in an arrow H2 direction shown in Figure 6, so that the demounting operation of the cartridge P from the apparatus main assembly 2 is completed. By the above-described operations, the cartridge P is 10 detachably mountable to the apparatus main assembly 2. Incidentally, a mounting process of the cartridge P from the packing member 46 into the apparatus main assembly 2 will be described later specifically.

<Structure of developing device>

15 **[0076]** As shown in Figures 3 and 7, the developing device 9 has an elongated shape in which the developing roller 6 as the developing means extends in a rotational axis direction as the longitudinal direction. In addition to the developing roller 6, the 20 developing device 9 is constituted by the developing frame 29, a developing blade 31, developing device end portion seal members 34R and 34L, a flexible sheet member 35, and supplying roller shaft seals 37R and 37L (Figure 7). Further, as shown in Figure 3, the 25 developing frame 29 includes a toner accommodating chamber 29c for accommodating the toner and includes an opening 29b for permitting discharge of the toner

from the toner accommodating chamber 29c. The developing roller 6 and the developer supplying roller 33 are provided close to the opening 29b. Further, as shown in Figure 7, end portions of a shaft (core material 6a) of the developing roller 6 are rotatably supported by a driving-side bearing 38 and a non-driving-side bearing 39 which are mounted on side surfaces of the developing frame 29. Further, at driving-side end portions of the core material 6a of the developing roller 6 and a core material 33a of the developer supplying roller 33, a developing roller gear 40 and a supplying roller gear 41 are provided, respectively, and are engaged with a developing device drive input gear 42. The developing device drive input gear 42 includes a developing device drive coupling 42a with which a drive output coupling (not shown) in the apparatus main assembly 2 side, so that a driving force of a driving motor (not shown) for the apparatus main assembly 2 is transmitted and thus the developing roller 6 and the developer supplying roller 33 are rotationally driven at a predetermined speed. The developing blade 31 is an about 0.1 mm-thick elastic metal plate, and a free end of the developing blade 31 with respect to a widthwise direction is contacted to the developing roller 6 counterdirectionally to the rotational direction (arrow E direction in Figure 3).

[0077] As shown in Figure 7, the developing device

end portion seal members 34R and 34L are provided at ends of the opening of the developing frame 29, so that toner leakage from a gap between the developing frame 29 as a second frame and each of the developing 5 blade 31 and the developing roller 6 is prevented. Further, the flexible sheet member 35 is provided in contact with the developing roller 6 along the longitudinal direction in a side where the sheet member 35 opposes the developing blade 31 at the 10 opening of the developing frame 29, thus preventing the toner leakage from a gap between the developing frame 29 and the developing roller 6. Further, the supplying roller shaft seal members 37R and 37L are mounted on the core material 33a of the developer 15 supplying roller 33 at exposed portions outside the developing frame 29, thus preventing the toner leakage from a gap between the core material 33a and a core material through hole 29d provided in the developing frame 29.

20 [0078] The developing device (developing unit) 9 is always urged by an urging spring (not shown) in a direction (arrow W1 direction in Figure 3), in which the developing roller 6 is contacted to the photosensitive drum 4, with the swing center (axis a) 25 shown in Figure 4 as a center. During the image formation, by the drive, the developer supplying roller 33 and the developing roller 6 are rotated and

rubbed with each other, so that the toner in the developer frame 29 is carried on the developing roller 6. The developing blade 31 regulates a thickness of a toner layer formed on a peripheral surface of the 5 developing roller 6, and at the same time, imparts triboelectric charges, generated between itself and the developing roller 6 by contact pressure, to the toner. Then, at the contact portion between the developing roller 6 and the photosensitive drum 4, the 10 charged toner on the developing roller 6 is deposited on the electrostatic latent image, so that the electrostatic latent image is developed.

[0079] Further, during non-image formation, the developing roller 6 is spaced from the photosensitive 15 drum 4, thus preventing deformation thereof at its surface. That is, the developing device 9 is constituted so as to be movable relative to the cleaning unit 8 and thus is capable of moving the developing roller 6 toward and away from the 20 photosensitive drum 4.

<Structure of packing member>

[0080] A structure of the packing member 46 will be described with reference to Figures 1, 8, 9 and 10.

[0081] Figure 1 is a schematic sectional view showing 25 a packing state of the cartridge P in the packing member 46 in this embodiment. Parts (a) and (b) of Figure 8 are schematic perspective views, as seen from

different angles, each showing the packing member 46 in this embodiment. Parts (a) and (b) of Figure 9 are schematic perspective views, as seen from different angles, each showing a demountable state of the 5 cartridge P from the packing member 46 in this embodiment. Here, a longitudinal direction of the packing member 46 is the same as the longitudinal direction (X1 and X2 directions) of the cartridge P when the cartridge P is accommodated in the packing 10 member 46. Figure 10 is a schematic perspective view showing the cartridge-packed state of the packing member 46 in this embodiment.

[0082] As shown in (a) and (b) of Figure 8, the packing member 46 is constituted by a frame portion 47, 15 a cap portion 48 and a hinge portion 49. The frame portion 47 and the cap portion 48 are rotatable, relative to each other, after a rotation shaft 49a of the hinge portion 49 (Figure 1). Each of the frame portion 47, the cap portion 48 are the hinge portion 20 49 which constitute the packing member 46 is constituted by a thin plate (sheet) of plastic (resin material), such as polyethylene terephthalate or polypropylene, and the resin material can be molded by vacuum molding, press molding, or injection molding. 25 However, the resin material can be molded inexpensive by employing the vacuum molding.

[0083] As shown in Figure 8, the frame portion 47

includes a first recessed portion 47c having a recessed shape provided with a first opening 47c1. Further, the cap portion 48 includes a second recessed portion 48b having a recessed shape provided with a 5 second opening 48b1. Further, at the frame portion 47 and the cap portion 48, flange portions 47a and 48a are formed so as to surround the first recessed portion 47c and the second recessed portion 48b, respectively. The frame portion 47 and the cap portion 10 48 are connected at the hinge portion 49, thus being integrally molded. Further, the cap portion 48 is capable of being located in a closed position where the cap portion 48 is capable of covering the first opening 47c1 of the frame portion 47 (Figures 1 and 15 11) and an open position where the first opening 47c1 is open (Figure 12).

[0084] The mounting of the cartridge P in the packing member 46 will be described. The cartridge P is, as shown in (a) and (b) of Figure 9, supported in a first 20 state at the frame portion 47 of the packing member 46. This will be specifically described later. Here, in the first state, as shown in (a) and (b) of Figure 9, the cartridge P inserted into the packing member 46 in an arrow Z2 direction through the first opening 47c1 25 is detachably mounted in the packing member 46. Further, in the first state, the cartridge P is held by the frame portion 47 and the frame portion 47

covers the exposed portion 4b ((b) of Figure 4) of the photosensitive drum 4 of the cartridge P. Further, in the first state, the exposed portion 4b of the photosensitive drum 4 is prevented from contacting an inner surface of the frame portion 47 and a user is capable of gripping the grip portion 45 of the cartridge P. Further, from the state shown in (a) and (b) of Figure 9, the cap portion 48 is rotated, about the rotation shaft 49a of the hinge portion 49, toward the frame portion 47, so that the flange portion 48a of the cap portion 48 is contacted to the flange portion 47a of the frame portion 47 as shown in Figure 10. Thereafter, the flange portion 47a of the frame portion 47 and the flange portion 48a of the cap portion 48 are partly or wholly bonded to each other. As a result, as shown in Figure 1, the first recessed portion 47c of the frame portion 47 and the second recessed portion 48b of the cap portion 48 form a connecting portion 46a (Figures 1 and 10) in combination. Thus, an accommodating space 46b is created inside the packing member 46, so that the packing member 46 is in a second state (packing state) in which the cartridge P is capable of being accommodated in the accommodating space 46b (Figure 10). In this second state, the second recessed portion 48b of the cap portion 48 covers the entire cartridge P or a part of the cartridge P so as to accommodate

the grip portion 45 of the cartridge P which is the substantially rectangular parallelopiped. Incidentally, the connecting portion 46a includes an unpacking portion 46a1 at an opposing position from the hinge portion 49. Although details will be described later, the user unseals (unpacks) the packing member 46 from the unpacking portion 46a1 of the connecting portion 46a. Further, it is also possible to employ a constitution in which the frame portion 47 and the cap portion 48 are not bonded at the unpacking portion 46a1. By the above-described packing, the whole cartridge P is covered with the frame portion 47 and the cap portion 48 to be placed in the packed state (Figures 1 and 10). Incidentally, in Figure 1, the connecting portion 46a where the flange portion 47a of the frame portion 47 and the flange portion 48a of the cap portion 48 are connected with each other to accommodate the cartridge P is formed at a position which is roughly 1/2 of a height c of the cartridge P as seen from the longitudinal direction but is not limited thereto. For example, the connecting portion may also be provided above the upper point of the height c of the cartridge P. Further, the cartridge P is the substantially rectangular parallelopiped, and the packing member 46 includes the frame portion 47 and the cap portion 48 which are similar figures. However, the cartridge P may have any shape, and if

the whole cartridge P or a part, of the cartridge P, to be protected, is covered with the packing member 46, also the packing member may have any shape. Further, as a bonding means between the flange portion 47a of 5 the frame portion 47 and the flange portion 48a of the cap portion 48, it is possible to use (thermal) welding adhesive bonding, bonding with a double-side tape, hooking, or the like. However, the bonding means may only be required that the flange portions 47a and 10 48a can be bonded to each other, and is not limited to the above means. That is, it is also possible to employ a constitution in which the frame portion 47 and the cap portion 48 are separate members and the flange portions 47a and 48a are bonded to each other.

15 [0085] Next, in the packed state, positional limitation of the cartridge P by the packing member 46 will be described. In order to effect the positional limitation of the cartridge P with respect to the X1 and X2 direction, a pair of third limiting portions 47f formed as shown in (a) and (b) of Figure 8 at 20 inner surfaces, of the frame portion 47, corresponding to longitudinal ends of the cartridge P is contacted to third portions-to-be-limited 24f and 25f of the cartridge P shown in (a) and (b) of Figure 9.

25 Accordingly, the positions of the cartridge P with respect to the X1 and X2 directions are limited in the first state described above. Further, in order to

effect the positional limitation of the cartridge P with respect to Y1 and Y2 directions and Z2 direction shown in (a) and (b) of Figure 4, the packing member 46 includes first positions 47g and 47b formed at an 5 upper surface of the frame portion 47 shown in (a) and (b) of Figure 8. Here, in the Z2 direction, the cartridge P enters the frame portion 47. Further, the Y1 and Y2 directions are a direction which crosses (is perpendicular to) the longitudinal direction of the 10 cartridge P and which crosses (is perpendicular to) Z2 direction in which the cartridge P enters the frame portion 47.

[0086] Then, the first limiting portions 47g and 47b are contacted to first portions-to-be-limited 24g, 25g, 15 24b and 24a shown in (a) and (b) of Figure 9. Accordingly, the positions of the cartridge P with respect to the Y (Y1 and Y2) directions is limited in the first state described above. Further, as shown in (a) and (b) of Figure 8, second limiting portions 48c 20 are formed in the cap portion 48. Further, the second limiting portions 48c is, as shown in (a) and (b) of Figure 9, formed at positions corresponding to second portions-to-be-limited 20c of the cartridge P in the packing state (second state) of the packing member 46. 25 Further, with respect to the cartridge P, in the packing state (second state) the second portions-to-be-limited 26c contact the second limiting

portions 48c of the cap portion 48. As a result, movement of the cartridge P in Z1 direction in which the cartridge P is spaced from the first limiting portions 47b is limited, so that the positional 5 limitation of the cartridge is made. That is, in the first state shown in (a) and (b) of Figure 9, the cartridge P is not limited with respect to the Z1 direction opposite to the direction of gravitation. In the above-described packing state (second state), the 10 packing member 46 does not contact the cartridge P at portions other than the limiting portions 47f, 47b, 48g and 47g shown in Figure 8. For that reason, the packing member 46 generates elastic deformation and plastic deformation at the portions other than the 15 respective limiting portions when vibration and impact are generated during transportation, so that the packing member 46 is capable of absorbing the vibration and the impact during transportation. Therefore, the packing member 46 does not directly 20 transmit the vibration and the impact during transportation to the photosensitive drum 4 and the process means and thus functions as a protecting member for protecting the cartridge P. Accordingly, it becomes also possible to eliminate a drum shutter, for 25 protecting the photosensitive drum 4, from the cartridge P. Further, each of the limiting portions of the packing member 46 may be contacted to the

cartridge P at any position if the position is not in a region where the electrostatic latent image is to be formed on the photosensitive drum 4 of the cartridge P. For example, even when the limiting portions are 5 contacted to the developing frame 29, a similar effect can be obtained. However, when the third portions-to-be-limited 24b and 25b have high rigidity, the cartridge P is less broken by the impact or the like during transportation. Further, in the first 10 state, the cartridge P has already been positionally limited by the frame portion 47 of the packing member 46 with respect to the X1, X2, Y1, Y2 and Z1 directions. That is, in order to fix the cartridge P in the packing member 46, when the state of the 15 packing member 46 is changed from the first state to the second state, the cartridge P is only required to be covered with the cap portion 48, so that an assembling property can be further improved. Further, the limiting portions 47f, 47b, 48c and 47g are formed 20 in the packing member 46 but may also be constituted as separate members.

[0087] As described above, as shown in (a) of Figure 4, the developing device 9 is rotatably supported by the driving-side cover member 24 and the 25 non-driving-side cover member 25 which are fixed on the cleaning unit 8 as described above. For that reason, as shown in (b) of Figure 11, there is a

possibility that the developing device 9 is rotationally moved in the clockwise direction (arrow W2 direction) against an urging force by the vibration and the impact generated during transportation of the 5 cartridge P. At this time, the developing device 9 causes rotational motion by which the developing device 9 is restored to an attitude in which the developing device 9 is urged by the urging force, so that there is a possibility that the developing device 10 9 collides with the cleaning unit 8 and then friction memory between the photosensitive drum 4 and the developing roller 6 appears as an image defect.

Further, in the above, the case where the developing device 9 includes the urging means such as the spring 15 or the like has been described, but also in a constitution in which the developing device 9 does not include the urging means, during transportation of the cartridge P, there is a possibility that similar collision occurs. Here, a fixing method in which the 20 developing device 9 in the member 46 during transportation of the cartridge P is not readily moved relative to the cleaning unit 8 will be described.

Parts (a) and (b) of Figure 11 are schematic sectional views each showing the packing state in which the 25 cartridge P is packed in the packing member 46. Part (a) of Figure 11 shows a state in which the developing device 9 is urged toward the cleaning frame (unit) 9

by a spring (not shown) or the like in the counterclockwise direction (arrow w1 direction) and in which the developing roller 6 contacts the photosensitive drum 4. On the other hand, (b) of 5 Figure 11 shows a state in which the developing device 9 is rotationally moved relative to the cleaning frame 9 in the clockwise direction (arrow w1 direction) against the urging force.

[0088] The developing device 9 includes a fourth 10 portion-to-be-limited 29d. Further, the cap portion 48 of the packing member 46 includes a fourth limiting portion 48d formed therein. That is as shown in (a) of Figure 11, with respect to the counterclockwise direction (arrow w1 direction) with the rotation axis 15 a ((a) of Figure 4) as the center, the fourth limiting portion 48d is provided downstream of the fourth portion-to-be-limited. Therefore, when the cartridge P is packed in the packing member 46, the fourth portion-to-be-limited 29d of the developing device 9 20 is supported by the fourth limiting portion 48d, so that excessive rotational movement of the developing device 9 in the clockwise direction (arrow w2 direction in (b) of Figure 11) can be suppressed. As described above, by providing the fourth 25 portion-to-be-limited 29d as a part of the developing device 9 and by forming the fourth limiting portion 48d as a part of the cap portion 48 of the packing

member 46, it is possible to suppress the excessive rotational movement of the developing device 9 in the clockwise direction (arrow w2 direction in (b) of Figure 11). As a result, a degree of the collision 5 between the developing device 9 and the cleaning unit 8 due to the vibration and the impact generated during transportation of the cartridge P can be reduced. As a result, e.g., it is possible to reduce a degree of memory on the photosensitive drum 4 due to friction 10 (sliding) between the developing roller 6 and the photosensitive drum 4.

<Relationship between grip portion and packing member>

[0089] A positional relationship between the grip portion 45 of the cartridge P and the packing member 15 46 will be described with reference to Figure 11. The cartridge P includes the grip portion 45 provided as a part of the cleaning unit 8, and is packed in an attitude in which the cleaning unit 8, the developing device 9 and the hinge portion 49 are arranged in this 20 order in Y1 direction. However, as described above, the grip portion 45 is provided as a part of the developing device in some cases. In the case, the cartridge P is packed in an attitude in which the hinge portion 49, the cleaning unit 8 and the 25 developing device 9 are arranged in Y1 direction.

[0090] A demounting operation of the cartridge P from the packing member 46 will be described with reference

to Figures 10 and 12. Figure 12 is a schematic sectional view showing a state in which the cartridge P is demountable (detachable) from the packing member 46. The demounting operation of the cartridge P is 5 performed in the order of uncovering of the cap portion 48, grip of the grip portion 45, demounting of the cartridge P and mounting of the cartridge P into the apparatus main assembly 2.

[0091] In Figure 10, the user separates the 10 connecting portion 46a of the cap portion 48, connected openably with the frame portion 47, from an unpacking portion 46a1 by an unshown means. That is, from the connecting portion 46a where the flange portion 47a is located, the flange portion 48a is 15 separated. Then, the user rotationally moves the cap portion 48 about a rotation shaft 49a of the hinge portion 49 as an axis in an arrow R direction in Figure 12. By about 180-degree rotational movement of the cap portion 48, the cartridge P is in a 20 demountable state (Figure 12), so that the uncovering operation of the cap portion 48 is completed.

Incidentally, if the cartridge P is demountable, the 25 cap portion 48 may also be not rotated by 180 degrees. Here, the user easily performs the uncovering operation of the packing member 46 in the case where the unpacking portion 46a1 is disposed in the front side rather than in the case where the hinge portion

49 is disposed in the front side. In the following, the uncovering by the user is performed in the state in which the unpacking portion 46a1 of the packing member 46 is disposed in the front side.

5 [0092] Then, the user grips the grip portion 45. The grip of the grip portion 45 by the user is made by gripping the grip portion 45 after the user rotationally moves the cap portion 48. At this time, as described above, the grip portion 45 is located in 10 the unpacking portion 46a1 side. For that reason, the user easily recognizes the grip portion 45 when the cap portion 48 is uncovered and can smoothly perform the grip of the grip portion 45 with no obstruction to a gripping operation by the cap portion 48.

15 [0093] Next, a mounting operation of the cartridge P, after being demounted, into the apparatus main assembly 2 will be described. This operation is performed, after the user demount the cartridge P by moving the cartridge P in an arrow J direction shown 20 in Figure 12, by mounting the cartridge P into the apparatus main assembly 2. When the user mounts the cartridge P into the apparatus main assembly 2, the user is positioned in a downstream side of the apparatus main assembly 2 with respect to a 25 pulling-out direction G1 of the cartridge tray 43 shown in Figure 5. Further, an attitude of the cartridge P when the user mounts the cartridge P into

the apparatus main assembly 2 is such that the cleaning unit 8 is located downstream of the developing device 8 with respect to the pulling-out direction G1. Further, in the attitude, with respect 5 to the mounting direction H1 of the cartridge P shown in Figure 6, the photosensitive drum 4 is located in the downstream side and the grip portion 45 is located in the upstream side. This attitude is the same as that of the cartridge P when the user grips the grip 10 portion 45 of the cartridge P accommodated in the packing member 46. That is, the user can mount the cartridge P into the apparatus main assembly in the attitude, in which the user demount the cartridge P from the packing member 46, as it is. Therefore, the 15 user is free from inconveniences, such that the cartridge P is shifted from one hand to the other and such that the wrist is twisted, during the mounting of the cartridge P, after being demounted, into the apparatus main assembly 2, thus leading to improvement 20 in usability.

[0094] As described above, in this embodiment, when the vibration and the impact during transportation are generated, the packing member 46 permits generation of elastic deformation and plastic deformation at 25 portions other than the respective limiting portions and thus is capable of absorbing the vibration and the impact during transportation. The packing member 46

functions as a cartridge packing member capable of protecting the cartridge P from the vibration and the impact during transportation.

[0095] Further, the cartridge P is constituted by the 5 first frame 8 as the cleaning frame for rotatably supporting the photosensitive drum 4 and by the second frame 9 as the developing frame, supported by the first frame 8, for supporting the process means. Further, the packing member 46 includes the fourth 10 limiting portion 48d for limiting movement of the second frame 9 in the accommodating space 46b. As a result, with respect to the cartridge P, rotation of the second frame 9 in the direction in which the process means are spaced from the photosensitive drum 15 4 is limited, so that the vibration and impact during transportation are suppressed.

[0096] Further, the cartridge P has the grip portion 45, to be gripped for demounting the cartridge P from the packing member, at a develop opposite from the 20 photosensitive drum 4. At this time, in a cross section perpendicular to the axial direction of the photosensitive drum 4, the photosensitive drum 4 is disposed in the frame portion 47 side and the grip portion 45 is disposed in the cap portion 48 side. As 25 a result, the user can take out the cartridge P from the packing member 46 without impairing the usability during unpacking of the cartridge P from the packing

member 46.

[0097] Incidentally, in this embodiment, the constitution in which the cartridge P is formed in the substantially rectangular parallelopiped shape and the grip portion 45 is disposed at a surface opposite from the exposed portion of the photosensitive drum 4 is employed, but the present invention is not limited thereto. When the cartridge P is packed in the packing member 46, it is also possible to apply the present invention when a constitution such that the exposed portion 4b is accommodated in the first recessed portion 47c of the frame portion 47 and the grip portion 45 is accommodated in the second recessed portion 48b of the cap portion 48 is employed. For example, the cartridge is formed in a substantially triangular prism shape and an exposed portion is provided in a side other than triangular sides. At this time, the grip portion is disposed in a side which is not opposite from the exposed portion side. Also in this case, the present invention is applicable when the cartridge is packed in the packing member, a constitution in which the exposed portion is accommodated in a recessed portion of the frame portion and the grip portion is accommodated in a recessed portion of the cap portion may only be required to be employed.

[0098] As described above, this embodiment relates to

the packing member 46 for packing the cartridge P and relates to the cartridge P packed in the packing member 46. Here, the cartridge P is constituted by the cleaning unit 8 as the first frame including the grip portion 45 and the developing device 9 as the second frame. Further, the packing member 46 is constituted by the frame portion 47 and the cap portion 48 which are connected by the hinge portion 49 as a rotation shaft for rotatably supporting the frame portion 47 and the cap portion 48 relative to each other. The frame portion 47 includes the first recessed portion 47c, and the cap portion 48 includes the second recessed portion 48b. Further, each of these portions 47 and 48 of the packing member 46 is rotatable about the hinge portion 49 as a rotation center, and the first recessed portion 47c and the second recessed portion 48b form the accommodating space 46b which is a space for accommodating the cartridge P. The cartridge P is positionally limited by the limiting portions 47g and 47b in the following manner when the cartridge P is packed in the accommodating space 46b of the packing member 46. That is, with respect to the direction perpendicular to the axial directions X1 and X2 of the photosensitive drum 4 and with respect to the direction crossing the entering direction in which the cartridge P enters the frame portion 47, a state in which the hinge portion 49, the developing device 9

and the cleaning unit 8 are arranged in this order is created. As a result, the user is easy to recognize the grip portion 45 since when the user unpacks the packing member 46 in the front side where the 5 unpacking portion 46a1 is located, the grip portion 45 of the cleaning unit 8 is closer in position to the user. Further, the cap portion 48 does not obstruct the gripping operation, and therefore the user is easy to grip the grip portion 45. For that reason, the user 10 can smoothly demount the cartridge P from the packing member 46. Further, an attitude of the cartridge P when the user demounts the cartridge P from the packing member 46 and an attitude of the cartridge P when the user mounts the cartridge P into the 15 apparatus main assembly 2 are substantially coincide with each other. For that reason, during a period from the demounting of the cartridge P from the packing member 46 to the mounting of the cartridge P into the apparatus main assembly 2, the user can reduce an operation, to the possible extent, in which the user 20 shifts the cartridge P from one hand to the other or twists the user is wrist. For that reason, according to this embodiment, usability is remarkably improved.

(Embodiment 2)

25 [0099] Embodiment 2 will be described with reference to Figures 13 to 15. In Embodiment 2, in place of the cartridges P each constituted by the cleaning unit 8

and the developing device 9 in Embodiment 1, cartridges Q (QY, QM, QC, QK) each constituted by only the developing device are used. For that reason, with respect to portions common to Embodiments 1 and 2, 5 description of the portions will be omitted.

<General structure of image forming apparatus>

[0100] First, Figure 14 is a schematic sectional view of an image forming apparatus 100 in this embodiment.

[0101] The image forming apparatus 1 is a four 10 color-based full-color laser printer using the electrophotographic image forming process and effects color image formation on a recording material S. In the image forming apparatus 100, the cartridge Q is, as shown in Figure 14, detachably mountable to an 15 apparatus main assembly 102 and a color image is formed on the recording material S.

[0102] However, in this embodiment, a constitution in which the cartridge Q is detachably mountable to the apparatus main assembly 102 is employed but the 20 present invention is not limited thereto. It is also possible to employ a constitution in which the cleaning unit 8 is detachably mountable to the apparatus main assembly 102. Incidentally, other parts, 25 of the apparatus main assembly 102, having the same functions as those in Embodiment 1 are represented by the same reference numerals or symbols and will be omitted from description.

<Structure of cartridge>

[0103] Parts (a) and (b) of Figure 13 are schematic perspective views each showing the cartridge Q in this embodiment, in which (a) is the schematic perspective view of the cartridge Q as seen from the driving side, and (b) is the schematic perspective view of the cartridge Q as seen from the non-driving side. The cartridge Q includes a grip portion 145. The grip portion 145 is a portion to be gripped by the user, and is mounted on a developing (device) frame 129 integrally or as a separate member. Further, the cartridge Q is the substantially rectangular parallelopiped. Of six sides, a side 158 includes an exposed portion 6b for permitting development of the electrostatic latent image on the photosensitive drum 4 with the toner on the developing roller 6. A side 159 opposite from the side 158 includes the above-described grip portion 145. The position of the grip portion 145 will be described later.

[0104] The cartridge Q includes, as portion to be positionally limited in a packing member 146 when the cartridge Q is packed in the packing member 146 described later, third portions-to-be-limited 139f and 144f, first portions-to-be-limited 129b, 144b, 139g and 144g, and a second portion-to-be-limited 129c.

[0105] The third portions-to-be-limited 139f and 144f are used for positional limitation of the cartridge Q

in the packing member 146 described later with respect to the longitudinal direction (X (X1, X2) direction in Figure 10) which is the axial direction of the developing roller 6. The first portions-to-be-limited 5 139b and 144b and the second portion-to-be-limited 129c are used for positional limitation of the cartridge Q with respect to Y1 and Y2 directions perpendicular to (crossing) the X1 and X2 directions and with respect to Z1 direction as the vertically 10 downward direction, respectively. The positional limitation of the cartridge Q in the packing member 146 by using the respective portions-to-be-limited will be specifically described later.

[0106] Other constitutions are the same as those of 15 the developing device 9 described in Embodiment 1 and therefore will be omitted from description.

<Mounting and demounting constitution of cartridge>

[0107] Next, a mounting and demounting operation of 20 the cartridge Q with respect to the apparatus main assembly 102 will be described.

[0108] Figure 14 is a schematic sectional view showing a state in which a cartridge tray 43 is pulled out from the apparatus main assembly 102 and thus the cartridge Q is detachably mountable to the cartridge tray 43, and is a schematic sectional view for 25 illustrating an operation by which the cartridge Q is demounted from and mounted into the cartridge tray 43.

[0109] Inside the apparatus main assembly 102, the cartridge tray 43 in which the cartridges Q are mountable is provided. Further, in the cartridge tray 43, the cleaning unit 8 is mounted in advance. The 5 cartridge tray 43 is, as shown in Figure 14, constituted so as to be linearly movable (pullable and pushable) in G1 and G2 directions which are substantially the horizontal direction with respect to the apparatus main assembly 102. Further, the 10 cartridge tray 43 is capable of being in a mounted position in the apparatus main assembly 102 and in a pulled-out position where the cartridge tray 43 is pulled out from the mounted position.

[0110] First, the mounting operation for mounting the 15 cartridge Q into the apparatus main assembly 102 will be described. The openable door 3 is opened, and then the cartridge tray 43 is moved in G1 direction indicated by an arrow in Figure 14 to be moved to the pulled-out position. In this state, the cartridge Q is 20 mounted in the cartridge tray 43 from an arrow H1 direction in Figure 14, so that an exposed portion 6b (Figure 13) of the developing roller 6 is positioned at an opposing portion to the photosensitive drum 4. Then, the cartridge tray 43 is moved in an arrow G2 25 direction shown in Figure 14, so that the cartridge tray 43 is moved to the mounted position in the apparatus main assembly 102. Then, the openable door 3

is closed, so that the mounting operation of the cartridge Q into the apparatus main assembly 102 is completed.

[0111] On the other hand, the demounting operation of 5 the cartridge Q from the apparatus main assembly 102 will be described. First, the cartridge tray 43 is moved in the arrow G1 direction in Figure 14 to the pulled-out position. In this state, the cartridge Q is demounted in an arrow H2 direction shown in Figure 14, 10 so that the demounting operation of the cartridge Q from the apparatus main assembly 102 is completed. By the above-described operations, the cartridge Q is detachably mountable to the apparatus main assembly 102,

[0112] Incidentally, in this embodiment, the cleaning 8 is mounted in the cartridge tray 43 in advance, but the constitution is not limited thereto. It is also possible to employ a constitution in which the cleaning unit 8 is disposed in the apparatus main 20 assembly 102 in advance. A process from demounting of the cartridge Q from the packing member 143 until the cartridge Q is mounted into the apparatus main assembly 102 will be described specifically.

<Structure of packing member>

[0113] A structure of the packing member 146 will be 25 described with reference to Figure 15.

[0114] Incidentally, constituent elements of the

packing member 146 similar to those in Embodiment 1 will be omitted from description.

5 [0115] Figure 15 is a schematic sectional view showing a packing state of the cartridge Q in the packing member 46 in this embodiment.

10 [0116] The packing member 146 is constituted by a frame portion 147, a cap portion 148 and a hinge portion 149. The frame portion 147 and the cap portion 148 are rotatable, relative to each other, after a rotation shaft 149a of the hinge portion 149. Each of the frame portion 147, the cap portion 148 are the hinge portion 149 which constitute the packing member 146 is constituted by a thin film of plastic (resin material), such as polyethylene terephthalate or 15 polypropylene and the resin material can be molded by vacuum molding, press molding, or injection molding. However, similarly as in Embodiment 1, the packing member 146 is processable at low cost by being formed by the vacuum molding.

20 [0117] Further, the packing member 146 includes a connecting portion 146a for unpacking the packing member 146. The connecting portion 146a is located in a position where it is opposite from the hinge portion 149 in the packing state of the packing member 146.

25 [0118] The frame portion 147 includes a first recessed portion 147c having a recessed shape provided with a first opening 147c1. Further, the cap portion

148 includes a second recessed portion 148b having a recessed shape provided with a second opening 148b1. Further, at the frame portion 147 and the cap portion 148, flange portions 147a and 148a are formed so as to 5 surround the first recessed portion 147c and the second recessed portion 148b, respectively. The frame portion 147 and the cap portion 148 are connected at the hinge portion 149, thus being integrally molded. Further, the cap portion 148 is capable of being 10 located in a closed position where the cap portion 148 is capable of covering the first opening 147c1 of the frame portion 147 (Figures 1 and 11) and an open position where the first opening 147c1 is open.

[0119] Next, the fixing of the cartridge Q in the 15 packing member 146 will be described. The cartridge Q is supported in a first state at the frame portion 147 of the packing member 146. This will be specifically described later. In the first state, the cartridge Q inserted into the packing member 146 through the first 20 opening 147c1 is detachably mounted in the packing member 146. Further, in the first state, the cartridge Q is held by the frame portion 147 and the frame portion 147 covers the exposed portion 6b of the developing roller 6 of the cartridge Q. Further, in 25 the first state, the exposed portion 6b of the developing roller 6 is prevented from contacting an inner surface of the frame portion 147 and the cap

portion 148 is rotated, relative to the frame portion 147, about a rotation shaft 149a of the hinge portion 149, and a user is capable of gripping the grip portion 145 of the cartridge Q. Further, from the 5 above-described packing state (not shown), the cap portion 148 is rotated, about the rotation shaft 149a of the hinge portion 149, toward the frame portion 147, so that the flange portion 148a of the cap portion 148 is contacted to the flange portion 147a of the frame portion 147 as shown in Figure 15. Thereafter, the flange portion 47a of the frame portion 47 and the flange portion 48a of the cap portion 48 which oppose each other are partly or wholly bonded to each other. As a result, as shown in Figure 15, the first recessed 15 portion 147c of the frame portion 147 and the second recessed portion 148b of the cap portion 148 form a connecting portion 146a in combination, thus creating an accommodating space 146b inside the packing member 146, so that the packing member 146 is capable of 20 being accommodated in the accommodating space 146b. In this state, the second recessed portion 148b of the cap portion 148 covers the entire cartridge Q or a part of the cartridge Q so as to accommodate the grip portion 145 of the cartridge Q which is the 25 substantially rectangular parallelopiped. By the above-described packing, the whole cartridge Q is covered with the frame portion 147 and the cap portion

148 to be placed in the packing state (second state) (Figure 15).

[0120] Next, in the packed state, positional limitation of the cartridge Q by the packing member 146 will be described. In order to effect the positional limitation of the cartridge Q with respect to the X (X1 and X2) direction, a pair of third limiting portions (not shown) formed at inner surfaces of the frame portion 147 is contacted to the third portions-to-be-limited 139f and 144f of the cartridge Q shown in (a) and (b) of Figure 13. Accordingly, the positions of the cartridge Q with respect to the X1 and X2 directions are limited in the first state described above. Further, the positional limitation of the cartridge Q with respect to Y1 and Y2 directions and Z2 direction shown in Figure 15 is effected. For that purpose, the first limiting portions 147g and 147b formed at the inner surface of the frame portion 148 of the packing member 146 are contacted to first portions-to-be-limited 144g and 144b shown in (a) and (b) of Figure 13. Accordingly, the positions of the cartridge Q with respect to the Y1, Y2, and Z directions is limited in the first state described above. Further, as shown in Figure 15, the second limiting portion 148c is formed in the cap portion 148. Further, the second limiting portion 148c is formed at a position corresponding to second

portion-to-be-limited 129c of the cartridge Q in the packing state (second state) of the packing member 146. Further, with respect to the cartridge Q, in the packing state (second state) the second 5 portion-to-be-limited 129c contacts the second limiting portion 148c of the cap portion 148. As a result, the positional limitation of the cartridge Q in Z1 direction is made. That is, in the first state, the cartridge Q is not limited with respect to the Z1 10 direction opposite to the direction of gravitation. In the above-described packing state (second state), the packing member 146 does not contact the cartridge Q at portions other than the limiting portion 144f, 147b, 148g and 147g shown in Figure 15. For that reason, 15 similarly as in Embodiment 1, the packing member 146 generates elastic deformation and plastic deformation at the portions other than the respective limiting portions when vibration and impact are generated during transportation, so that the packing member 146 20 is capable of absorbing the vibration and the impact during transportation. Therefore, the packing member 146 does not directly transmit the vibration and the impact during transportation to the developing roller 6 and other process means and thus functions as a 25 protecting member for protecting the cartridge Q. Further, each of the limiting portions of the packing member 146 may be contacted to the cartridge Q at any

position if the position is not in a region where the development is to be made by using the developing roller 6 of the cartridge Q. However, when the third portions-to-be-limited 139b and 144b have high 5 rigidity, the cartridge Q is less broken by the impact or the like during transportation. Further, in the first state, the cartridge Q has already by positionally limited by the frame portion 147 of the packing member 146 with respect to the longitudinal 10 direction Y1, Y2 and Z1 directions. That is, in order to fix the cartridge Q in the packing member 146, when the state of the packing member 146 is changed from the first state to the second state, the cartridge Q is only required to be covered with the cap portion 15 148, so that an assembling property can be further improved. Further, the third limiting portions 144f, 147b, 148c and 147g are formed in the frame portion 147 and cap portion 148 of the packing member 146 but may also be constituted as separate members.

20 <Relationship between grip portion and packing member>
[0121] A positional relationship between the grip portion 145 of the cartridge Q and the packing member 146 will be described with reference to Figure 15. With respect to the Y2 direction, as shown in Figure 25 15, the closest edge line, to the hinge portion 149, of the cartridge Q is a first edge line 109a, and the remotest edge line, from the hinge portion 149, of the

cartridge Q is a second edge line 109b. Further, with respect to the Y2 direction, a medium line between the first and second edge lines 109a and 109b is a center line m. In this case, the grip portion 145 is provided 5 in the right side of the center line m in Figure 15 (with respect to Y2 direction). Further, in this case, when the cartridge Q is packed in the packing member 146, the cartridge Q is in an attitude such that the grip portion 145 is disposed in a side opposite from 10 the hinge portion 149 side with respect to the center line m. Further, the demounting operation of the cartridge Q from the packing member 146 is the same as that in Embodiment 1 in which the cartridge P is replaced with the cartridge Q in this embodiment, and 15 therefore will be omitted from description.

[0122] As described above, this embodiment relates to the packing member 146 for packing the cartridge Q and relates to the cartridge Q packed in the packing member 146. Here, the cartridge Q includes the grip portion 145 and at least one of the photosensitive drum as the image bearing member and the process means actable on the photosensitive drum. Further, the packing member 146 is constituted by the frame portion 147 and the cap portion 148 which are connected by the hinge portion 149 as a rotation shaft for rotatably 20 supporting the frame portion 147 and the cap portion 148 relative to each other. The frame portion 147 25

includes the first recessed portion 147c, and the cap portion 148 includes the second recessed portion 148b. Further, each of these portions 147 and 148 of the packing member 46 is rotatable about the rotation 5 shaft 149 as a rotation center, and the first recessed portion 147c and the second recessed portion 148b form the accommodating space 146b which is a space for accommodating the cartridge Q. The cartridge Q is positionally limited by the limiting portions 147g and 10 147b in the following manner when the cartridge Q is packed in the accommodating space 46b. That is, with respect to the direction perpendicular to the axial directions X1 and X2 of the developing roller 6 and with respect to the direction crossing the entering 15 direction in which the cartridge Q enters the frame portion 147, a state in which the hinge portion 149 is located in a position remoter from the hinge portion 149 than the center line m is created. As a result, the user is easy to recognize the grip portion 145 20 since when the user unpacks the packing member 146 in the front side where the unpacking portion 146a1 is located, the grip portion 145 is closer in position to the user. Further, the cap portion 148 does not obstruct the gripping operation, and therefore the 25 user is easy to grip the grip portion 145. For that reason, the user can smoothly demount the cartridge Q from the packing member 146. Further, an attitude of

the cartridge Q when the user demounts the cartridge Q from the packing member 146 and an attitude of the cartridge Q when the user mounts the cartridge Q into the apparatus main assembly 102 are substantially 5 coincide with each other. For that reason, during a period from the demounting of the cartridge Q from the packing member 146 to the mounting of the cartridge Q into the apparatus main assembly 102, the user can reduce an operation, to the possible extent, in which 10 the user shifts the cartridge Q from one hand to the other or twists the user is wrist. For that reason, according to this embodiment, usability is remarkably improved.

15 [INDUSTRIAL APPLICABILITY]

[0123] As described hereinabove, according to the present invention, it is possible to protect the cartridge from the vibration and impact during transportation with a simpler constitution.

CLAIMS

1. A packing member for packing a cartridge which is detachably mountable to an image forming apparatus 5 and which includes a grip portion provided, for gripping the cartridge, in a position deviated from a center line passing through a center of the cartridge with respect to a direction crossing a longitudinal direction of the cartridge, said packing member 10 comprising:

(i) a frame portion including an opening as an entrance for the cartridge, a first recessed portion for accommodating the cartridge, and a limiting portion, provided in the first recessed portion, for 15 limiting a position of the cartridge with respect to the direction crossing the longitudinal direction; and

(ii) a cap portion, provided rotatably connected to said frame portion by a hinge portion, for openably covering the opening,

20 wherein the limiting portion limits the position of the cartridge so that the cartridge is located in a position where the grip portion is remoter from the hinge portion than the center line of the cartridge with respect to the direction crossing 25 the longitudinal direction of the cartridge and a direction crossing an entering direction in which the cartridge enters said frame portion.

2. A packing member according to Claim 1, wherein
said cap portion includes a second recessed portion
for accommodating the grip portion and for forming a
5 space for accommodating the cartridge together with
the first recessed portion when the opening is covered.

3. A packing member according to Claim 1, wherein
the hinge portion is integrally molded with said frame
10 portion and said cap portion.

4. A packing member according to Claim 1, wherein
said hinge portion is provided along the longitudinal
direction.

15

5. A packing member according to Claim 1, wherein
the cartridge includes a photosensitive drum on which
an electrostatic latent image is to be formed, and
wherein the longitudinal direction is an axial
20 direction of the photosensitive drum.

6. A packing member for packing a cartridge which
is detachably mountable to an image forming apparatus
and which includes a first frame including a grip
25 portion for gripping the cartridge and includes a
second frame connected to the first frame said packing
member comprising:

(i) a frame portion including an opening as an entrance for the cartridge, a first recessed portion for accommodating the cartridge, and a limiting portion, provided in the first recessed portion, for 5 limiting a position of the cartridge with respect to a direction crossing a longitudinal direction of the cartridge; and

10 (ii) a cap portion, provided rotatably connected to said frame portion by a hinge portion, for openably covering the opening,

15 wherein the limiting portion limits the position of the cartridge so that the grip portion is located in a position remoter from the hinge portion than the second frame with respect to the direction crossing the longitudinal direction of the cartridge and a direction crossing an entering direction in which the cartridge enters said frame portion.

20 7. A packing member according to Claim 6, wherein said cap portion includes a second recessed portion for accommodating the grip portion and for forming a space for accommodating the cartridge together with the first recessed portion when the opening is covered.

25 8. A packing member according to Claim 6, wherein the hinge portion is integrally molded with said frame portion and said cap portion.

9. A packing member according to Claim 6, wherein said hinge portion is provided along the longitudinal direction.

5

10. A packing member according to Claim 6, wherein the first frame includes a photosensitive drum on which an electrostatic latent image is to be formed, wherein the second frame includes a developing roller for developing the electrostatic latent image, and

wherein the longitudinal direction is an axial direction of the photosensitive drum.

15 11. A cartridge, packed in a packing member, detachably mountable to an image forming apparatus, wherein said cartridge includes a grip portion provided, for gripping said cartridge, in a position deviated from a center line passing through a center 20 of said cartridge with respect to a direction crossing a longitudinal direction of said cartridge, and wherein the packing member comprises:

(i) a frame portion including an opening as an entrance for said cartridge, a first recessed portion 25 for accommodating said cartridge, and a limiting portion, provided in the first recessed portion, for limiting a position of said cartridge with respect to

the direction crossing the longitudinal direction; and

(ii) a cap portion, provided rotatably connected to the frame portion by a hinge portion, for openably covering the opening,

5 wherein the limiting portion limits the position of said cartridge so that said cartridge is located in a position where the grip portion is remoter from the hinge portion than the center line of the cartridge with respect to the direction crossing 10 the longitudinal direction of said cartridge and a direction crossing an entering direction in which said cartridge enters the frame portion.

12. A cartridge according to Claim 11, wherein
15 the cap portion includes a second recessed portion for accommodating the grip portion and for forming a space for accommodating said cartridge together with the first recessed portion when the opening is covered.

20 13. A cartridge according to Claim 11, wherein the hinge portion is integrally molded with said frame portion and the cap portion.

25 14. A cartridge according to Claim 11, wherein the hinge portion is provided along the longitudinal direction.

15. A cartridge according to Claim 11, wherein
said cartridge includes a photosensitive drum on which
an electrostatic latent image is to be formed, and
wherein the longitudinal direction is an axial
5 direction of the photosensitive drum.

16. A cartridge, packed in a packing member,
detachably mountable to an image forming apparatus
wherein said cartridge includes a first frame
10 including a grip portion for gripping the cartridge
and includes a second frame connected to the first
frame and wherein the packing member comprises:

(i) a frame portion including an opening as an
entrance for said cartridge, a first recessed portion
15 for accommodating said cartridge, and a limiting
portion, provided in the first recessed portion, for
limiting a position of said cartridge with respect to
a direction crossing a longitudinal direction of the
cartridge; and

20 (ii) a cap portion, provided rotatably
connected to the frame portion by a hinge portion, for
openably covering the opening,

wherein the limiting portion limits the
position of said cartridge so that the grip portion is
25 located in a position remoter from the hinge portion
than the second frame with respect to the direction
crossing the longitudinal direction of said cartridge

and a direction crossing an entering direction in which said cartridge enters the frame portion.

17. A cartridge according to Claim 16, wherein
5 the cap portion includes a second recessed portion for accommodating the grip portion and for forming a space for accommodating said cartridge together with the first recessed portion when the opening is covered.

10 18. A cartridge according to Claim 16, wherein the hinge portion is integrally molded with said frame portion and the cap portion.

15 19. A cartridge according to Claim 16, wherein the hinge portion is provided along the longitudinal direction.

20. A cartridge according to Claim 16, wherein the first frame includes a photosensitive drum on
20 which an electrostatic latent image is to be formed, wherein the second frame includes a developing roller for developing the electrostatic latent image, and

25 wherein the longitudinal direction is an axial direction of the photosensitive drum.

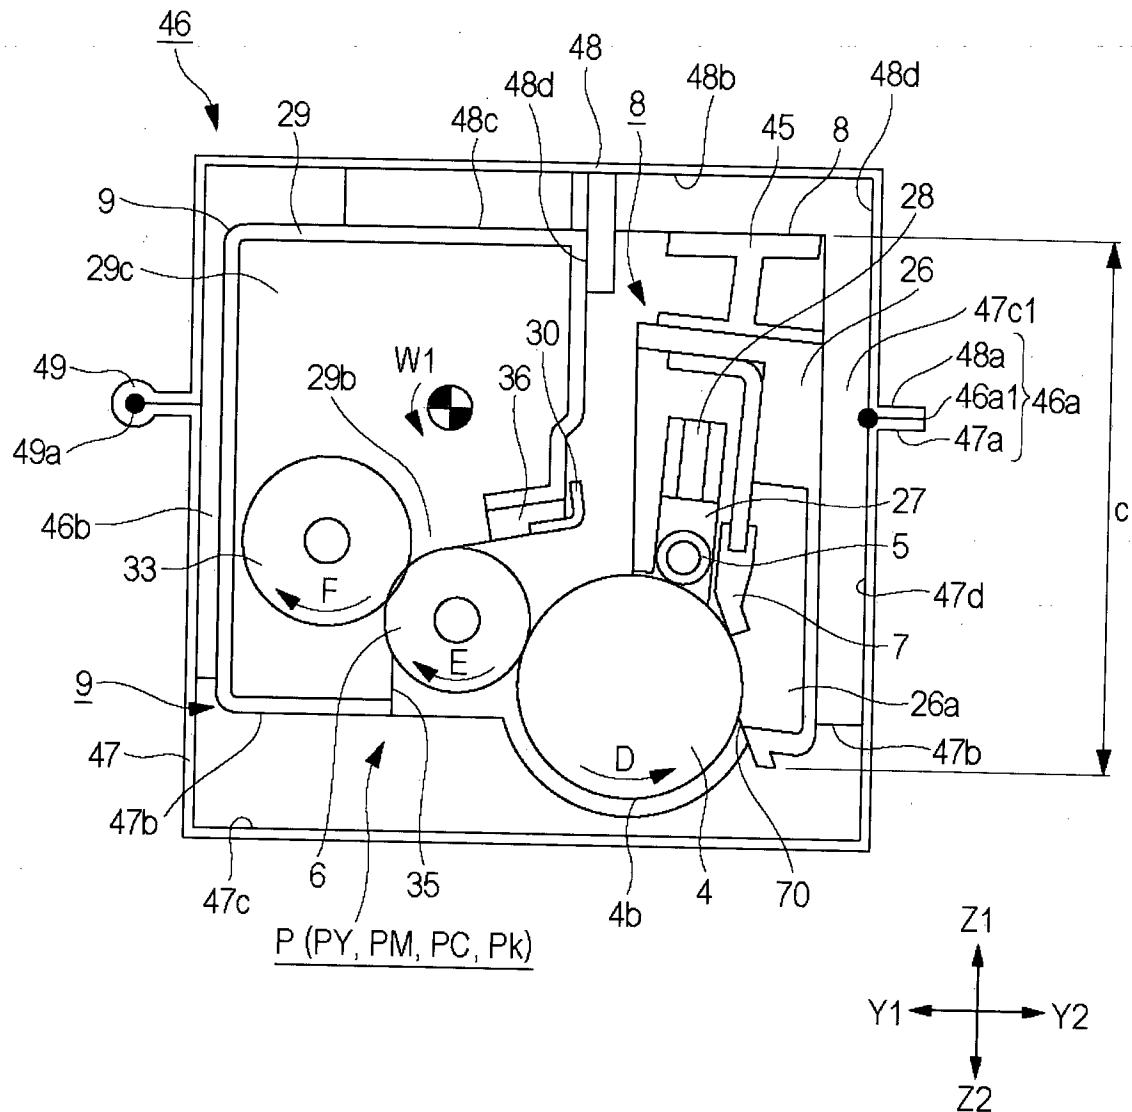


Fig. 1

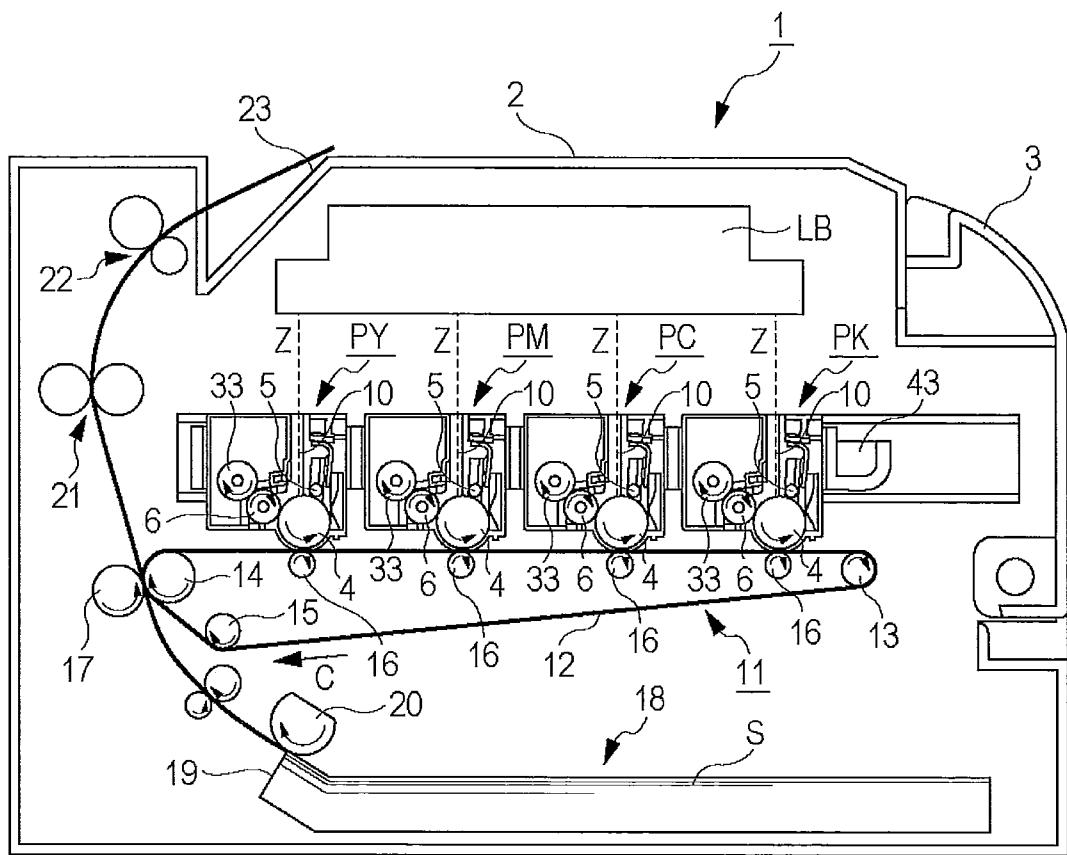


Fig. 2

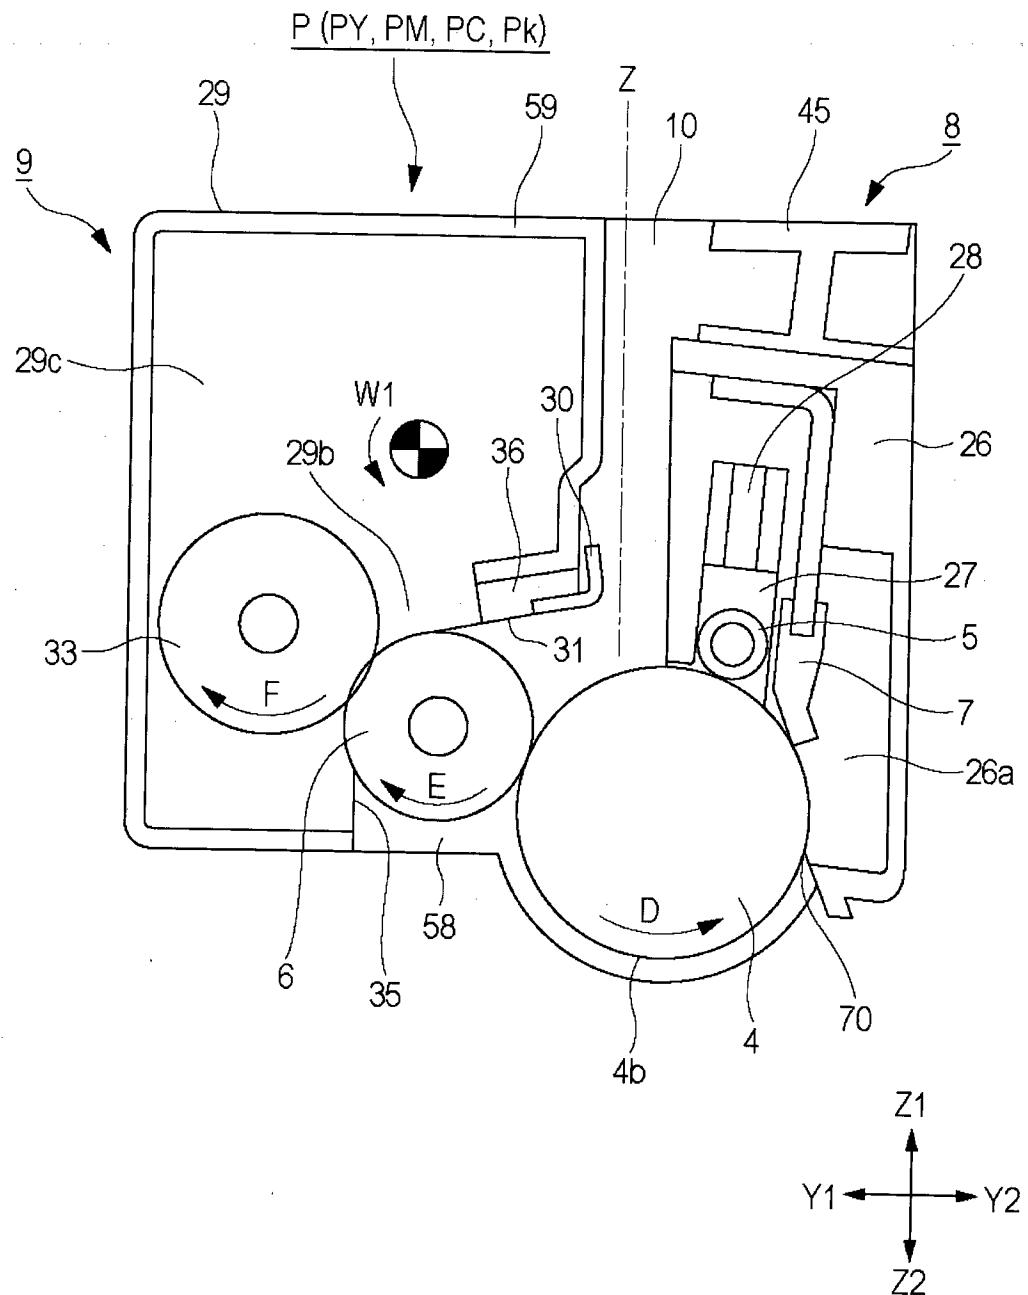


Fig. 3

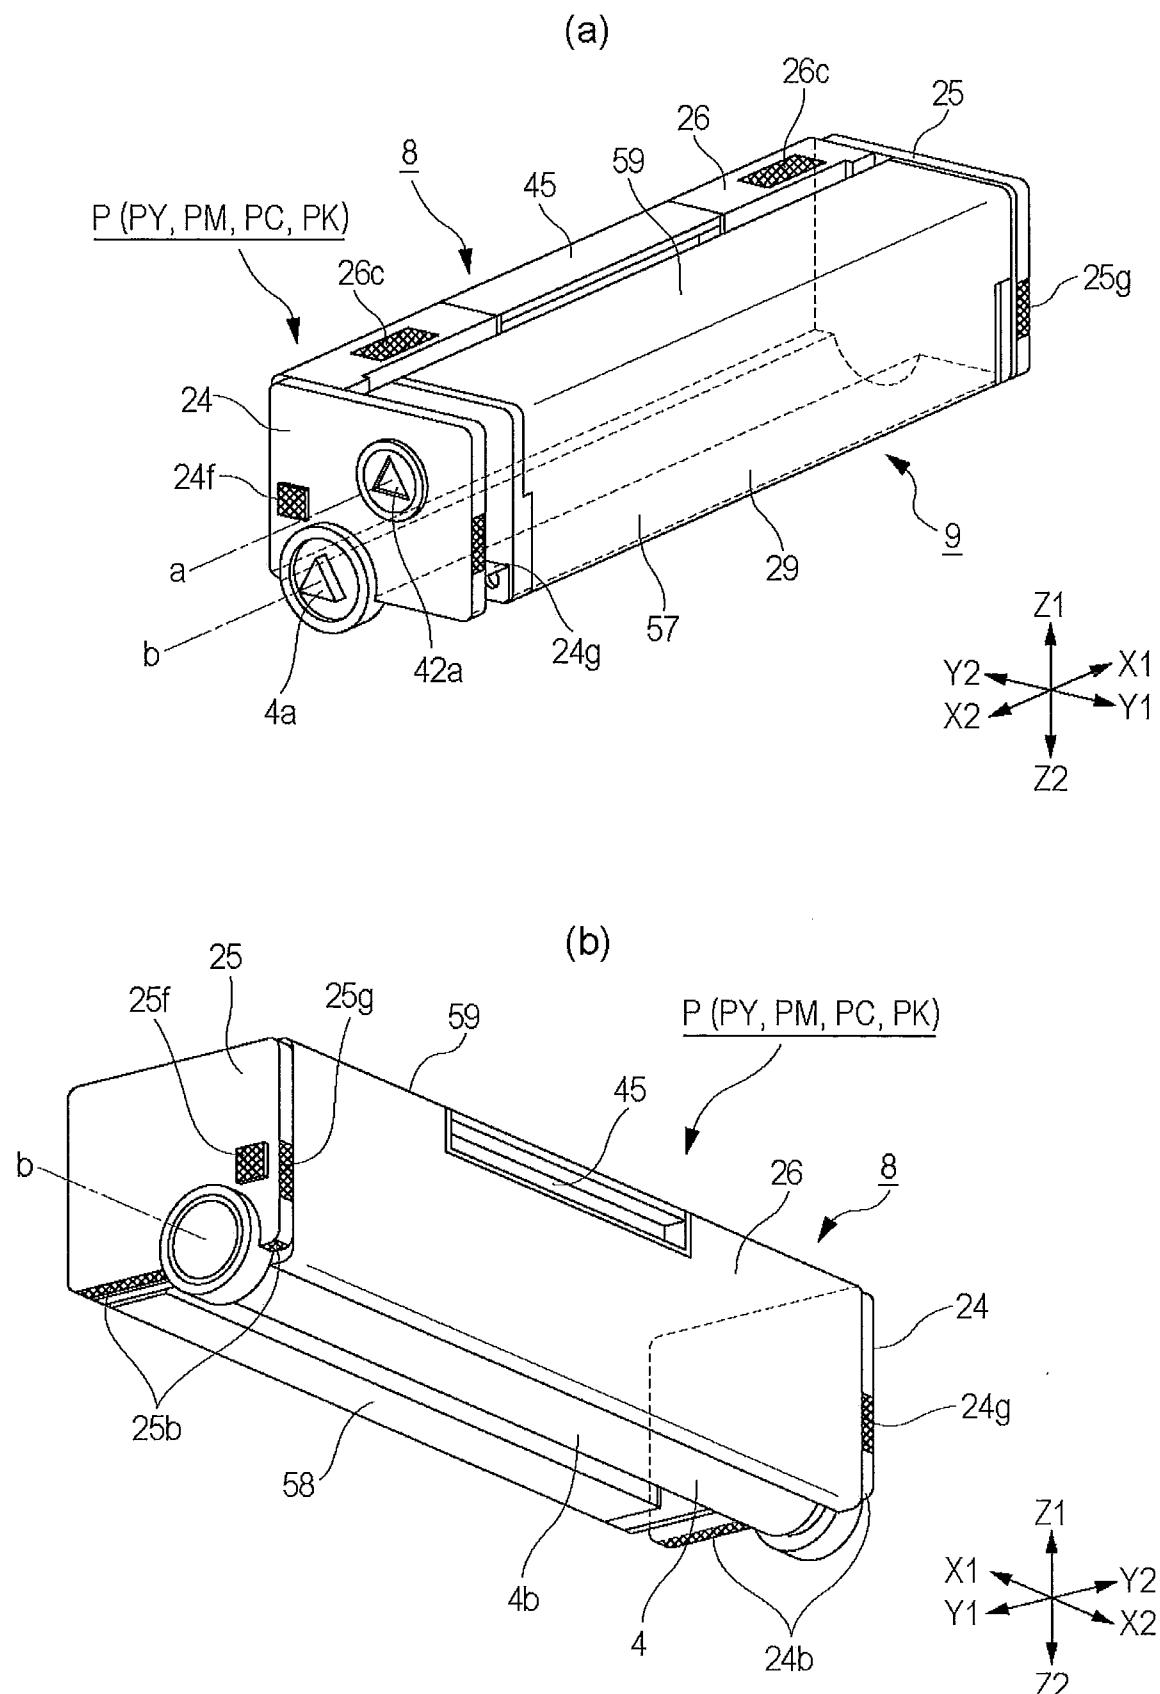


Fig. 4

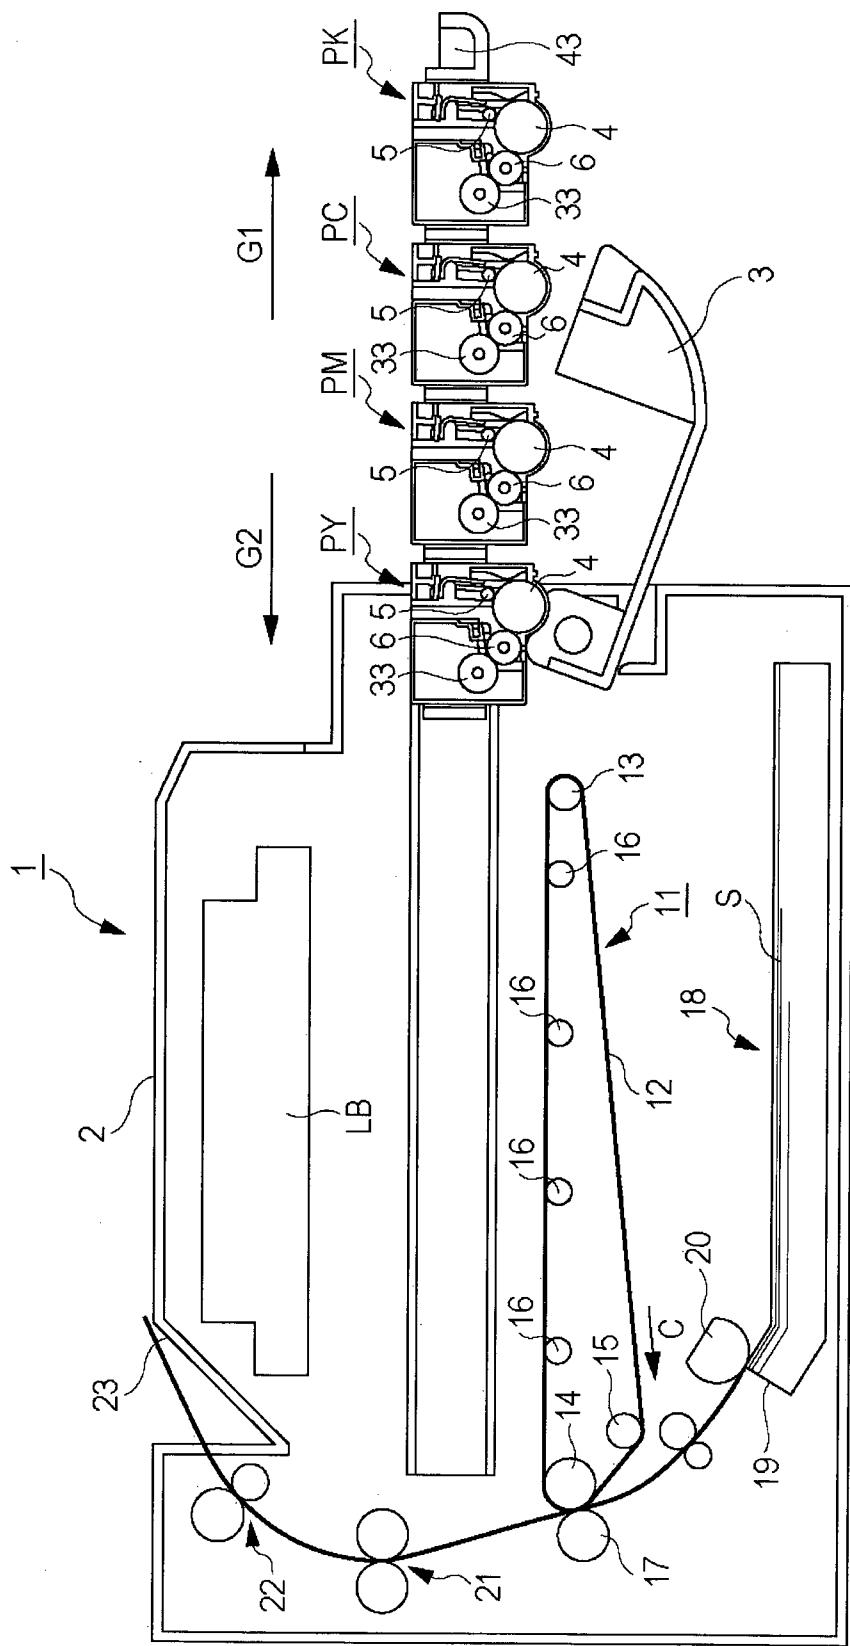


Fig. 5

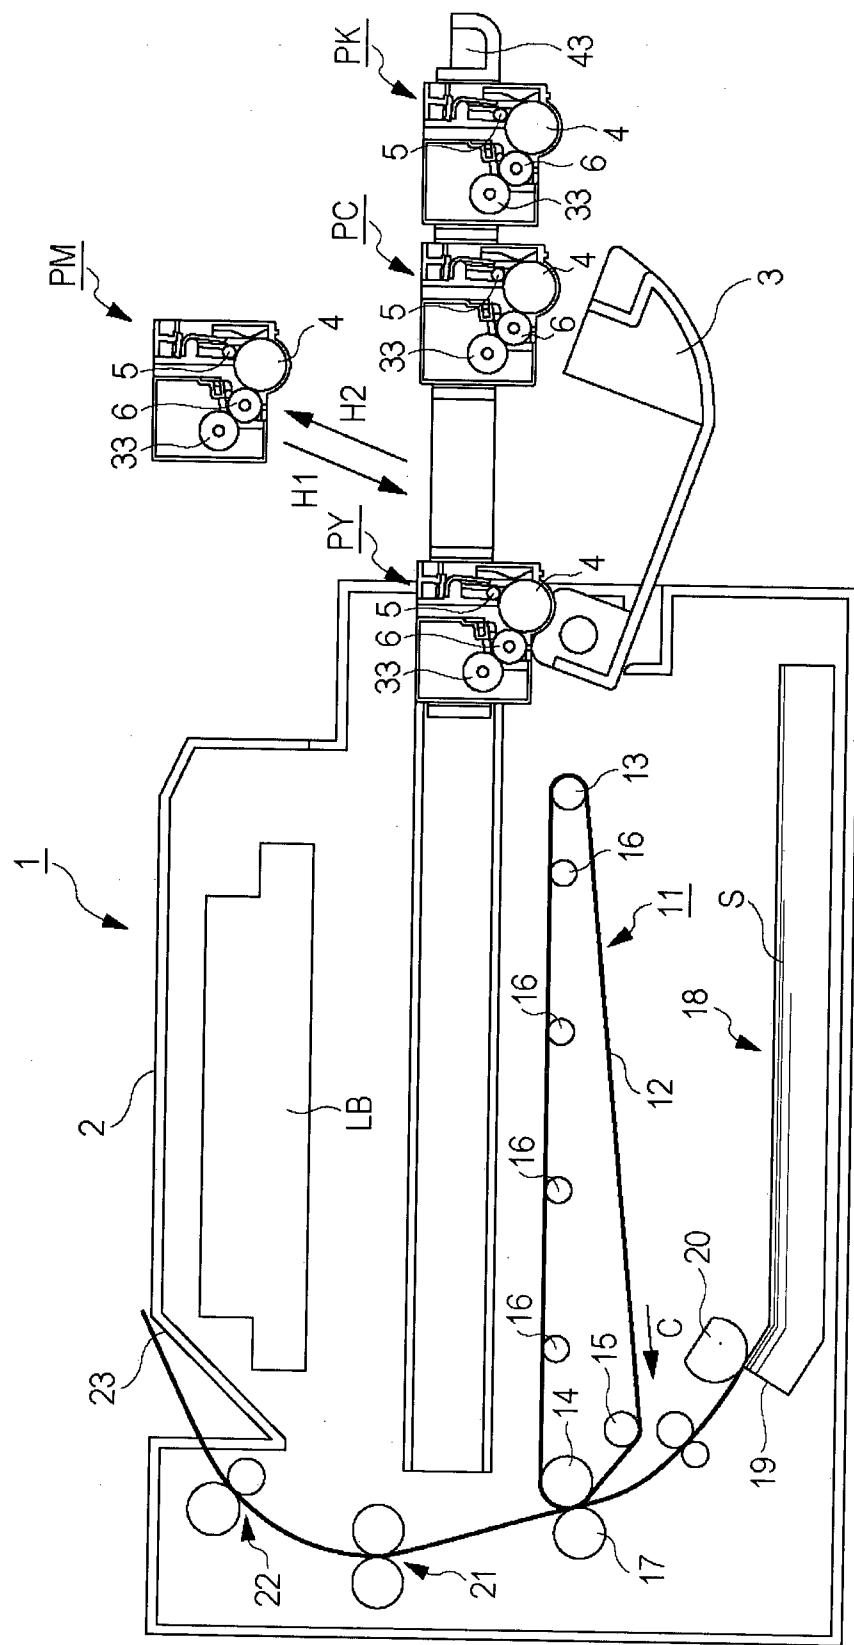


Fig. 6

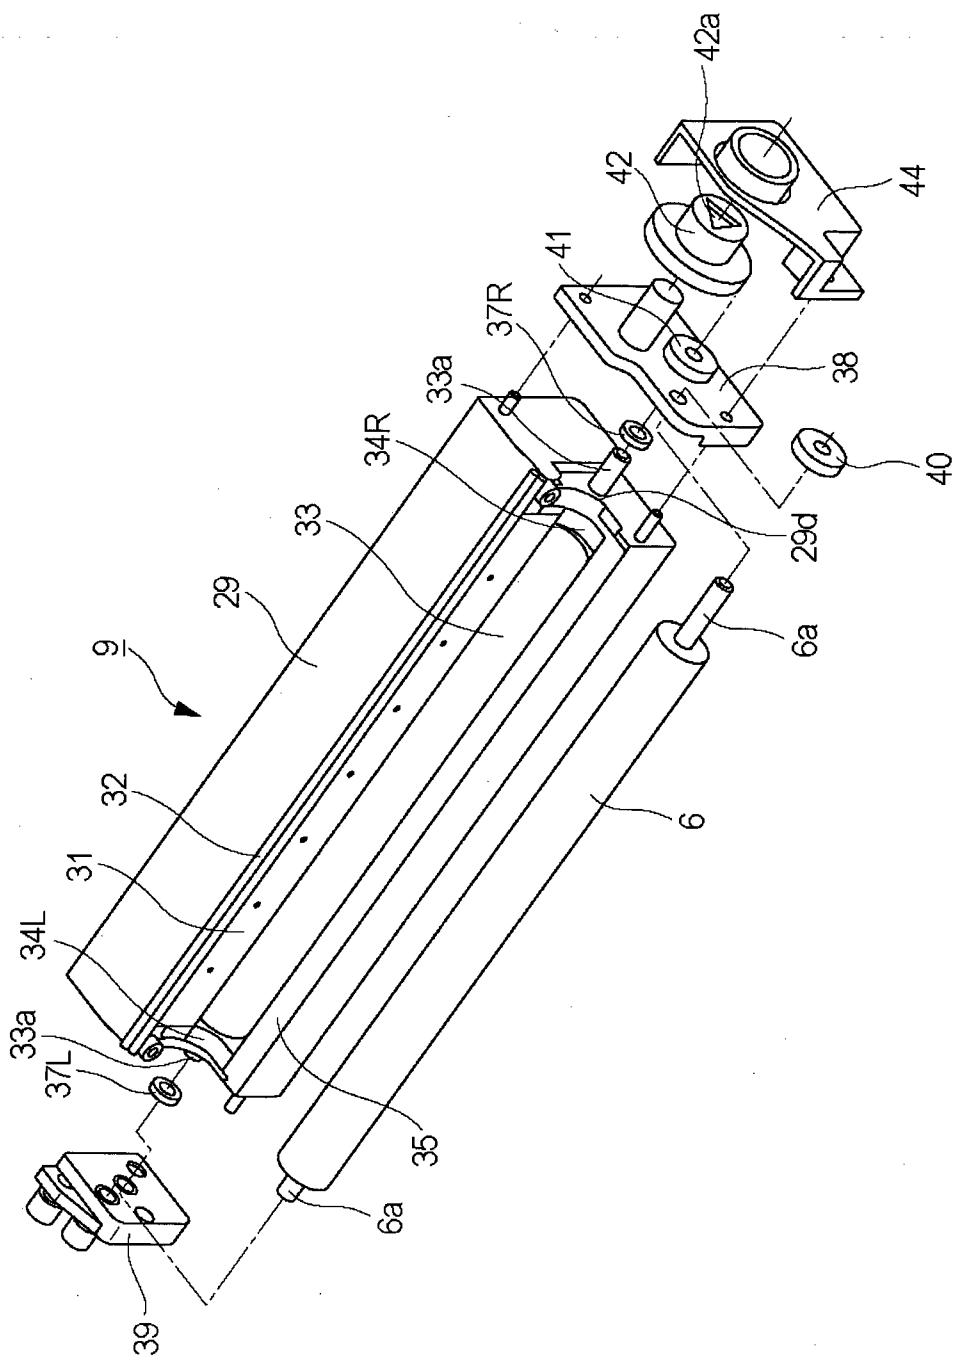


Fig. 7

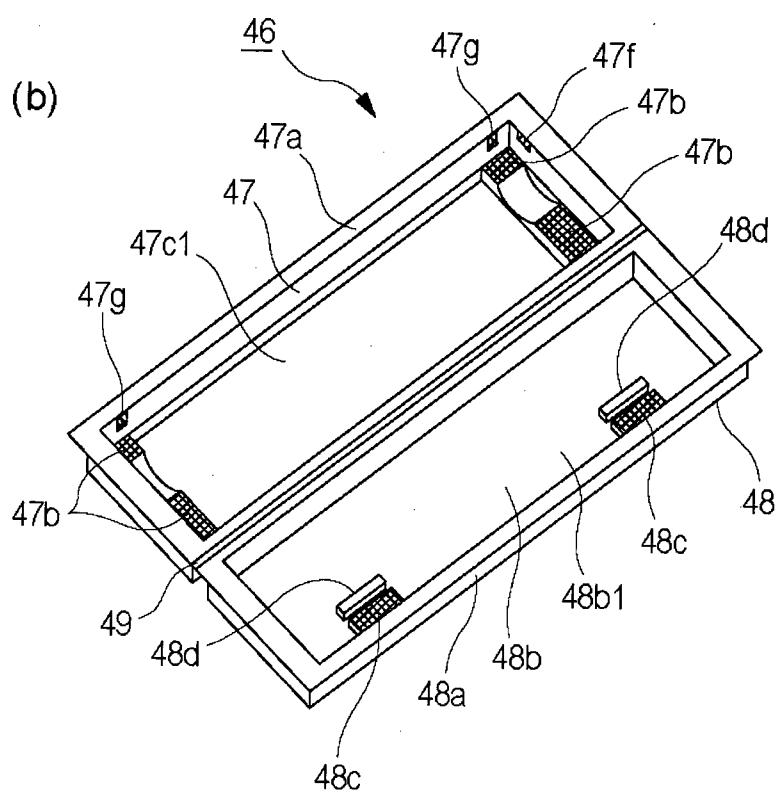
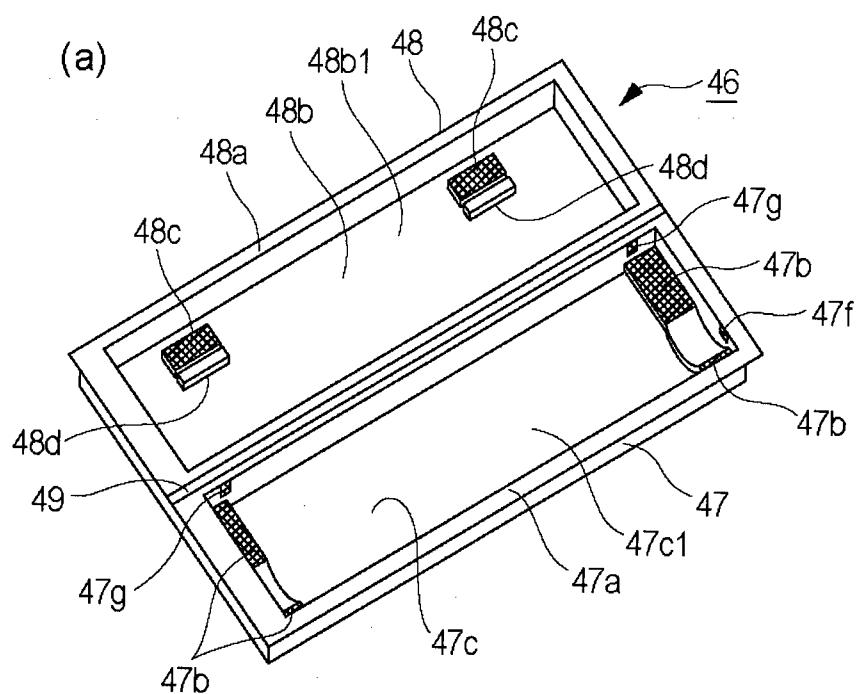


Fig. 8

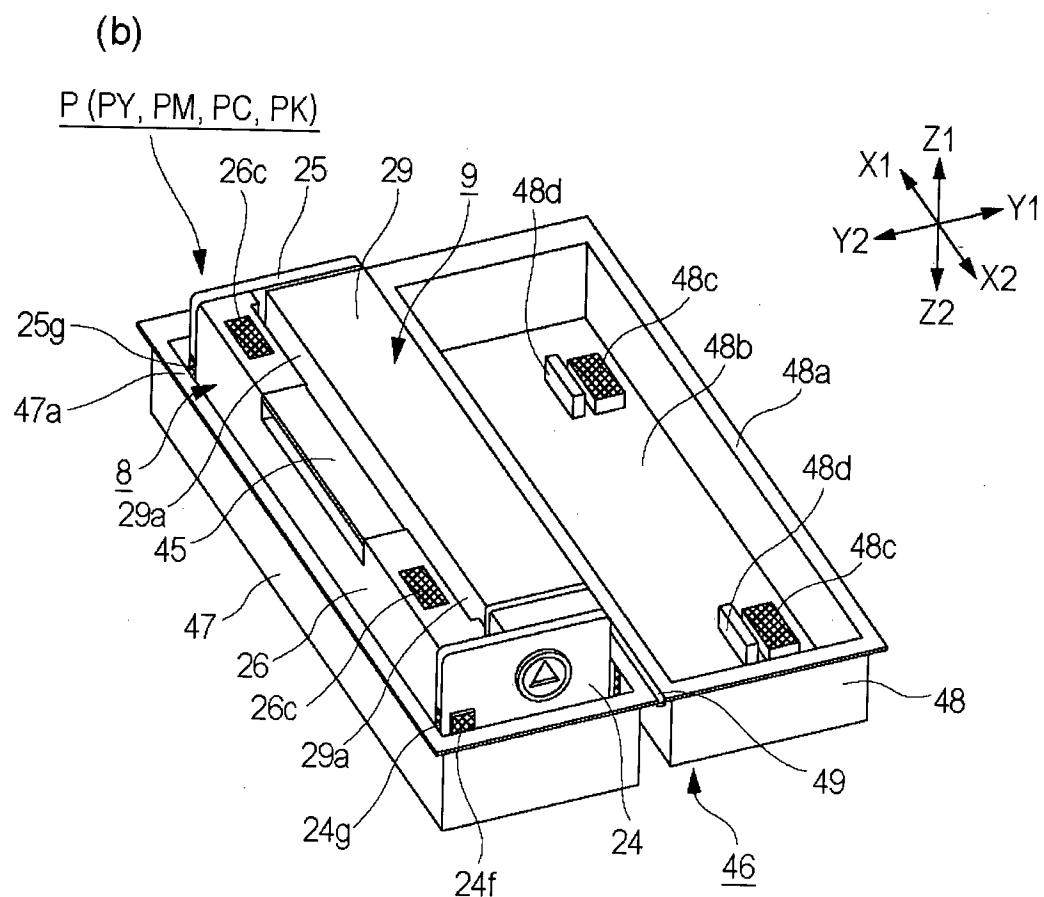
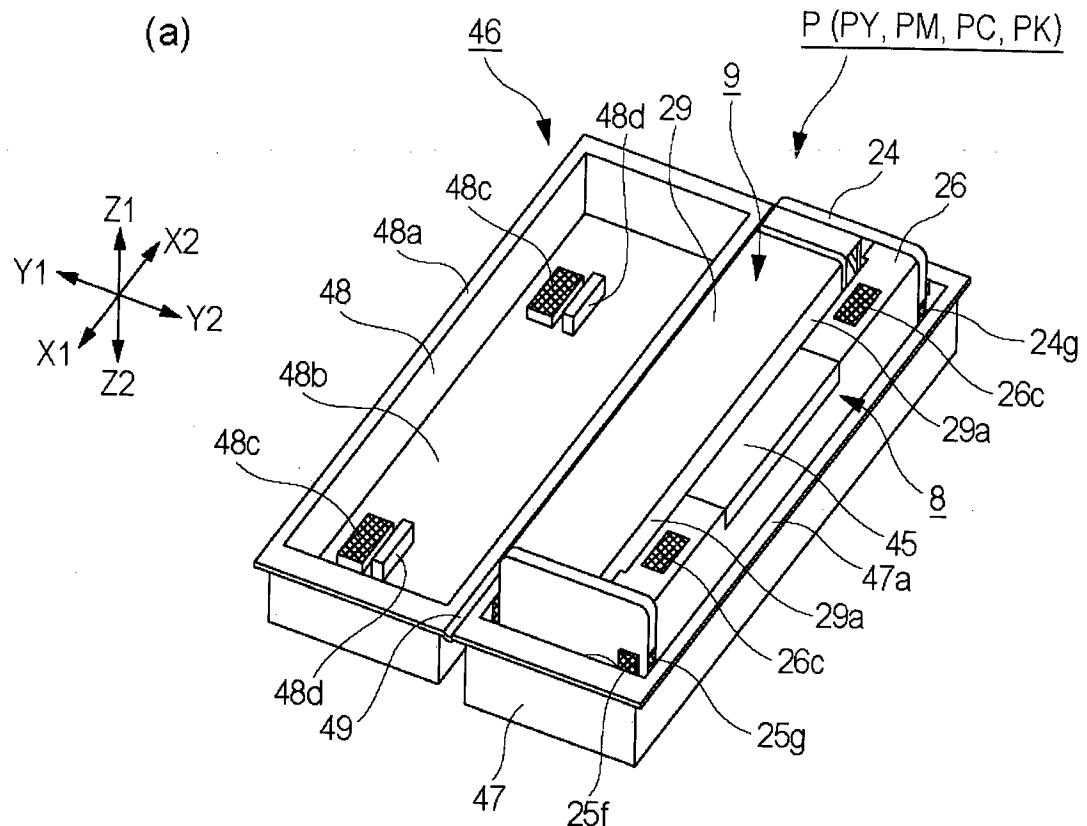


Fig. 9

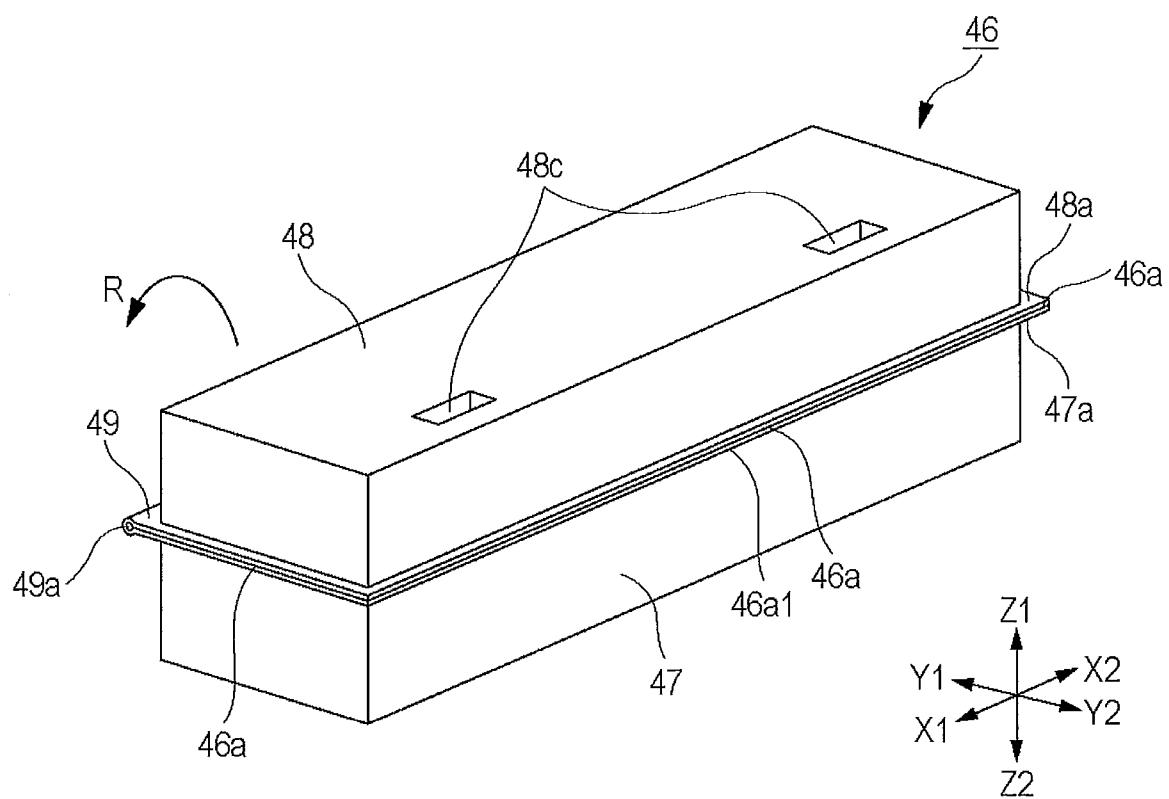


Fig. 10

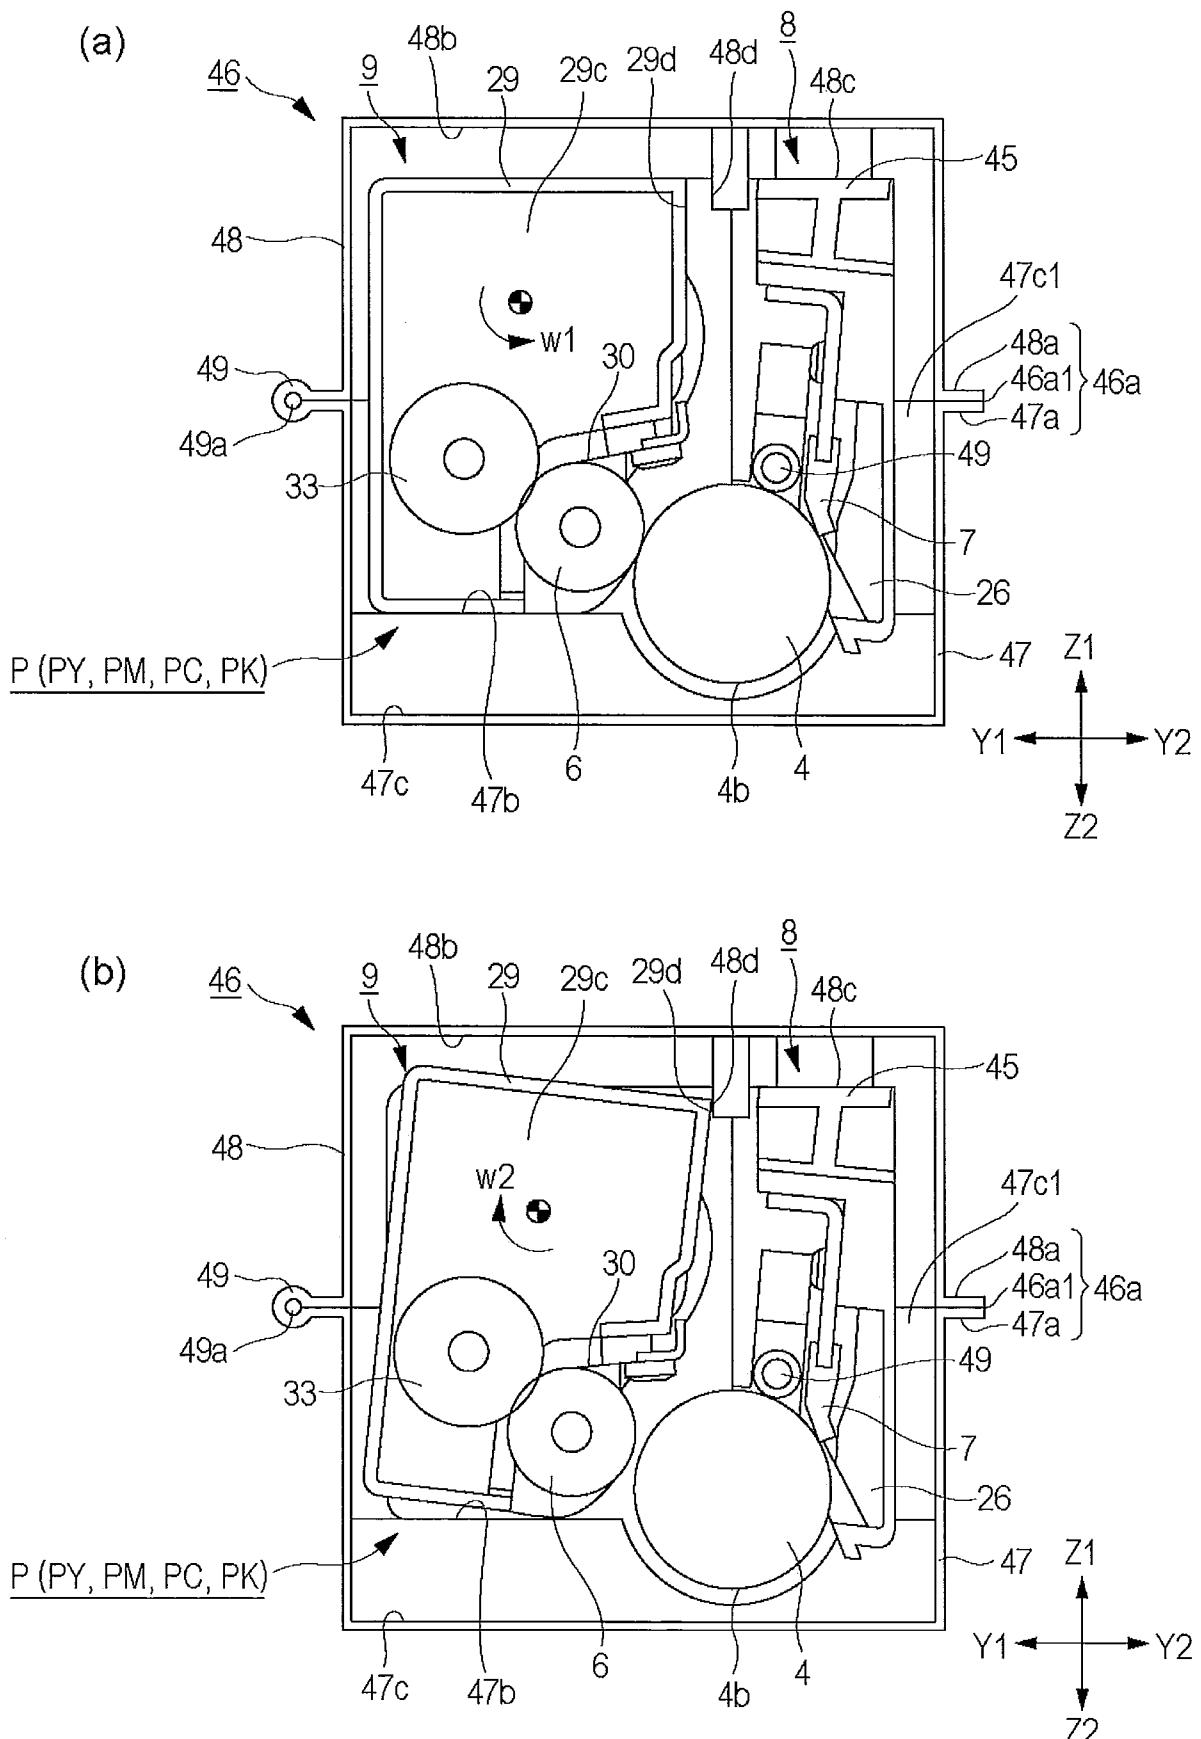


Fig. 11

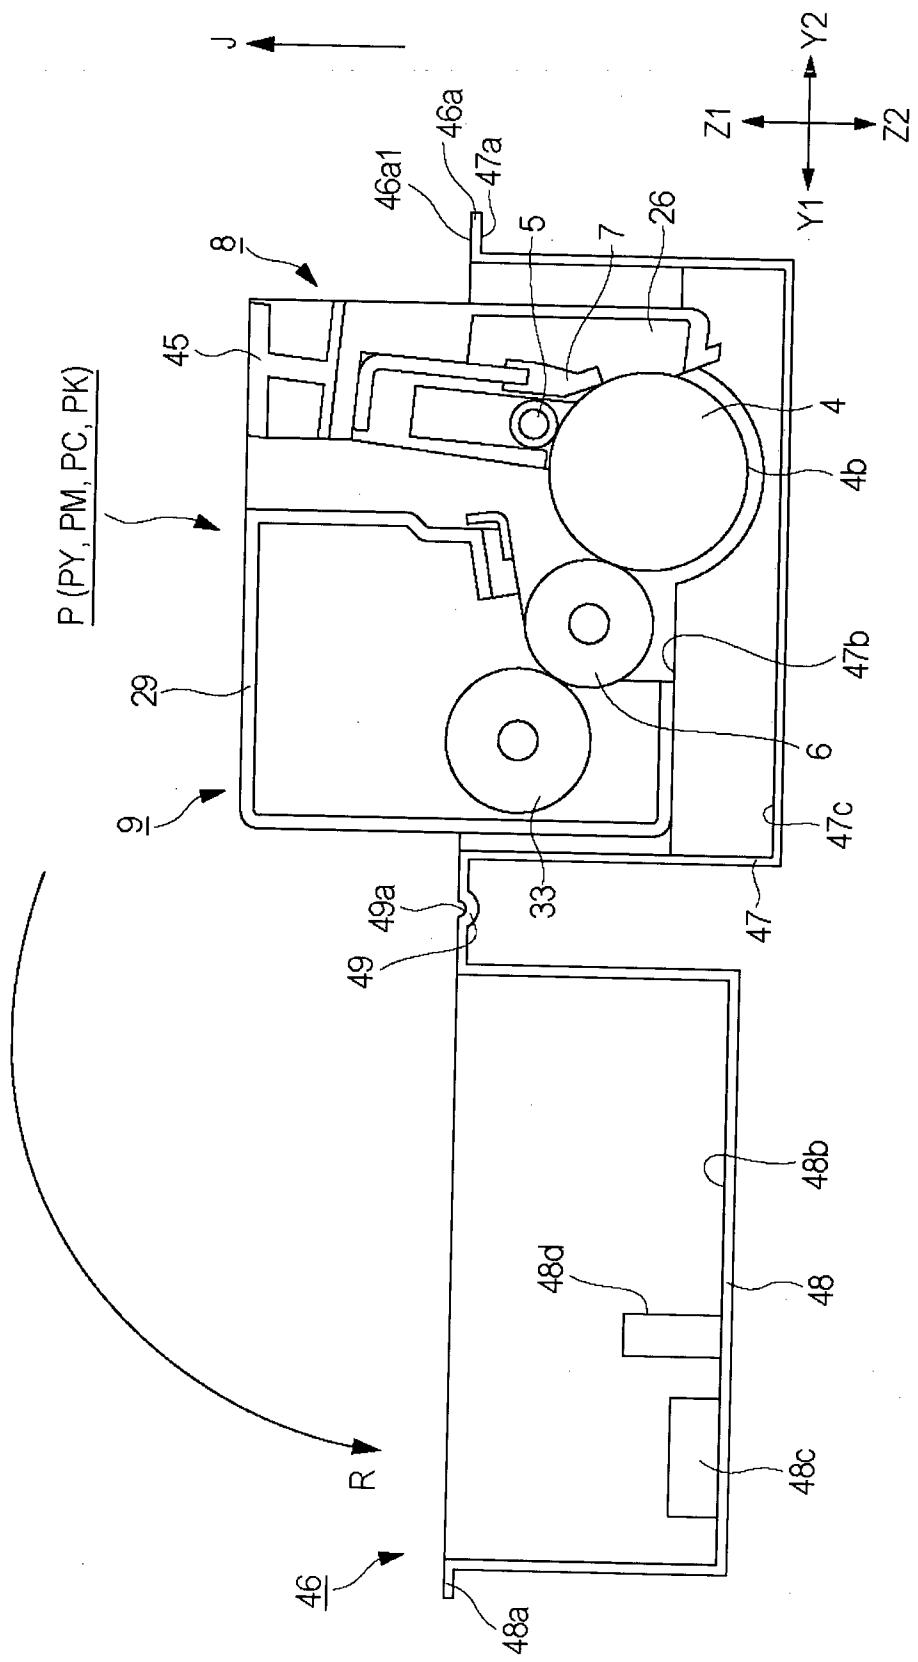


Fig. 12

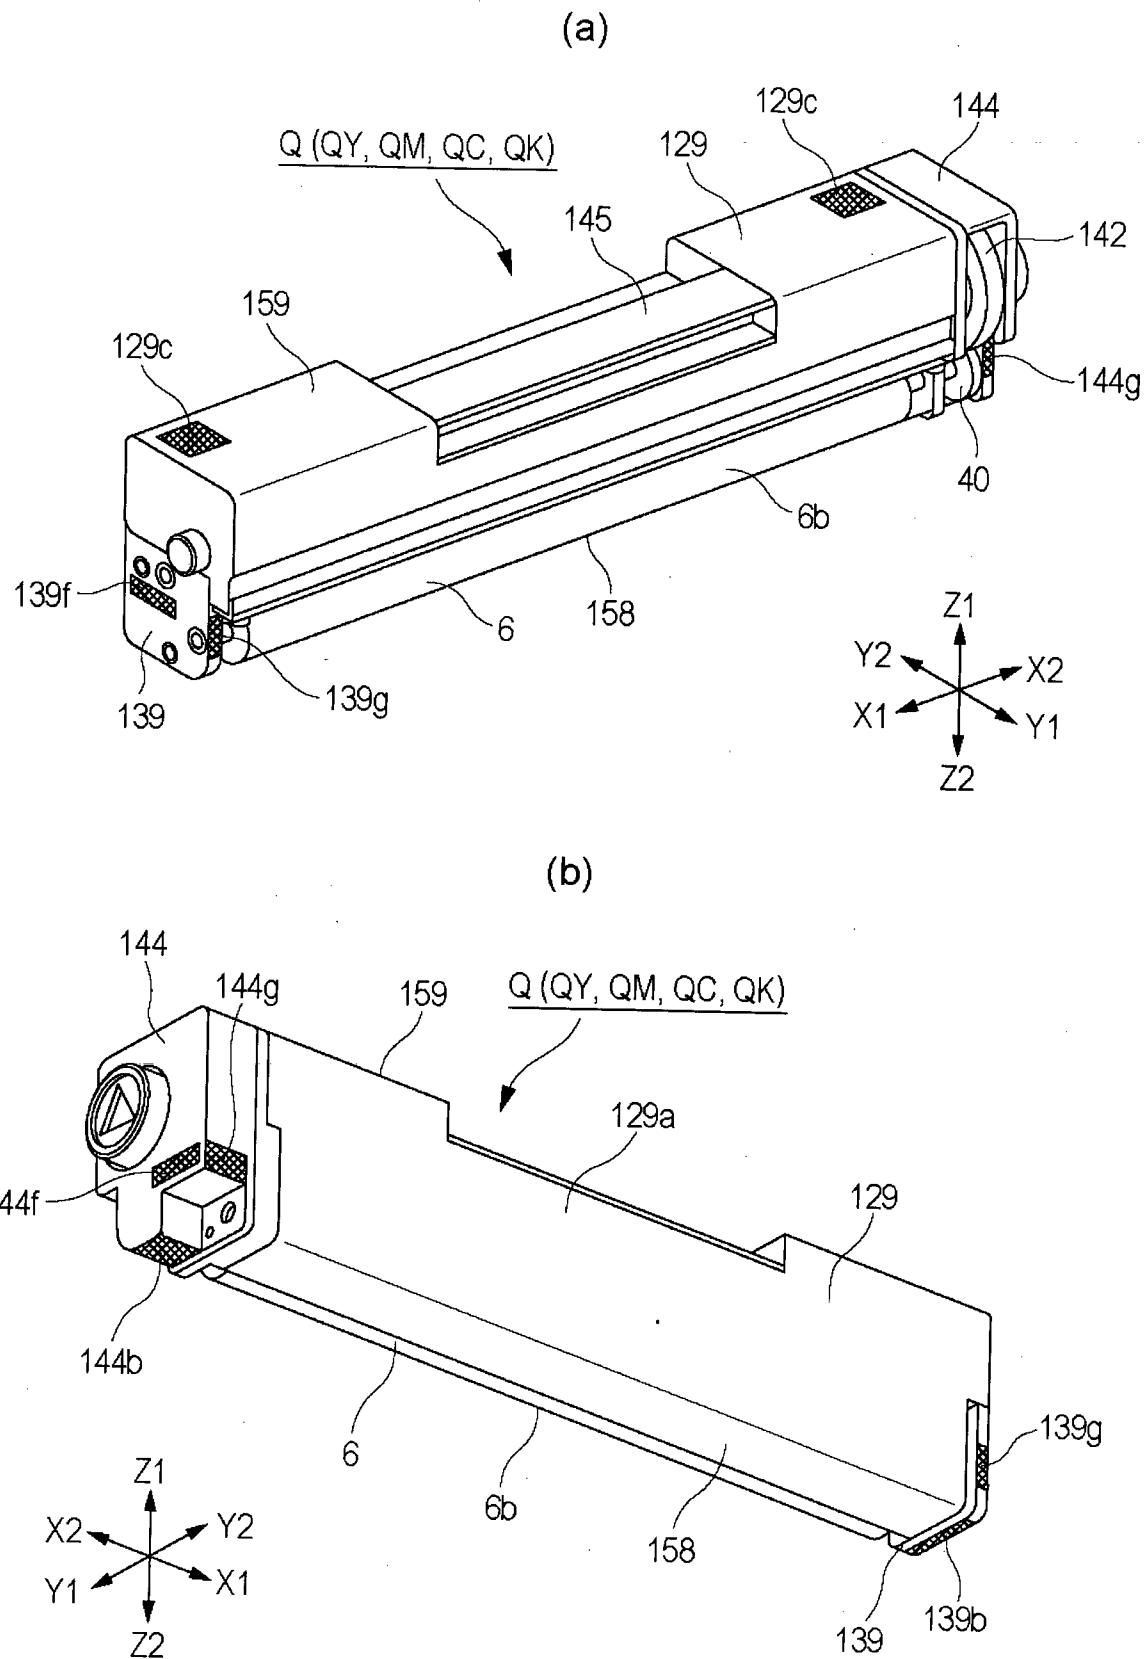


Fig. 13

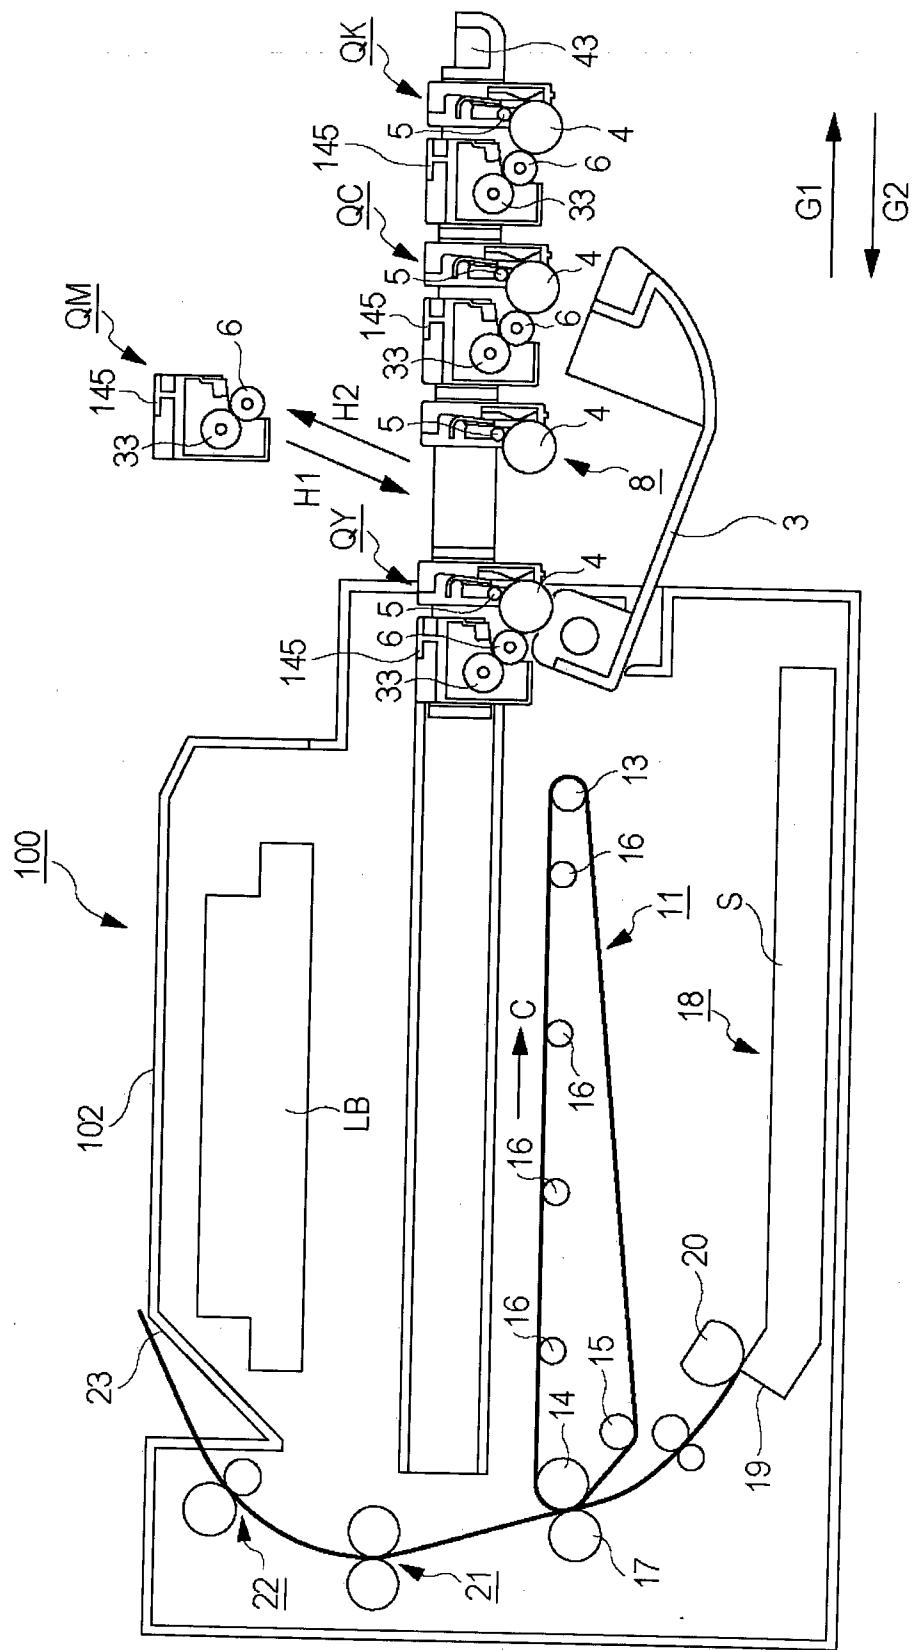


Fig. 14

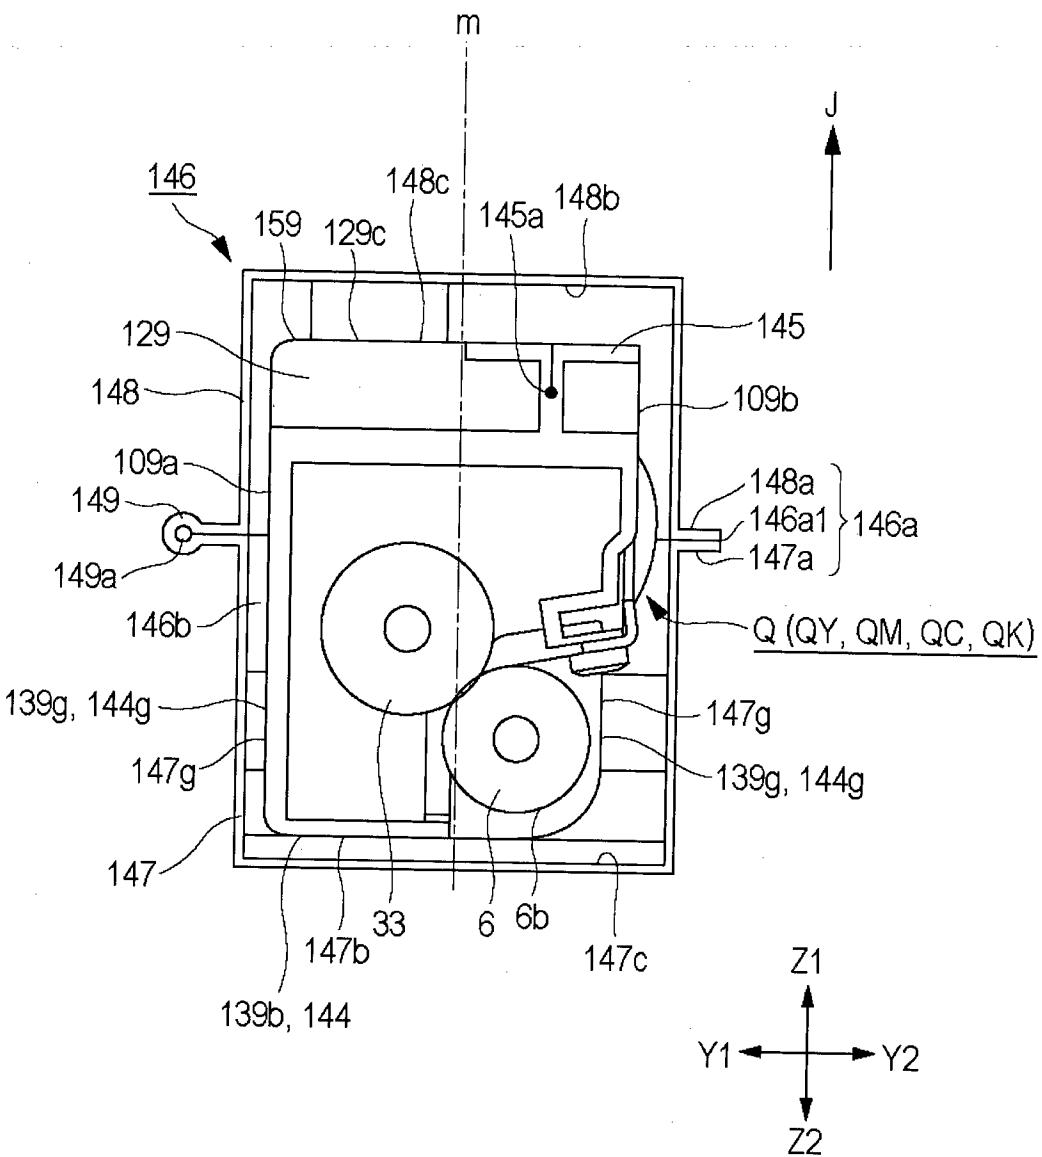


Fig. 15

INTERNATIONAL SEARCH REPORT

International application No
PCT/JP2013/066409

A. CLASSIFICATION OF SUBJECT MATTER
INV. B65D81/02 B65D43/16 B65D55/02 G03G21/18
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B65D G03G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 321 911 B1 (RAIMER GEORGE EDWIN [US] ET AL) 27 November 2001 (2001-11-27) columns 3-5; figures 1-24 -----	1-14, 16-19 15,20
X	US 5 871 097 A (SHIDA YOSHIHIKO [JP] ET AL) 16 February 1999 (1999-02-16) columns 3-6; figures 1-8 -----	1-10
Y	EP 0 758 105 A1 (CANON KK [JP]) 12 February 1997 (1997-02-12) columns 4-6,15; figure 16 -----	15,20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 11 September 2013	Date of mailing of the international search report 19/09/2013
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Jervelund, Niels

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/JP2013/066409

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 6321911	B1	27-11-2001	NONE		
US 5871097	A	16-02-1999	CN	1172757 A	11-02-1998
			JP	H1029616 A	03-02-1998
			US	5871097 A	16-02-1999
EP 0758105	A1	12-02-1997	AU	700508 B2	07-01-1999
			AU	6081396 A	06-03-1997
			CN	1167280 A	10-12-1997
			DE	69616208 D1	29-11-2001
			DE	69616208 T2	06-06-2002
			EP	0758105 A1	12-02-1997
			HK	1012079 A1	31-05-2002
			JP	3530644 B2	24-05-2004
			JP	H0943927 A	14-02-1997
			US	6169865 B1	02-01-2001
			US	6343192 B1	29-01-2002