



- (51) **International Patent Classification:**
H01B 11/08 (2006.01)
- (21) **International Application Number:**
PCT/EP2012/057784
- (22) **International Filing Date:**
27 April 2012 (27.04.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant (for all designated States except US):** **DRAKA COMTEQ BV** [NL/NL]; De Boelelaan 7, NL-1083 HJ Amsterdam (NL).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **WASSMUTH, Andreas** [DE/DE]; Pilgrimstrasse 2, 91154 Roth (DE). **PFEILER, Christian** [DE/DE]; Augraben 72c, 90475 Nürnberg (DE).
- (74) **Agent:** **RAU, SCHNECK & HÜBNER;** Patentanwälte Rechtsanwälte, Königstrasse 2, 90402 Nürnberg (DE).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) **Title:** ELECTRIC CABLE, IN PARTICULAR A DATA TRANSMISSION CABLE, EQUIPPED WITH MULTI-LAYER, STRIP-TYPE SCREENING SHEET

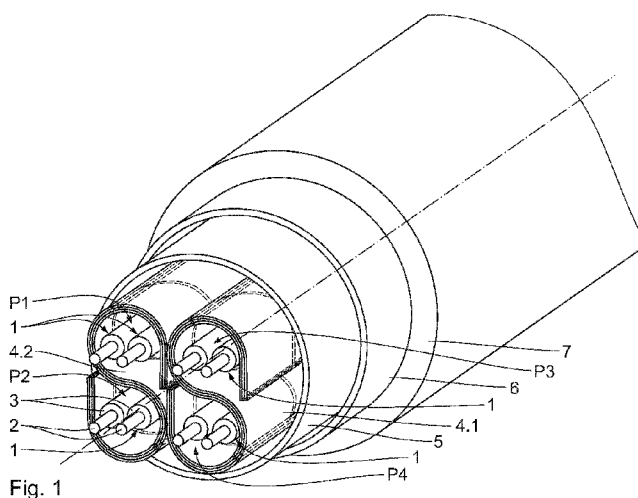

(57) **Abstract:** An electric cable, in particular a data transmission cable, includes - at least one line (1), in particular several twisted-pair lines (P1 to P4), - a screening sheet (4.1, 4.2) for the at least one line (1) which screening sheet (4.1, 4.2) includes at least one substrate layer (20, 80) of a plastic material and at least one screening layer (30) of an electrically conductive material, in particular metal, which the substrate layer (20, 80) is lined with, wherein the screening layer (30) being provided with spacing gaps (50) for electrical interruption thereof in a longitudinal strip direction (Z), with the spacing gaps (50) extending crosswise of the longitudinal strip direction (Z) and recurring at longitudinal intervals (p), - an external envelope (7) of an insulating material, and - a semi-conductive shielding layer (6) arranged between the screening sheet (4.1, 4.2) and the external envelope (7).



ELECTRIC CABLE, IN PARTICULAR A DATA TRANSMISSION
CABLE, EQUIPPED WITH MULTI-LAYER, STRIP-TYPE
SCREENING SHEET

- 5 The invention relates to an electric cable, in particular a data transmission cable, having at least one line, in particular several intertwined pairs of lines, so-called twisted pairs, according to the preamble of claim 1.

Such an electric cable is known from EP 1 632 957 A2. This prior art
10 document discloses a screening sheet for the at least one line which screening sheet includes at least one substrate layer of a plastic material and at least one screening layer of an electrically conductive material, in particular metal, which the substrate layer is lined with. The screening layer is provided with spacing gaps for electrical interruption thereof in a longitudinal strip direction with the spacing gaps extending crosswise of the longitudinal strip direction and recurring at longitudinal intervals. Further on the
15 cable includes an external envelope of an insulating material.

The problems the invention deals with can be explained most obviously in
20 conjunction with high-speed data transmission cables, which, however, does not restrict the use of the invention to this purpose.

Customary data transmission cables use several of the above twisted pairs, for example four, which are preferably screened as the category of trans-
25 mission bandwidth and transmission quality rises. External screening of the twisted pairs as well as screening of the twisted pairs one in relation to the other in a cable are important in this case.

- 2 -

For corresponding specifications of transmission bandwidth and transmission quality to be obtained, US 6 624 359 B2 teaches to provide the twisted pairs with a screening sheet which is comprised of a laminate of a plastic-material substrate layer lined with a screening layer of metal. This document further shows the most varying configurations of how to fold this laminated sheet so that it forms an external screening envelope placed around several twisted pairs. Fundamentally, the screening sheet is designed as a strip of material having a continuous screening layer, for example of aluminum or copper, in the longitudinal direction of the strip.

10

The above design of an electrically conductive screening layer that is continuous in the longitudinal direction of the cable gives rise to problems of grounding because, given varying potentials at the ends of a line, high potential compensation currents can flow through the screening. They cause malfunction and possibly even damages of equipment connected to such a data transmission cable.

15

This problem is solved according to the above-mentioned EP 1 632 957 A2 by the strip-type screening sheet comprising spacing gaps in the screening layer which extend somewhat crosswise of the longitudinal direction of the strip, longitudinally recurring at intervals. They serve for electrical interruption of the screening layer in the longitudinal direction of the strip. Consequently, there is no continuous electrically conductive connection in the longitudinal direction of the screening sheet, which completely precludes any flow of potential compensation currents. But although the gaps being small as compared to the rest of the screening surface of the pieces of foil that lie between the spacing gaps, there is some deterioration in the screening properties of the screening sheet which for high-frequency applications might not be acceptable.

25

It is therefore an object of the invention to improve the shielding performance of the known electric cable especially to further suppress the so-called “alien crosstalk” between two electric cables arranged in vicinity to each other.

This object is achieved according to the characterising part of claim 1 by a semi-conductive shielding layer arranged between the screening sheet and the external envelope. In the context of the invention “semi-conductive” does not mean a typical semi-conductor like silicon but refers to a material the conductivity of which is in between an insulator and an electrically conductive material, like a metal.

Due to the physical properties of the semi-conductive shielding on the one hand a shielding effect is generated as concerns the secondary high-frequency radiation, thus effectively reducing the mentioned “alien crosstalk”. On the other hand in the longitudinal direction of the cable the resistance of the semi-conductive shielding is high enough to avoid the above mentioned high potential compensation currents which could flow through the screening in case this would be from a conductive metal material. Accordingly the choice of the semi-conductive material for the shielding layer is an optimal compromise concerning two rather incompatible purposes.

According to a preferred embodiment the semi-conductive shielding layer is made of a polymer material filled with suitable semi-conductive particles. A typical example for such a material is a so-called thermoplastic black polyethylene compound, a standard semi-conductive polymer material which is commercially available and readily processible on common

extruders. This material is a polymer comprising carbon black particles as semi-conductive particles.

5 According to a further preferred embodiment the radial thickness of the semi-conductive shielding layer lies between 0,1 mm and 0,5 mm, most preferably between 0,3 mm and 0,4 mm or explicitly 0,35 mm. These dimensions are well adapted to the usual conditions in electric cables and particularly data transmission cables.

10 The conductivity values expressed as the so-called volume resistivity of the semi-conductive shielding layer may range between $10 \Omega \cdot \text{cm}$ and $1000 \Omega \cdot \text{cm}$, preferably the volume resistivity is about $100 \Omega \cdot \text{cm}$. An according value of the conductivity is $0,01 \text{ S} \cdot \text{m}/\text{mm}^2$. Thus it is clear that – as outlined above - the term “semi-conductive” material does not mean a typical
15 semi-conductor like silicon but refers to a material the conductivity of which is in between an insulator and an electrically conductive material, like a metal.

The semi-conductive shielding layer may preferably be extruded onto the
20 inner parts of the cable, i.e. the screening sheet surrounding the at least one line of the cable. This is an established production method easy and reliable to handle. An economic development of this extrusion step is the co-extrusion of the semi-conductive shielding layer together with the external envelope of an insulating material.

25

In keeping with a further preferred embodiment of the invention, the spacing gaps in the screening layer of the screening sheet recur periodically. The ratio that the spacing-gap width bears to the length of the pieces of foil

- 5 -

between the spacing gaps preferably ranges between 1:12 and 1:300, with typical lengths of the pieces of foil being in the range of 60 to 150 mm and typical widths of the spacing gaps being in the range of 0,5 to 5 mm. In practice, the corresponding geometric values must be chosen such that no
5 peaks of impedance or return loss, owing to the periodicity of the structure, will occur in the range of transmission frequency of the data transmission cable.

In keeping with another preferred embodiment of the invention, successive
10 spacing gaps are arranged at a preferably small, acute angle relative to the transverse direction of the strip.

With the spacing gaps positioned in parallel at an angle to the transverse direction of the strip, the pieces of foil there-between have the form of a
15 parallelogram. Upon application of the screening sheet in the longitudinal direction of the axis of the cable, this embodiment allows a gap to form that rotates in the way of a helix around the axis of the cable. Upon application of the sheet by a so-called banding system or when the cable is stranded, the acute angle of the spacing gaps relative to the transverse direction of
20 the strip can be designed for compensation by the angle of stranding, resulting in a cylindrical gap free of metal.

Upon alternating angular position, the pieces of foil between the spacing gaps will be trapezoidal. This configuration has the advantage that, with
25 these strips of screening sheet being wound about their longitudinal axis for a tubular envelope to form, the spacing gaps run helically, which, upon interruption of the path of the current in the longitudinal direction, is accompanied with advantages in the screening behaviour as opposed to the

gaps that are strictly rectangular in relation of the longitudinal direction of the strip.

5 According to another preferred embodiment of the invention the external envelope is made of a low smoke halogen free polymer material. Basically co-polymers of PE, EVA, filled ATH or the like materials are convenient for the outer protection layer (jacket).

10 Finally a separating foil may be inserted between the inner part of the cable, especially the screening sheet for the internal lines, and the semi-conductive shielding layer. This construction has the advantage that with the extrusion of the semi-conductive shielding layer this material cannot intrude into the gaps which are regularly present within the internal structure of the cable, i.e. between the internal lines of the cable and the screening sheet.

Further features, details and advantages of the invention will become apparent from the ensuing description of an exemplary embodiment, taken in conjunction with the drawings.

20

Fig. 1 is a strongly diagrammatic perspective partial view of a data transmission cable,

Fig. 2 is a cross sectional view of the data transmission cable of Fig. 1, and

25

Fig. 3 is a perspective diagrammatic view, partially broken away, of a multi-layer screening sheet used within the data transmission cable of Fig. 1.

- 7 -

Referring to Fig. 1 and 2 the structure of the data transmission cable can be explained. Within the core of the cable four pairs P1 to P4 of twisted lines 1 are running parallel to each other. Each line 1 has a metallic core wire 2, which is a 0,40 to 0,65 mm diameter solid or stranded bare copper wire, and a 1,0 to 1,6 mm diameter insulation 3 made of a foam skin polyolephine as is common in the art. Two pairs P1 / P2 and P3 / P4, respectively are surrounded by screening sheets 4.1, 4.2, which are explained in more detail in connection with Fig. 2. Both screening sheets 4.1, 4.2 are wrapped around the pairs P1 / P2 and P3 / P4, respectively in an S-configuration thus each pair P1 to P4 is fully surrounded by the screening sheet 4.1 or 4.2.

Further on a thin tube-like separating foil 5 made of an adequate thermoplastic material surrounds the central cables structure of the pairs P1 to P4 and the screening sheets 4.1, 4.2.

A semi-conductive shielding layer 6 is extruded onto the separating foil 5 with the pairs P1 to P4 of the lines 1 and the screening sheets 4.1, 4.2 within. The radial thickness T6 of this shielding layer 6 is about 0,35 mm, its material is a so-called carbon black polyethylene which has a volume resistivity of about 100 $\Omega \cdot \text{cm}$.

The outermost part of the data cable shown in Fig. 1 and 2 is an external envelope 7 made of common low smoke halogen free polymer material according to EN 50290-2-24. Usual alternatives for the material of the envelope 7 are PE, PUR or PVC. The radial thickness T7 of the envelope 7 is about 0,3 mm, but may range from 0,2 mm to 0,8 mm.

Fig. 3 illustrates the basic design of a multi-layer strip-type screening sheet 4. It comprises a first substrate layer 20 of continuous, strip-type plastic material, preferably polyester, of a thickness of 9 to 50 μm . It is lined with a screening layer 30 that consists of individual pieces of metal foil 40 separated from each other by a spacing gap 50 (also indicated in dashed lines in Fig. 1). These rectangular pieces of foil have a typical length L of 60 mm to 150 mm in the longitudinal strip direction Z. The gap width D in the longitudinal strip direction Z typically amounts to approximately 0,5 mm to 5 mm so that the ratio that the gap width D bears to the length L of the pieces of foil 4 ranges between 1:12 and 1:300. The width of the pieces of foil 40 can slightly be less than that of the substrate layer 20 so that the longitudinal edges 60 of the substrate layer 20 project by some millimeters over the longitudinal edges 70 of the screening layer 30. The metal foil of the screening layer 30 preferably consists of aluminum of a layer thickness between 5 and 50 μm .

The screening layer 30 is lined with another substrate layer 80 so that a kind of sandwich sheeting is produced. The substrate layer 80 may consist of the same material as the substrate layer 20 or another suitable insulating material and is tightly united with the bottom substrate layer 20 in the vicinity of the longitudinal edges that project laterally over the screening layer 30. Thus the screening layer 30 is hermetically insulated outwards.

Durably uniting the three layers 20, 30, 80 takes place by suitable adhesives customary in the field of laminated sheeting. For reasons of manufacture and stability, the substrate layer 20 can be comprised of several layers of uniform material.

- 9 -

The spacing gaps 50 are disposed at a small acute angle W to the transverse direction X of the strip, but parallel to each other in this screening sheet 4.1, 4.2. Thus the pieces of metal foil 40 between two adjacent spacing gaps 50 are designed in the form of a parallelogram in a plan view.

Patent Claims

1. An electric cable, in particular a data transmission cable, comprising
 - 5 - at least one line (1), in particular several twisted-pair lines (P1 to P4),
 - a screening sheet (4.1, 4.2) for the at least one line (1) which screening sheet (4.1, 4.2) includes at least one substrate layer (20, 80) of a plastic material and at least one screening layer (30) of an electrically conductive material, in particular metal, which the substrate
10 layer (20, 80) is lined with, wherein the screening layer (30) being provided with spacing gaps (50) for electrical interruption thereof in a longitudinal strip direction (Z), with the spacing gaps (50) extending crosswise of the longitudinal strip direction (Z) and recurring at longitudinal intervals (p), and
 - 15 - an external envelope (7) of an insulating material,
 characterized by
 - a semi-conductive shielding layer (6) arranged between the screening sheet (4.1, 4.2) and the external envelope (7).
- 20 2. An electric cable according to claim 1, **characterized in that** the semi-conductive shielding layer (6) is made of a polymer material filled with semi-conductive particles.
3. An electric cable according to claim 2, **characterized in that** the semi-
25 conductive shielding layer (6) is made of a thermoplastic black polyethylene compound.
4. An electric cable according to one of the preceding claims, **characterized in that** the radial thickness (T6) of the semi-conductive shielding

layer (6) is between 0,1 mm and 0,5 mm, preferably 0,3 mm to 0,4 mm.

5. An electric cable according to one of the preceding claims, **characterized in that** the volume resistivity of the material of the semi-conductive shielding layer (6) is between 10 $\Omega\cdot\text{cm}$ and 1000 $\Omega\cdot\text{cm}$, preferably 100 $\Omega\cdot\text{cm}$.
6. An electric cable according to one of the preceding claims, **characterized in that** the semi-conductive shielding layer (6) is extruded onto the screening sheet (4.1, 4.2) surrounding the at least one line (1).
7. An electric cable according to one of the preceding claims, **characterized in that** the semi-conductive shielding layer (6) and the external envelope (7) are tightly bonded together.
8. An electric cable according to claim 7, **characterized in that** the semi-conductive shielding layer (6) and the external envelope (7) are co-extruded.
9. An electric cable according to one of the preceding claims, **characterized in that** the spacing gaps (50) in the screening layer (30) recur at periodical intervals.
10. An electric cable according to one of the preceding claims, **characterized in that** the spacing gaps (50) extend at an acute angle (W) in relation to a transverse strip direction (X).

11. An electric cable according to claim 9, **characterized in that** two successive spacing gaps (50) extend in parallel or alternating angular directions in relation to the transverse strip direction (X) such that the foil pieces (40) that remain there-between have a shape of a parallelogram or trapezoid, respectively.
- 5
12. An electric cable according to one of the preceding claims, **characterized in that** the external envelope (7) is made of a low smoke halogen free polymer material.
- 10
13. An electric cable according to one of the preceding claims, **characterized in that** a separating foil (5) is inserted between the screening sheet (4.1, 4.2) and the semi-conductive shielding layer (6).

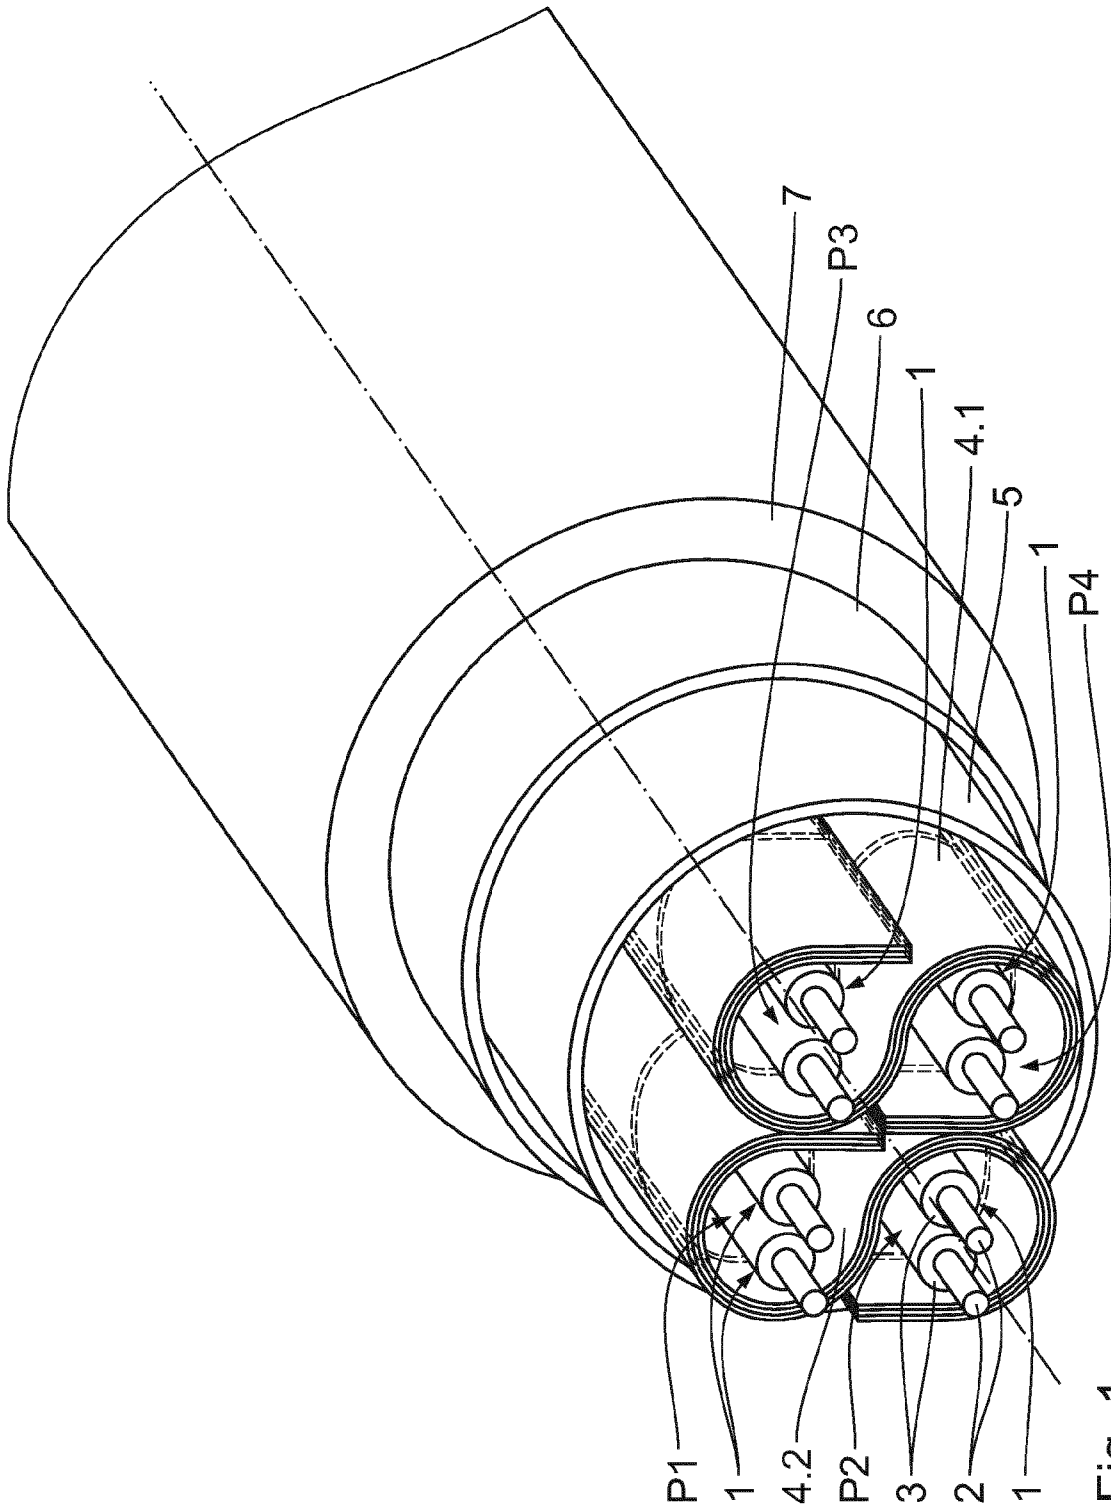


Fig. 1

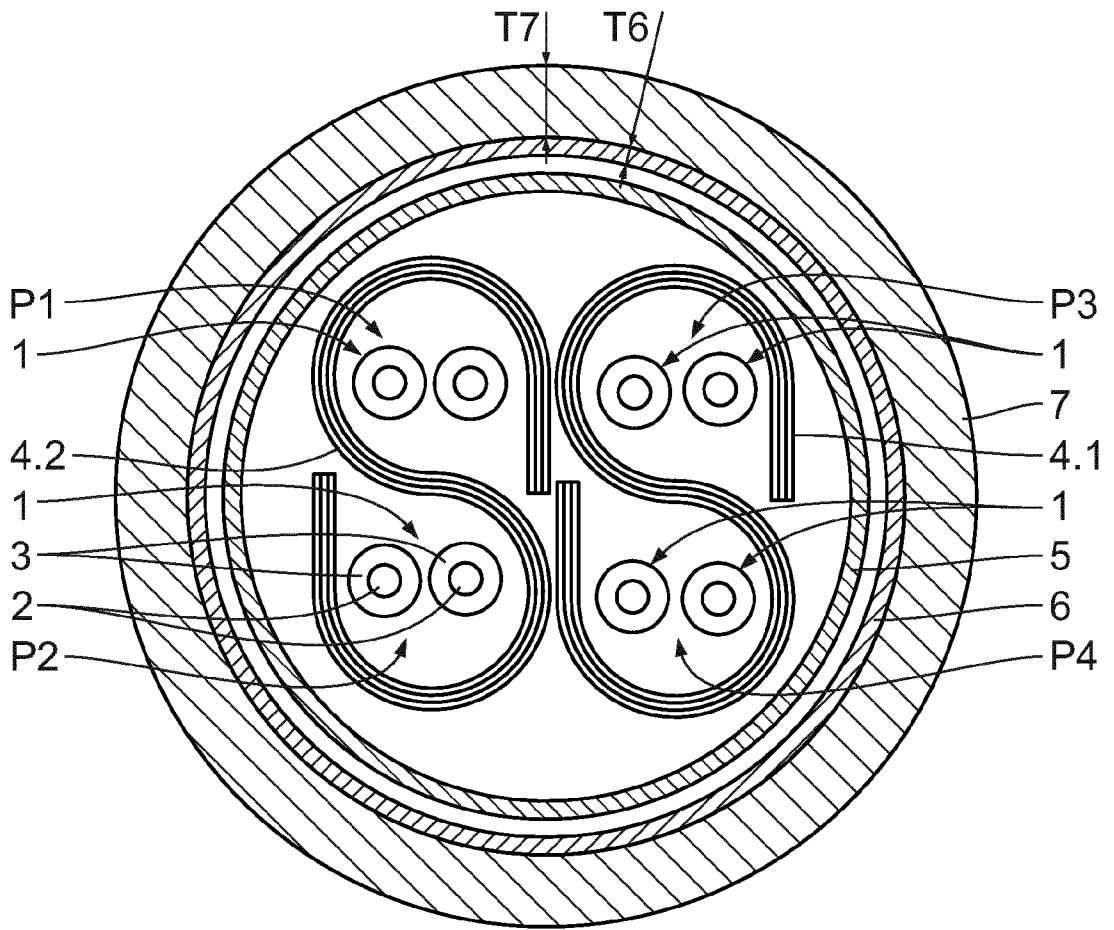


Fig. 2

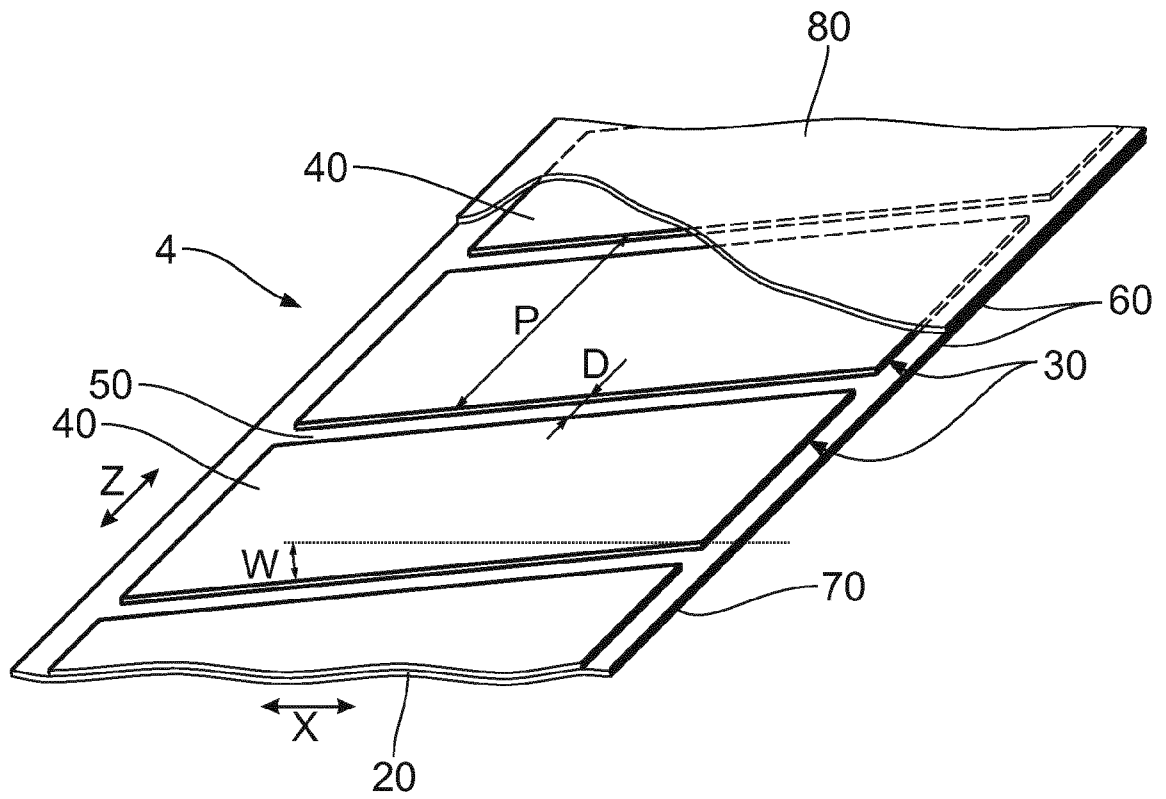


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/057784

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01B11/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
H01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2006/048961 A1 (PFEILER CHRISTIAN [DE] ET AL) 9 March 2006 (2006-03-09) cited in the application the whole document	1-13
A	EP 0 915 486 A1 (NK NETWORKS GMBH [DE] DRAKA MULTIMEDIA CABLE GMBH [DE]) 12 May 1999 (1999-05-12) the whole document	1-13

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 14 January 2013	Date of mailing of the international search report 21/01/2013
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Zeslawski, Wojciech
--	---

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/057784

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006048961	A1	09-03-2006	CN 1744235 A 08-03-2006
			DE 102004042656 B3 29-12-2005
			EP 1632957 A2 08-03-2006
			ES 2390712 T3 15-11-2012
			JP 2006073534 A 16-03-2006
			KR 20060050977 A 19-05-2006
			US 2006048961 A1 09-03-2006

EP 0915486	A1	12-05-1999	AT 288126 T 15-02-2005
			DE 29719866 U1 18-12-1997
			EP 0915486 A1 12-05-1999
			ES 2232908 T3 01-06-2005
