

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 771 899 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

03.04.2002 Bulletin 2002/14

(51) Int Cl.7: **D06F 58/28**

(21) Application number: **96115094.3**

(22) Date of filing: **20.09.1996**

(54) **Method of drying articles of washing in a drum washing drier**

Verfahren zum Trocken von Wäsche in einem Trommeltrockner

Procédé pour sécher le linge dans un sèche-linge à tambour

(84) Designated Contracting States:
DE FR GB IT SE

(30) Priority: **20.10.1995 DE 19539155**

(43) Date of publication of application:
07.05.1997 Bulletin 1997/19

(73) Proprietor: **WHIRLPOOL CORPORATION**
Benton Harbor Michigan 49022 (US)

(72) Inventors:
• **Zerrer, Thomas, c/o Whirlpool Europe s.r.l.**
21024 Biandronno (VA) (IT)

• **Hoersch, Susanne, c/o Whirlpool Europe s.r.l.**
21024 Biandronno (VA) (IT)
• **Chirstmann, Luise, c/o Whirlpool Europe s.r.l.**
21024 Biandronno (VA) (IT)

(74) Representative: **Guerci, Alessandro**
Whirlpool Europe S.r.l.
Patent Department
Viale G. Borghi 27
21025 Comerio (VA) (IT)

(56) References cited:
EP-A- 0 358 849 **DE-A- 4 032 079**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 771 899 B1

Description

[0001] The invention relates to a method of drying articles of washing in a drum washing drier, in which the articles of washing are circulated by rotary movements of the drum, the drum being driven in common with a process air blower in the same or alternating directions of rotation, and having heated process air flowing there-through, the air output of the process air blower being increased in the forward direction of rotation and being reduced in the reverse direction of rotation, the drying procedure including three phases - start phase, main drying phase and final phase - the temperature in the circuit of process air being detected, and the process air blower and a drum being permanently driven in the forward direction of rotation during the start phase.

[0002] A method of this type is known from EP 0 358 849 B1. In this known method the main drying phase begins only when a temperature approaching the predetermined drying temperature (e.g. 60°C) is reached, operation then being basically with alternating directions of rotation or, by means of selection by the person operating, it is determined whether operation is to be exclusively in the forward direction of rotation or with alternating directions of rotation.

[0003] As the main drying phase as a rule takes up the major proportion of the drying time, there results in the drying procedure a considerable period during which the machine operates with alternating directions of rotation. Long periods of reverse operation however involve an increase in the drying time and of the frequency of switching of the switch contacts, leading to a reduction in the life-expectancy of the drum washing drier.

[0004] The object of the invention is to provide a method of the type already mentioned in which the time spent in reverse operation during the drying procedure is reduced to a minimum and thus the drying time of the drying procedure is shortened, and the life-expectancy of the drum washing drier is increased.

[0005] This object is achieved according to the invention in that, during the main drying phase, operation is switched over for a period from the forward direction of rotation to alternating directions of rotation (reversing) only when a predetermined maximum temperature is reached, the period of time being predetermined or terminated when a predetermined minimum temperature is reached, and in that, in the final phase, operation is with alternating directions of rotation, or in that, when there is a condenser in the process air circuit, the temperature differential is measured at the condenser, in that, during the main drying phase, the drum and the process air blower are switched over for a period from the forward direction of rotation to alternating directions of rotation when a maximum temperature differential is reached, the alternating directions of rotation being terminated when a predetermined minimum temperature differential is reached, and in that, in the final phase, operation is optionally in the forward direction of rotation

or with alternating directions of rotation.

[0006] In this method, operation during the main drying phase is substantially only in the forward direction. The predetermined maximum temperature or temperature differential is only reached if the drum is improperly loaded, which for example can be caused by overloading or the introduction of a plurality of large towelling articles. Proper loading according to DIN or IEC therefore leads as a rule to no reverse operation during the main drying phase, so that a frequency of switching of the control contacts occurs only in exceptional cases.

[0007] The times for the start phase, the main drying phase and the final phase, depending on the embodiment, can be constantly predetermined or also adjustable.

[0008] If the temperature in the process air circuit is measured, this is preferably effected after it has passed through the drum, in the air duct of the process air circuit.

[0009] The invention will now be explained in more detail with reference to embodiments given by way of example and illustrated in the drawings, which show:

Fig. 1: a diagram of the drying procedure on the basis of a temperature measurement in the process air circuit, and

Fig. 2: a diagram of the drying procedure on the basis of a temperature differential at the condenser of a process air circuit.

[0010] The diagram in Fig. 1 gives the temperature curve of a drying procedure in dependence on the running time of the drum washing drier, the extended curve showing the normal situation. As the operating state of drum and process air blower, given under the diagram, shows, no reversing takes place during the start and main drying phases, i.e. drum and process air blower are operated in the forward direction of rotation, i.e. the direction of rotation with the increased air output can increase the temperature during the main drying phase and reach or exceed a predetermined maximum value. Operation is then switched to reverse, in fact only for a predetermined period, as Fig. 1 shows, or this period continues until, due to reverse operation, the temperature has dropped to a predetermined maximum value, or falls below it. For the remaining time in the main drying phase operation is switched back to the forward direction of rotation. In the final phase which, like the start phase, is considerably shorter than the main drying phase, operation is switched to reverse.

[0011] The diagram in Fig. 2 shows the drying procedure in which the temperature differential is detected at the condenser of a process air circuit. During the main drying phase, monitoring is undertaken to see whether the temperature differential reaches or exceeds a predetermined maximum value. Then operation is switched to reverse, until the temperature differential has again dropped to a predetermined minimum value. Thereafter operation continues in the forward direction with high air

output. In the final phase operation is optionally in the forward direction of rotation or in reverse with alternating directions of rotation. In this respect reverse operation can proceed with a strictly predetermined switching cycle. The choice of operation in the final phase may be effected by the person operating or by measurement of a predetermined parameter which indicates the degree of drying.

Claims

1. Method of drying articles of washing in a drum washing drier, in which the articles of washing are circulated by rotary movements of the drum, the drum being driven in common with a process air blower in the same or alternating directions of rotation, and having heated process air flowing there-through, the air output of the process air blower being increased in the forward direction of rotation and being reduced in the reverse direction of rotation, the drying procedure including three phases - start phase, main drying phase and final phase - and the temperature in the circuit of process air being detected, and the process air blower and a drum being permanently driven in the forward direction of rotation during the start phase,
characterised in that,
during the main drying phase, operation is switched over for a period from the forward direction of rotation to alternating directions of rotation (reversing) only when a predetermined maximum temperature is reached, the period of time being predetermined or terminated when a predetermined minimum temperature is reached,
and **in that**, in the final phase, operation is with alternating directions of rotation.
2. Method according to claim 1,
characterised in that,
when there is a condenser in the process air circuit, the temperature differential is measured at the condenser, **in that**, during the main drying phase, the drum and the process air blower are switched over for a period from the forward direction of rotation to alternating directions of rotation when a maximum temperature differential is reached, the alternating directions of rotation being terminated when a predetermined minimum temperature differential is reached, and **in that**, in the final phase, operation is optionally in the forward direction of rotation or with alternating directions of rotation.
3. Method according to claim or 2,
characterised in that
the times for the start phase, the main drying phase and the final phase are constant and predetermined.

4. Method according to claim or 2,
characterised in that
the times for the start phase, the main drying phase and the final phase are adjustable for the drying procedure.
5. Method according to one of claims 1, 3 or 4,
characterised in that
the temperature in the process air circuit is measured after the drum.

Patentansprüche

1. Verfahren zum Trocknen von Wäschestücken in einem Trommelwäschetrockner, in dem die Wäschestücke durch drehende Bewegungen der Trommel umgewälzt werden, wobei die Trommel gemeinsam mit einem Prozessluftgebläse in derselben oder der gegenläufigen Drehrichtung betrieben wird, eine erhitze Prozessluft durch die Trommel strömt, der Strom des am Ausgang des Prozessluftgebläses austretenden Luft in Vorwärtsdrehrichtung erhöht und in Gegendrehrichtung vermindert wird, der Trocknungsvorgang drei Phasen aufweist, und zwar eine Startphase, eine Haupttrocknungsphase und eine Endphase, die Temperatur im Prozessluft-Kreislauf festgestellt wird und das Prozessluftgebläse und eine Trommel während der Startphase in der Vorwärtsdrehrichtung ständig betrieben werden,
dadurch gekennzeichnet,
dass in der Haupttrocknungsphase der Betrieb für einen Zeitabschnitt von der Vorwärtsdrehrichtung auf wechselnde Drehrichtungen (Umkehrbetrieb) nur dann umgeschaltet wird, wenn eine vorbestimmte Maximaltemperatur erreicht worden ist, wobei der Zeitabschnitt vorbestimmt ist oder dann beendet wird, wenn eine vorbestimmte Minimaltemperatur erreicht worden ist, und dass in der Endphase der Betrieb mit wechselnden Drehrichtungen erfolgt.
2. Verfahren nach Anspruch 1,
dadurch gekennzeichnet,
dass beim Vorhandensein eines Kondensators im Prozessluft-Kreislauf der Temperaturunterschied am Kondensator gemessen wird, dass in der Haupttrocknungsphase die Trommel und das Prozessluftgebläse für einen Zeitabschnitt von der Vorwärtsdrehrichtung auf wechselnde Drehrichtungen umgeschaltet werden, wenn ein Maximaltemperaturunterschied erreicht worden ist, wobei die wechselnden Drehrichtungen dann beendet werden, wenn ein vorbestimmter Minimaltemperaturunterschied erreicht worden ist, und dass in der Endphase der Betrieb wahlfrei entweder in Vorwärtsdrehrichtung oder mit wechselnden Drehrichtungen er-

folgt.

3. Verfahren nach Anspruch 1 oder 2,
dadurch gekennzeichnet,
dass die Zeitabschnitte für die Startphase, die
Haupttrocknungsphase und die Endphase konstant
und vorbestimmt sind. 5
4. Verfahren nach Anspruch 1 oder 2,
dadurch gekennzeichnet,
dass die Zeitabschnitte für die Startphase, die
Haupttrocknungsphase und die Endphase für das
Trocknungsverfahren einstellbar sind. 10
5. Verfahren nach einem der Ansprüche 1, 3 oder 4,
dadurch gekennzeichnet,
dass die Temperatur im Prozessluft-Kreislauf hinter
der Trommel gemessen wird. 15

Revendications

1. Procédé de séchage d'articles lavés dans un lave-
linge sécheur à tambour, dans lequel les articles la-
vés circulent lors des mouvements de rotation du
tambour, le tambour étant entraîné en commun
avec un ventilateur d'air de traitement dans le mê-
me sens de rotation ou dans des sens de rotation
qui alternent, et ayant de l'air de traitement chauffé
qui circule à l'intérieur, le débit d'air du ventilateur
d'air de traitement étant accru dans le sens de ro-
tation vers l'avant et étant réduit dans le sens de
rotation vers l'arrière, la procédure de séchage
comprenant trois phases, une phase de démarrage,
une phase principale de séchage et une phase fi-
nale, et la température du circuit d'air de traitement
est détectée, et le ventilateur d'air de traitement et
le tambour sont entraînés de façon permanente par
rotation vers l'avant au cours de la phase de démar-
rage, 20
caractérisé en ce que
au cours de la phase principale de séchage,
le fonctionnement est commuté pendant une certai-
ne période de la rotation dans le sens de rotation
vers l'avant à une rotation dans des sens qui alter-
nent (inversion) uniquement lorsqu'une températu-
re maximale prédéterminée est atteinte, la période
étant prédéterminée ou terminée lorsqu'une tempé-
rature minimale prédéterminée a été atteinte, et
dans la phase finale, le fonctionnement s'ef-
fectue avec des sens de rotation qui alternent. 30 35 40 45 50
2. Procédé selon la revendication 1,
caractérisé en ce que,
lorsque le circuit d'air de traitement comprend
un condenseur, la différence de température est
mesurée au niveau du condenseur, et **en ce que,**
pendant la phase principale de séchage, le tambour 55

et le ventilateur d'air de traitement sont commutés
pendant une certaine période de la rotation dans le
sens de rotation vers l'avant à une rotation dans des
sens qui alternent lorsqu'une différence maximale
de température est atteinte, la rotation dans des
sens qui alternent étant interrompue lorsqu'une dif-
férence minimale prédéterminée de température
est atteinte, et **en ce que,** dans la phase finale, le
fonctionnement est éventuellement dans le sens de
rotation vers l'avant ou dans des sens de rotation
qui alternent.

3. Procédé selon la revendication 1 ou 2,
caractérisé en ce que
les durées de la phase de démarrage, de la
phase principale de séchage et de la phase finale
sont constantes et prédéterminées.
4. Procédé selon la revendication 1 ou 2,
caractérisé en ce que
les durées de la phase de démarrage, de la
phase principale de séchage et de la phase finale
sont réglables pour la procédure de séchage.
5. Procédé selon l'une des revendications 1, 3 et 4,
caractérisé en ce que
la température du circuit d'air de traitement
est mesurée après le tambour.

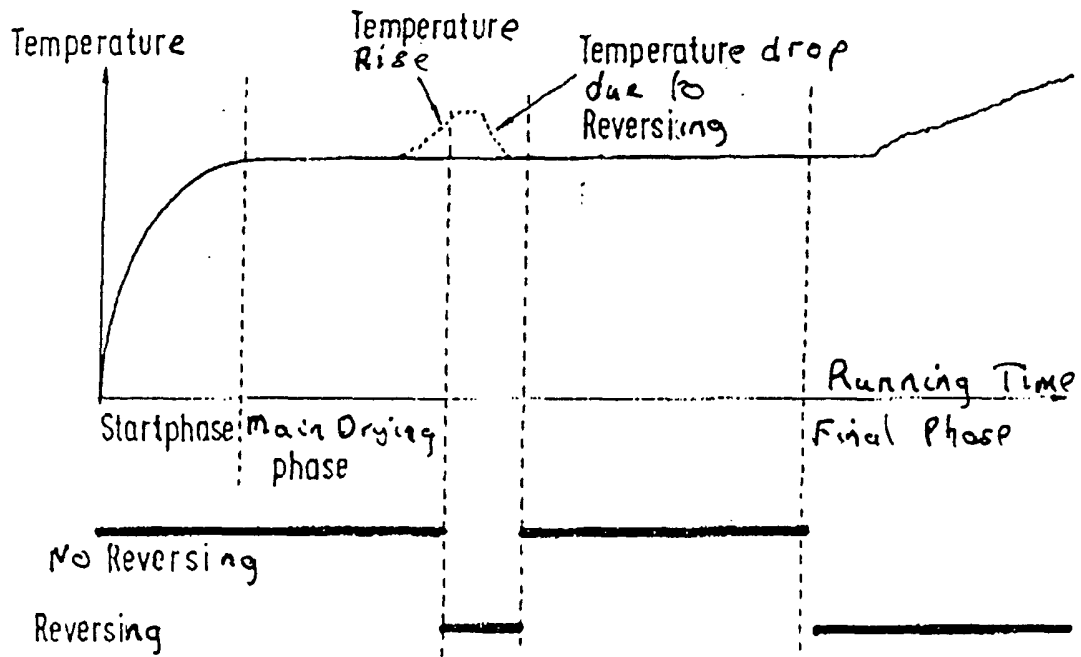


Fig. 1

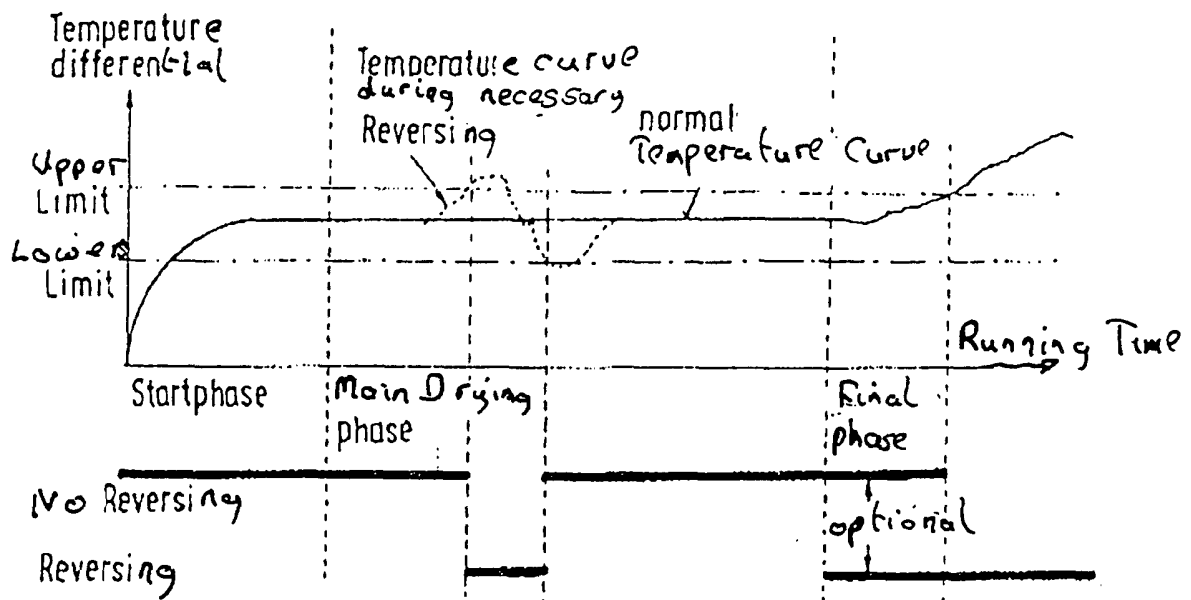


Fig. 2