

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 July 2002 (04.07.2002)

PCT

(10) International Publication Number
WO 02/052054 A1

(51) International Patent Classification⁷: **C22C 29/08**

(21) International Application Number: PCT/SE01/02690

(22) International Filing Date: 6 December 2001 (06.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0004817-3 22 December 2000 (22.12.2000) SE
0101561-9 4 May 2001 (04.05.2001) SE

(71) Applicants: **SECO TOOLS AB** [SE/SE]; S-737 82 Fagersta (SE). **H.C. STARCK GMBH & CO. KG** [DE/DE]; Im Schleeke 78-91, 38642 Goslar (DE).

(72) Inventors: **SANDBERG, Anna**; Svedjevägen 5B, S-737 43 Fagersta (SE). **KRUSE, Olof**; Parkvägen 40, S-737 31 Fagersta (SE). **GRIES, Benno**; An der Tongrube 10 A, 38302 Wolfenbüttel (DE).

(74) Agent: **CARLSSON, Lars-Åke**; Sandvik AB, S-811 81 Sandviken (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COATED CUTTING TOOL INSERT WITH IRON-NICKEL BASED BINDER PHASE

(57) Abstract: The present invention relates to cutting tool insert consisting of a tungsten carbide based hard metal substrate and a coating. The hard metal consists of about 4-15 wt-% binder phase with face centered cubic structure and a composition of 35-65 wt-% Fe and 35-65 wt-% Ni in addition to dissolved elements. As a result, inserts have been produced with at least as good performance in machining as conventional state-of-the-art inserts with Co-based binder phase. The insert can be applied in milling and turning of low and medium alloyed steels as well as stainless steels.



WO 02/052054 A1

Coated cutting tool insert with iron-nickel based binder
phase

The present invention relates to cutting tool
5 insert consisting of a tungsten carbide based hard metal
substrate and a coating. The hard metal has an iron-
nickel binder phase exhibiting a face centered cubic
(fcc) structure. As a result, a coated hard metal insert
with no cobalt and at least as good performance in ma-
10 chining as a corresponding coated hard metal insert with
Co-based binder has been obtained. The insert is useful
in milling and turning of low and medium alloyed steels
as well as stainless steels.

Hard metals are composite materials comprising
15 grains of a hard phase and a binder phase that binds the
hard phase grains. An example of a hard metal is tung-
sten carbide (WC) and cobalt (Co), also known as cobalt
cemented tungsten carbide or WC-Co. Here, the hard com-
ponent is WC while the binder phase is cobalt based, for
20 example, a cobalt-tungsten-carbon alloy. The Co content
is generally 6-20 wt-%. The binder phase is mainly com-
posed of cobalt in addition to dissolved W and C.

Cobalt is, thus, the major binder in hard
metals. For example, about 15 percent of the world's
25 annual primary cobalt output is used in the manufacture
of hard materials including WC-based cemented carbides.
About 25 percent of the world's annual primary cobalt
output is used in the manufacture of superalloys
developed for advanced aircraft turbine engines - a
30 factor contributing to cobalt being designated a
strategic material. About half of the world's primary
cobalt supply is obtained in politically unstable
regions. These factors not only contribute to the high
cost of cobalt but also explain its erratic cost
35 fluctuations.

Industrial handling of hard metal raw materials may cause lung disease on inhalation. A study by Moulin et al. (1998) indicates that there exists a relationship between lung cancer and exposure to inhaled particles
5 containing WC and Co.

Therefore, it would be desirable to reduce the amount of cobalt used as binder in hard metals.

Attempts have been made to achieve this goal in hard metals by substituting the Co-based binder phase
10 with an iron rich iron-cobalt-nickel binder phase (Fe-Co-Ni-binder). Hard metals with an iron rich Fe-Co-Ni-binder have thus been strengthened by stabilizing a body centered cubic (bcc) structure in the Fe-Co-Ni-binder. This bcc structure was achieved by a martensitic trans-
15 formation. Hard metal with enhanced corrosion resistance has been obtained with a nickel rich nickel-iron binder at high binder contents.

EP-A-1024207 relates to a sintered cemented carbide consisting of 50 to 90 wt-% submicron WC in a
20 hardenable binder phase. The binder phase consists of, in addition to Fe, 10 - 60 wt-% Co, <10 wt-% Ni, 0.2 - 0.8 wt-% C and Cr and W and possibly Mo and/or V.

JP 2-15159 A relates to a substrate consisting of a hard phase with composition (Ti,M)CN, where M is
25 one or more of Ta, Nb, W, and Mo. In addition, there is a binder phase selected from the group Co, Ni, and Fe. The substrate is coated with a Ti-based hard coating.

US 4,531,595 discloses an insert for earth boring tools, such as drill bits, with diamonds imbedded in
30 a sintered matrix of WC and a Ni-Fe binder. The matrix prior to sintering has a particle size of from about 0.5 to about 10 μm . The Ni-Fe binder represents from about 3% to about 20% by weight of the matrix.

US 5,773,735 discloses a cemented tungsten carbide body with a binder phase selected from the group
35

Fe, Ni, and Co. The average WC grain size is at most 0.5 μm and the material is free of grain growth inhibitors.

In US 6,024,776 cemented carbides having a Co-Ni-Fe-binder are described. The Co-Ni-Fe-binder is
5 unique in that even when subjected to plastic deformation, the binder substantially maintains its face centered cubic crystal structure and avoids stress and/or strain induced phase transformations.

WO 99/59755 relates to a method for producing
10 metal and alloy powders containing at least one of the metals iron, copper, tin, cobalt, or nickel. According to the method an aqueous solution of metal salts is mixed with an aqueous carboxylic acid solution. The precipitate is then separated from the mother liquor and
15 thereafter reduced to metal.

Fig. 1 shows a scanning electron microscope image of a coating grown on a tungsten carbide based hard metal with Co binder and Fig. 2 a corresponding coating on a hard metal according to the invention.
20 Scale bars are given on the photos.

It has now surprisingly been found that inserts consisting of a tungsten carbide based hard metal with iron-nickel binder and a coating exhibits at least as good performance in machining as state-of-the-art commercial grade inserts consisting of conventional hard
25 metal with cobalt binder and a coating.

The invention relates to a coated cutting tool insert consisting of a tungsten carbide based hard metal substrate and a coating. For use in milling applications, the hard metal contains 5-15 wt-% Fe and Ni forming the binder phase, preferably 6-13 wt-%, most preferably 7-12 wt-%. For use in turning applications, the hard metal contains 4-12 wt-% Fe and Ni forming the binder phase, preferably 4.5-11 wt-%, most preferably 5-
30 10 wt-%. More particularly, the binder phase consists of
35

an alloy which has a composition of 35-65 wt-% Fe and 35-65 wt-% Ni, preferably 40-60 wt-% Fe and 40-60 wt-% Ni, most preferably 42-58 wt-% Fe and 42-58 wt-% Ni. In the sintered material, the binder phase also contains
5 minor amounts of W, C, and other elements, such as Cr, V, Zr, Hf, Ti, Ta, or Nb as a result of dissolution into the binder phase of these elements from the included carbide constituents during the sintering process. In addition, trace amounts of other elements may occur as
10 impurities. The binder phase exhibits a face centered cubic structure.

The tungsten carbide grains have a mean intercept length of about 0.4-1.0 μm , preferably 0.5-0.9 μm . These values are measured on ground and polished representative cross sections through sintered material.
15

In addition to tungsten carbide, other compounds may also be included as hard phases in the sintered material. In one preferred embodiment, cubic carbide with composition (Ti,Ta,Nb,W)C is used. In another
20 preferred embodiment, Zr and/or Hf may also be included in the cubic carbide. In the most preferred embodiment, (Ta,Nb,W)C is used. The cubic carbide is present in 0.1-8.5 wt-%, preferably 0.5-7.0 wt-%, most preferably 1.0-5.0 wt-%.

25 In addition to hard phases like tungsten carbide and cubic carbide, minor amounts (less than 1 wt-%) of chromium carbide and/or vanadium carbide may be included as grain growth inhibitor.

The total carbon concentration in a hard metal
30 according to the invention is chosen so that free carbon or eta phase is avoided.

The coating consists of single or multiple layers known in the art. In one preferred embodiment, the coating consists of an inner layer of about 2-4 μm
35 Ti(C,N) followed by a multilayer coating of about 2-4 μm

Al₂O₃ and TiN. In another preferred embodiment, the coating consists of an inner layer of at least about 2.5 μm Ti(C,N) followed by a layer of about 0.5-1.5 μm Al₂O₃ with a total coating thickness of about 3.5-6.5 μm. In a third preferred embodiment, the coating consists of an inner layer of about 3-5 μm Ti(C,N) followed by about 2-4 μm Al₂O₃. In a fourth preferred embodiment the coating consists of about 5-8 μm Ti(C,N) followed by about 4-7 μm Al₂O₃. In yet another preferred embodiment the coating consists of about 1-3 μm TiN.

In the preferred embodiments where Ti(C,N) forms the inner layer of the coating, the Ti(C,N) crystals exhibit radial growth whereas Ti(C,N) grown on a conventional hard metal with Co binder exhibits a columnar pattern (see Fig 1).

The substrate is made by conventional powder metallurgical technique. Powder constituents forming the binder phase and hard phases are mixed by milling and thereafter granulated. The granulate is then pressed to green bodies of desired shape and dimension which thereafter are sintered. The powder forming the binder phase is added as a prealloy. The sintered substrates are subsequently coated with one or more layers using known CVD, MTCVD, or PVD methods, or combinations of CVD and MTCVD methods.

Example 1

273 g of a tungsten carbide powder with grain size 0.8 μm FSSS (according to ASTM B330), doped with 0.15 wt-% vanadium carbide, were milled together with 27 g of a FeNi alloy powder (prepared according to WO 99/59755 with 48.5 wt-% Fe, 50.54 wt-% Ni, and 0.43 wt-% oxygen, with grain size 1.86 μm FSSS according to ASTM B330) and 0.3 g carbon black for 3 h in a 500 ml attritor mill, using hexane as milling liquid. After 3 h, the

balls (3 mm diameter, 2.1 kg) were separated by screening. Hexane was then separated by vacuum distillation. The resulting powder was pressed at 1500 kp/cm² and sintered under vacuum at 1450 °C for 45 min. The
 5 resulting hard metal had the following properties:

	Coercitive force	17.1 kA/m
	Density	14.57 g/cm ³
	Magnetic saturation	136 Gcm ³ /g
10	Hardness Rockwell A	92.6
	Hardness Vickers (30 kg)	1698 kg/mm ²
	Porosity (ISO 4505)	A06 B00 C00

Example 2

15 Inserts according to the invention were tested for room temperature coating adhesion against a commercial coated cemented carbide grade: Seco T250M, with a substrate consisting of WC, 10.2 wt-% Co, and 1.5 wt-% Ta+Nb (in cubic carbide). The T250M substrate material
 20 was obtained by pressing powder intended for the standard production of this grade. The powder contained PEG (polyethylene glycol) as pressing aid. Pressing was made uniaxially at 1750 kp/cm². Sintering was made in a lab size sinterHIP unit with a maximum temperature of 1430
 25 °C at 30 bar Ar pressure during 30 minutes. Coating was made with CVD. The coating consisted of a 2-4 µm inner layer of Ti(C,N) and a 2-4 µm multilayer of Al₂O₃ and TiN.

Inserts according to the invention had the same
 30 composition and coating with the exception that the Co binder phase was replaced by the same volume of a Fe + Ni 50/50 (by weight) alloy. The desired composition was obtained by mixing powders as follows: 3550 g WC with a grain size (Fisher, milled according to ASTM) of 2.3 ±
 35 0.3 µm, 383 g Fe-Ni as mentioned above, 64.44 g TaC/NbC (carbide weight ratio 90/10) and 2.26 g carbon black. As

pressing aid, 80 g PEG 3400 was added. Milling was made in a lab-size ball mill with 12 kg cemented carbide balls with maximum 8.5 mm diameter and 800 cm³ liquid obtained by diluting 7 dm³ ethanol to 8 dm³ with deionized water. The mill rotated with 44 rev/min for 60 h. The slurry thus obtained was spray dried into a granulate. Pressing, sintering, and coating was made as for the commercial grade inserts.

The insert geometry was SNUN120412.

Testing was made with a standard laboratory equipment (Revetest). In this test, a diamond indenter is pressed perpendicularly into the insert rake face with a defined force. The insert is then moved 6 mm at a defined velocity parallel with the rake face. Thus, a scratch mark is formed by the indenter. These marks are then inspected in a stereo lens in order to reveal whether they are restricted to the coating or penetrate into the substrate. If a large force is needed to totally remove the coating, then its adhesion to the substrate is good.

Testing was made with three commercial grade inserts and three inserts according to the invention. The indenter force was 60 and 70 newton. The commercial grade insert showed coating loss after 1.2 mm scratch length at 60 N, 0.3 mm at 70 N, and 0.6 mm at 60 N. The insert according to the invention showed coating loss at 70 N (whole length), after 1.5 mm at 60 N, and 2.3 mm at 60 N.

Example 3

Inserts according to the invention were tested for machining performance in turning. The work piece material was an SS1672 (corresponds to W-nr 1.1191, DIN Ck45, or AISI/SAE 1045) cylindrical bar. Cutting speed was 250 m/min, feed 0.4 mm/rev and depth of cut 2.5 mm.

The tool cutting edge angle was 75° and no coolant was applied. As reference grade, Seco T250M as described above was used. Reference grade inserts and inserts according to the invention were obtained as described under Example 1 above.

The insert geometry was SNUN120412 with an edge hone of about 35-40 µm.

Four edges each of inserts according to the invention and reference grade inserts were tested. Of these four edges, two were run four minutes and two were run six minutes.

Reference grade edges run four minutes showed flank wear values of 0.08 and 0.06 mm. Corresponding values for inserts according to the invention were 0.07 and 0.06 mm. All edges run six minutes showed flank wear values of 0.07 mm. Loss of coating occurred only in immediate conjunction with plastic deformation close to the edges.

20 Example 4

Inserts according to the invention were tested in turning against the commercial grade Seco TP400 which has substrate and coating identical to T250M as described above. Reference grade inserts were ready-made products intended for sale. Inserts according to the invention were pressed, sintered, and coated following the procedure described under Example 1 above.

Insert geometry was CNMG120408 and tool cutting edge angle 95°.

Turning was made in a cylindrical bar of SS2343 (corresponds to W-nr 1.4436, DIN X5 CrNiMo 17 13 3, or AISI/SAE 316) at a cutting speed of 180 m/min, feed 0.3 mm/rev and depth of cut 1.5 mm. No coolant was applied. Machining was made in cycles with 15 s cutting followed by 15 s rest in order to cause temperature variations in

the cutting tool. Three cutting edges each of inserts according to the invention and reference grade inserts were tested. The two sets of inserts were tested in pairs with total testing times (cutting + cooling) of 10, 12, and 14 min, respectively.

The resulting wear was dominated by chipping along the edge line and notch wear. Within all three pairs of inserts, the overall wear was about equal on comparison.

10

Example 5

Inserts according to the invention, with 6.0 wt-% Fe and Ni in 50/50 weight proportion forming the binder phase, were tested in turning against the commercial grade Seco TX150. This grade has 6.0 wt-% Co in the substrate and a coating consisting of an inner layer of at least 5 μm Ti(C,N) followed by 1.0-2.5 μm Al_2O_3 with a total thickness of 9-14 μm . Reference inserts were ready-made products intended for sale. Inserts according to the invention were made following the procedure described under Example 1 above by mixing and granulating powder with appropriate proportions of constituents, followed by pressing, sintering, and coating.

Insert geometry was CNMA120408 and tool cutting edge angle 95°.

Turning was made in a cylindrical bar of SS0727 (corresponds to DIN GGG 50 or AISI/SAE 80-55-06) at a cutting speed of 140 m/min, feed 0.4 mm/rev and depth of cut 2.0 mm. No coolant was applied. The two varieties of inserts were tested in pairs with 5 minutes each of machining between measurements of wear.

The dominant wear mode was flank wear. Three edges per variety were tested until a flank wear of 0.3 mm was obtained. Reference grade inserts reached this wear after (interpolated values) 16.6, 17.5, and 17.9

minutes. Corresponding values for inserts according to the invention were 17.3, 16.9, and 18.3 minutes.

Example 6

5 Inserts according to the invention were tested in milling against Seco T250M as described above. Reference grade inserts and inserts according to the invention were obtained as described under Example 1 above.

10 The insert geometry was SNUN120412 with an edge hone of about 35-40 μm .

The inserts were tested in a face milling operation in SS2244 (corresponds to W-nr 1.7225, DIN 42CrMo4, or AISI/SAE 4140) with a feed of 0.2 mm/tooth and depth of cut 2.5 mm. The cutter body used was a Seco
15 220.74-0125. The cutting speed was 200 m/min with coolant and 300 m/min without coolant. At each cutting speed, three edges per variety were used. The length of cut for each edge was 2400 mm.

20 The measured flank wear amounted to about 0.1 mm for both varieties at 200 and 300 m/min cutting speed.

At 200 m/min cutting speed with coolant, the commercial grade inserts showed 2 to 3 comb cracks across the edge lines whereas the test grade showed 0 to
25 1. At 300 m/min cutting speed without coolant, the commercial grade inserts showed 4 to 5 comb cracks whereas the test grade showed 2 to 3.

At 200 m/min cutting speed and coolant, no crater wear could be detected on any insert. At 300 m/min
30 cutting speed without coolant, the crater wear on the commercial grade inserts could be inscribed within surface areas of 1.9 x 0.2 mm, 2.2 x 0.3 mm, and 2.5 x 0.3 mm, respectively. Corresponding values for inserts made according to the invention were 1.9 x 0.1, 1.7 x 0.1,
35 and 2.2 x 0.3 mm, respectively.

The above examples show that a coated cutting tool insert can be manufactured from tungsten carbide based hard metal with an iron-nickel based binder. The performance of such an insert is at least as good as a
5 corresponding state-of-the-art commercial grade insert with Co-based binder.

Claims

1. Cutting tool insert consisting of a tungsten carbide based hard metal substrate and a coating
c h a r a c t e r i s e d in that the hard metal has a
5 binder phase consisting of 35-65 wt-% Fe and rest Ni in
addition to dissolved elements.
2. Cutting tool insert according to the pre-
vious claim c h a r a c t e r i s e d in that said
binder phase has a face centered cubic structure.
- 10 3. Cutting tool insert according to any of the
previous claims c h a r a c t e r i s e d in that said
binder phase consists of 40-60 wt-% Fe and rest Ni in
addition to dissolved elements.
4. Cutting tool insert according to any of the
15 previous claims c h a r a c t e r i s e d in that said
hard metal contains 4-15 wt-% binder phase.
5. Cutting tool insert according to any of the
previous claims c h a r a c t e r i s e d in that said
coating consists of an inner layer of about 2-4 μm
20 Ti(C,N) followed by a multilayer of about 2-4 μm Al_2O_3
and TiN.

1/1

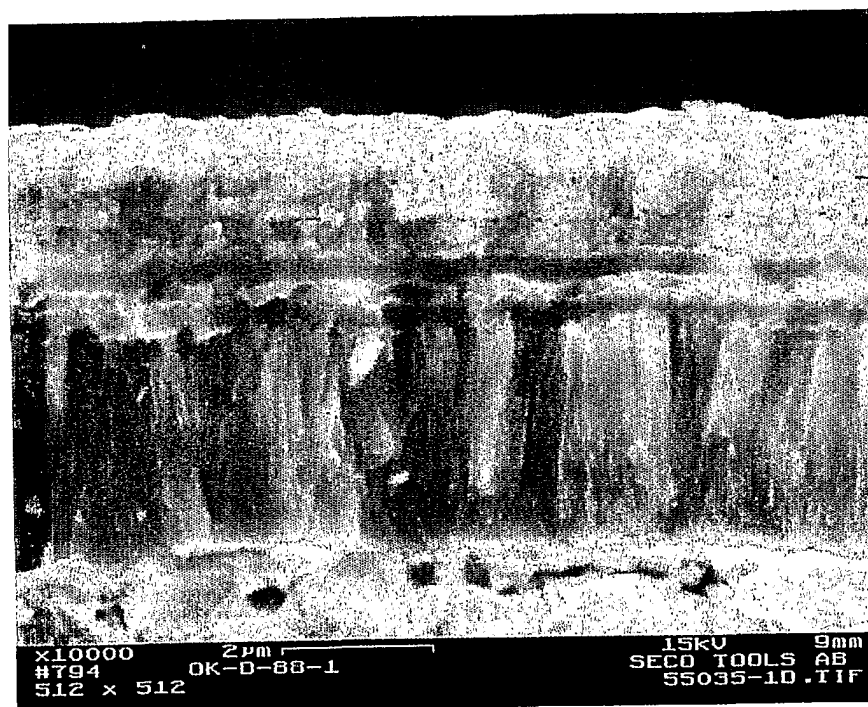


Fig. 1

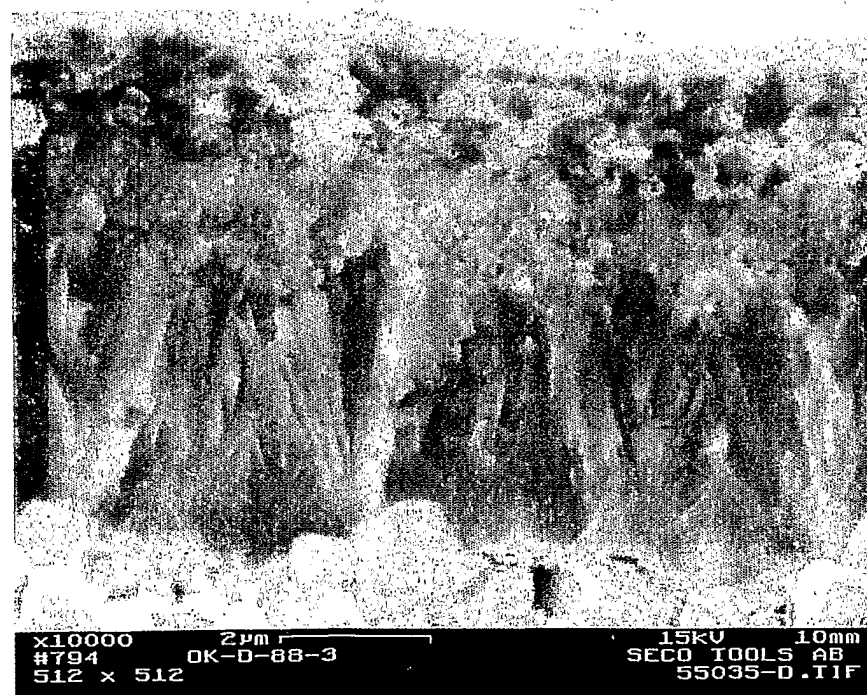


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 01/02690

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: C22C 29/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: C22C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PAJ, EPO-INTERNAL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0085125 A1 (GENERAL ELECTRIC COMPANY), 10 August 1983 (10.08.83) --	1-45
A	DE 29617040 U1 (UNITED HARDMETAL GMBH), 6 March 1997 (06.03.97) --	1-45
A	JP 8-225878 A (TOSHIBA TUNGALLOY KK), 3 Sept 1996 (03.09.96) --	1-45

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

3 April 2002

Date of mailing of the international search report

05-04-2002

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Nils Engnell/MP

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 01/02690

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	File WPI/Derwent accession no. 1996-451140, Toshiba Tungalloy KK, "Iron-base tough-hardening cemented carbide - made by sintering green compact of powdery mixt. comprising tungsten - and iron - contg. substance at elevated temp. in vacuum or non-oxidising atmos." JP 8225878 A, 1996-09-03, DW199645, abstract --	1-5
A	JP 2-15159 A (MITSUBISHI METAL CORP), 18 January 1990 (18.01.90) --	1-45
A	File WPI/Derwent accession no. 1990-062838, Mitsubishi Metal Corp, "Mfg. throwaway coated cerment cutting tool - using coating of titanium carbide etc. which is ion implated with nitrogen etc." JP 2015159 A, 1990-01-18 DW199009, abstract --	1-45
A	JP 61-261454 A (HITACHI METALS LTD), 19 November 1986 (19.11.86) --	1-45
A	File WPI/Derwent accession no. 1987-002692, Hitachi Metals Ltd. "Hard alloy for dot printer wires - consists of hard phase of tungsten and vanadium carbide (s) and binder phase of iron and nickel." JP 61261454 A, 1986-11-19, DW198701, abstract -- -----	1-45

INTERNATIONAL SEARCH REPORT

Information on patent family members

28/01/02

International application No.

PCT/SE 01/02690

Patent document cited in search report				Publication date		Patent family member(s)		Publication date	
EP	0085125	A1	10/08/83	SE	0085125	T3			
				AT	21939	T		15/09/86	
				AU	553700	B		24/07/86	
				AU	7873181	A		30/06/83	
				CA	1194893	A		08/10/85	
				DE	3272955	D		00/00/00	
				JP	58110655	A		01/07/83	
				ZA	8108744	A		30/12/82	

DE	29617040	U1	06/03/97	AT	2318	U		25/08/98	

JP	8-225878	A	03/09/96	NONE					

JP	2-15159	A	18/01/90	NONE					

JP	61-261454	A	19/11/86	NONE					
