

CONVENTION

AUSTRALIA

Patents Act 1990

660785

**REQUEST FOR A STANDARD PATENT
AND NOTICE OF ENTITLEMENT**

The Applicant identified below requests the grant of a patent to the nominated person identified below for an invention described in the accompanying standard complete patent specification.

[70,71]Applicant and Nominated Person:

McPherson's Limited

Level 43, Rialto, 525 Collins Street, Melbourne, Victoria, 3000, AUSTRALIA

[54]Invention Title:

KNIFE BLADES

[72]Actual Inventors:

David Mark Williams

Jess Cawley

[74]Address for Service:

PHILLIPS ORMONDE & FITZPATRICK

367 Collins Street

Melbourne 3000 AUSTRALIA

[31,33,32]

Details of basic application(s):-

5208952.3 UNITED KINGDOM

GB 24 April 1992

Applicant states the following:

1. The nominated person is the assignee of the actual inventor(s)
2. The nominated person is
 - the applicant
 - ~~- the assignee of the applicant~~
 - ~~--authorised to make this application by the applicant~~of the basic application.
3. The basic application(s) was/were the first made in a convention country in respect of the invention.

The nominated person is not an opponent or eligible person described in Section 33-36 of the Act.

23 April 1993

McPherson's Limited

By PHILLIPS ORMONDE & FITZPATRICK

Patent Attorneys

By

Our Ref : 326208

5999q

M 045042 230493

David B Fitzpatrick



AU9337092

(12) PATENT ABRIDGMENT (11) Document No. AU-B-37092/93
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 660785

- (54) Title
KNIFE BLADES
- International Patent Classification(s)
(51)⁵ **B26B 009/00**
- (21) Application No. : **37092/93** (22) Application Date : **23.04.93**
- (30) Priority Data
- | | | |
|----------------|-----------------|--------------------------|
| (31) Number | (32) Date | (33) Country |
| 9208952 | 24.04.92 | GB UNITED KINGDOM |
- (43) Publication Date : **28.10.93**
- (44) Publication Date of Accepted Application : **06.07.95**
- (71) Applicant(s)
MCPHERSON'S LIMITED
- (72) Inventor(s)
DAVID MARK WILLIAMS; JESS CAWLEY
- (74) Attorney or Agent
PHILLIPS ORMONDE & FITZPATRICK , 367 Collins Street, MELBOURNE VIC 3000
- (56) Prior Art Documents
AU 647614 15147/92 B26B 9/00
US 4450205
DE 2512001
- (57) Claim

1. A knife blade having a V-shaped cutting edge formed on a blank and arranged such that the tip of the cutting edge lies substantially centrally between opposite sides of the blank, characterised in that a coating is applied to one side face of that part of said blank which forms the V-shaped cutting edge, said coating being of a material harder than the material of the blank, said tip of the cutting edge being formed wholly of the harder material, and the coating having a columnar crystal structure in which the columnar crystals extend away from said side face to an outer surface of the coating which is remote from said side face.

AUSTRALIA

Patents Act

660785

**COMPLETE SPECIFICATION
(ORIGINAL)**

Application Number: Class Int. Class
Lodged:

Complete Specification Lodged:
Accepted:
Published:

Priority

Related Art:

Name of Applicant:

McPherson's Limited

Actual Inventor(s):

David Mark Williams
Jess Cawley

Address for Service:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Invention Title:

KNIFE BLADES

Our Ref : 326208
POF Code: 98875/1693

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

KNIFE BLADES

This invention relates to knife blades and to a method of their production.

It has long been known that the surface hardness and wear resistant properties of metal objects can be enhanced by the provision of a hard surface on the metal objects. Thus it is known to generate a carbide and/or nitride enriched or transformed surface, by an appropriate heat treatment, and also known to provide a hard surface coating such as by carburising or nitriding, chemical or physical vapour deposition, electroplating, plasma arc spraying, and other equivalent processes.

When considering a knife blade, providing a hard surface particularly at the cutting edge, it is difficult to put into practice by either of the general techniques outlined above, as a consequence of the very thin sections of blank ordinarily employed in knife blade construction, and the acute angle to be found at the cutting tip. To take a finished enriched or transformed hard surface layer, there is the inevitable depletion of carbon from the body of the blade, leaving a blade of insufficient strength. With surface coatings and with a finished blade the relatively small included angle formed at the cutting edge is such that there is an inevitable build-up of coating material at the actual cutting tip and which has a major adverse effect on the sharpness of the blade.

Attempts have been made hitherto to apply a hardened surface to a knife blade such as by a diffusion heat treatment

and by vapour deposition of carbides or nitrides. In one known form of construction there has been the treatment of a tapered blank followed by a single wetting or grinding to form a chisel cutting edge and to put the cutting edge in line with one side face of the blank. When subjected to recognised edge testing procedures, such knives have demonstrated no significant improvement in their cutting characteristics in comparison with untreated blades of the same configuration.

The object of the present invention is to provide a knife blade with a cutting edge of a harder material than the body of the blade, and a method of producing knife blades with such harder edges and which display a major improvement in cutting performance in comparison with blades known hitherto.

According to the present invention, a knife blade comprises a v-shaped cutting edge formed on a blank and such that the cutting tip lies substantially centrally of the width of the blank, one side face of the v-shaped cutting edge being provided with a coating of a material harder than the material of the blank, the actual cutting edge being formed wholly of the harder material, the coating having a columnar crystal structure that extends away from the surface of the blank and to the outer face of the coating.

According to a further feature of the invention, a knife blade comprises a v-shaped cutting edge formed on a blank and such that the cutting tip lies substantially centrally of the width of the blank, one side face of the v-shaped cutting edge being provided with a coating of a carbonitride, the actual cutting edge being formed wholly of the

carbo-nitride material, and the carbo-nitride material displaying a columnar crystal structure that extends away from the surface of the blank and to the outer face of the carbo-nitride coating.

5 To ensure the production of the required columnar crystal structure within the coating, it is preferred that during the application of the coating, the coating process is controlled to prevent the temperature of the blank exceeding its tempering temperature, with the additional advantage that there is avoided the negating of the temper of the body material. Thus, the temperature of the blank should be held below 480°C and preferably below 400°C.

10
15
20 Preferably, the carbo-nitride material is titanium carbo-nitride or chromium carbo-nitride. The coating may be applied by thermal evaporation physical vapour deposition either in the form of electron beam physical vapour deposition, or of arc physical vapour deposition with the arc either random or steered. Equally possible is the employment of sputter physical vapour deposition either in the form of magnetron sputtering or arc bond sputtering.

25 All of these physical vapour deposition techniques use reactive gas control which allows a plasma generated in a vacuum chamber in which the blade is located to combine with nitrogen and carbon-carrying gases and to result in the deposition of a metallic nitride and/or metallic carbo-nitride coating on the substrate formed by the blade.

The employment of chemical vapour deposition to provide a metallic ceramic coating may also be possible.

To ensure that the whole of the cutting tip is formed by the applied coating, it is preferred to grind a first face of a v-shaped cutting edge and to apply the coating material to the blank, and followed by the grinding of the second face of the v-shaped cutting edge. Preferably, the side faces of a partly-ground blank are masked to limit the application of the coating to the first ground face.

As a consequence of creating a coating of a columnar crystal structure to one side of the v-shaped cutting edge, whilst on the one hand there is the provision of body material directly behind the cutting tip formed wholly from the coating material, and as a consequence of which considerable support is provided to the otherwise somewhat brittle coating material, there is on the other hand the provision of an uncoated second face to the v-shaped cutting edge. Therefore, during normal usage of the knife blade, it displays a considerable initial sharpness directly resulting from the whole of the cutting tip being formed from hard material and there is wear on the uncoated face which whilst to a degree not readily perceptible to the eye, is sufficient to weaken the body material immediately behind the cutting tip. The fact that the coating material is of a columnar crystal structure, has the result that a series of fault lines are provided through the depth of the coating at the interface between adjacent columnar crystals. This, plus the minute degree of wear on the uncoated surface of the cutting edge during use, causes the exposure of such a fault line and the breaking away from the coating of the outermost columnar

crystals. Consequently, and during use of the knife, there is the effective regeneration of the cutting edge, with the effect of that in providing not only a considerable initial sharpness but also the maintenance of the cutting edge to a degree that cannot be matched by any knife known hitherto.

Preferably, the material of the blank is a martensitic stainless steel having a carbon content in the range 0.16% to 0.36%, and further preferably has a chromium content of 12% to 14%. Whilst the surface finish of the blank is not critical, it is highly desirable that it is not highly polished and not overly rough. It is therefore preferred that the surface finish on the blank is in the range 0.1RA to 2.0RA, with a preferred hardness in the range 46-54 HRC.

For optimum performance characteristics, the depth of the thickness of the applied hard surface coating should be in the range 2.0 μm to 20 μm , and preferably in the range 8 μm to 15 μm .

Whilst of necessity the cutting edge formed on the blank must be a discrete vee cutting edge with the cutting tip lying substantially central of the blank width, the blank can be a parallel-sided blank or can of itself be tapered to one or to both sides.

The cutting edge itself can be formed by flat grinding or plunge grinding of a first face prior to the effecting of the coating and flat or plunge grinding the second face subsequent to the coating. However, other edge forms can be provided with enhanced performance within the present invention. Thus, the two grinding stages can be such as to

provide a hollow ground edge. Equally the edge form can be the first grinding of a face of the vee shaped cutting edge with serrations, scallops, or combinations therefore and the flat or plunge grinding of the second face.

5 Particularly with a plunge or flat ground edge form, it is preferred that the vee shaped cutting edge has an included angle of 14° to 30° . Further preferably the included angle lies between 16° and 22° and still further preferably the included angle lies between 18° and 20° .

10 In the form of construction where a first face of the vee shaped cutting edge is ground with serrations, it is preferred to provide between 25 and 50 serrations per inch and further preferably to provide 40 serrations per inch. Desirably, the included angle of the serrations lies between 80° and 100° , preferably 90° . In the form of construction where a first face of the vee shaped cutting edge is ground with scallops, the scallops may have a radius in the range 0.1" , preferably 0.16" to 0.75" and may have a pitch in the range 1.0 to 10 and preferably 1 to 5 T.P.I.

15 An essential advantage of the invention in addition to the provision of considerably enhanced performance characteristics in comparison with conventional blades lies in the fact that no subsequent process beyond the second grinding stage is required save perhaps for a final polishing.

25 The invention will now be further discussed with reference to the accompanying drawings, in which:-

Figure 1 is a side elevation of a knife blade in accordance with the invention;

Figure 2 is a section on the line 2-2 of Figure 1; and

Figure 3 is a block diagram representation of the cutting performances of three knives subjected to the identical test as is detailed below.

5 The three knives were subjected to the same recognised edge test where a block of 150 cards, each 0.3mm thick, were provided in a holder, a knife blade held in position with its edge resting on the lowermost card and the card holder provided with a static load of 30N and the knife reciprocated at a constant rate of 50mm/sec over a 50mm stroke length. The number of strokes taken to cut through a block of cards was noted and the block replaced when completely cut through, the test being treated as ended when more than 30 strokes were required to cut through a block of cards.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995

Of the three knives, Blade A of Figure 1 was a utility knife constructed in accordance with British Patent No. 2108887, Blade B was a utility knife constructed in accordance with European Patent No. 0220362, and Blade C was a utility knife constructed in accordance with the invention. Each of Blades A, B, and C, were formed from a parallel-sided blank with a substantially centrally located v-shaped cutting edge, plane ground to one side and provided with serrations and scallops to the other side. The blade of the invention, Blade C, was prepared by first grinding one side 1 of the generally v-shaped edge of a knife blade 2, following which the coating 3 of the invention was applied, and followed by the grinding of the second face 4 of the cutting edge to form at the cutting tip 5 a cutting edge formed wholly of the coating

material. The coating was formed by a magnetron sputtering technique as is of itself known, but with the temperature within the chamber held at below the tempering temperature of the material of the blade blank i.e. at approximately 350°C and hence below the conventional temperatures at which magnetron sputtering is effected for its other uses, to guarantee the creation of a columnar crystal structure in the material coated on the blade edge. The reactive gases were carbon carrying acetylene and nitrogen and the target in the chamber was titanium and whereby a titanium carbo-nitride coating was formed on the blade edge.

The purpose for the selection of Blades A and B respectively made in accordance with British Patent No. 2108887 and European Patent No. 0220362, is that they constitute edge constructions with better edge retention characteristics than other edge constructions known in the art.

As is shown by Figure 3, Blade A cut a total of 19,500 cards up to the suspension of the test, Blade B cut a total of 31,800 cards and Blade C, in accordance with the invention, a total of 324,450 cards, evidencing the provision of edge retention characteristics by the invention massively improved over the edge retention characteristics of the blades of the prior art.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A knife blade having a V-shaped cutting edge formed on a blank and arranged such that the tip of the cutting edge lies substantially centrally between opposite sides of the blank, characterised in that a coating is applied
5 to one side face of that part of said blank which forms the V-shaped cutting edge, said coating being of a material harder than the material of the blank, said tip of the cutting edge being formed wholly of the harder material, and the coating having a columnar crystal structure in which the columnar crystals extend away from said side face to an outer surface of the coating which is
10 remote from said side face.
2. A knife blade as claimed in claim 1, characterised in that said coating material is a carbo-nitride.
3. A knife blade as in claim 2, characterised in that the carbo-nitride material is titanium carbo-nitride.
- 15 4. A knife blade as in claim 2, characterised in that the carbo-nitride material is chromium carbo-nitride.
5. A method of producing a knife blade from a blank having a V-shaped cutting edge such that the tip of the cutting edge lies substantially centrally between opposite sides of the blank, including the steps of applying a coating
20 by a process of vapour deposition to one side face of that part of said blank which forms the V-shaped cutting edge, said coating being of a material harder than the material of the blank, forming said cutting edge tip wholly of said harder material, and controlling said deposition process so that the coating has a columnar crystal structure in which the columnar crystals extend away from
25 said side face to an outer surface of the coating which is remote from said side face.
6. A method in accordance with claim 5, characterised in that the coating of a harder material is applied by sputter physical vapour deposition.
7. A method in accordance with claim 5, characterised in that the coating
30 of a harder material is applied by chemical vapour deposition.
8. A method as in any one of claims 5 to 7, characterised in that the temperature of the deposition process is held below the tempering temperature



of the material of the knife blade.

9. A method as in claim 8, characterised in that the temperature of the deposition process is held below 480°C.

10. A knife blade as in any one of claims 1 to 4, characterised in that the material of the blank is a martensitic stainless steel having a carbon content in the range 0.16% to 0.36%.

11. A knife blade as in claim 10, characterised in that the material of the blank has a chromium content of 12% to 14%.

12. A knife blade as in claim 10 or claim 11, characterised in that the surface finish on the blank is in the range 0.1RA to 2.0RA.

13. A knife blade as in any one of claims 1 to 4 and 10 to 12, characterised in that the depth of the thickness of the applied coating of a harder material is in the range 2.0µm to 20µm.

14. A knife blade as in claim 13, characterised in that the depth of the thickness of the applied coating is in the range 8µm to 15µm.

15. A knife blade substantially as herein particularly described with reference to what is shown in the accompanying drawings.

16. A method of producing a knife blade substantially as herein particularly described with reference to what is shown in the accompanying drawings.

DATED: 1 May, 1995

PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

David B Fitzpatrick

McPHERSON'S LIMITED



ABSTRACT

The invention relates to knife blades and their methods of production. Whilst it has long been known that the surface hardness and wear resistant properties of metal objects can be enhanced by a hard surface provided on them, the effective employment of this in relation to knife blades has proved difficult to achieve. The object of the invention is to provide a knife blade with a cutting edge of a harder material than the body of the blade, and the objective is met by a construction comprising a v-shaped cutting edge formed on a blank and such that the cutting tip lies substantially centrally of the width of the blank characterised in that one side face of the v-shaped cutting edge is provided with a coating of a material harder than the material of the blank, the actual cutting edge being formed wholly of the harder material, and the coating having a columnar crystal structure that extends away from the surface of the blank and to the outer face of the coating.

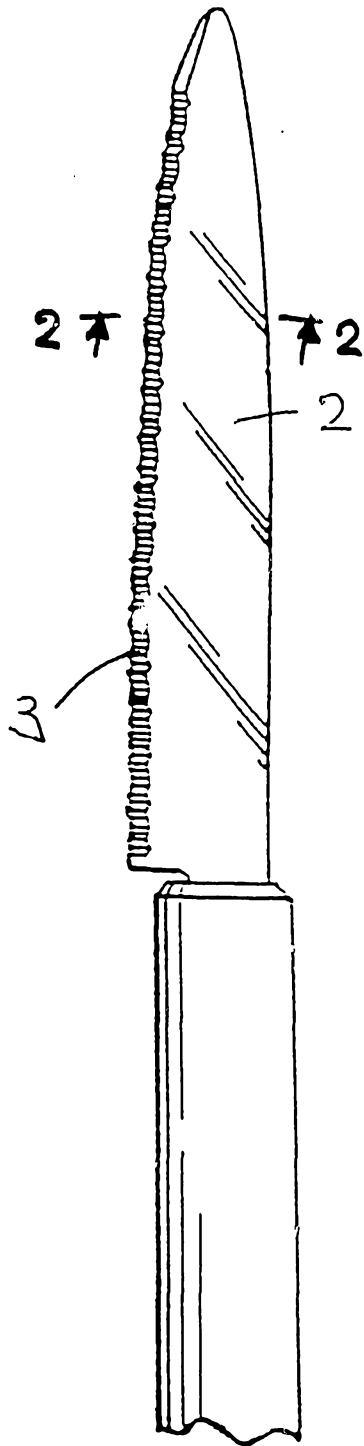


Fig. 1

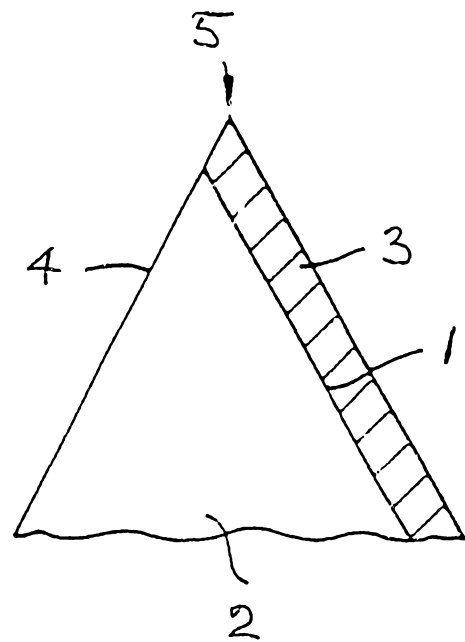


Fig. 2

23 04 93 37092.

COMPARISON OF BLADES A,B and C

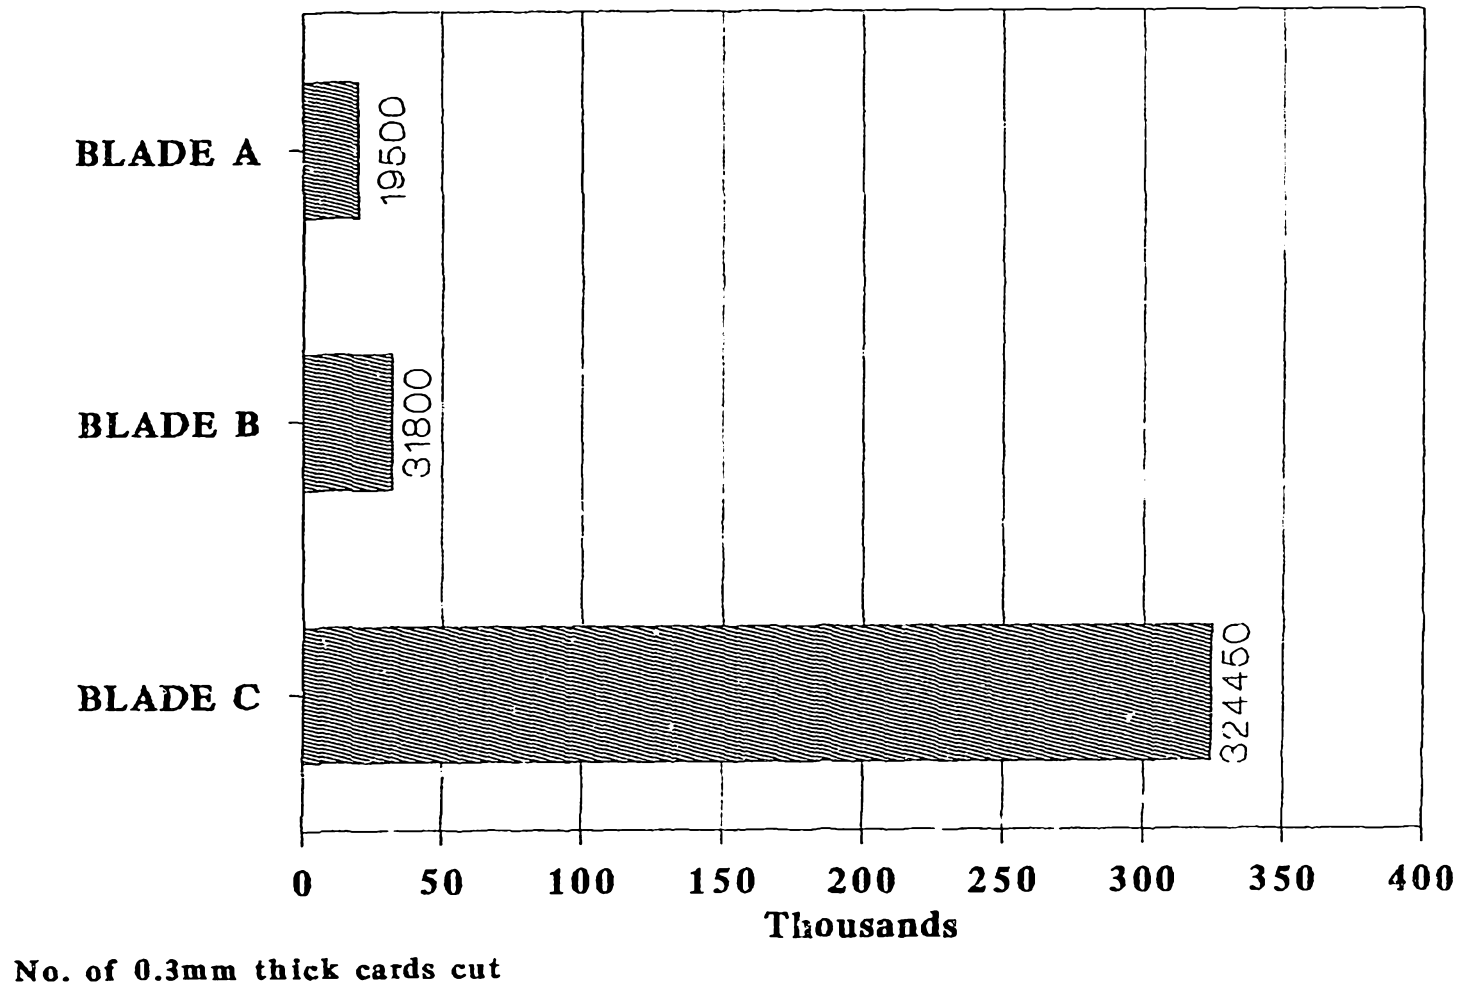


Fig. 3