



(11) **EP 2 687 197 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
27.03.2019 Bulletin 2019/13

(51) Int Cl.:
A61H 3/02 (2006.01)

(21) Application number: **13177118.0**

(22) Date of filing: **18.07.2013**

(54) **Adjustable cane with memory function**

Verstellbarer Stock mit Speicherfunktion

Canne réglable avec fonction de mémoire

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
22.01.2014 Bulletin 2014/04

(73) Proprietors:
• **Footwear & Recreation Technology
Research Institute
Taichung City 407 (TW)**
• **Lin, Ching-Ming
Taichung City 407 (TW)**

(72) Inventors:
• **Lin, Ching-Ming
TAICHUNG CITY 407 (TW)**

• **Huang, Szu-Yuan
TAICHUNG CITY 407 (TW)**
• **Tseng, Yu-Zen
TAICHUNG CITY 407 (TW)**
• **Chen, Yu-Ju
TAICHUNG CITY 407 (TW)**

(74) Representative: **Cabinet Chaillot
16/20, avenue de l'Agent Sarre
B.P. 74
92703 Colombes Cedex (FR)**

(56) References cited:
**EP-A2- 0 236 708 DE-A1- 2 819 717
JP-U- 3 185 401 TW-U- M 448 169
US-A- 4 616 668**

EP 2 687 197 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] This invention relates generally to an adjustable cane, and more particularly, to an adjustable cane having a memory function that allows a user to set a desired length. Therefore, a user does not need to adjust the length every single time after folding.

2. Description of the Related Art

[0002] Canes, such as crutches, are well known for helping a user to walk and support the body in an erect position. A conventional cane assembly 900, as shown in FIG. 12, comprises an upper handle portion 91, secured to an elongated tubular, hollow upper body portion 92, telescopically mounted within an elongated tubular, hollow lower body portion 93. A plurality of openings 94 are provided in the elongated hollow lower body portion 93 whereby a spring-loaded button 95, which is movably secured interiorly of the hollow inner portion of upper body portion 92, can be pressed inwardly to allow the lower body portion 93 to move with respect to the upper body portion 92, and the button 95 is locked at the next aligned openings 94. In this manner the overall length of the cane 900 may be easily adjusted to accommodate different sized people.

[0003] To solve the problem, Taiwan Patent No. M448169 U discloses a cane according to the preamble of claim 1. Specifically, the control mechanism includes a carrier, a first locking component movably seated in the carrier, a second locking component movably seated in the first locking component, and two springs respectively provided for biasing the first and second components in such a way that the control mechanism is movable among several positions for adjustment of the cane. In a first position, the first locking component of the control mechanism is positioned in a selected one of the holes in the extension rod while the second component of the control mechanism is engaged in the first aperture in the tube. At this time, the tube, the extension rod and the control mechanism are prohibited from moving axially with respect to one another. In a second position, the second locking component of the control mechanism is moved with respect to the first locking component to be withdrawn from the first aperture in the tube. At this time, the extension rod and the control mechanism together are allowed to move axially with respect to the tube. In a third position, the first locking component is disengaged with one end from the selected hole in the tube but engaged with the other end in the second aperture in the tube. As such, the extension rod is allowed to move axially with respect to the control mechanism and the tube to determine a desired total length of the cane which will be so-called memorized length of the cane for next use.

[0004] However, many people who use canes are afflicted with some type of ailment or have other memory problems that make it difficult for these people to adjust the overall length of a cane. For example, when the cane is extended (from its retracted condition) for use, senile people may not remember how to properly adjust the cane to the proper height. Thus, it often takes much time for them just to adjust the length of the cane to fit their needs. Moreover, they will have to face the same problem from time to time as long as the cane is retracted back to its shortest length (for storage).

SUMMARY OF THE INVENTION

[0005] To solve the problems mentioned above, the objective of the present invention is to provide a streamlined, adjustable cane with memory function. It allows a user to set a desired length so the cane can be extended directly to the desired length whenever is needed.

[0006] Specifically, the cane is as defined in claim 1 and thus includes a tube, an extend rod telescopically mounted within one end of the tube, and a control mechanism disposed in between an inner wall of the tube and an outer wall of the extension rod. The tube defines a first aperture and a second aperture spaced in a side thereof. The extension rod defines a plurality of holes in a side thereof. The control mechanism is movable among positions. While the control mechanism is in the first position, the control mechanism is positioned in a selected one of the holes in the extension rod and exposed in the first aperture in the tube, and the tube, the extension rod and the control mechanism are prohibited from moving axially with respect to one another. As such, the cane can be used to aid walking if it is extended in a proper height. While the control mechanism is in the second position, the extension rod and the control mechanism together are allowed to move axially with respect to the tube, which means the cane is allowed to be retracted back to its shortest length for storage or be moved to the third position for setting. While the control mechanism is in the third position, the control mechanism is exposed in the second aperture in the tube, and the extension rod is allowed to move axially with respect to the control mechanism and the tube. At this time, the cane enters a memory change mode where the extension rod is adjustable to have the control mechanism engaged in a new selected one of the holes in the extension rod in order to cause a change in the total length of cane. This ensures that next time the cane is extended (from its retracted condition), the cane is extended to the changed total length as desired.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007]

FIG. 1 is a perspective view of a cane in accordance with the preferred embodiment of the present inven-

tion;

FIG. 2 is another perspective view of the cane shown in FIG. 1, taken from another angle;

FIG. 3 is a partial exploded perspective view of the cane shown in FIG. 1;

FIGS. 4-10 are partial enlarged cross-sectional views of the cane shown in FIG. 1, showing the process of adjusting the cane;

FIG. 11 illustrates that the cane in FIG. 1 is extended to a desired length; and

FIG. 12 is a prior art.

DETAILED DESCRIPTION OF EMBODIMENTS

[0008] Referring to the drawings to FIGS. 1-11, a cane 100 is provided in accordance with the preferred embodiment of the present invention. As shown in FIG. 1 or 2, the cane 100 is an underarm auxiliary crutch and generally includes a tube 11, an upper extension rod 12 telescopically mounted within an upper end of the tube 11, a lower extension rod 13 telescopically mounted within a lower end of the tube 11, an underarm support 6 laterally extending from a top end of the upper extension rod 12, a handle 5 laterally extending from a side of the tube 11 and a rubber tip 7 mounted to a bottom end of the lower extension rod 13.

[0009] Referring to FIG. 3, the tube 11 defines a first aperture 111 and a second aperture 112 spaced a distance apart in an upper side thereof. The second aperture 112 of the tube 11 is larger in diameter than the first aperture 111 of the tube 11. Preferably, a first flexible cap 41 is sized and shaped to cover the first aperture 111 in the tube 11, and a second flexible cap 42 is sized and shaped to cover the second aperture 112 in the tube 11 for protection. The upper extension rod 12 defines a plurality of holes 14 in a side thereof.

[0010] Moreover, the cane 100 further includes a control mechanism 2 for controlling movement of the tube 11 and the extension rod 12. There are an identical control mechanism and other two apertures presented at the other end of the tube 11. As it is identical, only the upper control mechanism 2 is described.

[0011] As shown in FIG. 3, the control mechanism 2 includes a carrier 21, a button 22 and a spring 23. As shown in FIG. 4, the carrier 21 is slidably sandwiched between the inner wall of the tube 11 and the outer wall of the extension rod 12. The button 22 is seated in a recess 211 of the carrier 21 and includes a head 222 and a pin 221. The head 222 of the button 22 is provided to be at least partly received in the first aperture 112 in the tube 11. The pin 221 has one end joined to the head 222, and the other end extends through a transverse bore 212 in a bottom of the recess 211 of the carrier 21 to be engaged in a selected one 14a of the holes in the extension rod 12. When the cane 100 is in a retracted position, as depicted in FIG. 4, the pin 221 of the button 22 passes through the transverse bore 212 of the carrier 21 and into the hole 14a of the extension rod 12. The spring 23 is

assembled around the pin 221 and braced in the recess 211 of the carrier 23 for normally biasing the button 22 toward the inner wall of the tube 11. In particular, the head 222 of the button 22 has a stepped shape with a first outer shoulder 223 and a second larger shoulder 224 corresponding to the first aperture 111 and the second aperture 112 in the tube 11.

[0012] In operation, the cane 100 is adjusted from the retracted position (FIG. 4), for storage, to an extended position (FIG. 5), for use. Specifically, the control mechanism 2 together with the extension rod 12 moves from a lower original position (FIG. 4) to an upper, first position (FIG. 5) where the control mechanism 2 remains positioned in the selected hole 14a in the extension rod 12 and exposed in the first aperture 111 in the tube 11. As shown in FIG. 5, when the control mechanism 2 is in the first position, the control mechanism 2 has a first end, namely the head 222, laterally engaged in the first aperture 111 in the tube 11 and a second end, namely the pin 221, laterally engaged in the selected hole 14a in the extension rod 12 such that the tube 11, the extension rod 12 and the control mechanism 2 are prohibited from moving axially with respect to one another. Specifically, the head 222 of the button 22 is partly engaged in the first aperture 111 in the tube 11 with its first outer shoulder 223 abutting against the inner wall of the tube 11. On the other hand, the pin 221 of the button 22 is engaged in the selected hole 14a in the extension rod 12. As such, the cane 100 is extended with a predetermined length and is ready to be used for walking. However, if the user is not satisfied with the length of the cane 100, the cane 100 may be further adjusted as described below.

[0013] With reference to FIG. 6, by pushing the button 22 from outside of the first flexible cap 41, as indicated by the arrow, the control mechanism 2 may be moved laterally from the first position (FIG. 5) to a second position (FIG. 6) where the first end of the control mechanism 2, namely the head 221, is withdrawn from the first aperture 111 in the tube 11 such that the extension rod 12 and the control mechanism 2 together are allowed to move axially with respect to the tube 11. That is, the control mechanism 2 is ready to move with the extension rod 12 from the second position (FIG. 6) up to a third position (FIG. 8) via a transition position (FIG. 7) where the control mechanism 2 is exposed in the second aperture 112 in the tube 11. More specifically, upon the control mechanism 2 arrives in the transition position, as shown in FIG. 7, the button 22 of the control mechanism 2 is pushed by the spring 23 toward the tube 11 such that the control mechanism 2 laterally moves from the transition position (FIG. 7) to the third position (FIG. 8) where the first end of the control mechanism 2, namely the head 222, is engaged in the second aperture 112 of the tube 11 and the second end of the control mechanism 2, namely the pin 221, is completely withdrawn from the selected hole 14a. Thus, the extension rod 12 is released from the control mechanism 2 and therefore allowed to move axially with respect to the control mechanism 2 and the tube 11. More

specifically, the head 222 of the button 22 is partly engaged in the second aperture 112 in the tube 11 with the second enlarged shoulder 224 abutting against the inner wall of the tube 11. Since the extension rod 12 is released from the control mechanism 2, the cane 100 is allowed to be adjusted to change its total length by moving the extension rod 12. For example, the extension rod 12 may be pulled upward or outward, as shown in FIG. 11, with respect to the control mechanism 2 and the tube 11 to a desired position where a new selected hole 14b of the extension rod 12, instead of the hole 14a, is aligned with the pin 221 of the button 22 of the control mechanism 2, as depicted in FIG. 9.

[0014] In order to prevent the extension rod 12 from being completely detached from the tube 11, a stop member 3 is provided to be mounted on the upper end of the tube 11 to block the control mechanism 2 so that the extension rod 12 will not come off the tube 11. As best seen in FIG. 3, the stop member 3 defines, from top to bottom, a passage 31 through which the extension rod 12 extends.

[0015] As shown in FIG. 9, the control mechanism 2 may then be pushed inward from outside of the second flexible cap 42, as indicated by the arrow, to have the pin 221 of the button 22 be re-engaged in the new selected hole 14b in the extension rod 12 and have the head 222 of the button 22 withdrawn from the second aperture 112 in the tube 11. This means that the cane 100 is reset to have a desired total length. The extension rod 12 together with the control mechanism 2 may then be pushed downward to have the new selected hole 14b and the control mechanism 2 together laterally aligned with the first aperture 111 in the tube 11, as shown in FIG. 10, for use. At this time, the total length of the cane 100 has been changed to the desired total length. Alternatively, the extension rod 12 together with the control mechanism 2 may pass by the first aperture 111 in the tube 11 and down to a lowest position to have the cane 100 be retracted for storage. It is understood that the next time the cane 100 is extended for use, the cane 100 can be extended directly to the desired total length as the cane 100 memories the user's desire.

[0016] Preferably, the extension rod 12 is formed thereon with a plurality of alignment marks 15, as shown in FIG. 3, spaced along a length of the extension rod 12 and corresponding to the holes 14 in the extension rod 12 to facilitate adjust the length of the cane 100. If one of the alignment marks is aligned with a top edge of the stop member 3, the respective hole 14 in the extension rod 12 is aligned with the second aperture 112 in the tube 11. This helps for alignment between the new selected hole 14b in the extension rod 12 and the pin 221 of the button 22 of the control mechanism 2 which is in line with the second aperture 112 in the tube 11, as shown in FIG. 9.

[0017] It is to be understood that the disclosed embodiments are illustrative in nature and the invention is not to be limited to any one or more embodiments except as

set forth in the following claims.

Claims

1. A cane comprising a tube (11) defining a first aperture (111) and a second aperture (112) spaced in a side thereof and being larger in diameter than the first aperture (111); an extension rod (12) telescopically mounted within one end of the tube (11) and defining a plurality of holes (14) in a side thereof; and a control mechanism (2), wherein the control mechanism (2) is disposed in between an inner wall of the tube (11) and an outer wall of the extension rod (12), and is movable to a first position where the control mechanism (2) has a first end laterally engaged in the first aperture (111) in the tube (11) and a second end laterally engaged in the selected hole (14) in the extension rod (12) such that the tube (11), the extension rod (12) and the control mechanism (2) are prohibited from moving axially with respect to one another; a second position where the first end of the control mechanism (2) is withdrawn from the first aperture (111) in the tube (11) such that the extension rod (12) and the control mechanism (2) together are allowed to move axially with respect to the tube (11), the control mechanism (2) being movable laterally from the first position to the second position; and a third position where the first end of the control mechanism (2) is engaged in the second aperture (112) of the tube (11) and the second end of the control mechanism (2) is withdrawn from the selected hole (14) such that the extension rod (12) is allowed to move axially with respect to the control mechanism (2) and the tube (11); wherein the control mechanism (2) together with the extension rod (12) is axially movable from the second position to a transition position to permit the control mechanism (2) laterally moving to the third position, wherein the control mechanism (2) includes a carrier (21) having a transverse bore (212) and sandwiched between the inner wall of the tube (11) and the outer wall of the extension rod (12), a button (22) seated in the carrier (21), and a spring (23) disposed in the carrier (21) for normally biasing the button (22) toward the inner wall of the tube (11); **characterized in that** the button (22) consists of a head (222) and a pin (221), wherein the head (222) is configured to be at least partly received in the first aperture (111) in the tube (11), the head (222) having a stepped shape with a first outer shoulder (223) and a second larger shoulder (224), and the pin (221) has one end joined to the head (222) and the other end extending through the transverse bore (212) in the carrier (21), the spring (23) being mounted about the pin (221) and interposed between the carrier (21) and the head (222), such that when the control mech-

anism (2) is in the first position, the other end of the pin (221) of the button (22) is engaged in the selected hole (14) in the extension rod (12) and the head of the button (22) is partly engaged in the first aperture (111) in the tube (11) with the first outer shoulder (223) abutting against the inner wall of the tube (11); and when the control mechanism (2) is in the third position, the head (222) of the button (22) is partly engaged in the second aperture (112) in the tube (11) with the second enlarged shoulder (224) abutting against the inner wall of the tube (11).

2. The cane of claim 1, **characterized in that** the cane further comprises a stop member (3) mounted on the end of the tube (11) to prevent the extension rod (12) from being detached from the tube (11); the stop member (3) has a passage (31) defined from top to bottom thereof; and the extension rod (12) extends through the passage (31) of the stop member (3).
3. The cane of claim 2, **characterized in that** the extension rod (12) is formed thereon with a plurality of alignment marks (15) spaced along a length of the extension rod (12) and corresponding to the holes (14) in the extension rod (12) such that if one of the alignment marks (15) is aligned with a top edge of the stop member (3), the respective hole (14) in the extension rod (12) is aligned with the second aperture (112) in the tube (11).
4. The cane of claim 1, **characterized in that** the cane further comprises a first flexible cap (41) sized and shaped to cover the first aperture (111) in the tube (11).
5. The cane of claim 4, **characterized in that** the cane further comprises a second flexible cap (42) sized and shaped to cover the second aperture (112) in the tube (11).
6. The cane of claim 1, **characterized in that** the cane further comprises an underarm support (6) laterally extending from a top end of the extension rod (12).
7. The cane of claim 6, **characterized in that** the cane further comprises a handle (5) laterally extending from a side of the tube (11).
8. The cane of claim 1, **characterized in that** the cane further comprises another extension rod (12) telescopically mounted within the other end of the tube (11).
9. The cane of claim 8, **characterized in that** the cane further comprises a rubber tip (7) mounted to a bottom end of the another extension rod (12).

Patentansprüche

1. Stock, umfassend ein Rohr (11), das eine erste Öffnung (111) und eine zweite Öffnung (112) definiert, die in einer Seite davon beabstandet ist und einen größeren Durchmesser als die erste Öffnung (111) aufweist; eine Erweiterungsstange (12), die teleskopisch innerhalb eines Endes des Rohrs (11) montiert ist und eine Vielzahl von Löchern (14) in einer Seite davon definiert; und einen Steuermechanismus (2), wobei der Steuermechanismus (2) zwischen einer inneren Wand des Rohrs (11) und einer äußeren Wand der Erweiterungsstange (12) angeordnet ist und in eine erste Position bewegt werden kann, in der der Steuermechanismus (2) ein erstes Ende aufweist, das seitlich in die erste Öffnung (111) im Rohr (11) eingreift, und ein zweites Ende, das seitlich in das ausgewählte Loch (14) in der Erweiterungsstange (12) eingreift, so dass das Rohr (11), die Erweiterungsstange (12) und der Steuermechanismus (2) daran gehindert sind, sich axial mit Bezug aufeinander zu bewegen; eine zweite Position, in der das erste Ende des Steuermechanismus (2) von der ersten Öffnung (111) im Rohr (11) zurückgezogen wird, so dass der Erweiterungsstange (12) und dem Steuermechanismus (2) zusammen ermöglicht wird, sich axial mit Bezug auf das Rohr (11) zu bewegen, wobei der Steuermechanismus (2) seitlich aus der ersten Position in die zweite Position bewegt werden kann; und eine dritte Position, in der das erste Ende des Steuermechanismus (2) in die zweite Öffnung (112) des Rohrs (11) eingreift und das zweite Ende des Steuermechanismus (2) vom ausgewählten Loch (14) zurückgezogen wird, so dass der Erweiterungsstange (12) ermöglicht wird, sich axial mit Bezug auf den Steuermechanismus (11) und das Rohr (11) zu bewegen; wobei der Steuermechanismus (2) zusammen mit der Erweiterungsstange (12) axial aus der zweiten Position in eine Übergangsposition bewegt werden kann, um zu ermöglichen, dass sich der Steuermechanismus (2) seitlich in die dritte Position bewegt, wobei der Steuermechanismus (2) einen Träger (21) einschließt, der eine Querbohrung (212) aufweist und zwischen der inneren Wand des Rohrs (11) und einer äußeren Wand der Erweiterungsstange (12) eingeklemmt ist, einen Knopf (22), der im Träger (21) sitzt, und eine Feder (23), die im Träger (21) angeordnet ist, um normal den Knopf (22) hin zur inneren Wand des Rohrs (11) vorzuspannen; **dadurch gekennzeichnet, dass** der Knopf (22) aus einem Kopf (222) und einem Stift (221) besteht, wobei der Kopf (222) konfiguriert ist, um mindestens teilweise in der ersten Öffnung (111) im Rohr (11) aufgenommen zu sein, wobei der Kopf (222) eine abgestufte Form mit einer ersten äußeren Schulter (223) und einer zweiten größeren Schulter (224) aufweist, und vom Stift (221) ein Ende mit dem Kopf

- (222) verbunden ist und sich das andere Ende durch die Querbohrung (212) im Träger (21) erstreckt, wobei die Feder (23) um den Stift (221) montiert ist und zwischen den Träger (21) und den Kopf (222) gestellt ist, so dass, wenn sich der Steuermechanismus (2) in der ersten Position befindet, das andere Ende des Stifts (221) des Knopfs (22) in das ausgewählte Loch (14) in der Erweiterungsstange (12) eingreift und der Kopf des Knopfs (22) teilweise in die erste Öffnung (111) im Rohr (11) eingreift, wobei die erste äußere Schulter (223) gegen die innere Wand des Rohrs (11) stößt; und wenn sich der Steuermechanismus (2) in der dritten Position befindet, der Kopf (222) des Knopfs (22) teilweise in die zweite Öffnung (112) im Rohr (11) eingreift, wobei die zweite vergrößerte Schulter (224) gegen die innere Wand des Rohrs (11) stößt.
2. Stock nach Anspruch 1, **dadurch gekennzeichnet, dass** der Stock weiter ein Blockierelement (3) umfasst, das am Ende des Rohrs (11) montiert ist, um zu verhindern, dass die Erweiterungsstange (12) vom Rohr (11) losgelöst wird, das Blockierelement (3) einen Durchgang (31) aufweist, der von der oberen Seite zur unteren Seite davon definiert ist; und sich die Erweiterungsstange (12) durch den Durchgang (31) des Blockierelements (3) erstreckt.
 3. Stock nach Anspruch 2, **dadurch gekennzeichnet, dass** die Erweiterungsstange (12) darauf mit einer Vielzahl von Ausrichtungsmarkierungen (15) gebildet ist, die entlang einer Länge der Erweiterungsstange (12) beabstandet sind und den Löchern (14) in der Erweiterungsstange (12) entsprechen, so dass, wenn eine der Ausrichtungsmarkierungen (15) mit einer oberen Kante des Blockierelements (3) ausgerichtet ist, das entsprechende Loch (14) in der Erweiterungsstange (12) mit der zweiten Öffnung (112) im Rohr (11) ausgerichtet ist.
 4. Stock nach Anspruch 1, **dadurch gekennzeichnet, dass** der Stock weiter eine erste flexible Kappe (41) umfasst, die abgemessen und geformt ist, um die erste Öffnung (111) im Rohr (11) abzudecken.
 5. Stock nach Anspruch 4, **dadurch gekennzeichnet, dass** der Stock weiter eine zweite flexible Kappe (42) umfasst, die abgemessen und geformt ist, um die zweite Öffnung (112) im Rohr (11) abzudecken.
 6. Stock nach Anspruch 1, **dadurch gekennzeichnet, dass** der Stock weiter eine Unterarmstütze (6) umfasst, die sich seitlich von einem oberen Ende der Erweiterungsstange (12) erstreckt.
 7. Stock nach Anspruch 6, **dadurch gekennzeichnet, dass** der Stock weiter einen Griff (5) umfasst, der sich seitlich von einer Seite des Rohrs (11) erstreckt.

8. Stock nach Anspruch 1, **dadurch gekennzeichnet, dass** der Stock weiter eine andere Erweiterungsstange (12) umfasst, die teleskopisch innerhalb des anderen Endes des Rohrs (11) montiert ist.

9. Stock nach Anspruch 8, **dadurch gekennzeichnet, dass** der Stock weiter eine Gummispitze (7) umfasst, die auf einem unteren Ende der anderen Erweiterungsstange (12) montiert ist.

Revendications

1. Canne comprenant un tube (11) définissant une première ouverture (111) et une seconde ouverture (112) espacée sur un côté de celui-ci et ayant un diamètre plus grand que la première ouverture (111); une tige d'extension (12) montée de manière télescopique dans une extrémité du tube (11) et définissant une pluralité de trous (14) sur un côté de celle-ci; et un mécanisme de commande (2), le mécanisme de commande (2) étant disposé entre une paroi interne du tube (11) et une paroi externe de la tige d'extension (12), et étant déplaçable à une première position dans laquelle le mécanisme de commande (2) a une première extrémité engagée latéralement dans la première ouverture (111) dans le tube (11) et une seconde extrémité engagée latéralement dans le trou sélectionné (14) dans la tige d'extension (12) de telle sorte que le tube (11), la tige d'extension (12) et le mécanisme de commande (2) sont empêchés de se déplacer axialement les uns par rapport aux autres; une deuxième position dans laquelle la première extrémité du mécanisme de commande (2) est retirée de la première ouverture (111) dans le tube (11) de telle sorte que la tige d'extension (12) et le mécanisme de commande (2) ensemble sont autorisés à se déplacer axialement par rapport au tube (11), le mécanisme de commande (2) étant déplaçable latéralement de la première position à la deuxième position; et une troisième position dans laquelle la première extrémité du mécanisme de commande (2) est engagée dans la seconde ouverture (112) du tube (11) et la seconde extrémité du mécanisme de commande (2) est retirée du trou sélectionné (14) de telle sorte que la tige d'extension (12) est autorisée à se déplacer axialement par rapport au mécanisme de commande (2) et au tube (11); le mécanisme de commande (2), conjointement avec la tige d'extension (12), étant déplaçable axialement de la deuxième position à une position de transition pour permettre au mécanisme de commande (2) de se déplacer latéralement à la troisième position, le mécanisme de commande (2) comprenant un support (21) ayant un alésage transversal (212) et pris en sandwich entre la paroi interne du tube (11) et la

paroi externe de la tige d'extension (12), un bouton (22) placé dans le support (21), et un ressort (23) disposé dans le support (21) pour solliciter normalement le bouton (22) vers la paroi interne du tube (11) ;

caractérisée par le fait que le bouton (22) consiste en une tête (222) et en un axe (221), la tête (222) étant configurée pour être au moins partiellement reçue dans la première ouverture (111) dans le tube (11), la tête (222) ayant une forme épaulée avec un premier épaulement externe (223) et un second épaulement plus grand (224), et l'axe (221) ayant une extrémité liée à la tête (222) et l'autre extrémité s'étendant à travers l'alésage transversal (212) dans le support (21), le ressort (23) étant monté autour de l'axe (221) et interposé entre le support (21) et la tête (222) de telle sorte que, lorsque le mécanisme de commande (2) est dans la première position, l'autre extrémité de l'axe (221) du bouton (22) est engagée dans le trou sélectionné (14) dans la tige d'extension (12) et la tête du bouton (22) est partiellement engagée dans la première ouverture (111) dans le tube (11) avec le premier épaulement externe (223) en butée contre la paroi interne du tube (11) ; et, lorsque le mécanisme de commande (2) est dans la troisième position, la tête (222) du bouton (22) est partiellement engagée dans la seconde ouverture (112) dans le tube (11) avec le second épaulement plus grand (224) en butée contre la paroi interne du tube (11).

2. Canne selon la revendication 1, **caractérisée par le fait que** la canne comprend en outre un élément d'arrêt (3) monté sur l'extrémité du tube (11) pour empêcher la tige d'extension (12) de se détacher du tube (11) ; l'élément d'arrêt (3) a un passage (31) défini de la partie supérieure à la partie inférieure de celui-ci ; et la tige d'extension (12) s'étend à travers le passage (31) de l'élément d'arrêt (3).

3. Canne selon la revendication 2, **caractérisée par le fait que** la tige d'extension (12) comporte sur celle-ci une pluralité de repères d'alignement (15) espacés le long d'une longueur de la tige d'extension (12) et correspondant aux trous (14) dans la tige d'extension (12) de telle sorte que si l'un des repères d'alignement (15) est aligné avec un bord supérieur de l'élément d'arrêt (3), le trou respectif (14) dans la tige d'extension (12) est aligné avec la seconde ouverture (112) dans le tube (11).

4. Canne selon la revendication 1, **caractérisée par le fait que** la canne comprend en outre un premier capuchon souple (41) dimensionné et formé pour recouvrir la première ouverture (111) dans le tube (11).

5. Canne selon la revendication 4, **caractérisée par le fait que** la canne comprend en outre un second ca-

puchon souple (42) dimensionné et formé pour recouvrir la seconde ouverture (112) dans le tube (11).

6. Canne selon la revendication 1, **caractérisée par le fait que** la canne comprend en outre un support d'aisselle (6) s'étendant latéralement à partir d'une extrémité supérieure de la tige d'extension (12).

7. Canne selon la revendication 6, **caractérisée par le fait que** la canne comprend en outre une poignée (5) s'étendant latéralement à partir d'un côté du tube (11).

8. Canne selon la revendication 1, **caractérisée par le fait que** la canne comprend en outre une autre tige d'extension (12) montée de manière télescopique dans l'autre extrémité du tube (11).

9. Canne selon la revendication 8, **caractérisée par le fait que** la canne comprend en outre une pointe en caoutchouc (7) montée sur une extrémité inférieure de l'autre tige d'extension (12).

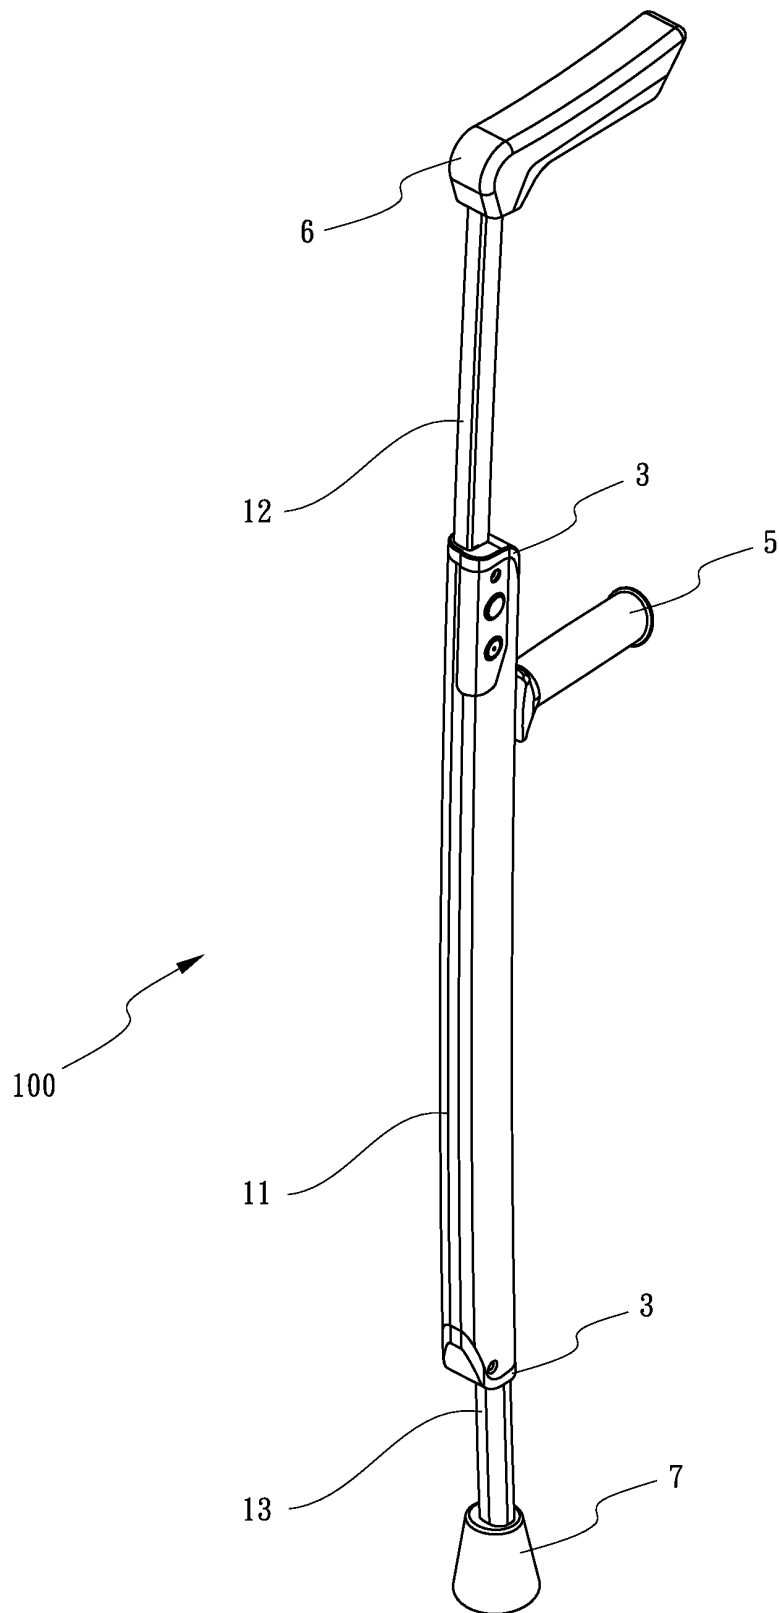


FIG.1

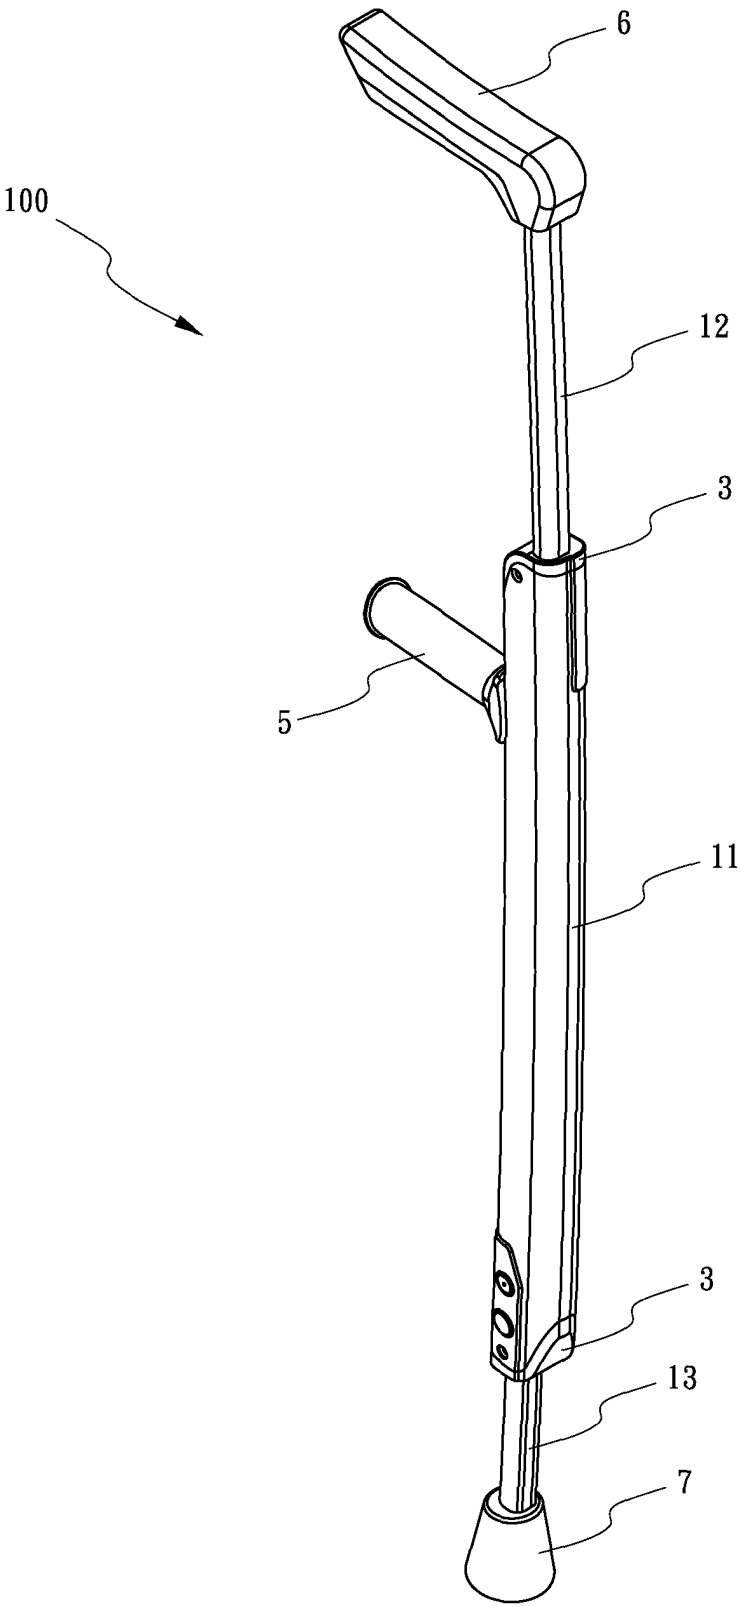
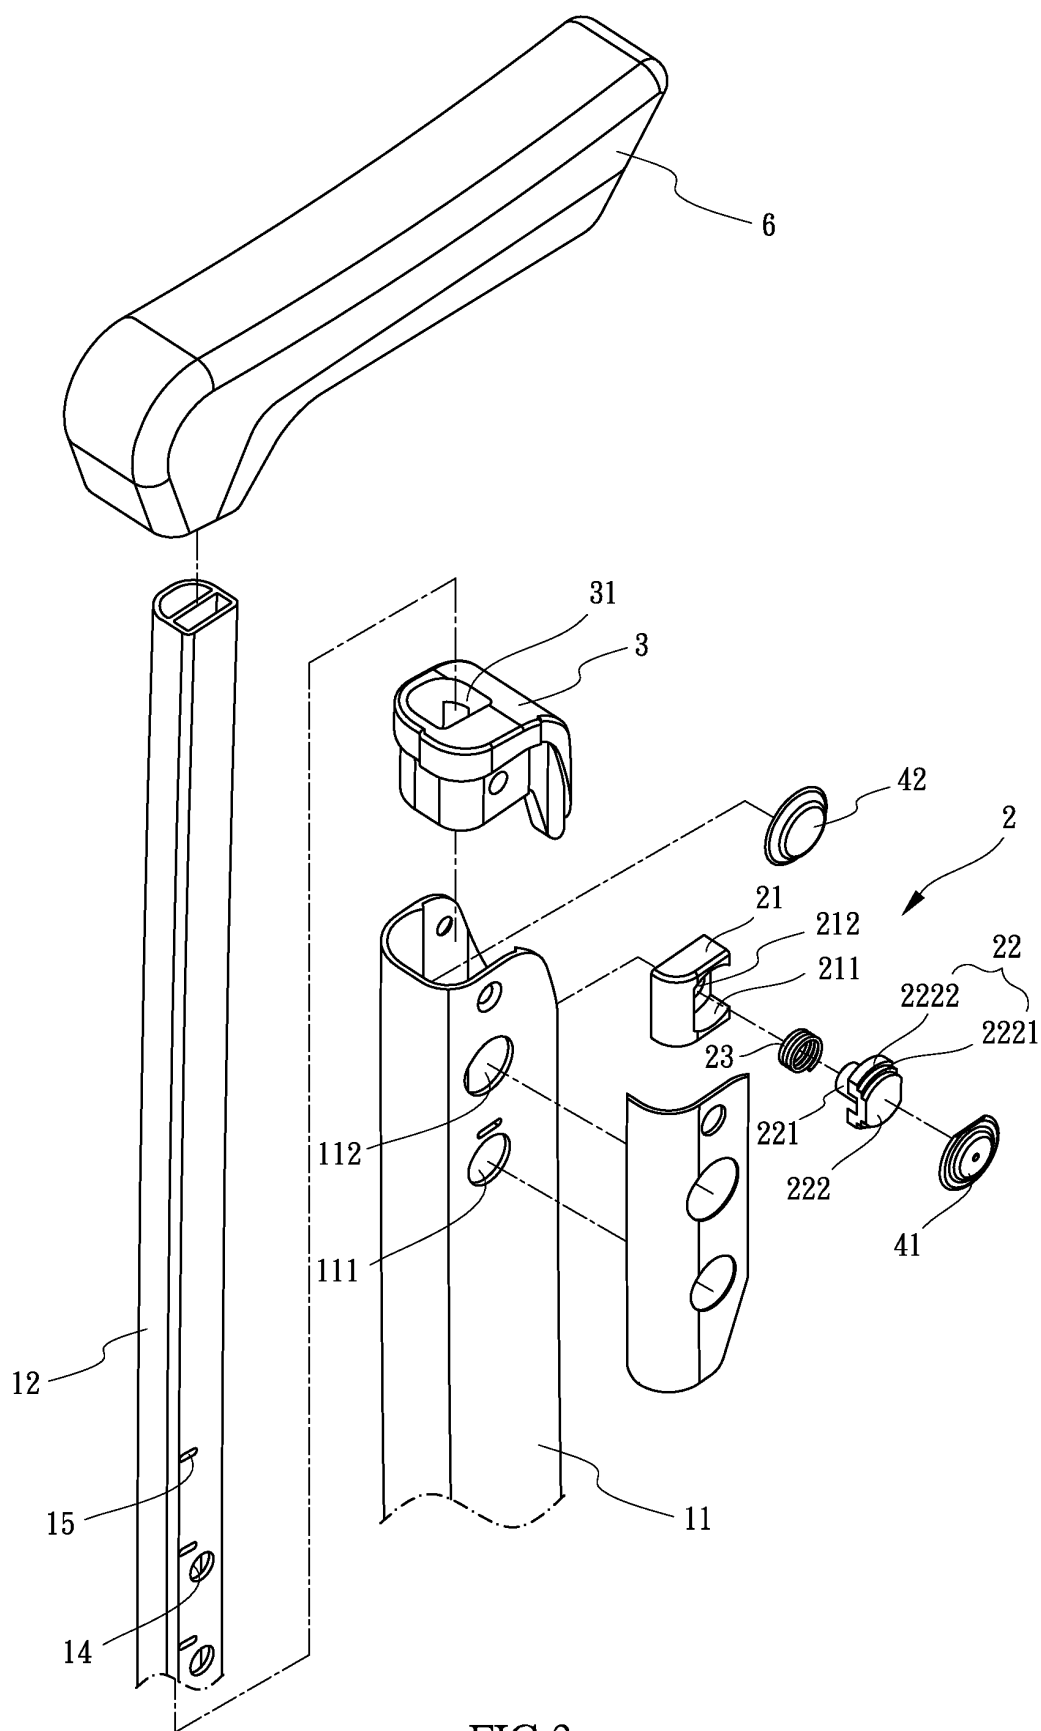


FIG.2



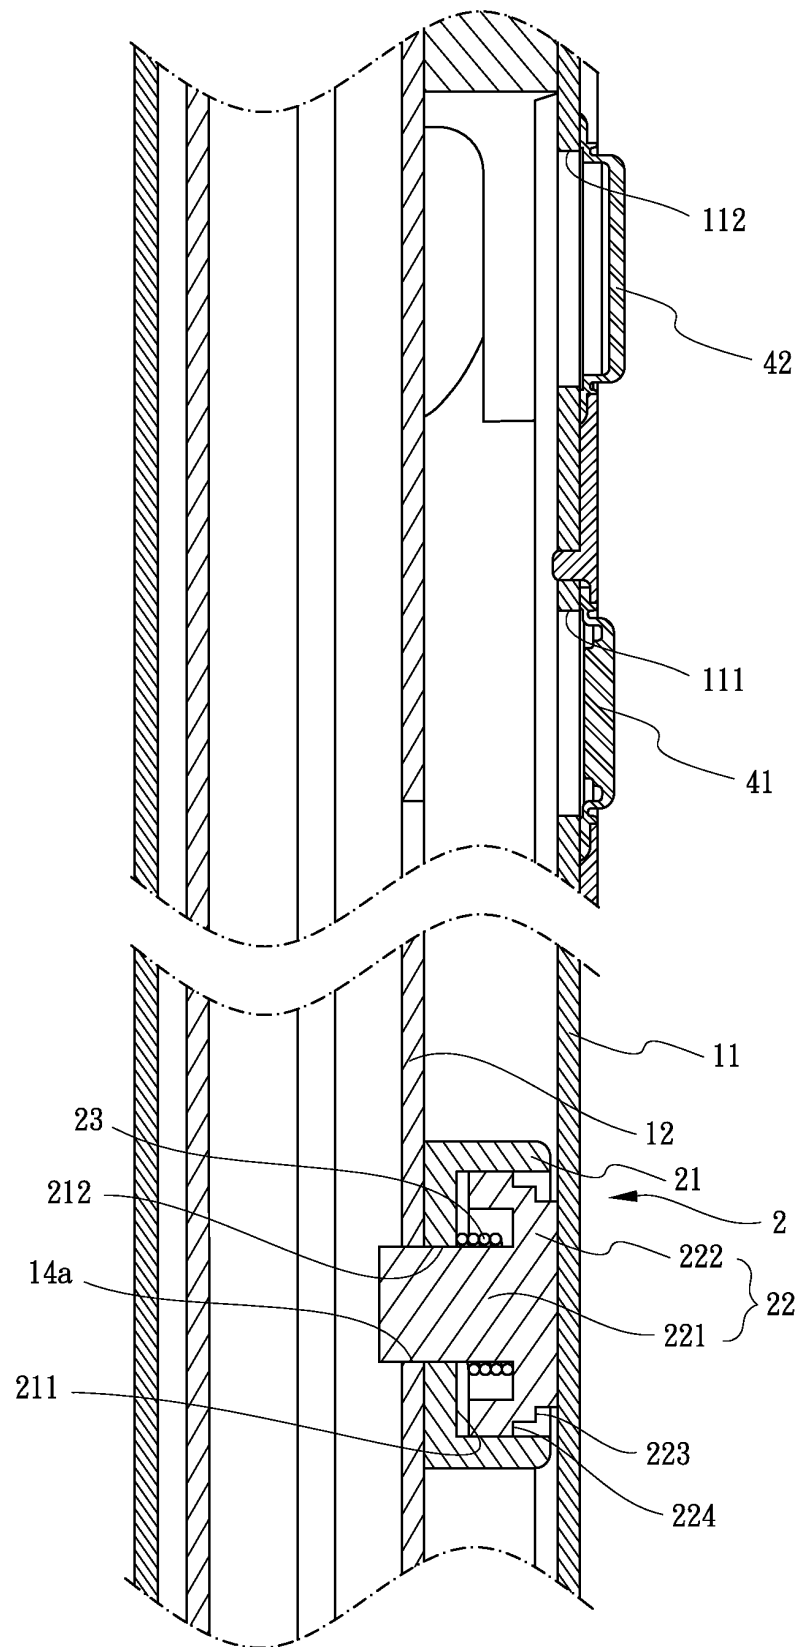


FIG.4

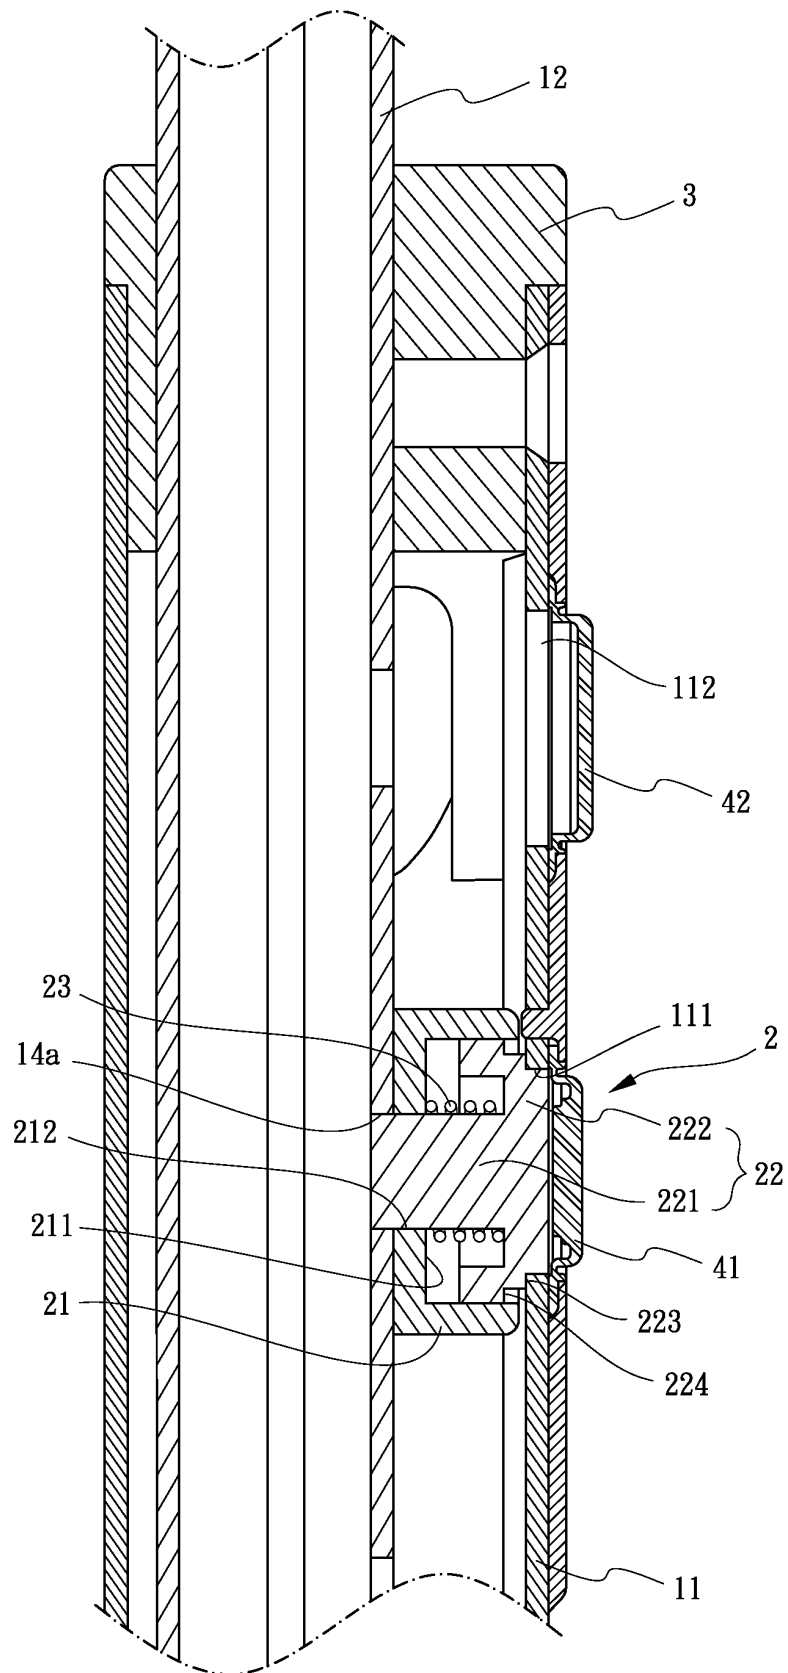


FIG.5

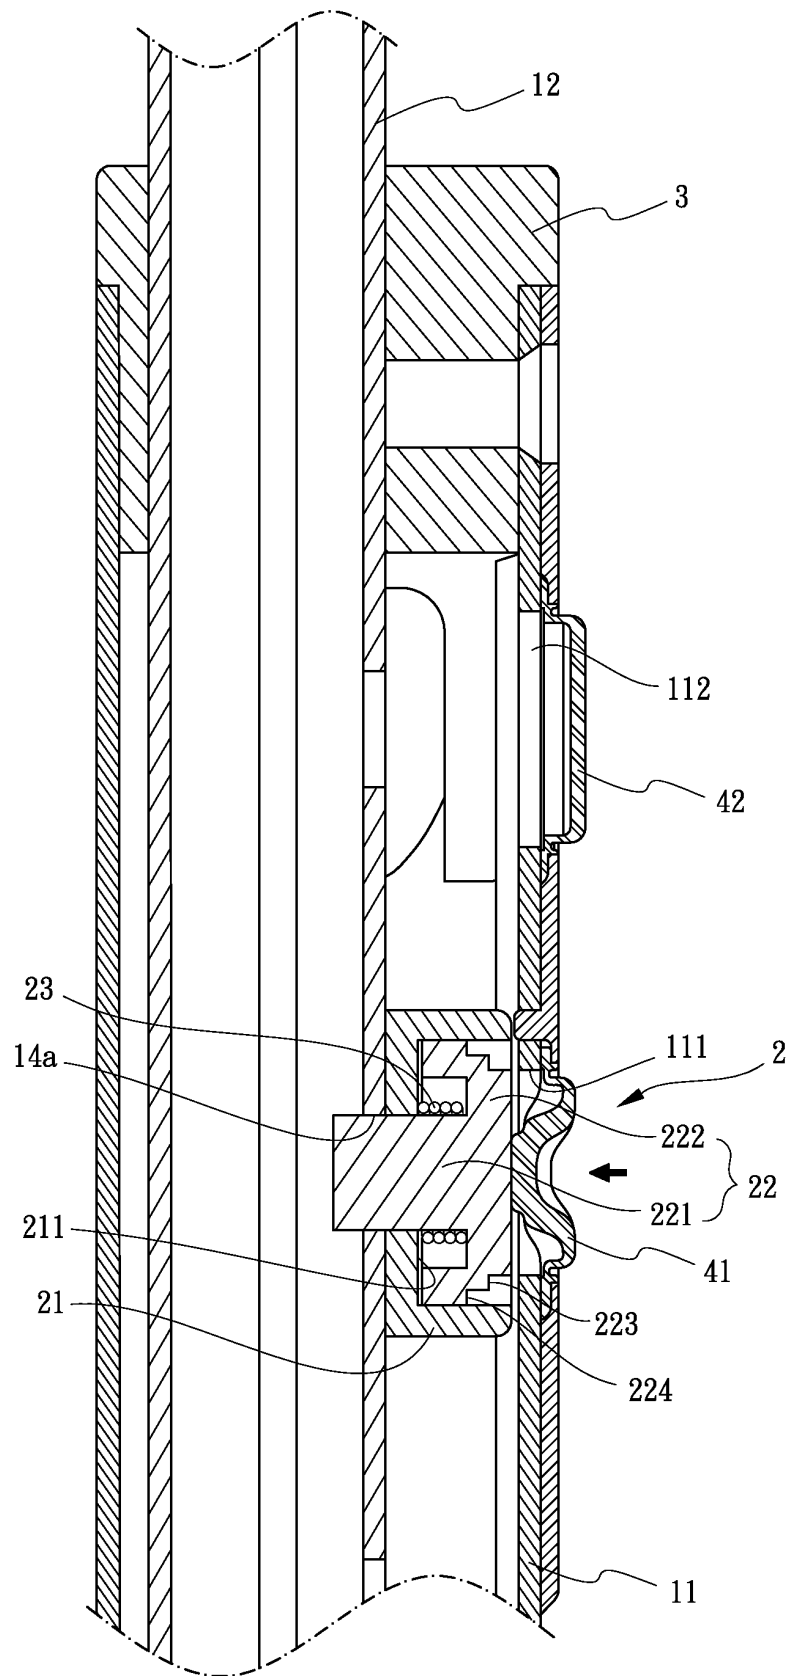


FIG.6

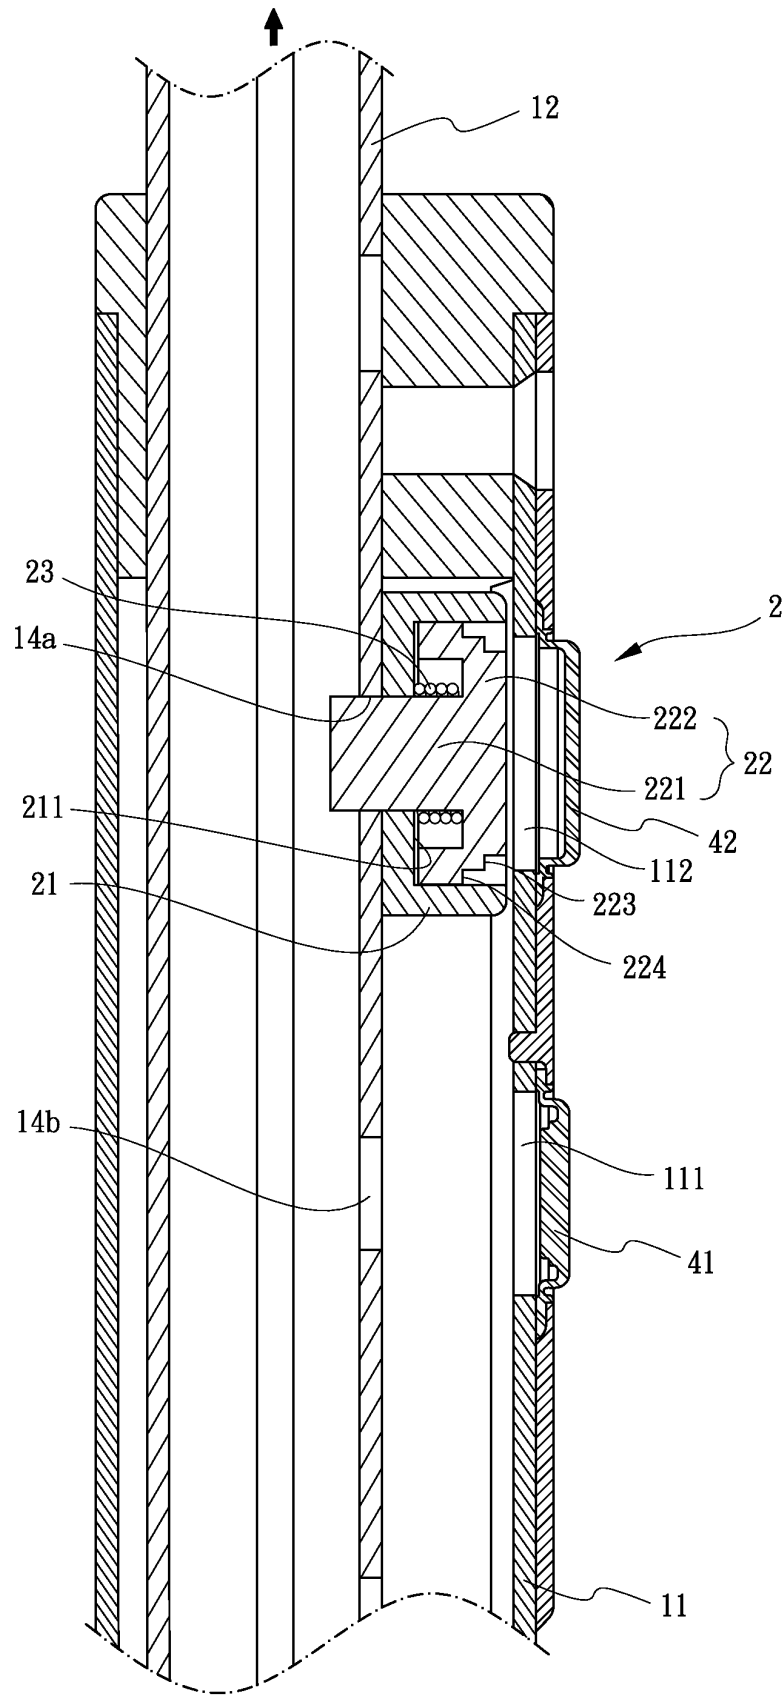


FIG.7

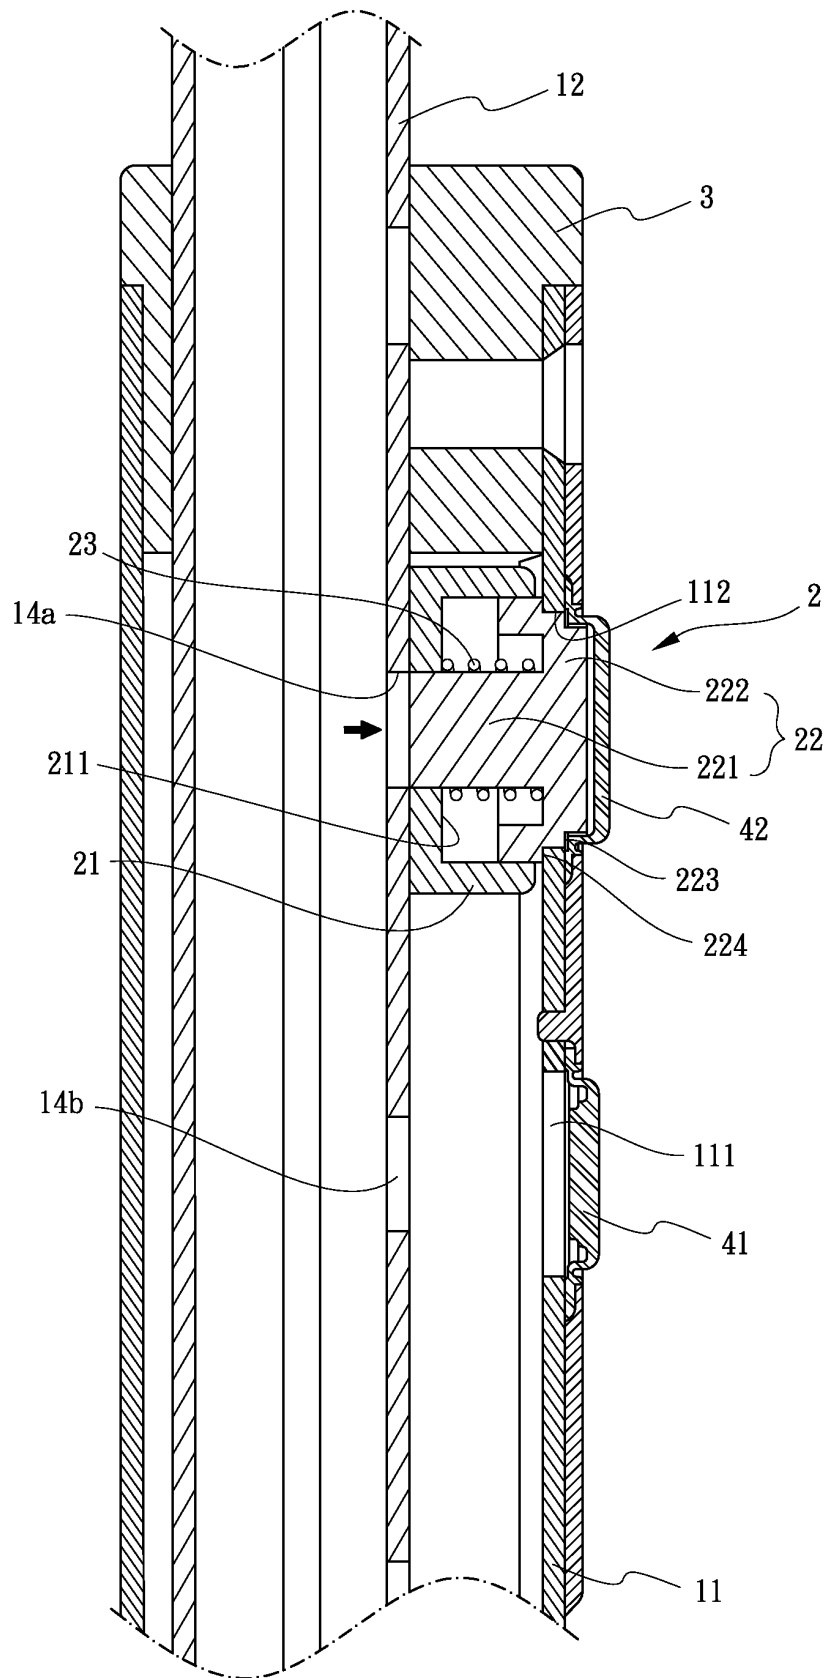


FIG.8

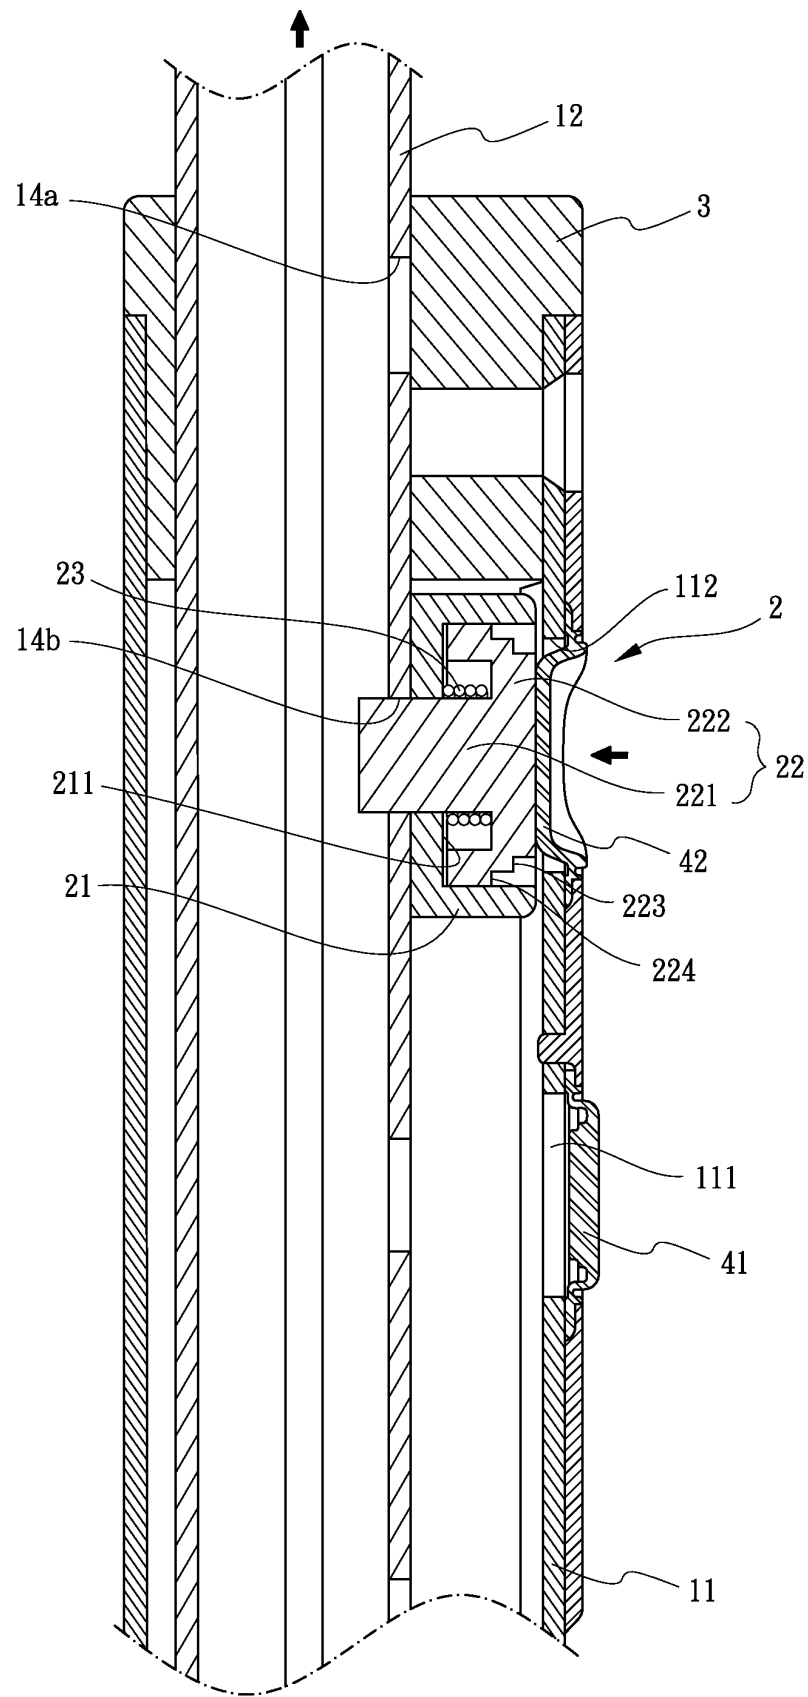


FIG.9

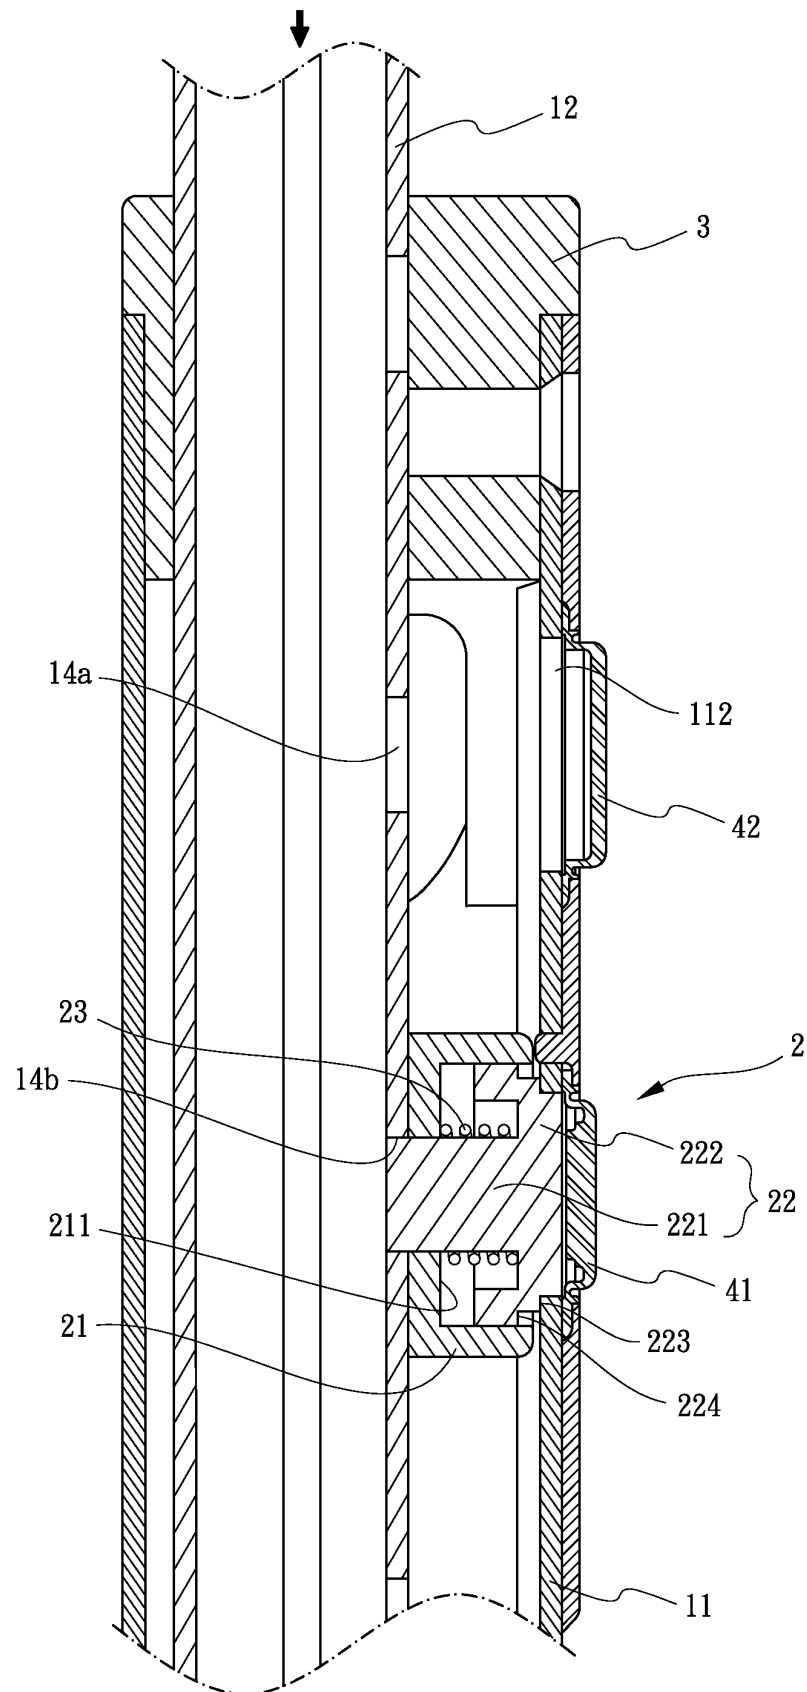


FIG.10

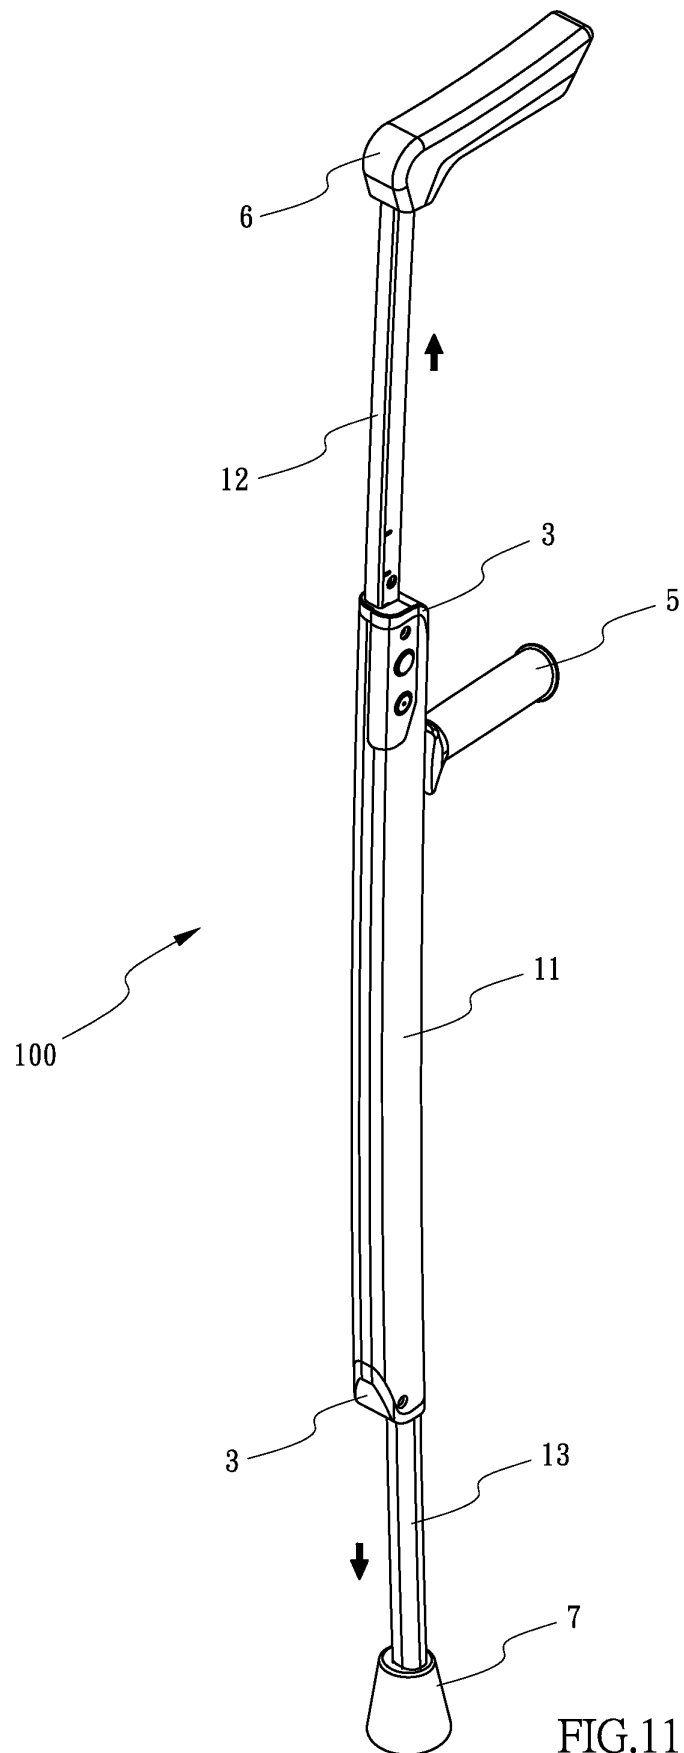


FIG.11

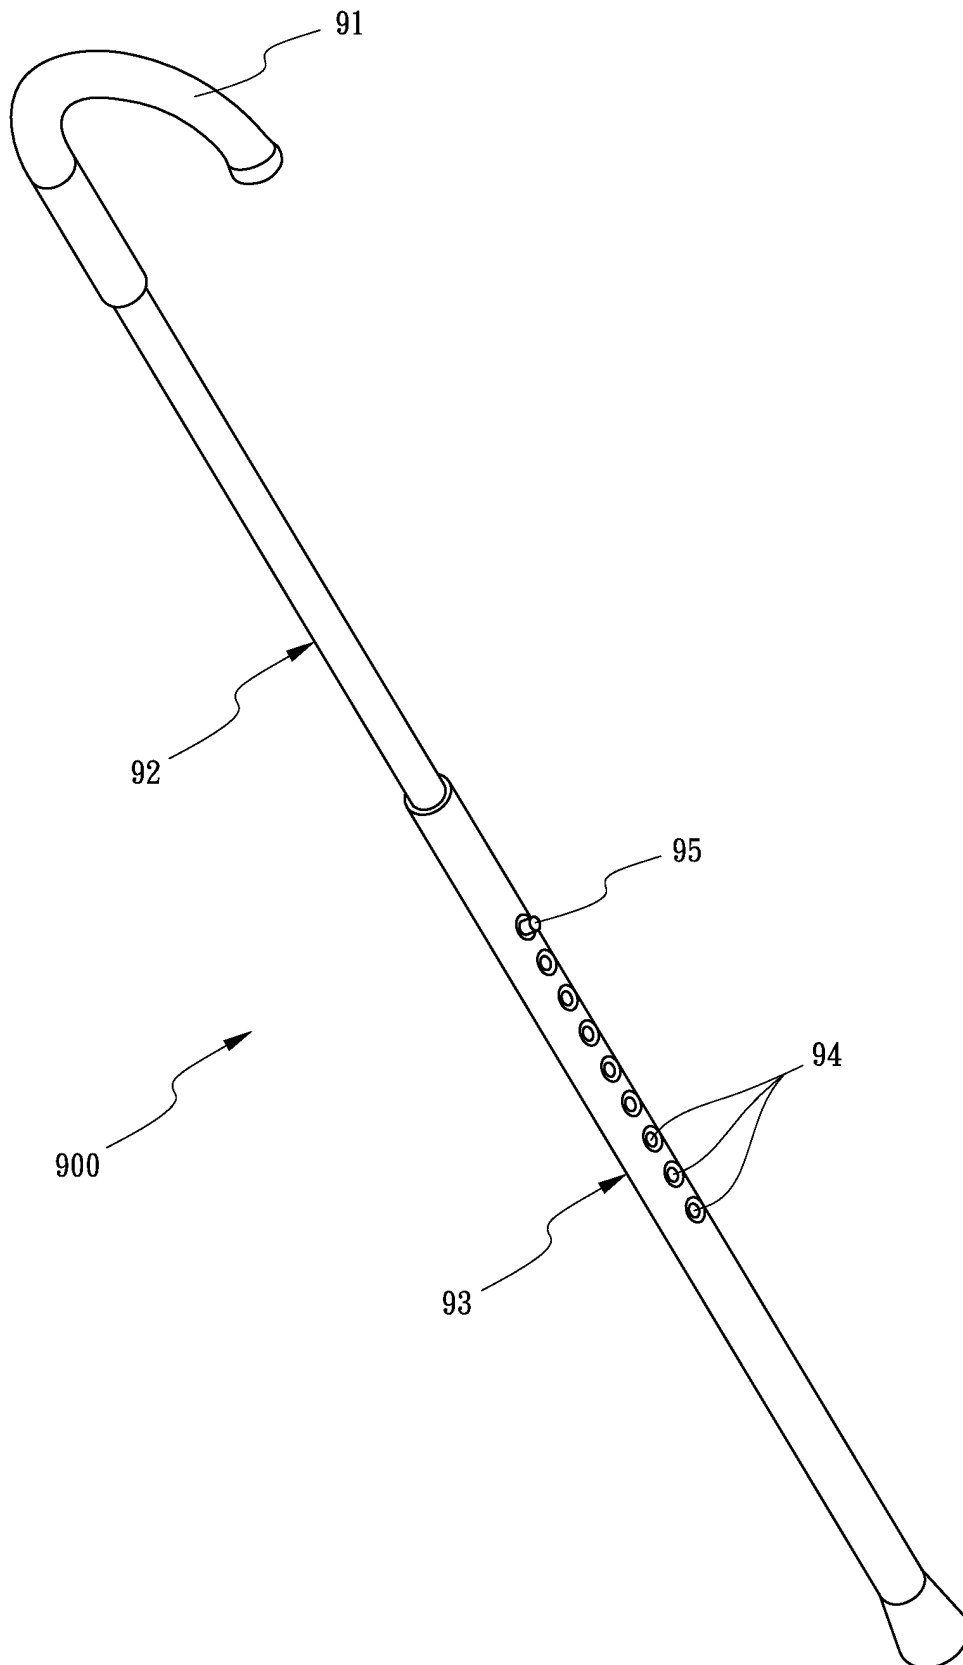


FIG.12 (Prior art)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- TW M448169 U [0003]