



(22) Date de dépôt/Filing Date: 1991/09/25

(41) Mise à la disp. pub./Open to Public Insp.: 1992/04/23

(45) Date de délivrance/Issue Date: 2001/09/11

(30) Priorité/Priority: 1990/10/22 (07/601,832) US

(51) Cl.Int.⁵/Int.Cl.⁵ D04H 5/00


(72) Inventeurs/Inventors:
Vincent, James Ralph, US;
Kwok, Wo Kong, US

(73) Propriétaire/Owner:
E.I. DU PONT DE NEMOURS AND COMPANY, US

(74) Agent: DIMOCK STRATTON CLARIZIO LLP

(54) Titre : TISSUS D'ACRYLIQUE/POLYESTER TISSES DENTELLE

(54) Title: SPUNLACED ACRYLIC/POLYESTER FABRICS

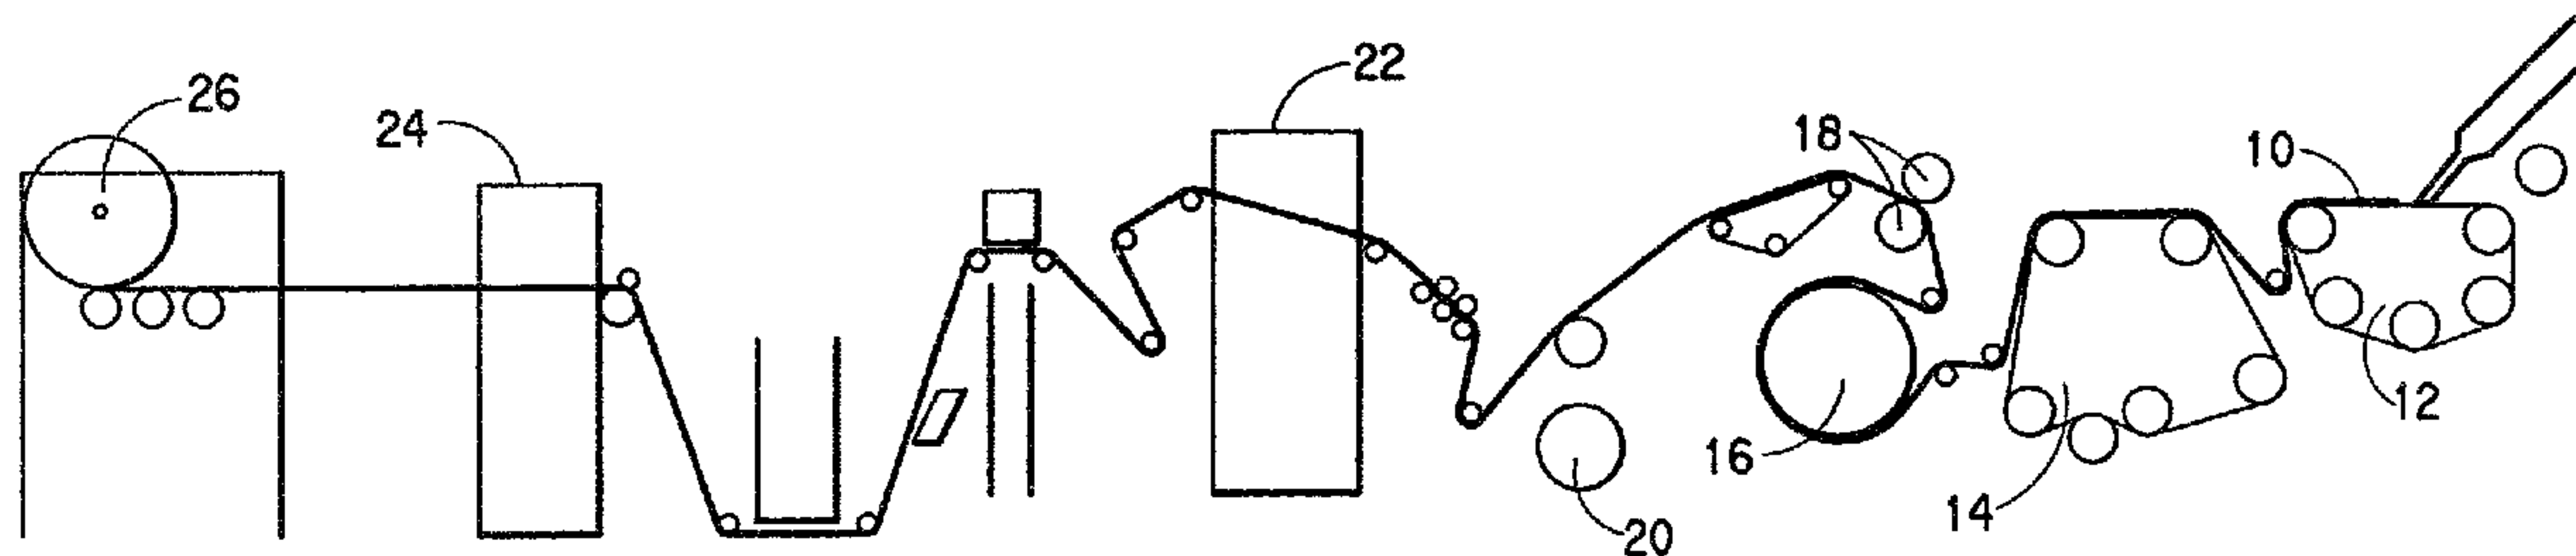

(57) Abrégé/Abstract:

A process is disclosed for making spunlaced acrylic/polyester fabrics comprising applying low impact water jet energy to a fabric web and vacuum dewatering the resulting spunlaced fabric. The spunlaced fabrics exhibit very low wet and dry particle counts and high absorbency thereby making them particularly useful in cleanroom wiper applications and as coverstock for sanitary napkins, diapers and the like.



2052216

TITLE

Spunlaced Acrylic/Polyester Fabrics

ABSTRACT OF THE DISCLOSURE

5 A process is disclosed for making spunlaced
acrylic/polyester fabrics comprising applying low impact
water jet energy to a fabric web and vacuum dewatering the
resulting spunlaced fabric. The spunlaced fabrics exhibit
very low wet and dry particle counts and high absorbency
thereby making them particularly useful in cleanroom wiper
10 applications and as coverstock for sanitary napkins, diapers
and the like.

TITLE

Spunlaced Acrylic/Polyester Fabrics

FIELD OF THE INVENTION

5 The present invention relates to a process for making spunlaced acrylic/polyester fabrics. More particularly, the invention relates to a process for making spunlaced acrylic/polyester fabrics by applying low impact water jet energy and vacuum dewatering such that the fabrics
10 produced exhibit very low wet and dry particle counts and high absorbency.

BACKGROUND OF THE INVENTION

Fabric wipers used in clean room applications
15 require low particle generation when flexed in air and when washed in water. In addition, the wipers must exhibit a high absorbency rate and capacity. However, particle and absorbency properties for many fabrics are many times mutually exclusive of each other. For example, 100%
20 polyester fabrics generate low particle counts but provide almost no absorbency. On the other hand, cotton fabrics exhibit high absorbency rates and capacity but generate unacceptably high particle counts.

Commercially available spunlaced
25 woodpulp/polyester (55%/45%) fabrics have proved adequate in Class 100 cleanroom environments (i.e., no more than 100 particles/ft³ air). Although this fabric may be acceptable in Class 100 environments, it is not acceptable in Class 10 environments. Class 10 environments (i.e., no more than
30 10 particles/ft³ air) are more desirable for sensitive clean room applications.

Example III of U.S. Patent 3,485,709 (Evans) 161/179 3/10
discloses hydroentangling an acrylic/polyester web to 1312
produce a spunlaced fabric. The fabric is made using a 3048 11-2
35 laboratory table washer. The hydroentanglement process calls for imparting high energy water jets to the web to entangle the web and produce a spunlaced fabric. In Figure

40 of a related patent (U.S. Patent 3,485,706 (Evans)), a continuous commercial process is disclosed wherein the fabric is subsequently dewatered by one or more squeeze rollers. Unfortunately, the application of high impact
5 energy and squeeze roll dewatering generates particle counts which are unacceptable for sensitive cleanroom wiper applications.

Clearly, what is needed is a fabric which provides an adequate degree of absorbency but a low wet and dry
10 particle count. In this regard, the applicants have found that spunlaced fabrics made of acrylic/polyester blends provide both low particle generation and good absorbency when processed under certain critical conditions. Specifically, the applicants have found that low water jet
15 energy must be applied to the acrylic/polyester web in order to achieve an adequate balance of low wet and dry particle counts and good absorbency. Other objects and advantages of the present invention will become apparent to those skilled in the art upon reference to the attached drawings and to
20 the detailed description of the invention which hereinafter follows.

SUMMARY OF THE INVENTION

In accordance with the invention, there is
25 provided a process for making spunlaced acrylic/polyester fabrics having low wet and dry particle counts and good absorbency. The process comprises supporting a fabric web comprising 10-90 wt.% acrylic fibers and 10-90 wt.%
30 polyester fibers on a mesh screen and passing the supported web underneath low energy water jets providing a total impact energy of no greater than 30 Hp-hr-lb_f/lb_m to entangle the web and produce a spunlaced fabric. Preferably, the web is then passed through a vacuum dewaterer to help remove particles that may be suspended in
35 the water after jetting. Spunlaced fabrics made by the inventive process are useful as cleanroom wipers and coverstock for sanitary napkins, diapers and the like.

In a preferred embodiment, the process comprises supporting a fabric web comprising 30-90 wt.% acrylic fibers and 10-70 wt.% polyester fibers on a mesh screen and passing the supported web underneath low energy water jets providing a total impact energy of between 5 to 28 Hp-hr-lb_f/lb_m to entangle the web and produce a spunlaced fabric. Thereafter, the spunlaced fabric is vacuum dewatered to remove water and suspended particles.

The invention also provides for a spunlaced acrylic/polyester fabric having a dry particle count no greater than 5000, a wet particle count no greater than 9500, an absorbency rate of at least 0.1 gm/gm/sec and an absorbency capacity of at least 600%. Most preferably, the spunlaced acrylic/polyester fabric has a dry particle count no greater than 1000, a wet particle count no greater than 8000, an absorbency rate of at least 0.25 gm/gm/sec and an absorbency capacity of at least 700%.

As used herein, "total impact energy" means the cumulative amount of energy that is provided to both sides of the fabric web. Preferably, each side of the fabric web is provided with about the same amount of impact energy although this is not critical to the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood with reference to the following figures:

Fig. 1 is a schematic view of a continuous hydroentanglement process depicting belt and drum washers for water jetting both sides of a fabric web and a conventional squeeze roll for dewatering following water jetting.

Fig. 2 is a schematic view of a preferred continuous hydroentanglement process of the invention depicting belt and drum washers for water jetting both sides of a fabric web and a vacuum dewatering extractor for removing water and suspended particles following water jetting.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the figures, wherein like reference numerals represent like elements, schematic representations are shown of a continuous process of the prior art and a continuous process of the preferred invention. Figure 1 depicts a prior art continuous process wherein a web of fibers 10 is air-laid onto a conveyor 12 having a mesh screen and conveyed towards a belt washer 14. Belt washer 14 contains a series of banks of water jets which treat one side of the fiber web. Thereafter, the web is passed underneath a series of banks of water jets while it is supported on a drum washer screen 16 so that the other side of the web can be treated. The resulting spunlaced fabric is passed through a squeeze roll 18 to dewater the fabric. Finally, the spunlaced fabric maybe further treated by a padder 20, a dryer 22 and a slitter 24 before it is wound up on roll 26.

Figure 2 is identical to Figure 1 except that the squeeze roll 18 has been replaced by a vacuum dewatering extractor 19. The vacuum extractor removes suspended particles that may have been dislodged during water jetting or have been transferred through the water or air thereby reducing the number of particles present in the spunlaced fabric. The vacuum extractor is positioned between the drum washer screen 16 and the dryer 22.

Although the process of hydrolacing an acrylic/polyester fabric is not new, the fabrics formed by water jetting at conditions not disclosed by the prior art display physical properties and product features that are significantly different. These specific differences are set forth in the Tables below for fabrics of the invention and for fabrics of the prior art.

The following test procedures were employed to determine the various characteristics and properties reported below.

Dry particle count and wet particle count were

determined by the test methods described in Kwok et al.,
 "Characterization of Cleanroom Wipers: Particle Generation"
Proceedings-Institute of Environmental Sciences, pp. 365-372
 (1990) and "Wipers Used In Clean Rooms And Controlled
 5 Environments", Institute of Environmental Sciences,
 IES-RP-CC-004-87-T, pp. 1-13 (October, 1987). In brief, the
 spunlaced fabric is flexed in air on a Gelbo Flexer and the
 particles generated are measured with a laser counter as dry
 particle count. The wet particle count (i.e., number of
 10 particles suspended in water) is also measured with a laser
 counter after the fabric has been washed in water by the
 biaxial shake test method.

In the inventive process, the acrylic/polyester
 webs are subjected to low energy, low impact jets of water
 15 delivered through closely-spaced small orifices. The jets
 impart to the web a total impact-energy product ("I x E") of
 less than 30 Horsepower-hour-pounds force/pounds mass (Hp-
 hr-lb_f/lb_m).

Equipment of the general type described above, and
 20 mentioned in U.S. Patent 3,485,709 (Evans) and U.S. Patent
 3,403,862 (Dworjany), is suitable for the water-jet
 treatment.

The energy-impact product delivered by the water
 jets impinging upon the fabric web is calculated from the
 25 following expressions, in which all units are listed in the
 "English" units in which the measurements reported herein
 were originally made so that the "I x E" product was in
 horsepower-hour-pounds force per pound mass.

$$I=PA$$

$$30 \quad E=PQ/wzs$$

wherein:

I is impact in lbs force
 E is jet energy in horsepower-hours per pound mass
 P is water supply pressure in pounds per square inch
 35 A is cross-sectional area of the jet in square inches
 Q is volumetric water flow in cubic inches per minute
 w is web weight in ounces per square yard

z is web width in yards and
s is web speed in yards per minute.

The major difference between prior art
5 hydroentangling processes and the process of the instant
invention is the manner in which the web is jetted. Prior
art processes impart high impact energies to the web due to
such parameters as high pressure or low web speed.
Conversely, in the inventive process low impact energy (i.e.,
10 low water jet pressure or high web speed) is used to
hydroentangle the web fibers and produce a spunlaced fabric.
Low impact energy minimizes fiber breakage and the
generation of additional fiber particles.

The following non-limiting examples further
15 illustrate the differences in jetting between the inventive
process and the prior art processes:

EXAMPLES

Example 1

20 A spunlaced acrylic/polyester fabric was made with
blends of acrylic and polyester fibers in the form of an
air-laid staple fiber web. Polyester staple fibers having a
denier of 1.35 (1.5 dtex) and a length of 0.85 inch (2.2 cm)
were blended with Type 404 Orlon® (an acrylic fiber
25 commercially available from E.I. du Pont de Nemours and
Company, Wilmington, Delaware) staple fibers having a denier
of 1.5 (1.7 dtex) and a length of 0.85 inch (2.2 cm) at
50/50 by weight. Acrilan® acrylic fibers, commercially
available from Monsanto Corp., St. Louis, Missouri, are also
30 suitable for purposes of the invention. The blended fibers
were formed into a 2.0 oz.yd² (67.8 gm/m²) web by an air-
laydown process of the type described in U.S. Patent
3,797,074 (Zafiroglu). Then, in a continuous operation, the
web was placed and supported on a mesh screen and passed
35 along at a speed of 31 yds/min (28.2 m/min) and then passed
underneath a series of banks of belt washer jets under
conditions as shown in Table I. In a continuous operation,

the web was wrapped around a drum screen and the back side of the web was passed underneath a series of banks of drum washer jets under conditions as shown in Table II.

5

Table I
Belt Washer Treatment

Jet#	Orifice Diameter inch (mm)	# of Jets per inch (cm)	Pressure psi	I x E Hp-hr-lb _f /lb _m	
10	1	0.005(0.127)	40(15.7)	500	0.22
	2	0.005(0.127)	40(15.7)	1000	1.22
	3	0.005(0.127)	40(15.7)	1300	2.34
	4	0.005(0.127)	40(15.7)	1500	3.35
	5	0.005(0.127)	40(15.7)	1500	3.35
15	6	0.005(0.127)	40(15.7)	1400	2.82

Total I x E = 13.30 Hp-hr-lb_f/lb_m

20

Table II
Drum Washer Treatment

Jet#	Orifice Diameter inch (mm)	# of Jets per inch (cm)	Pressure psi	I x E Hp-hr-lb _f /lb _m	
25	1	0.005(0.127)	40(15.7)	500	0.22
	2	0.005(0.127)	40(15.7)	1000	1.22
	3	0.005(0.127)	40(15.7)	1300	2.34
	4	0.005(0.127)	40(15.7)	1500	3.35
	5	0.005(0.127)	40(15.7)	1500	3.35
	6	0.005(0.127)	60(23.6)	1200	2.88

30

Total I x E = 13.36 Hp-hr-lb_f/lb_m

The inventive fabric was tested for dry particle generation using a Gelbo Flex Test Apparatus. The inventive fabric was tested for wet particle generation using a biaxial shake test. Both wet and dry particle generation were tested by the test procedure described in IES-RP-CC-004-87-T. The results of the wet and dry particle tests are

tabulated below in Table III and are compared to results obtained for a commercial spunlaced 2.0 oz/yd² (67.8 g/m²) woodpulp/polyester (WP/PET) fabric and a spunlaced 2.0 oz/yd² (67.8 g/m²) 100% polyester (PET) fabric. Absorbency rates and capacities are also provided for the inventive fabric, the WP/PET fabric and the PET fabric. Both the WP/PET and PET fabrics are currently used as commercial cleanroom wipers.

10

Table III

<u>Properties</u>	<u>Inventive Fabric</u>	<u>WP/PET Fabric</u>	<u>PET Fabric</u>
Particle counts (≥0.5 microns)			
Dry	500	43600	4550
Wet	7030	9060	1590
Absorbency			
Rate (g/g/sec)	0.39	0.25	0
Capacity (%)	820	340	-

The fabrics of the invention generate lower particle counts than WP/PET fabrics and exhibit higher absorbency rates and capacities than both the WP/PET and PET fabrics.

Example 2

In this example, the beneficial effects of higher web speeds (i.e., lower impact energy) for passing the web under the water jets in regard to reduced particle generation of the fabric are demonstrated. The same blend of 50/50 by weight fibers as described in Example 1 was formed into a 2.0 oz/yd² (67.8 g/m²) web and it was placed and supported on a fine mesh screen except that the web was forwarded through the water jets at about twice the speed (60 yds/min). (For purposes of the invention, the web speed is preferably maintained at between 20 to 200 yds/min.) Then, in a continuous operation, the web was passed under a

series of banks of belt washer jets under conditions shown in Table IV below. In a continuous operation, the web was then wrapped around a drum screen and the back side of the web was passed under a series of banks of drum washer jets
5 under conditions as shown in Table V below.

Table IV
Belt Washer Treatment

Jet #	Orifice Diameter	# of Jets per	Pressure	I x E
	inch (mm)	inch (cm)	psi	Hp-hr-lb _f /lb _m
1	0.005(0.127)	40(15.7)	700	0.22
2	0.005(0.127)	40(15.7)	900	0.42
15 3	0.005(0.127)	40(15.7)	1400	1.26
4	0.007(0.177)	20(7.9)	1500	2.89
5	0.007(0.177)	20(7.9)	1400	2.43

Total I x E = 7.22 Hp-hr-lb_f/lb_m

Table V
Drum Washer Treatment

Jet #	Orifice Diameter	# of Jets per	Pressure	I x E
	inch (mm)	inch (cm)	psi	Hp-hr-lb _f /lb _m
1	0.005(0.127)	40(15.7)	700	0.22
2	0.005(0.127)	40(15.7)	900	0.42
3	0.005(0.127)	40(15.7)	1200	0.86
4	0.005(0.127)	40(15.7)	1500	1.50
25 5	0.005(0.127)	40(15.7)	0	0
6	0.005(0.127)	60(23.6)	1500	2.25

Total I x E = 5.25 Hp-hr-lb_f/lb_m

35 The inventive fabric of Example 2 was tested for dry particle generation using a Gelbo Flex Test Apparatus. The inventive fabric was also tested for wet particle generation using a biaxial shake test. Both wet and dry

particle generation were tested by the test procedure described in IES-RP-CC-004-87-T. The results of the wet and dry particle tests are tabulated below in Table VI and are compared against the results in Example 1 wherein higher I x E values were used.

Table VI
Particle Generation vs. I x E

		Example 1	Example 2
10	Particle counts (≥0.5 microns)		
15	Dry	500	696
	Wet	7030	2862
	I x E (Belt)	13.30	7.22
	I x E (Drum)	13.36	5.25
20	Total I x E	26.66	12.47

Table VI shows that a lower total energy-input product (I x E) for both the belt washer jets and the drum washer jets results in a fabric having lower wet particle generation while maintaining low dry particle generation. This result is believed to occur because lower energy input reduces fiber breakage and surface fibrillation which cause particle formation.

Example 3

In this example, the spunlaced fabric of the invention is vacuum dewatered instead of squeezed rolled to further reduce wet particle count. The same blend of fibers as described in Example 1 was formed into a 1.5 oz/yd² (50.9 g/m²) web using the equipment and air-lay process described in Example 1. The web was placed and supported on a mesh screen and forwarded at a speed of 92 yds/min (83.6 m/min). Then, in a continuous operation, the web was passed under a series of banks of belt washer jets and drum washer jets under conditions as shown in Tables IV and V respectively. Fabric A was dewatered with a conventional squeeze roll

dewatering device after passing the drum washer jets.
Fabric B was dewatered with a vacuum dewatering extractor at 7 inches of mercury vacuum after passing the drum washer jets. The results are summarized in Table VII below. The results show that vacuum dewatering clearly reduces wet particle count significantly.

Table VII

		Fabric A (Squeeze roll)	Fabric B (Vacuum extractor)
Particle count (≥0.5 microns)			
Dry		974	618
Wet		4562	2750

Example 4

In this example, five fabric samples of various fiber blends were treated under the process conditions set forth in Example III of Evans. A 100% acrylic sample (A), a 65/35 acrylic/rayon sample (B), a 65/35 acrylic/PET sample (C), a 65/35 acrylic/nylon sample (D), and a 65/35 acrylic/anti-static acrylic sample (E) were all prepared and treated under the process conditions set forth in Table VIII below. The results indicate that the total I x E product for Example III of Evans is many magnitudes higher than the I x E products of the inventive process.

Table VIII

		A	B	C	D	E
Basis Wt. (oz/sq.yd)		2.6	2.8	2.6	2.5	2.5
A. Drum Screen						
Speed (yd/min)		5	5	5	5	5
Jet #1 Orifice (in)		0.005	----->	----->	----->	----->
jet per in		40	----->	----->	----->	----->
pressure, psi		500	----->	----->	----->	----->
Jet #2 Orifice (in)		0.007	----->	----->	----->	----->
jet per in		20	----->	----->	----->	----->
pressure, psi		900	----->	----->	----->	----->

Table VIII (cont.)

		<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>
5	B. Flat Screen					
	Speed (yd/min)	1.3	2.0	1.3	1.0	1.6
	Jet #3 Orifice (in)	0.005	----->	----->	----->	----->
	jet per in	40	----->	----->	----->	----->
	pressure, psi	500	----->	----->	----->	----->
	Jet #4 Orifice (in)	0.007	----->	----->	----->	----->
10	jet per in	20	----->	----->	----->	----->
	pressure, psi	1200	1200	1500	1500	1500
	Jet #5 Orifice (in)	0.007	----->	----->	----->	----->
	jet per in	20	----->	----->	----->	----->
	pressure, psi	2000	2000	1500	1500	2000
15	Jet #6 Orifice (in)	0.007	----->	----->	----->	----->
	jet per in	20	----->	----->	----->	----->
	pressure, psi	2000	2000	1500	1500	2000

The total I x E products for these samples are as follows:

20	Fabric	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>
	IxE: Drum (jets 1-2)	9.7	9.0	9.7	10.1	10.1
	Belt (jets 3-6)	560.3	337.6	360.7	488.3	515.8
25	Total (Hp-hr-lb _f /lb _m)	570.3	346.6	370.4	498.4	525.9

Although particular embodiments of the present invention have been described in the foregoing description, it will be understood by those skilled in the art that the invention is capable of numerous modifications, substitutions and rearrangements without departing from the spirit or essential attributes of the invention. Reference should be made to the appended claims, rather than to the foregoing specification, as indicating the scope of the invention.

What is claimed is:

1. A process for making spunlaced acrylic/polyester fabrics comprising the steps of:
 - (a) supporting a lightweight web of fibers on a mesh screen wherein the fibers
5 comprise a blend of 10-90 wt.% acrylic fibers and 10-90 wt.% polyester fibers;
and
 - (b) passing the supported web underneath low energy water jets operating at a
total impact energy no greater than 30 Hp-hr-lb_f/lb_m to entangle the acrylic and
polyester fibers and form a spunlaced fabric.
- 10 2. The process of claim 1 further comprising the step of vacuum dewatering the
spunlaced fabrics to remove water and suspended particles.
3. The process of claim 1 wherein the web is passed underneath the water jets at a
speed of between 20 to 200 yds/min.
4. A process for making spunlaced acrylic/polyester fabrics comprising the steps of:
 - (a) supporting a lightweight web of fibers on a mesh screen wherein the fibers
15 comprise a blend of 30-90 wt.% acrylic fibers and 10-70 wt.% polyester fibers;
 - (b) passing the supported web underneath low energy water jets operating at a
total impact energy between 5 and 28 Hp-hr-lb_f/lb_m to entangle the acrylic and
polyester fibers; and
 - 20 (c) vacuum dewatering the spunlaced fabric to remove water and suspended
particles.
5. The process of claim 4 wherein the web is passed underneath the water jets at a
speed of between 20 to 200 yds/min.
6. A spunlaced acrylic/polyester fabric having a dryparticle count no greater than
25 5000, a wet particle count no greater than 9500, an absorbency rate of at least 0.1
gm/gm/sec and an absorbency capacity of at least 600%.
7. The spunlaced acrylic/polyester fabric of claim 6 wherein the dry particle count is
no greater than 1000, the wet particle count is no greater than 8000, the absorbency rate is

- 14 -

at least 0.25 gm/gm/sec and the absorbency capacity is at least 700%.

8. A spunlaced acrylic/polyester fabric produced by the process of any one of claims 1-5.

9. The spunlaced fabric of claim 6 wherein the fabric comprises a cleanroom wiper
5 or coverstock for sanitary napkins and diapers.

- 14 -

FIG. 1

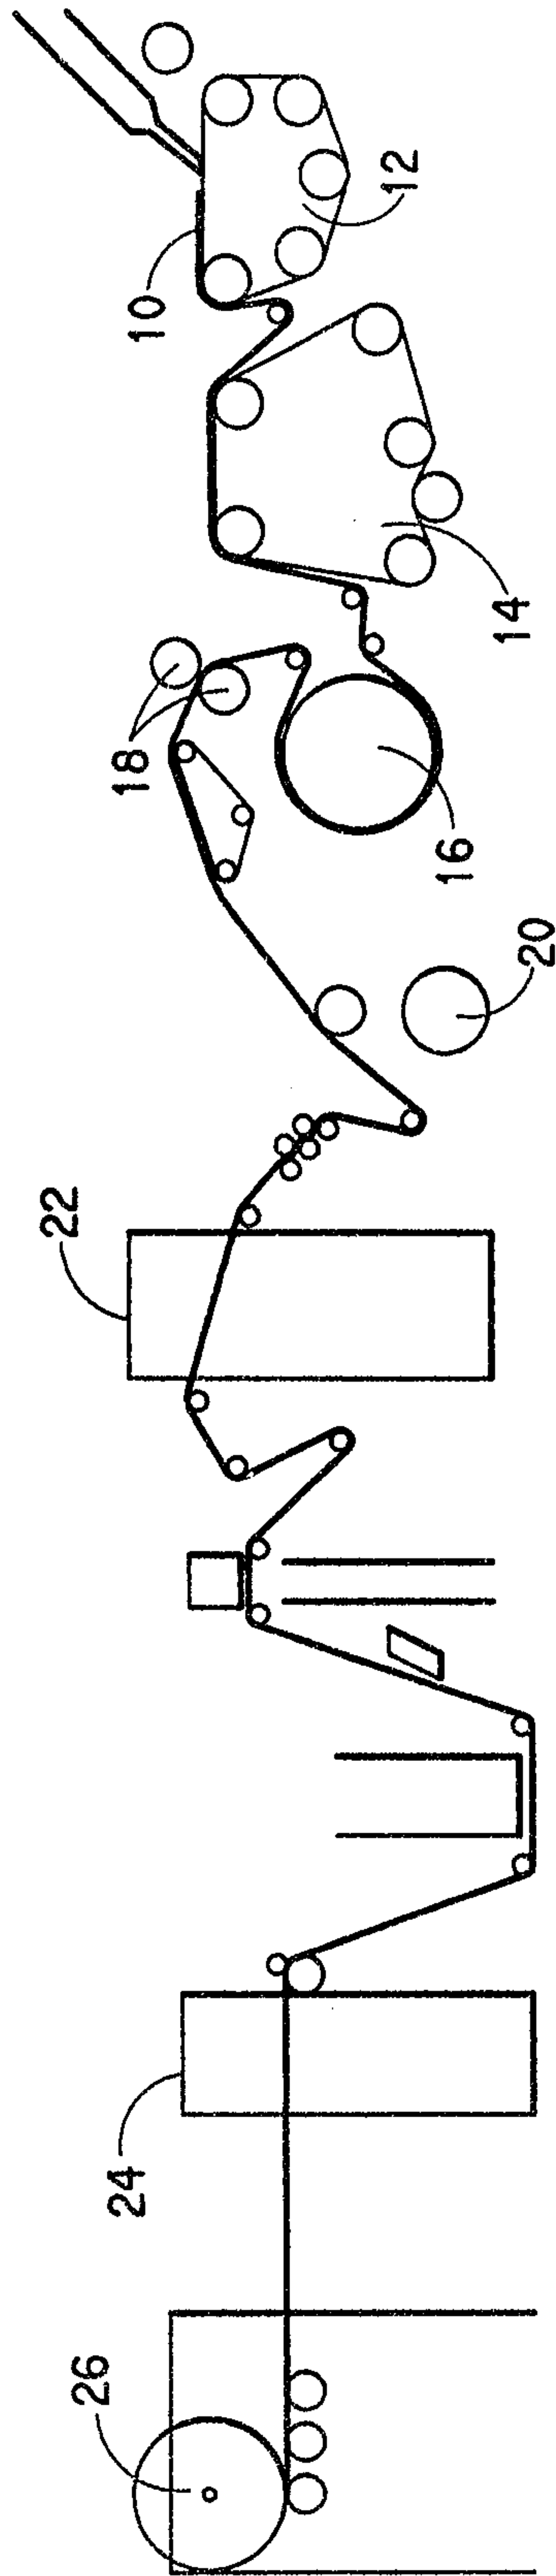


FIG. 2

