(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
12 June 2014 (12.06.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/088684 A1

(51) International Patent Classification:
G06F 11/10 (2006.01) *G06F 3/06* (2006.01)
G06F 12/00 (2006.01)

(21) International Application Number:
PCT/US2013/062053

(22) International Filing Date:
26 September 2013 (26.09.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/732,830 3 December 2012 (03.12.2012) US
13/756,328 31 January 2013 (31.01.2013) US

(71) Applicants: **WESTERN DIGITAL TECHNOLOGIES, INC.** [US/US]; 3355 Michelson Drive, Suite 100, Irvine, CA 92612 (US). **SKYERA, INC.** [US/US]; 1704 Automation Parkway, San Jose, CA 95131 (US).

(72) Inventors: **DANILAK, Radoslav**; 10425 Glencore Drive, Cupertino, CA 95014 (US). **MULLENDORE, Rodney, N.**; 5813 Killarney Circle, San Jose, CA 95138 (US). **JONES, Justin**; c/o Western Digital Technologies, Inc., 3355 Michelson Drive, Suite 100, Irvine, CA 92612 (US). **TOMLIN, Andrew, J.**; c/o Western Digital Technologies, Inc., 3355 Michelson Drive, Suite 100, Irvine, CA 92612 (US).

(74) Agent: **ALTMAN, Daniel, E.**; KNOBBE MARTENS OLSON & BEAR, LLP, 2040 Main Street, 14th Floor, Irvine, CA 92614 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHODS, SOLID STATE DRIVE CONTROLLERS AND DATA STORAGE DEVICES HAVING A RUNTIME VARIABLE RAID PROTECTION SCHEME

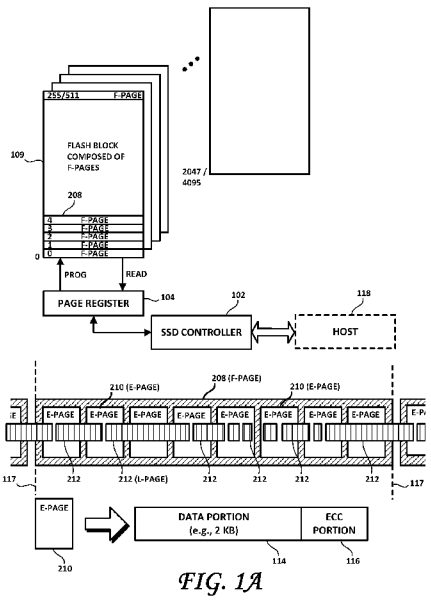


FIG. 1A

(57) Abstract: A data storage device may comprise a flash controller and an array of flash memory devices coupled to the flash controller. The array may comprise a plurality of S-Pages that may each comprise a plurality of F-Pages. In turn, each of the plurality of F-Pages may be configured to store a variable amount of data and a variable amount of error correction code. The flash controller may be configured to generate an error correction code across each F-Page of an S-Page and to store the generated error correction code within one or more F-Pages having the largest amount of data.

WO 2014/088684 A1

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

METHODS, SOLID STATE DRIVE CONTROLLERS AND DATA STORAGE DEVICES HAVING A RUNTIME VARIABLE RAID PROTECTION SCHEME

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to provisional U.S. Patent Application Serial No. 61/732,830 (Atty. Docket No. T5961.P), filed on December 3, 2012, which is hereby incorporated by reference in its entirety.

BACKGROUND

[0002] In any die of a solid-state drive (SSD), there are likely to be a number of bad memory blocks, due to process technology and manufacturing variations, among other factors. Moreover, every block's endurance varies. In the early life of a die, most of the blocks are good. There are, however, some initial failures. During the bulk of the life of the die, random bit errors occur. Eventually, towards the end of life of the die, a wear effect manifests itself, in which the error rate increases. Every block goes through this lifecycle, albeit potentially at a different rate. Indeed, some blocks take a long time to go through this lifecycle, while others take a comparatively shorter period of time. To provide an adequate safety margin, however, conventional SSD systems are provisioned according to the worst-performing blocks.

[0003] Bits in a flash memory may be read incorrectly (i.e., develop bit errors) after being programmed. The charge level on a flash cell will change due to several conditions (e.g., time, temperature, accesses to other pages in the block, etc.). Eventually, when an affected cell is read, the wrong value is returned. Flash manufacturers specify a maximum number of bit errors for a flash page based on the process technology, cell design, lab testing, simulation, operating conditions, and the like. The bit error specification is usually specified as P errors per M bytes. In some cases, the controller manufacturer is responsible for implementing an Error Correcting Code (ECC), which satisfies or exceeds the specification. Types of ECC include Reed Solomon, BCH and Low-Density Parity-Check (LDPC) codes, which are methods of correcting bit errors in a block of data bits. The life (measured in Program/Erase (PE) cycles) of a flash device specified by a flash manufacturer is based on the

implementation of the specified error correction requirements. Flash manufacturers provide extra bytes in a flash page to accommodate the number of expected ECC bits plus a small amount of space for other metadata such as, for example, Cyclic Redundancy Check (CRC) field, sector number, and the like.

[0004] The Open NAND flash Interface (ONFI) specification, version 2.3, defines a flash Page as containing a data area and a spare area. The spare area is intended for use in holding ECC checkbits and metadata, while the data area is assumed to contain sector (e.g. logical block) data. Errors can occur in data portions of specific pages and in entire pages. Different ECC codes and different error correction strategies are required for each type of error.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] Fig. 1A is a diagram showing aspects of the physical and logical data organization of a data storage device according to one embodiment.

[0006] Fig. 1B is a diagram of an F-Page in which the data portion and ECC portion of each E-Page are physically separated, according to one embodiment.

[0007] Fig. 1C is a diagram illustrating that the F-Page data portion and the F-Page ECC portion are variable in size within a given F-Page.

[0008] Fig. 2 shows a logical-to-physical address translation map and illustrative entries thereof, according to one embodiment.

[0009] Fig. 3 shows a graph showing a percentage of bad blocks versus Program /Erase Cycles for both conventional devices and methods and according to one embodiment.

[0010] Fig. 4 is a diagram showing a relationship between block failure rates over the lifetime of a data storage device, and the manner in which the ECC and data portions of an E-Page may be varied to extend the useful lifetime of the data storage device, according to one embodiment.

[0011] Fig. 5 is a diagram of a block information data structure, according to one embodiment.

[0012] Fig. 6 is a block diagram of a superblock (S-Block), according to one embodiment.

[0013] Fig. 7 shows another view of a super page (S-Page), according to one embodiment.

[0014] Fig. 8 is a diagram of an S-Page illustrating the generation and storage of Check Pages, according to one embodiment.

[0015] Fig. 9 is a diagram showing a relationship between block failure rates over the lifetime of a data storage device, and the manner in which the number of Check Pages may be varied to extend the useful lifetime of the data storage device, according to one embodiment.

[0016] Fig. 10 is a flowchart of a method of generating and storing Check Pages in a data storage device, according to one embodiment.

DETAILED DESCRIPTION

[0017] Fig. 1A is a diagram showing aspects of the physical and logical data organization of a data storage device according to one embodiment. In one embodiment, the data storage device is an SSD. In another embodiment, the data storage device is a hybrid drive including flash memory and rotating magnetic storage media. The disclosure is applicable to both SSD and hybrid implementations, but for the sake of simplicity, the various embodiments are described with reference to SSD-based implementations. An SSD controller 102 according to one embodiment may be configured to be coupled to a host, as shown at reference numeral 118. The host 118 may utilize a logical block addressing (LBA) scheme. While the LBA size is normally fixed, the host can vary the size of the LBA dynamically. For example, the LBA size may vary by interface and interface mode. Indeed, while 512 Bytes is most common, the 4 KB size is also gaining favor, as are the 512+ (520, 528, etc.) and 4K+ (4K+8, 4K+16, etc.) formats. As shown therein, the SSD controller 102 may comprise or be coupled to one or more page registers 104. The controller 102 may be configured to program and read data from an array of flash memory devices responsive to data access commands from host 118. While the description herein refers to flash memory, it is understood that the array of memory devices may comprise other types of non-volatile memory, such as flash integrated circuits, Chalcogenide RAM (C-RAM), Phase Change Memory (PC-RAM or PRAM), Programmable Metallization Cell RAM (PMC-

RAM or PMCm), Ovonic Unified Memory (OUM), Resistance RAM (RRAM), NAND memory (e.g., single-level cell (SLC) memory, multi-level cell (MLC) memory, or any combination thereof), NOR memory, EEPROM, Ferroelectric Memory (FeRAM), Magnetoresistive RAM (MRAM), other discrete NVM (non-volatile memory) chips, or any combination thereof.

[0018] The page register 104 may be configured to enable the controller 102 to read data from and store data to the array. The array of flash memory devices may comprise a plurality of flash memory devices in one or more die (e.g., 128 die). The flash memory devices may comprise a plurality of flash blocks, such as shown at 109 in Fig. 1A. A combination of flash blocks, grouped together, may be called a Superblock or S-Block. In some embodiments, the individual blocks that form an S-Block may be chosen from one or more dies, planes or other levels of granularity. An S-Block, therefore, may comprise a plurality of flash blocks, spread across one or more die, that are combined together. In this manner, the S-Block may form a unit on which the Flash Management System (FMS) operates. In some embodiments, the individual blocks that form an S-Block may be chosen according to a different granularity than at the die level, such as the case when the memory devices include dies that are sub-divided into structures such as planes (i.e., blocks may be taken from individual planes). According to one embodiment, allocation, erasure and garbage collection may be carried out at the S-Block level. In other embodiments, the FMS may perform data operations according to other logical groupings such as pages, blocks, planes, dies, etc.

[0019] Each of the flash blocks 109 may comprise a plurality of physical pages such as flash pages (F-Pages) 208. Each F-Page 208 may be of a fixed size such as, for example, 16 KB. The size of the F-Page 208, according to one embodiment, may be defined as the size of the minimum unit of program for a given flash device. As also shown in Fig. 1A, each F-Page 208 may be configured to accommodate one or more physical sub-pages, such as ECC pages, hereinafter denoted as E-Pages 210. As used herein, the term "E-Page" refers to a data structure configured to store data, in non-volatile memory, over which an error correcting code has been applied. According to one embodiment, the E-Page 210 may form the basis for physical addressing within the SSD and may constitute the minimum unit of flash

read data transfer. That is, each E-Page 210 may be configured to store the minimum amount of data readable by the controller 102. The E-Page 210 may be of a predetermined fixed size (such as 2 KB, for example) and determine the size of the payload (e.g., host or other data) of the ECC system. The size of the physical pages (e.g., E-Pages), however, need not be fixed. In one embodiment, the address of an E-Page uniquely identifies the location of the E-Page within the flash memory. For example, the E-Page's address may specify the flash channel, a particular die within the identified flash channel, a particular block within the die, a particular F-Page and, finally, the start of the E-Page within the identified F-Page.

[0020] According to one embodiment, each F-Page 208 may be configured to fit one or more E-Pages 210 within its boundaries. For example, given 16 KB wide F-Pages 208 and a fixed size of 2 KB per E-Page 210, eight E-Pages 210 fit within a single F-Page 208, as shown in Fig. 1A. In any event, according to one embodiment, an integer number of E-Pages, such as a power of 2 multiple of E-Pages 210, including ECC, may be configured to fit into an F-Page 208. As also shown in Fig. 1A, each E-Page 210 may comprise a data portion 114 and, depending on where the E-Page 210 is located, may also comprise an ECC portion 116. The ECC portion 116 may be configured to store the ECC that was applied to the data stored in the data portion 114 of the E-Page 210. According to one embodiment, neither the data portion 114 nor the ECC portion 116 needs to be fixed in size. Therefore, according to one embodiment, for a given E-Page size, the ratio between the size of the ECC portion and the size of the data portion within an E-Page may be varied.

[0021] The E-Pages, data portions, and ECC portions need not be arranged according to the example arrangement of Figure 1A. For example, the data portion and ECC portion of each E-Page may be physically separated, so that the data portions are grouped together and the ECC portions are grouped together within an F-Page, as shown in Fig. 1B. Within F-Pages, the data portions and the ECC portions may be variably-sized. Indeed, Fig. 1C shows an F-Page whose constituent data portions are relatively larger than the data portions of the E-Pages shown in Fig. 1B. Correspondingly, the ECC portions of the F-Page of Fig. 1C are relatively smaller in size than the ECC portions of the E-Pages shown in Fig. 1B. It follows, therefore, that in the

aggregate within an F-Page, the F-Page data portion of the F-Page of Fig. 1C is larger than the F-Page data portion of the F-Page shown in Fig. 1B. Similarly, in the aggregate within an F-Page, the F-Page ECC portion of the F-Page of Fig. 1C is smaller in size, as compared to the F-Page data portion of the F-Page shown in Fig. 1B. That the data portions and ECC portions of F-Pages are variably-sized will be used to good advantage in the storage of F-Page error correcting codes, as is developed fully herein below. Other arrangements of E-Pages, data portions, and ECC portions are possible in various embodiments, and the size adjustment methods disclosed herein are applicable to those embodiments as well. In one embodiment, an F-Page may include just one E-Page.

[0022] Indeed, to bridge between physical addressing on the SSD and logical block addressing by the host, a logical page (L-Page) construct is introduced. An L-Page, denoted by the reference numeral 212 in Figs. 1A and 2, may comprise the minimum unit of address translation used by the flash management system. Each L-Page 212, according to one embodiment, may be associated with an L-Page number. In one embodiment, data is logically stored in L-Pages 212 and L-Pages 212 are physically stored on the SSD in E-Pages 210. Whereas E-Pages 210 are, according to one embodiment, of a fixed size (an integer number of them may fit within an F-Page), the size of L-Pages 112, according to one embodiment, may be variable, due to variability in the compression of data to be stored. Since the compressibility of data varies, a 4 KB amount of data of one type may be compressed into a 2 KB L-Page while a 4 KB amount of data of a different type may be compressed into a 1 KB L-Page. Because of this compression, according to one embodiment, the physical and logical sizes need not be aligned, as is developed further herein. L-Pages 212 and their associated L-Page numbers, therefore, may be configured to enable the controller 102 to logically reference data (such as host data, for example) stored in one or more of the E-Pages 210. The L-Page 212 may also be utilized as the basic unit of compression. Indeed, unlike F-Pages 208 and E-Pages 210, L-Pages 212 are not, according to one embodiment, fixed in size and may vary with a range defined by a minimum compressed size of, for example, about 24 bytes to a maximum uncompressed size of, for example, about 4 KB or 4 KB+.

[0023] As shown in Figs. 1A and 2, L-Pages 212 need not be aligned with the boundaries of E-Page 210. Indeed, L-Pages 212 may be configured to have a starting address that is aligned with an F-Page 208 and/or E-Page 210 boundary, but also may be configured to be unaligned with either of the boundaries of an F-Page 208 or E-Page 210. That is, an L-Page starting address may be located at a non-zero offset from either the start or ending addresses of the F-Pages 208 or the start or ending addresses of the E-Pages 210, as shown in Fig. 1A. As the L-Pages 212 are not fixed in size and may be smaller than the fixed-size E-Pages 210, more than one L-Page 212 may fit within a single E-Page 210. Similarly, as the L-Pages 212 may be larger in size than the E-Pages 210, the L-Pages 212 may span more than one E-Page 210, and may even cross the boundaries of F-Pages 208, shown in Fig. 1A at numeral 117. As detailed further below, L-Pages 112 may also span block boundaries, such as would be the case wherein one of the boundaries 117 represented a block boundary.

[0024] Where the LBA size is 512 or 512+ bytes, a maximum of, for example, eight sequential LBAs may be packed into a 4 KB L-Page 212, given that an uncompressed L-Page 212 may be 4 KB to 4 KB+. It is to be noted that, according to one embodiment, the exact logical size of an L-Page 212 is unimportant as, after compression, the physical size may span from few bytes at minimum size to thousands of bytes at full size. For example, for 4 TB SSD device, 30 bits of addressing may be used to address each L-Page 112 to cover for an amount of L-Pages that could potentially be present in such a SSD.

[0025] Fig. 2 shows a logical-to-physical address translation map 250 and illustrative entries thereof, according to one embodiment. As stored data is referenced by the host in L-Pages 212 and as the SSD stores the L-Pages 212 in one or more E-Pages 210, a logical-to-physical address translation map is required to enable the controller 102 to associate an L-Page 212 to one or more E-Pages 210. Such a logical-to-physical address translation map (effectively, an L-Page to E-Page address translation map) is shown in Fig. 2 at 250 and, in one embodiment, is a linear array having one entry per L-Page 212. Such an address translation map 250 may be stored in a volatile memory, such as a DRAM.

[0026] Fig. 2 also shows entries in the address translation map 250 for

four different L-Page numbers, which L-Page numbers are labeled in Fig. 2 as L-Page 1, L-Page 2, L-Page 3 and L-Page 4. According to one embodiment, each L-Page stored in the SSD may be pointed to by a single and unique L-Page number entry in the address translation map 250. Accordingly, in the example being developed herewith, four entries are shown. As shown, each entry in the map L-Page to E-Page translation 250 may comprise an L-Page number, which may comprise an identification of the E-Page containing the start address of the L-Page being referenced, the offset of the start address within the E-Page and the length of the L-Page. In addition, a plurality of ECC bits may provide error correction functionality for the map entry. For example, as shown in Fig. 2 and assuming an E-Page size of 2 KB, L-Page 1 may be referenced in the address translation map 250 as follows: E-Page 1003, offset 800, length 1,624, followed by a predetermined number of ECC bits (not shown). That is, in physical address terms, the start of the L-Page referenced by L-Page number L-Page 1 is within (not aligned with) E-Page 1003, and is located at an offset from the starting physical location of the E-Page 1003 that is equal to 800 bytes. The compressed L-Page associated with L-Page number L-Page 1, furthermore, extends 1,624 bytes, thereby crossing an E-Page boundary to E-Page 1004. Therefore, E-Pages 1003 and 1004 each store a portion of the L-Page associated with L-Page number L-Page 1.

[0027] Similarly, the compressed L-Page associated with L-Page number L-Page 2 is stored entirely within E-Page 1004, and begins at an offset therein of 400 bytes and extends only 696 bytes within E-Page 1004, thereby remaining entirely within the starting and ending address range designated as E-Page 1004. The compressed L-Page associated with L-Page number L-Page 3 starts within E-Page 1004 at an offset of 1,120 bytes (just 24 bytes away from the boundary of L-Page 2) and extends 4,096 bytes past E-Page 1005 and into E-Page 1006. Therefore, the L-Page associated with L-Page number L-Page 3 spans a portion of E-Page 1004, all of E-Page 1005 and a portion of E-Page 1006. Finally, the L-Page associated with L-Page number L-Page 4 begins within E-Page 1006 at an offset of 1,144 bytes, and extends 3,128 bytes to fully span E-Page 1007, to cross an F-Page boundary into E-Page 1008 of the next F-Page.

[0028] Collectively, each of these constituent identifier fields (E-Page, offset, length and ECC) making up each entry of the address translation map 250 may

be, for example, 8 bytes in size. That is, for an exemplary 4 TB drive, the address of the E-Page may be 32 bits in size, the offset may be 12 bits (for E-Page data portions up to 4 KB) in size, the length may be 13 bits and the ECC field may be provided. Such an 8 byte entry may be created each time an L-Page is written or modified, to enable the controller 102 to keep track of the data (written in L-Pages) within the flash storage. As illustrated above, this 8-byte entry in the address translation map 250 may be termed a logical page number or LPN. It is to be noted that, in the case of a 4 KB sector size, the LBA is the same as the LPN. The LPN, therefore, may constitute the index of the L-Page within the logical-to-physical address translation table 250 and comprise the address of the entry within the non-volatile memory. Therefore, when the controller 102 receives a read command from the host 118, the LPN may be derived from the supplied LBA and used to index into the address translation map 250 to extract the location of the data to be read in the flash memory. When the controller 102 receives a write command from the host 118, the LPN may be constructed from the LBA and the address translation map 250 may be modified. For example, a new entry therein may be created. Depending upon the size of the volatile memory storing the address translation map 250, the LPN may be stored in a single entry or broken into, for example, two entries. For example, a first entry may identify the E-Page containing the starting address of the L-Page in question (plus ECC bits) and a second entry may identify the offset and length (plus ECC bits). Together, these two entries may correspond and point to a single L-Page within the flash memory. In other embodiments, the specific format of the address translation map entries may be different from the examples shown above.

[0029] The variable data portion sizes within the E-Pages are used in various ways to accommodate changing conditions of the memory blocks in the array of flash memory devices. The condition of the blocks is further discussed below with reference to Figs. 3 and 4. Fig. 3 shows a graph showing a percentage of bad blocks versus PE cycles for both conventional devices and methods and those devices and methods according to various embodiments. Fig. 4 is a diagram showing a relationship between block failure rates over the lifetime of a data storage device such as a SSD, and the manner in which the ECC and data portions of an E-Page may be varied to

extend the useful lifetime of the data storage device, according to one embodiment. The life cycle of blocks varies from block to block and die to die, with some blocks aging (becoming less able to reliably store data) quicker than other blocks. Such variations may be caused by process variations from die to die, the block location on the die and by use patterns and uneven PE cycles from one block to the next, among other reasons for uneven aging.

[0030] According to one embodiment, a data storage device may be configured to determine which of a plurality of ECC profiles to apply and/or to adjust the size of the ECC portion 116 and to correspondingly adjust a size of the data portion 114 of the E-Pages 210 in one or more F-Pages and/or one or more blocks, based at least in part on a condition of the block(s). The condition of the block may include, for example, a PE count of the block, an ECC error rate, flash error information, temperature, dwell time (time between erasure events), and internal flash state information, or most any other measurable physical characteristic such as operating conditions, temperature, age and the like. According to one embodiment, the controller may be configured to adjust the size of the ECC portion and/or the size of the data portion, based on host-provided metadata (generated as a result of host-specified data set management commands such as the TRIM command, for example) and/or overall free space in the data storage device. In doing so, one embodiment may operate to extend the useful life of the blocks from an initial PE count PE_i as shown at 300 in Fig. 3 to a greater PE count of PE_{i+x}, where "x" is greater than zero, as shown at 302. This is because a block that has degraded can be protected with a greater amount of ECC, thus extending its useful life. In addition, the variability of ECC at a block/page level also means that the applied ECC can be tailored to the unique condition of the individual blocks/pages and can track the degradation paths experienced by those individual blocks/pages.

[0031] As suggested in Fig. 3, the useful life of the SSD extends to a PE count at which the percentage of bad blocks reaches a predetermined maximum. In practice, this predetermined maximum may be dictated by the SSD's ability to garbage collect. When garbage collection is no longer possible, because of an insufficient number of free blocks, the SSD has effectively reached the end of its useful life, or at

least has reached the end of its ability to store new data. According to one embodiment, by judiciously adjusting the size of the ECC portion 116 and by correspondingly adjusting the size of the data portion 114 of the E-Pages 210 in one or more blocks, based at least in part on a condition of the block(s), the number of memory blocks deemed to be "bad blocks" may rise more slowly with respect to PE cycles, resulting in the life of the SSD being increased as measured by the number of PE cycles. It is to be noted that, according to one embodiment, the selected ECC profile for a block may be maintained until at least the block in question has been garbage collected.

[0032] As shown in Fig. 4, the percentage of bad blocks observed may be different for different points in the life cycle of the SSD. In early life (when the PE cycle count is low), the failure rate may be somewhat high; that is, there may be a comparatively higher incidence of page/block related failures. At least some of these early life page/block failures may be effectively uncorrectable using the ECC of the E-Pages. To address these ECC uncorrectable instances, some embodiments provide for an additional error correction mechanism in one or more F-Pages termed "Check Pages," which have check data calculated from data across multiple F-Pages, as will be further described in conjunction with Figs. 8-10. Because of the use of Check Pages to address these early ECC-uncorrectable failures, in early life, E-Pages may be configured with comparatively weaker ECC than in later stages of life. A weaker ECC, moreover, may be provided in fewer bytes than would otherwise be necessary for a comparatively stronger ECC. Therefore, as shown, the ECC portion 116_{EARLY} may be adjusted to occupy a comparatively smaller number of bytes in the E-Page. In turn, this allows a correspondingly larger data portion $114_{EARLY,}$ given the fixed size of the E-Pages. Advantageously, such larger data portions 114_{EARLY} frees up extra bytes, yields greater free space for data storage and garbage collecting and increases overprovisioning. Alternatively, to accommodate the higher incidence of failure rate, a higher amount of ECC may be used in some embodiments.

[0033] In mid-life, the SSD's ability to balance the size of the data portion and the strength of the ECC is at its peak, resulting in an efficient use of E-Pages to optimize lifespan. As shown, mid-life is a relatively stable period in the lifespan of the

SSD, as shown by the relatively flat failure rate curve. Therefore, a somewhat greater number of bytes may be utilized for the ECC as shown at 116_{MID} as compared to 116_{EARLY}. The space within an E-Page at mid-life reserved for the data portion 114_{MID} may then be, according to one embodiment, comparatively smaller than the space reserved for the data portion of an early life E-Page, as shown at 114_{EARLY}. A comparatively smaller data portion 114_{MID}, moreover, may only yield a relatively smaller amount of additional free space, and consequently, only result in a relatively small increase in overprovisioning. Yet, this comparatively smaller data portion 114_{MID} may nevertheless, be greater than would be the case if the block had been provisioned for worst case failure rate, as is conventionally done.

[0034] Toward late or end of life, the data portion 114_{LATE} may be adjusted smaller still, to make room within the E-Page for an even stronger (e.g., larger) ECC portion 116_{LATE}. As one embodiment increases the useable life of the SSD through adjustments of the sizes of the data and ECC portions and selection of the ECC profile, the ECC strength, in late life / end of life, may need to be increased relative to the ECC portion size conventionally used. Through judicious selection of the ECC strength at the time of generating, therefore, the maximum PE count of the SSD may be increased over that conventionally possible in the case in which the sizes of both the data portion and the ECC portion of the E-Pages are static. This is because in early and mid-life, the space allocated to ECC is smaller than may be required according to conventional practice, in which the sizes of the ECC and data portions are static. According to one embodiment, even the increase in the ECC portion size and corresponding decrease in the data portion size in late / end of life is not sufficient to negate the gains achieved through the increased size of the data portion in early and mid-life, resulting in a net increase in the PE count over the useful lifetime of the data storage device. Moreover, according to one embodiment and as described below, leveraging the variably-sized data portions of F-Pages and the use of cross-F-Page error correction (also called "outer" error correction, as opposed to the ECC portions which are called "inner" error correction), the useful life of an SSD, as measured by the number of PE cycles, may be increased still further.

[0035] One embodiment supports and tracks block-level configuration of

the ECC dynamically, over the life cycle of the SSD. Beyond adjusting the ECC over the lifecycle, different ECCs may be used for different blocks based on block quality. Weak blocks may be provided with additional ECC, whereas comparatively stronger blocks may be provided with a relatively weaker ECC in a relatively smaller ECC portion 116, thereby yielding additional free space and a consequent increase in overprovisioning.

[0036] According to one embodiment, the controller 102 may be configured to increase the size of the ECC portion and correspondingly decrease the size of the data portion of one or more of the E-Pages when the PE count reaches a first pre-determined threshold PE_{TH1}, as the SSD transitions from early life to mid-life. Also according to one embodiment, the controller 102 may be configured to further increase the size of the ECC portion and again correspondingly decrease the size of the data portion of one or more of the E-Pages when the PE count reaches a second pre-determined threshold PE_{TH2}, as the SSD transitions from mid-life to late life / end of life. The second pre-determined threshold PE_{TH2} may be higher than the first predetermined PE threshold PE_{TH1}. It is to be understood that the life stages (early, mid and late/end) described and shown herein are but exemplary stages and that a lesser or greater granularity (e.g., number) of life stages may be defined, with a correspondingly reduced or increased number of predetermined PE thresholds. Alternatively, the threshold governing the adjustments in the ECC portion and the data portions of the physical pages may be wholly independent of (or not solely dependent on) the PE count. Thus, embodiments are not to be limited to adjustments in the relative sizes of the data and ECC portions of physical pages based on a PE count. Indeed, other factors may drive or contribute such adjustments, such as the overprovisioning amount, free space, operating modes, operating temperatures, criticality of the data, safety margins and the like.

[0037] According to one embodiment, the choice of the strength (and the size) of the ECC portion may be made by a selection, by the controller 102, of one of a plurality of ECC profiles. According to one embodiment, such selection may be made at runtime. This selection may determine which of the plurality of ECC profiles to apply to one or more of the blocks, F-Pages or E-Pages. At least some of the ECC profiles may

define different ECC strengths and, therefore, correspond to error correction codes that occupy a greater or lesser number of bytes and that are able to correct a greater or lesser amount of data (e.g., number of bits, symbols) stored in the physical pages. Given a fixed physical page size, the ECC profiles may dictate how many bytes are allocated to data in the data portion 114 and how many bytes are allocated to ECC in the ECC portion 116. Each profile may be associated with a different number. For example, 16 ECC profiles may be defined, which 16 ECC profiles, therefore, are addressable using 4 bits. The ECC profiles may be stored within or may be otherwise accessible to the controller 102 and may be selected based upon the condition of the E-Page(s), F-Page(s) or block(s) to be programmed.

[0038] According to one embodiment, the controller 102 may be further configured to determine which of the plurality of ECC profiles is to be applied across the E-Pages within the F-Pages of a block 109, at the time of generating the block 109. This, in turn, implies the ability for the controller 102 to apply different ones of the plurality of ECC profiles to different ones of the plurality of blocks 109, F-Pages 208 and/or E-Pages 210. For example, the controller 102 may be configured to select a first one of the plurality of ECC profiles to generate F-Pages 208 of a first block 109 and to select a second one of the plurality of ECC profiles to generate F-Pages 208 of a second block 109. In early and/or mid-life, the controller 102 may be configured to increase overprovisioning of the SSD by decreasing the size of the ECC portion 116 and correspondingly increasing the size of the data portion 114 of E-Pages 210 of a block 109 when, for example, the PE count of the block 109 is below a pre-determined or dynamically-selected or calculated threshold (e.g., PE_{TH1} or PE_{TH2}).

[0039] According to one embodiment, the controller 102 may be further configured to determine which of the plurality of ECC profiles to apply to a block 109, F-Page 208 or E-Page 210 based on an error rate. When the error rate within a particular block 109, F-Page 208 or E-Page 210 is low, upon the next programming, the controller 102 may select an ECC profile defining a relatively smaller ECC portion 116 and a correspondingly greater data portion 114 for the particular E-Page 210, or E-Page(s) residing in the particular block 109 or F-Page 208. For example, the error rate may be based on a prior occurrence of ECC errors within a block 109, F-Page 208 or E-Page

210.

[0040] With reference back to Fig. 2, the L-Page associated with L-Page number L-Page 4 (L-Page 4) spans two F-Pages. Moreover, with continued reference to Fig. 2, dashed line 117 may indicate a block boundary, meaning that L-Page 4 spans two different blocks. According to one embodiment, the data portion of the E-Pages within a first F-Page may be corrected using the ECC according to a first ECC profile and the data portion of the E-Pages within a second F-Page may be corrected using the ECC according to a second ECC profile that is different than the first ECC profile. Therefore, it follows that the controller 102 may be further configured to read L-Pages, such as L-Page 4 of Fig. 2, that span across blocks (e.g., from a first block to a second block) and to accommodate two or more of the plurality of ECC profiles within a single read operation involving an L-Page. For example, the first F-Page may belong to a block that has transitioned into late life or end of life and whose E-Pages, therefore, comprise ECC portions 116 that may be of comparatively greater size than the ECC portions 116 of the E-Pages of the block to which the second F-Page belongs, which block may still be categorized as fitting within the mid-life stage, for example. Therefore, as the SSD is processing random host reads, there can be a plurality of different size ECC portions in the E-Pages present in the page register(s) 104.

[0041] According to one embodiment, any given block 109 may comprise a first E-Page having an ECC portion of a first size and a second E-Page having an ECC portion of a second size that is different from the first size. The second size, according to one embodiment, may be selected based on the location of the second E-Page within the block. In one embodiment, the different ECC portion sizes are selected based on the physical location, within a memory block of the F-Pages in which the first and second E-Pages reside. This F-Page location-based ECC profile selection may be useful in selecting the ECC profile to apply to particular F-Pages within a block. For example, the first F-Page of a block (such as F-Page 0 in Fig. 1A) and the last F-Page of a block (such as F-Page 255 in Fig. 1A) may be the worst F-Pages of the block, in terms of the occurrence of errors. Therefore, according to one embodiment, the ECC profile selected for the first and last F-Pages of a block may result in the controller 102 applying an ECC having a stronger error correcting capability to data stored in the

physical pages (e.g., E-Pages) of the first and last F-Pages of a block. However, such location-influenced ECC profile selection is not limited to the first and last F-Pages of a block, but may be widely applied as needed to most efficiently extend the useful lifetime of the SSD and/or for any other purpose.

[0042] Fig. 5 is a block diagram of a block information data structure, according to one embodiment. In one embodiment, every block 109 may be associated with, for example, about 32 bytes of information that may be stored, for example, in a block information data structure, as shown at 500 in Fig. 5. This or a similar block information data structure 500 may be saved by the controller firmware to the flash memory, so that the block information is stored in a non-volatile manner. As shown therein, the Block Type field may be configured to store which ECC profile has been applied to the data portions of the E-Pages of that particular block. Indeed, the ECC profile for each block should be tracked, as it is pulled out for every read, to enable the controller 102 to properly decode and error correct the data stored in the data portion of the E-Pages of that block. As shown, the Block Type field may occupy, for example, 4 bits to address a possible 16 ECC profiles. However, a greater or lesser number of ECC profiles may be provided, which may be selected using a greater or a lesser number of bits. The different ECC formats themselves may be stored in an ECC profile table, as shown at 502. The ECC profile table 502 may be referenced by the Block Type field of block information data structures 500.

[0043] It is to be noted that, should the strongest ECC format be ineffective in error-correcting data stored in the E-Pages of a given block, that block may be switched to lower page only (assuming MLC memory is used), meaning that instead of storing two bits per cell, only one bit per cell is stored. The Block Type field within the block information structure 500 may also indicate whether the block associated therewith is a fully bad block by storing, for example, a 0xFh value therein. Such a bad block is, in this manner, flagged as being thereafter unavailable for data storage, thereby potentially decreasing free space and overprovisioning. According to one embodiment, an ECC profile may be defined and selected to cause the controller 102 to skip an invalid F-Page during programming. This would be recognized by the controller 102, which would not program the invalid F-Page and would skip to the next

sequential F-Page of the block.

[0044] The block information data structure 500, as shown in Fig. 5, may also comprise a Timestamp field, which may indicate the date and time of the last write. The block information data structure 500 may also include a Temperature field, to store temperature-related information, and a PE Count field to track the number of program /erase cycles undergone by the block, which field may be used, for example, when selecting the ECC profile to use and may, therefore, influence the selected size of the data portion 114 and the ECC portion 116 of the E-Pages of the block, as detailed earlier. One or more Block Trim Offset fields of the block information data structure 500, may be used by the SSD's firmware to adjust internal settings of the Flash device. The Block Trim Offset fields may be provided with their own error correction. Moreover, the block's TRIM information may be configured to contain data relative to the health of a block, such that if errors become uncorrectable using the current ECC, that information may be used to change the ECC profile and increase the strength of the ECC used to provide error correction for data stored in the E-Pages of that block. A Read Disturb field may be provided, to contain a number of times that this block has been read. An Error Count field may track the number of errors encountered in the block. As will be described later, data structure 500 may also include one or more data values (e.g., flag(s)) indicating which F-Page(s) within an S-Page is/are designated as the Check Page(s).

[0045] Fig. 5 provides an example format for storing information related to a block. In other embodiments, the information may be stored at a different level of granularity. For example, in some embodiments, each E-Page or F-Page may have its own profile designation and corresponding information. Also, the information may be stored in a format that is different from the example depicted in Fig. 5.

[0046] According to one embodiment, a structure known as an S-Journal may be configured to contain mapping information for a given S-Block. More precisely, according to one embodiment, S-Journals contain the mapping information for a predetermined range of E-Pages within a given S-Block. Fig. 6 is a block diagram of an S-Block, according to one embodiment. As shown therein, an S-Block 602 may comprise one flash block (F-Block) 604 (as also shown at 109 in Fig. 1) per die. An S-

Block, therefore, may be thought of as a collection of F-Blocks, one F-Block per die, that are combined together to form a unit of the Flash Management System. According to one embodiment, allocation, erasure and GC may be managed at the S-Block level. Each F-Block 604, as shown in Fig. 6, may comprise a plurality of flash pages (F-Page) such as, for example, 256 or 512 F-Pages. An F-Page, according to one embodiment, may be the size of the minimum unit of program for a given non-volatile memory device. Fig. 7 shows a super page (S-page), according to one embodiment. As shown therein, an S-Page 702 may comprise one F-Page per F-Block of an S-Block, meaning that an S-Page spans across an entire S-Block.

[0047] Fig. 8 is a diagram of an S-Page illustrating the generation and storage of Check Pages, according to one embodiment. An S-Page 702 is shown, comprising a correspondingly-numbered F-Page in each of a plurality of dies. In the example of Fig. 8, the S-Page 702 comprises the F-Page 3 of 128 dies. It is to be understood that S-Pages are not limited to the exemplary 128 dies shown in Fig. 8. The flash controller 102 may be configured to generate variably-sized ECC portions and to store data in corresponding variably-sized data portions within an F-Page, as shown and described relative to Figs. 1B and 1C. Such ECC portions, therefore, may be characterized as being intra-E-Page error correction codes; namely, error correction codes that only apply to a predetermined data portion within a given E-Page within an F-Page. Such intra-E-Page error correction codes may also be characterized as "inner" error correction codes. As noted above, the variably-sized data portions of E-Pages within one F-Page collectively define, in the aggregate, an F-Page data portion.

[0048] According to one embodiment, the controller 102 may further be configured to generate one or more error correction codes across the F-Pages of an S-Page and to store the generated error correction code within that or those F-Pages of the S-Page that have the largest F-Page data portion. The one or more F-Pages used to store the generated error correction code are termed "Check Pages." Such cross-F-Page error correction codes may also be characterized as "outer" error correction codes, and operate in an orthogonal manner to the "inner" error codes to provide an additional layer of data protection. That is, the generated cross-F-Page error correction code(s) may be stored in the F-Page or F-Pages having the largest F-Page data

portion(s), as such portions are shown in Figs. 1B and 1C. Fig. 8 shows aspects of the generation and storage of such a cross-F-Page error correction code 802. According to one embodiment, the controller 102 may be configured to designate one or more F-Pages having the largest size F-Page data portion among the F-Pages in the S-Page as the Check Page(s); that is, as the F-Page(s) designated to store a cross-F-Page error correction code. According to one embodiment, the cross-F-Page error correction code may comprise a Forward Error Correction (FEC) code such as, for example, a Reed-Solomon ("R-S") code.

[0049] According to one embodiment, the controller 102 may be further configured to generate and store the E-Page error correction code at runtime, upon generating each E-Page. In contrast, the controller 102 may be configured to complete the generation and storage of the cross-F-Page error correction code (e.g., the R-S or other FEC code) after the data (e.g., user data) have been stored in the F-Pages within the S-Page. According to one embodiment and as suggested in Fig. 8, as the data (e.g., user data) within the S-Page are stored, a check information generator (e.g., a programmed controller or processor) may traverse the S-Page at runtime in a cross-F-Page (i.e., across several F-Pages simultaneously) manner and may generate one or more FEC (R-S, for example) codes 802 from the data portions of the constituent E-Pages of the F-Pages within the S-Page. To enable the code to be generated from all F-Pages, the F-Page(s) having the largest data portion(s) may be skipped when generating the S-Page as shown at 812, so as to enable the controller 102 to thereafter store the FEC code in such F-Page(s) having the largest data portion(s) – shown at references 806 and 808 in Fig. 8. As shown at 810, should the FEC code 802 be stored, for example, in F-Page 3 of die 127, the FEC code would not be generated from F-Page 3 in die 1, shown at reference 804. It is only by first encoding all data in the S-Page and by thereafter writing out the check (e.g., parity) symbols in designated F-Page(s) (the designated Check Page(s)) having the largest F-Page data portions that the cross-F-page error correction code is assured of covering all variably-sized F-Page data portions within an S-Page. As the Check Page(s) comprise the generated cross-F-Page error correction codes and not user data, they may be skipped (not read) during read operations. Check Pages, therefore, need only be accessed when attempting to

recover from an error in an F-Page. As before, the ECC code stored within the ECC portion of an E-Page may be utilized to recover from an error within a data portion of a given E-Page. A failure of the ECC code stored within the ECC portion of an E-Page to correct a data error identifies that F-Page within the plurality of F-Pages of an S-Page that is subject to the error. It is against the thus-identified F-Page(s) that the cross-F-Page error correction code may be applied, in an attempt to recover from the F-Page error(s). It is to be noted that, when generating the FEC code 802, the E-Pages in F-Pages not having been designated as Check Pages may be padded (with, for example, zeros) such that the data field size of these E-Pages matches the size of the data field of the E-Pages in the Check Page(s). Conversely, when correcting F-Page(s), the pad values used during the generation of the FEC code 802 may be used during correction. Moreover, one or more of the F-Pages in an S-Page may have been previously marked as being "bad", or unavailable for data storage. Such bad F-Pages, it is understood, may be skipped during the generation of the FEC code 802 and may take no part in any subsequent correction(s) using such FEC code 802.

[0050] According to one embodiment, the controller 102 may be further configured to set a flag in a block information data structure (such as 500 in Fig. 5) to identify and designate a particular F-Page or F-Pages within an S-Page as being Check Page(s). Accordingly, the controller 102 may be configured to consult the block information data structure 500 to determine which of the F-Page(s) of an S-Page has or have been designated as Check Page(s). It follows, therefore, according to one embodiment, that the positions of the Check Page(s) are not fixed in S-Pages. For example, as between a first S-Page and a second S-Page, the F-Page(s) designated as Check Page(s) in the first S-Page may occupy a comparatively different position within the first S-Page as do the F-Page(s) designated as the Check Page(s) within the second S-Page.

[0051] It is to be noted that one or more additional F-Pages in the S-Page may be designated as Check Pages and configured to store a cross-F-Page error correction code. The decision to generate and store additional cross-F-Page error correction codes may depend on one or more factors. For example, additional cross-F-Page error correction codes may be generated and stored based on the configuration of

the memory array, the performance of the memory array (e.g., tracked number of E-Page ECC errors, correctable or uncorrectable, and/or both) and/or the use-profile of predetermined portions of the memory array. Indeed, some combinations of configurations, performance and use-profiles may recommend designating a greater number of Check Pages than would otherwise be the case. For example, some areas of the memory array storing critical information may be provisioned with a comparatively greater number of Check Pages per S-Page than other areas of the memory array. For example, S-Pages storing file system information such as S-Journals may be provisioned with a comparatively greater number of Check Pages than S-Pages that do not store such file system information. Therefore, according to one embodiment, different S-Pages may comprise a different number of Check Pages and the positions of such Check Pages are not fixed across S-Pages.

[0052] According to one embodiment, the controller 102 may be configured to periodically determine (e.g., upon each Program-Erase (PE) cycle) the strength of E-Page error correction code to generate within the variably-sized ECC portion of each E-Page, the strength of the cross-F-Page error correction code to generate within the S-Page being generated and which F-Page(s) within the S-Page being generated that should be designated as the Check Page(s). Therefore, the strength of both the E-Page ECC, the cross-F-Page error correction code and the number of Check Pages may be dynamically determined and varied across, for example, S-Pages.

[0053] Fig. 9 is a diagram showing a relationship between block failure rates over the lifetime of a data storage device, and the manner in which the number of Check Pages may be varied to extend the useful lifetime of the data storage device, according to one embodiment. The three graphs 902, 904, and 906 are correlated in the X-axis in that they plot three parameters versus the same PE count progression. Graph 902 plots the failure rate vs. the PE count, graph 904 plots the ECC strength used vs. the PE count, and graph 906 plots the number of Check Pages used vs. the PE count.

[0054] As described relative to Fig. 4, although the memory array may be relatively healthy, in early life the memory array may be characterized by a relatively

high incidence of F-Page failures, which errors are not correctable using the ECC within the E-Pages of the F-Pages. Later in life, the strength of the ECC within the E-Pages may be gradually increased. To address the above-mentioned relative high incidence of page errors in the early life of the memory array, a comparatively greater number of Check Pages may be utilized in early life (as shown in 912), as compared with later in the life cycle of the array. For example, four Check Pages (or more) per S-Page may be used to correct such early-life F-Page errors that are otherwise uncorrectable using the ECC of the E-Pages. Later in life (e.g., during mid-life), as the strength of the ECC of E-Pages is increased (as shown in 918) and F-Page errors become less frequent, S-Pages may be provisioned with comparatively fewer Check Pages and their number may be kept relatively constant (as shown in 914). In late or end-of life during which E-Page errors rise and F-Page errors also become more frequent relative to mid-life, the strength of the ECC of E-Pages may be increased (as shown in 920) and the number of Check Pages per S-Page may be increased as needed (as shown in 916). According to one embodiment, the controller 102 may track E-Page ECC error rates and this tracked rate may be used as one exemplary factor in the determination of the number of Check Pages with which an S-Page may be provisioned. In another embodiment, the number of uncorrectable ECC errors is used as at least one factor in this determination. Other E-Page ECC and/or Check Page profiles may be applied, as those of skill in this art may recognize. For example, the relationship between the amount of ECC used and the Check Pages used in different life stages need not be correlated as shown in Fig. 9. In some embodiments, each could be independently adjusted without regard to the trend of the other.

[0055] Fig. 10 is a flowchart of a method of generating and storing Check Pages in a data storage device, according to one embodiment. As shown, Block B101 calls for defining an S-Page configured as shown and described above; namely, comprising a plurality of F-Pages from one or more of a plurality of dies. As shown at B102 and as shown at Fig. 1C, an E-Page error correction code with a variably-sized ECC portion may be stored within one or more of the E-Pages of the F-Pages of the defined S-Page, to correct an error within the corresponding variably-sized data portions of the E-pages. Block B103 calls for designating one or more F-Pages having the

largest size F-page data portion among the F-pages in the defined S-page as a Check Page(s), as shown and described relative to Fig. 8. As shown at B104, a cross-F-Page error correction code may then be stored within each F-Page(s) designated as Check Pages. Such cross-F-Page error correction code may comprise, for example, an R-S code or other FEC code.

[0056] While certain embodiments of the disclosure have been described, these embodiments have been presented by way of example only, and are not intended to limit the scope of the disclosure. Indeed, the novel methods, devices and systems described herein may be embodied in a variety of other forms. Furthermore, various omissions, substitutions and changes in the form of the methods and systems described herein may be made without departing from the spirit of the disclosure. The accompanying claims and their equivalents are intended to cover such forms or modifications as would fall within the scope and spirit of the disclosure. For example, those skilled in the art will appreciate that in various embodiments, the actual structures (such as, for example, the structure of the SSD blocks or the structure of the physical or logical pages) may differ from those shown in the figures. Depending on the embodiment, certain of the steps described in the example above may be removed, others may be added. Also, the features and attributes of the specific embodiments disclosed above may be combined in different ways to form additional embodiments, all of which fall within the scope of the present disclosure. Although the present disclosure provides certain preferred embodiments and applications, other embodiments that are apparent to those of ordinary skill in the art, including embodiments which do not provide all of the features and advantages set forth herein, are also within the scope of this disclosure. Accordingly, the scope of the present disclosure is intended to be defined only by reference to the appended claims.

CLAIMS:

1. A solid state drive controller, comprising:

a processor, the processor being configured to couple to an array of flash memory devices, the array comprising a plurality of dies, each die comprising a plurality of flash blocks (F-Blocks), each F-Block comprising a plurality of flash pages (F-Pages), at least some of the F-Page comprising at least one error correcting code page (E-Page), and at least some of the E-Pages comprising a variably-sized error correction code (ECC) portion and a corresponding variably-sized data portion, the variably-sized data portions within one F-Page defining, in the aggregate, an F-Page data portion,

wherein the processor is configured to:

define an S-Page that comprises a plurality of F-Pages from one or more of the plurality of dies;

within the S-Page,

store an E-Page error correction code within the variably-sized ECC portion of each E-Page within the F-Pages to correct an error within the corresponding variably-sized data portion;

designate at least one F-Page having a largest size F-Page data portion among the F-Pages in the S-Page as a Check Page; and

store a cross-F-Page error correction code within the at least one Check Page.

2. The solid state drive controller of claim 1, wherein the cross-F-Page error correction code comprises a Forward Error Correction (FEC) code.

3. The solid state drive controller of claim 2, wherein the FEC code comprises a Reed-Solomon code.

4. The solid state drive controller of claim 1, wherein the E-Page error correction code comprises a Low-Density Parity-Check (LDPC) error correction code.

5. The solid state drive controller of claim 1, wherein the processor is

configured to generate and store the E-Page error correction code at runtime, at a time of generating one of the plurality of E-Pages.

6. The solid state drive controller of claim 1, wherein the processor is further configured to generate the cross-F-Page error correction code for the S-Page as data is written to the S-Page.

7. The solid state drive controller of claim 1, wherein the processor is further configured to read data from the S-Page and to skip the at least one F-Page within the S-Page that has been designated as a Check Page.

8. The solid state drive controller of claim 1, wherein the processor is further configured to:

set a flag in a block information data structure to designate particular F-Pages within an S-Page as being Check Pages; and

consult the block information data structure to determine which of the F-Pages of an S-Page have been designated as Check Pages.

9. The solid state drive controller of claim 1, wherein the processor is further configured to designate additional F-Pages in the S-Page as Check Pages, depending upon at least one of: (1) a configuration of the array, (2) a performance of the array and (3) a use-profile of predetermined portions of the array.

10. The solid state drive controller of claim 1, wherein the processor is further configured to designate additional F-Pages as Check Pages in S-Pages storing a predetermined type of information.

11. The solid state drive controller of claim 10, wherein the predetermined type of information comprises metadata.

12. The solid state drive controller of claim 10, wherein the predetermined

type of information comprises host-indicated data.

13. The solid state drive controller of claim 1, wherein as between a first S-Page and a second S-Page, the at least one F-Page designated as a Check Page in the first S-Page occupies a comparatively different position within the first S-Page as does the at least one F-Page designated as a Check Page within the second S-Page.

14. The solid state drive controller of claim 1, wherein the S-Page is a first S-Page and the controller is further configured to define a second S-Page that has a greater number of F-Pages designated as Check Pages than the first S-Page.

15. The solid state drive controller of claim 1, wherein the processor is further configured to, when writing to an F-Block, determine at least one of:

(1) a strength of E-Page error correction code to generate within the variably-sized ECC portion of each E-Page;

(2) a strength of cross-F-Page error correction code to generate; and

(3) which F-Pages within an S-Page to designate as a Check Page.

16. The solid state drive controller of claim 1, wherein the processor is further configured to apply the cross-F-Page error correction code when the E-Page error correction code fails to correct an encountered error.

17. A data storage device, comprising:

the controller of claim 1, and

the array of flash memory devices.

18. A method of controlling a data storage device, the data storage device comprising a processor, the processor being configured to couple to an array of flash memory devices, the array comprising a plurality of dies, each die comprising a plurality of flash blocks (F-Blocks), each F-Block comprising a plurality of flash pages (F-Pages), at least some of the F-Page comprising at least one error correcting code page (E-

Page), and at least some of the E-Pages comprising a variably-sized error correction code (ECC) portion and a corresponding variably-sized data portion, the variably-sized data portions within one F-Page defining, in the aggregate, an F-Page data portion, the method comprising:

defining an S-Page that comprises a plurality of F-Pages from one or more of the plurality of dies;

within the S-Page,

storing an E-Page error correction code within the variably-sized ECC portion of each E-Page within the F-Pages to correct an error within the corresponding variably-sized data portion;

designating at least one F-Page having a largest size F-Page data portion among the F-Pages in the S-Page as a Check Page; and

storing a cross-F-Page error correction code within the at least one Check Page.

19. The method of claim 18, wherein the cross-F-Page error correction code comprises a Forward Error Correction (FEC) code.

20. The method of claim 19, wherein the FEC code comprises a Reed-Solomon code.

21. The method of claim 18, wherein the E-Page error correction code comprises a Low-Density Parity-Check (LDPC) error correction code.

22 The method of claim 18, wherein storing the E-Page error correction code comprises generating and storing the E-Page error correction code at runtime, at a time of generating one of the plurality of E-Pages.

23. The method of claim 18, wherein storing the cross-F-Page error correction code comprises generating and storing the cross-F-Page error correction code for the S-Page as data is written to the S-Page.

24. The method of claim 18, further comprising reading data from the S-Page and skipping the at least one F-Page within the S-Page having been designated as a Check Page.

25. The method of claim 18, further comprising:

setting a flag in a block information data structure to designate particular F-Pages within an S-Page as being Check Pages; and

consulting the block information data structure to determine which of the F-Pages of an S-Page have been designated as Check Pages.

26. The method of claim 18, further comprising designating additional F-Pages in the S-Page as Check Pages, depending upon at least one of: (1) a configuration of the array, (2) a performance of the array and (3) a use-profile of predetermined portions of the array.

27. The method of claim 18, further comprising designating additional F-Pages as Check Pages in S-Pages storing a predetermined type of information.

28. The method of claim 27, wherein the predetermined type of information comprises one of metadata and host-indicated data.

29. The method of claim 18, wherein as between a first S-Page and a second S-Page, the at least one F-Page designated as a Check Page in the first S-Page occupies a comparatively different position within the first S-Page as does the at least one F-Page designated as a Check Page within the second S-Page.

30. The method of claim 18, wherein the S-Page is a first S-Page and wherein the method further comprises defining a second S-Page that has a greater number of F-Pages designated as Check Pages than the first S-Page.

31. The method of claim 18 wherein, when writing to an F-Block, the method further comprises determining at least one of:

(1) a strength of E-Page error correction code to generate within the variably-sized ECC portion of each E-Page;

(2) a strength of cross-F-Page error correction code to generate; and

(3) which F-Pages within an S-Page to designate as a Check Page.

32. The method of claim 18, further comprising applying the cross-F-Page error correction code when the E-Page error correction code fails to correct an encountered error.

33. A method of controlling a data storage device, the data storage device comprising a flash controller and an array of flash memory devices coupled to the flash controller, the array comprising a plurality of S-Pages that each comprise a plurality of F-Pages, the method comprising:

storing, in each of the plurality of F-Pages, a variable amount of data and a variable amount of error correction code;

generating an error correction code across each F-Page of an S-Page; and

storing the generated error correction code within at least one F-Page having a largest amount of data.

34. A solid state drive controller, comprising:

a processor, the processor being configured to couple to an array of flash memory devices comprising a plurality of S-Pages that each comprise a plurality of F-Pages, each of the plurality of F-Pages being configured to store a variable amount of data and a variable amount of error correction code;

wherein the processor is configured to generate an error correction code across each F-Page of an S-Page and to store the generated error correction code within at least one F-Page comprising a largest amount of data.

35. A data storage device, comprising:

the controller of claim 34, and

the array of flash memory devices.

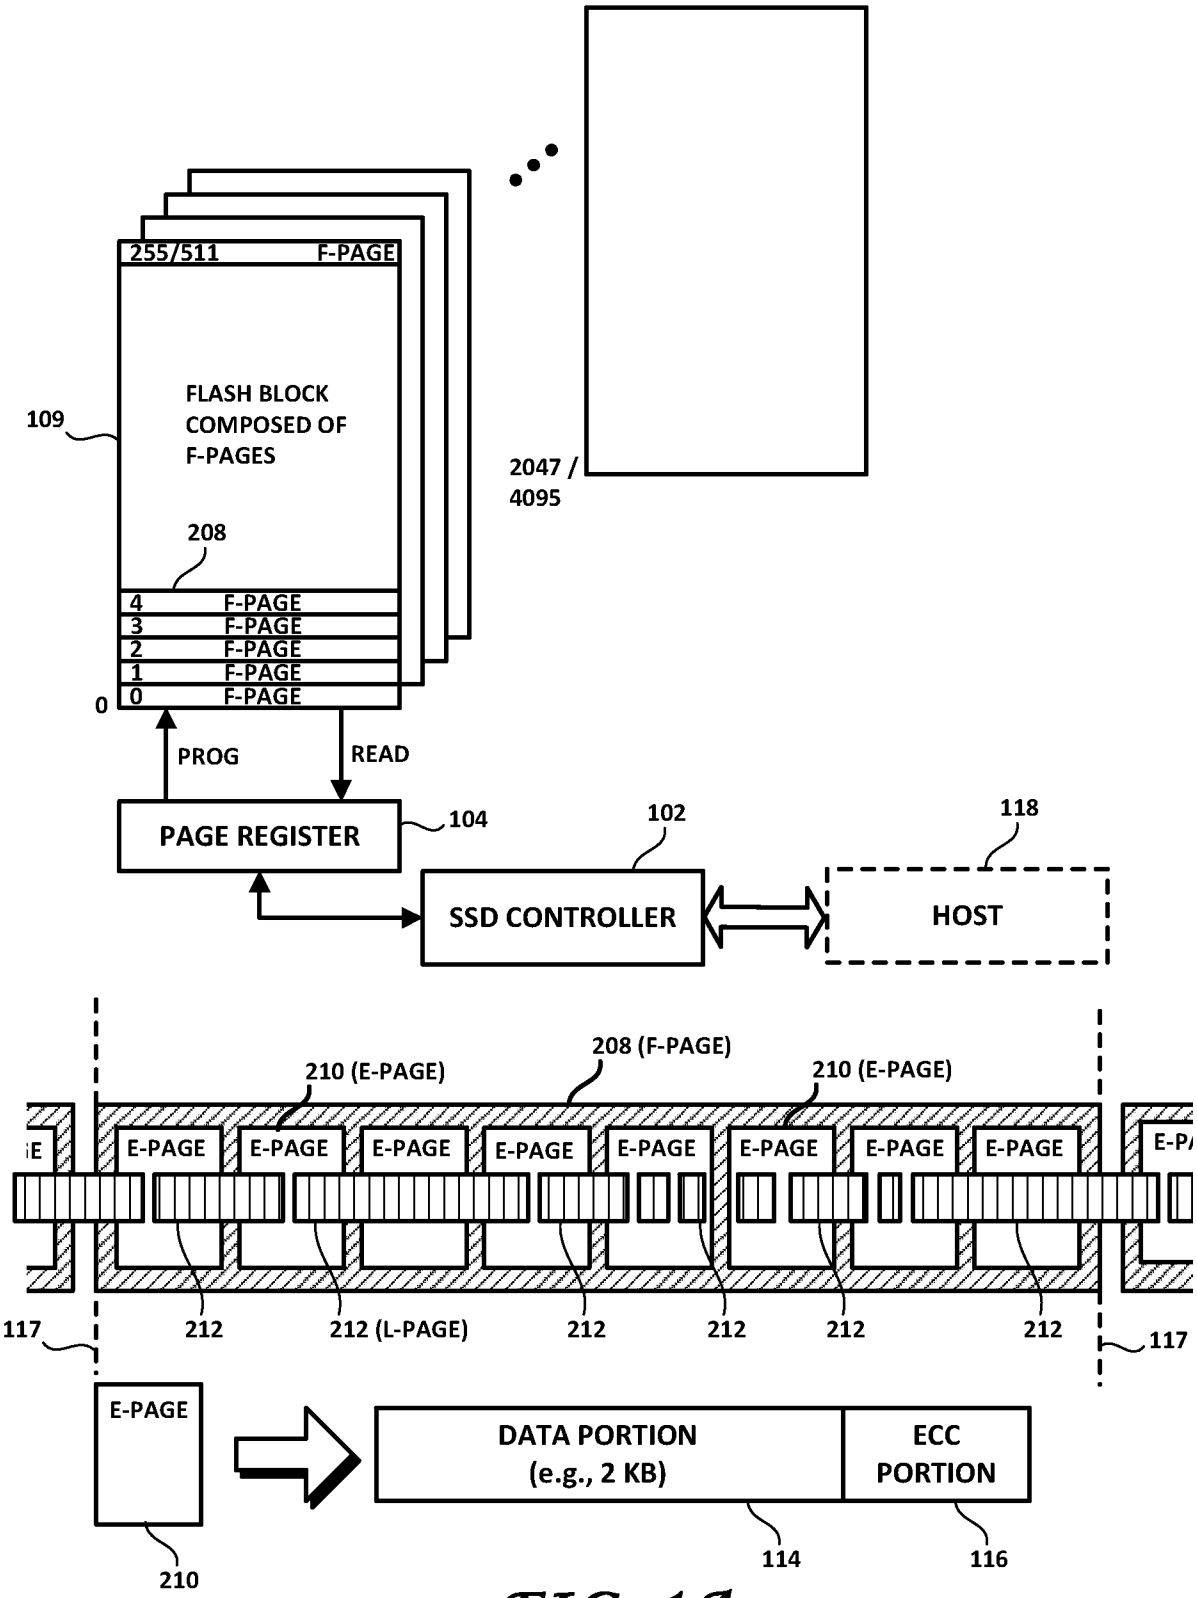

255/511 F-PAGE
FLASH BLOCK COMPOSED OF F-PAGES
109
208
4 F-PAGE
3 F-PAGE
2 F-PAGE
1 F-PAGE
0 F-PAGE
0
2047 / 4095
PROG
READ
PAGE REGISTER
104
102
SSD CONTROLLER
118
HOST
208 (F-PAGE)
210 (E-PAGE)
210 (E-PAGE)
E-PAGE
212
212 (L-PAGE)
212
212
212
212
117
117
E-PAGE
210
DATA PORTION (e.g., 2 KB)
ECC PORTION
114
116

FIG. 1A

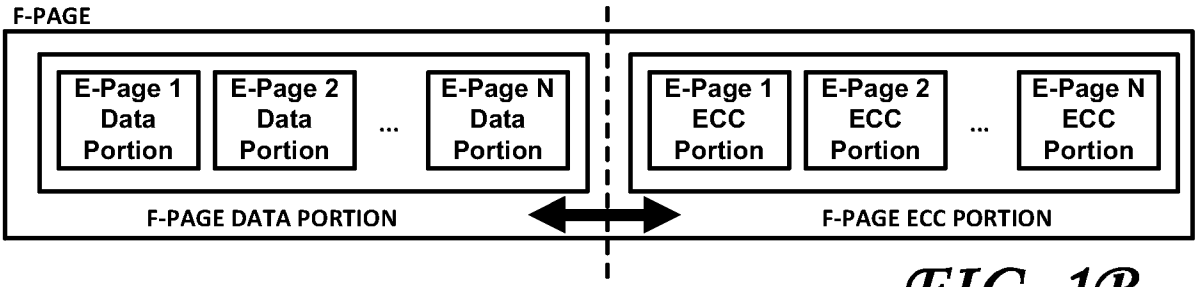


FIG. 1B

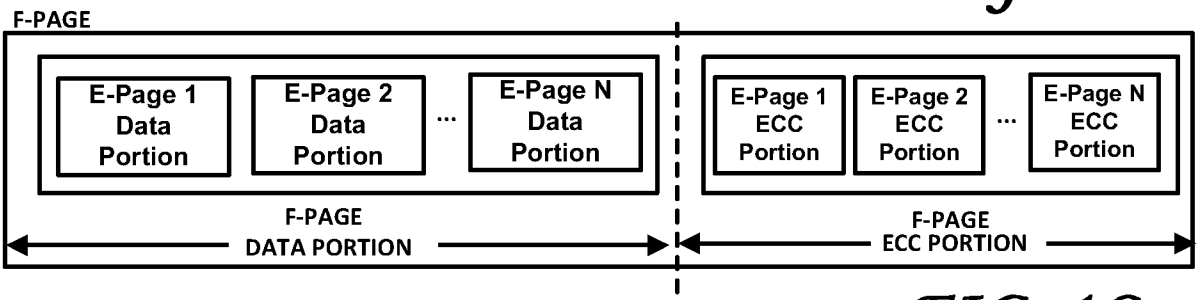
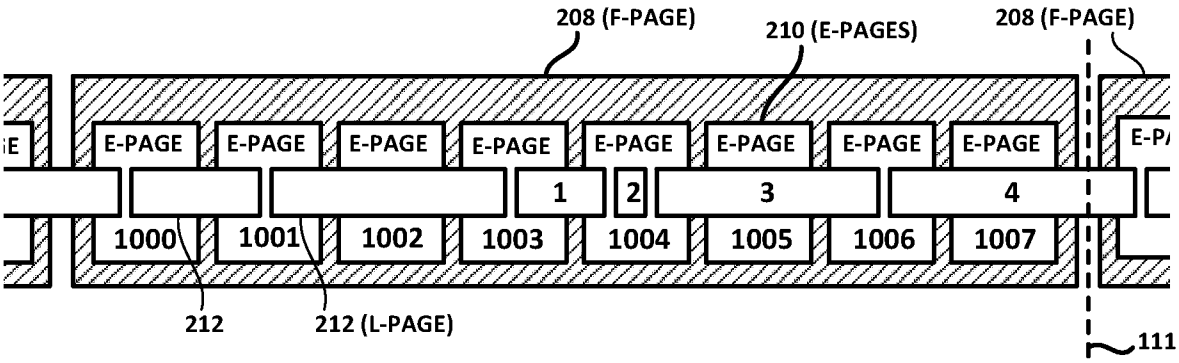


FIG. 1C



L-PAGE #				E-PAGES NEEDED
L-Page 1 =	E-Page 1003	Offset 800	Len 1624	1003,1004
L-Page 2 =	E-Page 1004	Offset 400	Len 696	1004
L-Page 3 =	E-Page 1004	Offset 1120	Len 4096	1004, 1005, 1006
L-Page 4 =	E-Page 1006	Offset 1144	Len 3128	1006, 1007, 1008

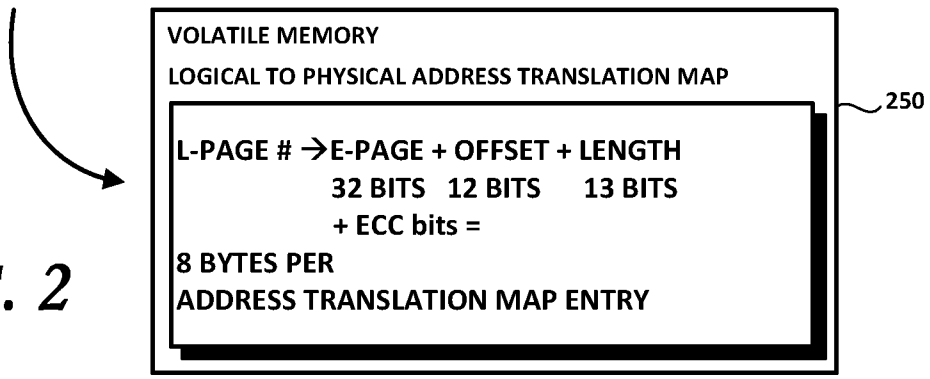


FIG. 2

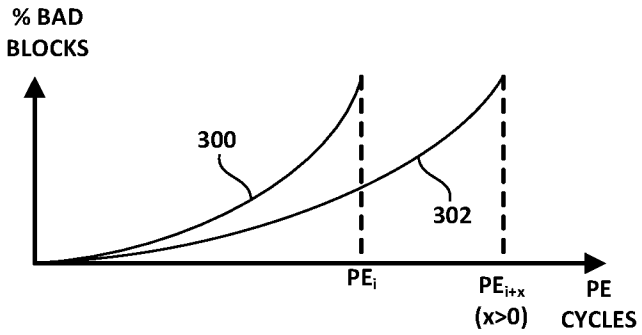

% BAD
BLOCKS
300
302
PE$_i$
PE$_{i+x}$
(x>0)
PE
CYCLES

FIG. 3

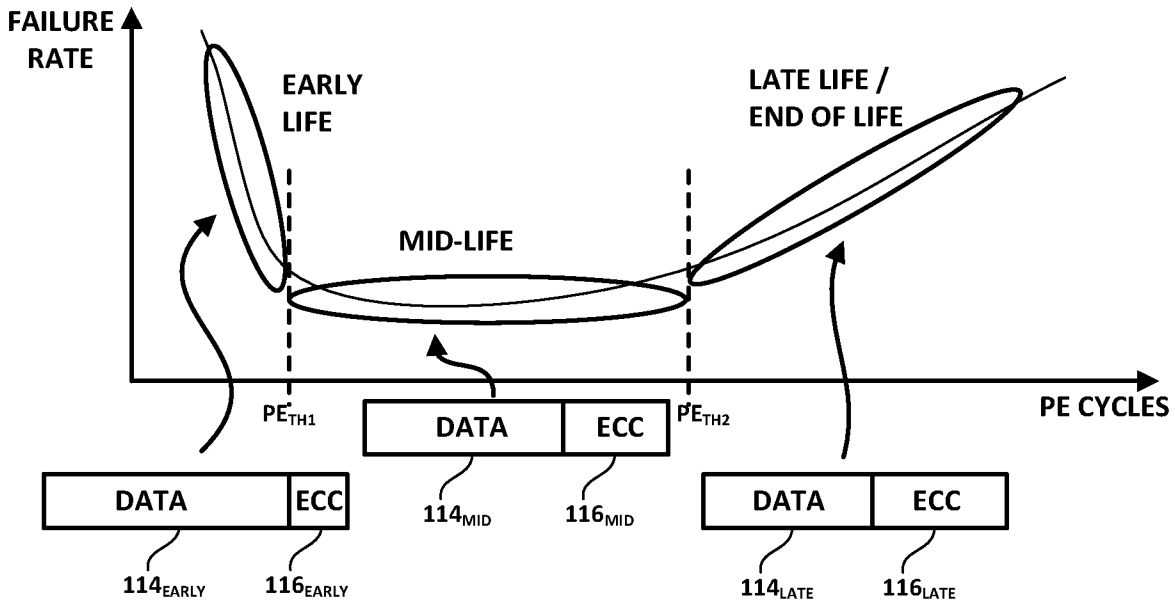

FAILURE
RATE
EARLY
LIFE
MID-LIFE
LATE LIFE /
END OF LIFE
PE$_{TH1}$
PE$_{TH2}$
PE CYCLES
DATA
ECC
DATA
ECC
DATA
ECC
114$_{EARLY}$
116$_{EARLY}$
114$_{MID}$
116$_{MID}$
114$_{LATE}$
116$_{LATE}$

FIG. 4

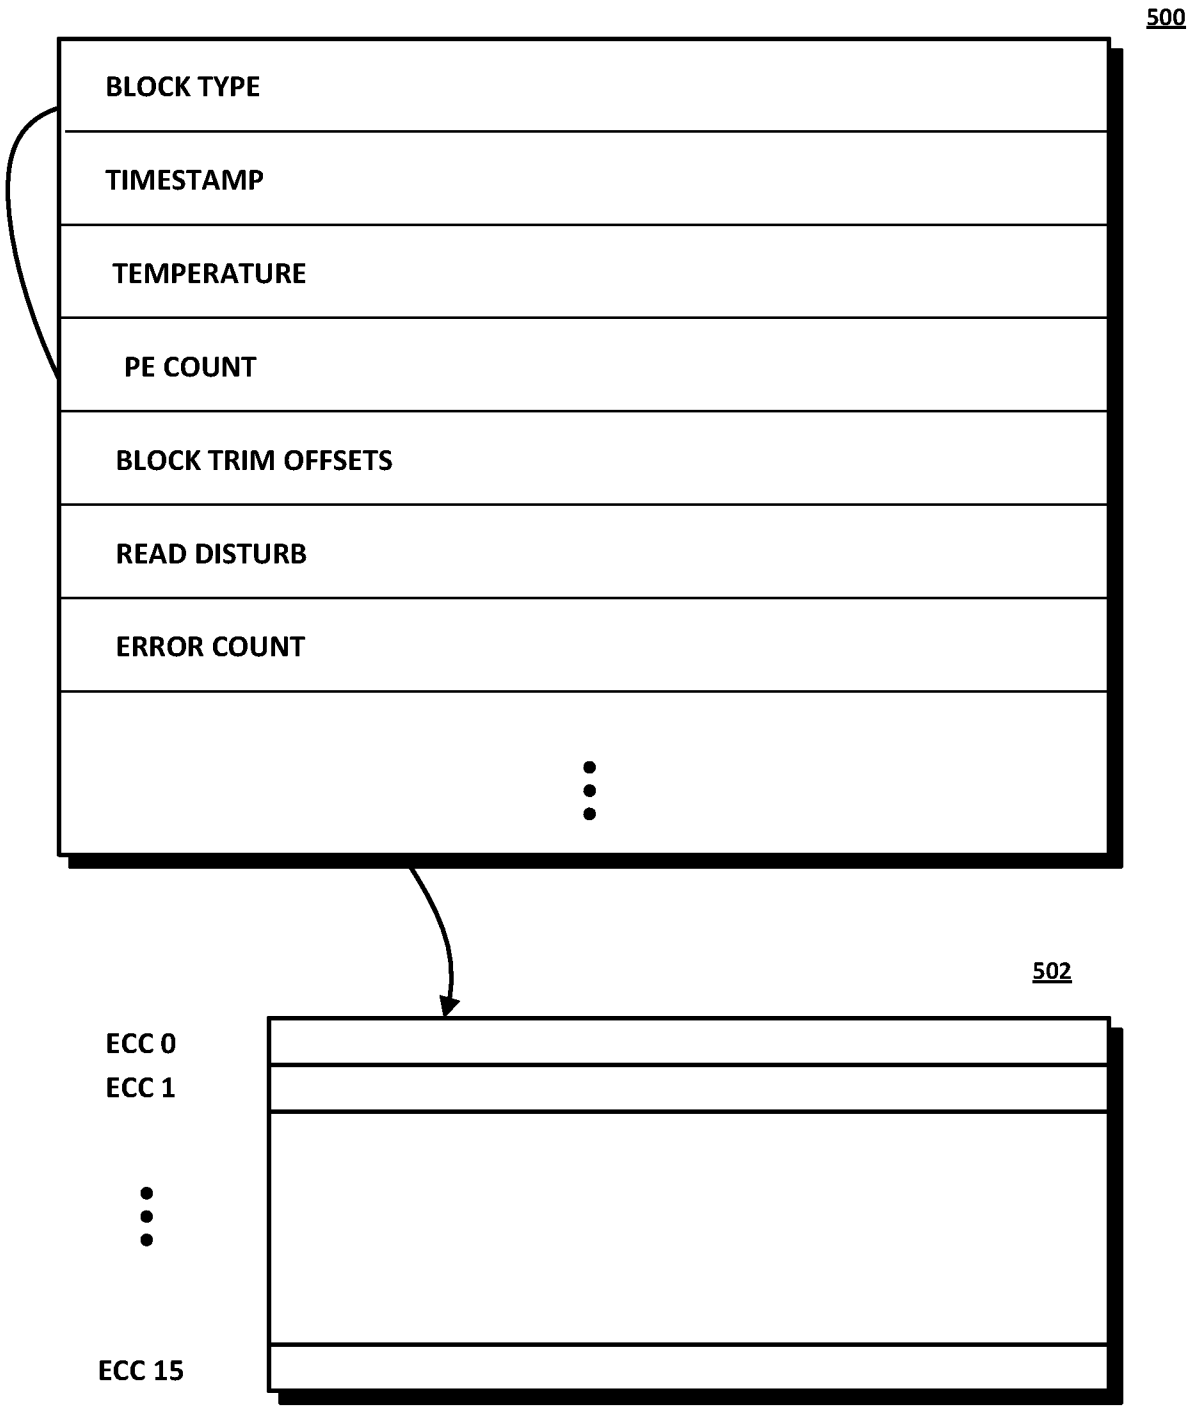

500
BLOCK TYPE
TIMESTAMP
TEMPERATURE
PE COUNT
BLOCK TRIM OFFSETS
READ DISTURB
ERROR COUNT
502
ECC 0
ECC 1
ECC 15

FIG. 5

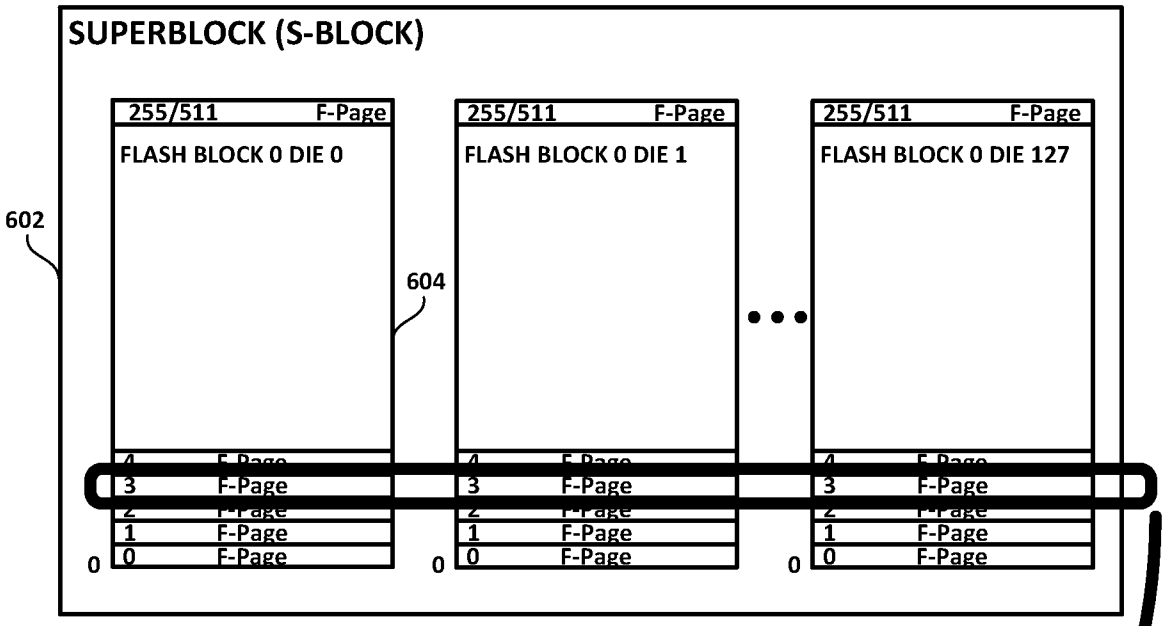

SUPERBLOCK (S-BLOCK)
602
604
255/511 F-Page
FLASH BLOCK 0 DIE 0
FLASH BLOCK 0 DIE 1
FLASH BLOCK 0 DIE 127
4 F-Page
3 F-Page
2 F-Page
1 F-Page
0 F-Page
0
0
0

FIG. 6

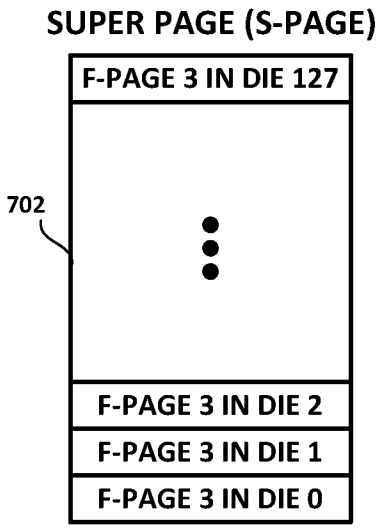

SUPER PAGE (S-PAGE)
702
F-PAGE 3 IN DIE 127
F-PAGE 3 IN DIE 2
F-PAGE 3 IN DIE 1
F-PAGE 3 IN DIE 0

FIG. 7

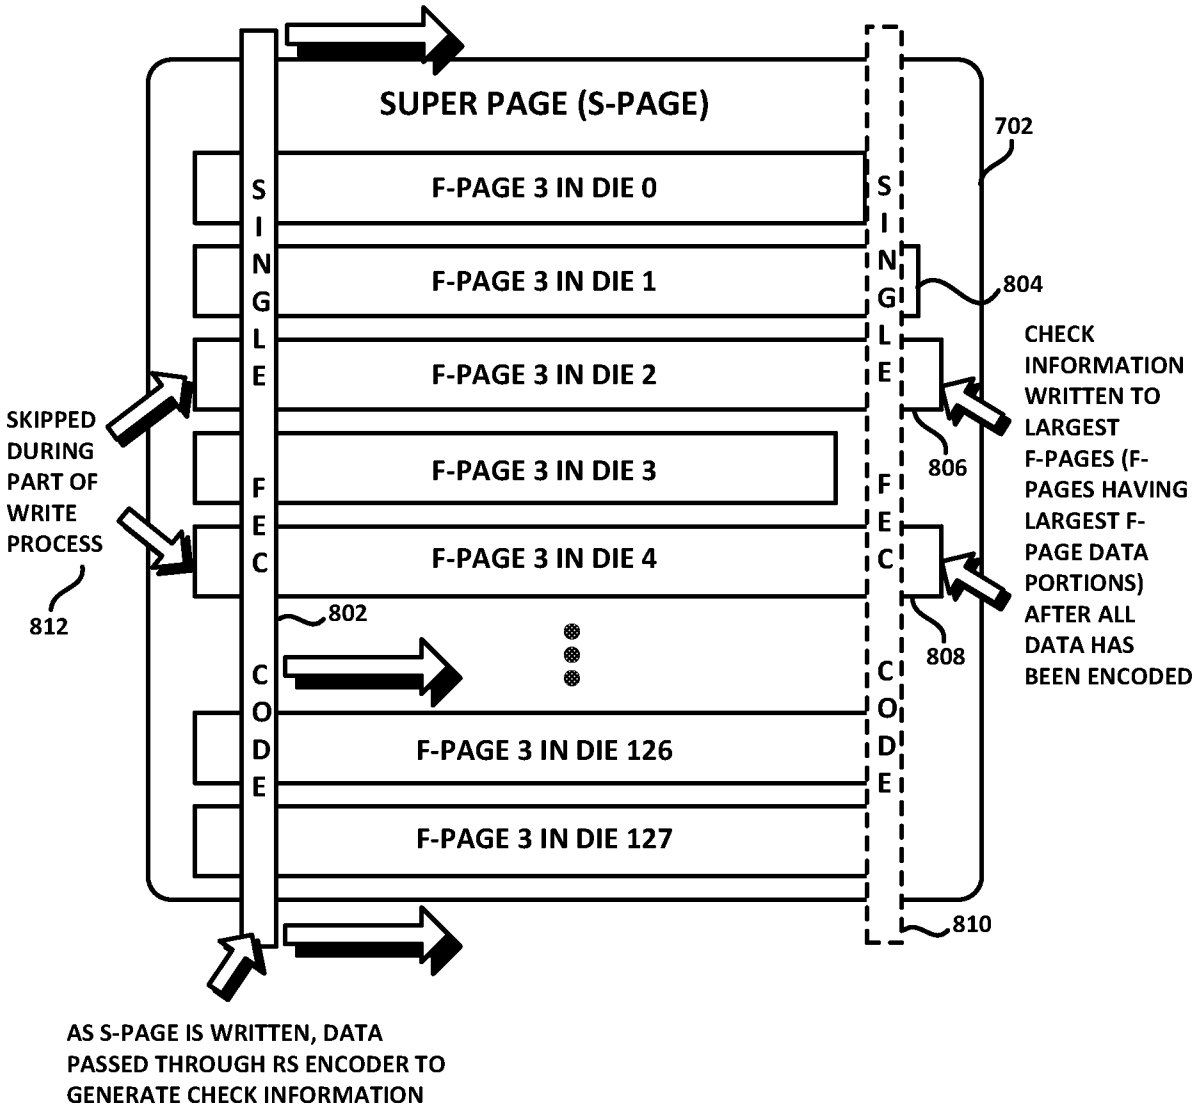

SUPER PAGE (S-PAGE)
F-PAGE 3 IN DIE 0
F-PAGE 3 IN DIE 1
F-PAGE 3 IN DIE 2
F-PAGE 3 IN DIE 3
F-PAGE 3 IN DIE 4
F-PAGE 3 IN DIE 126
F-PAGE 3 IN DIE 127
SINGLE FEC CODE
SINGLE FEC CODE
702
804
806
808
810
802
812
SKIPPED DURING PART OF WRITE PROCESS
CHECK INFORMATION WRITTEN TO LARGEST F-PAGES (F-PAGES HAVING LARGEST F-PAGE DATA PORTIONS) AFTER ALL DATA HAS BEEN ENCODED
AS S-PAGE IS WRITTEN, DATA PASSED THROUGH RS ENCODER TO GENERATE CHECK INFORMATION

FIG. 8

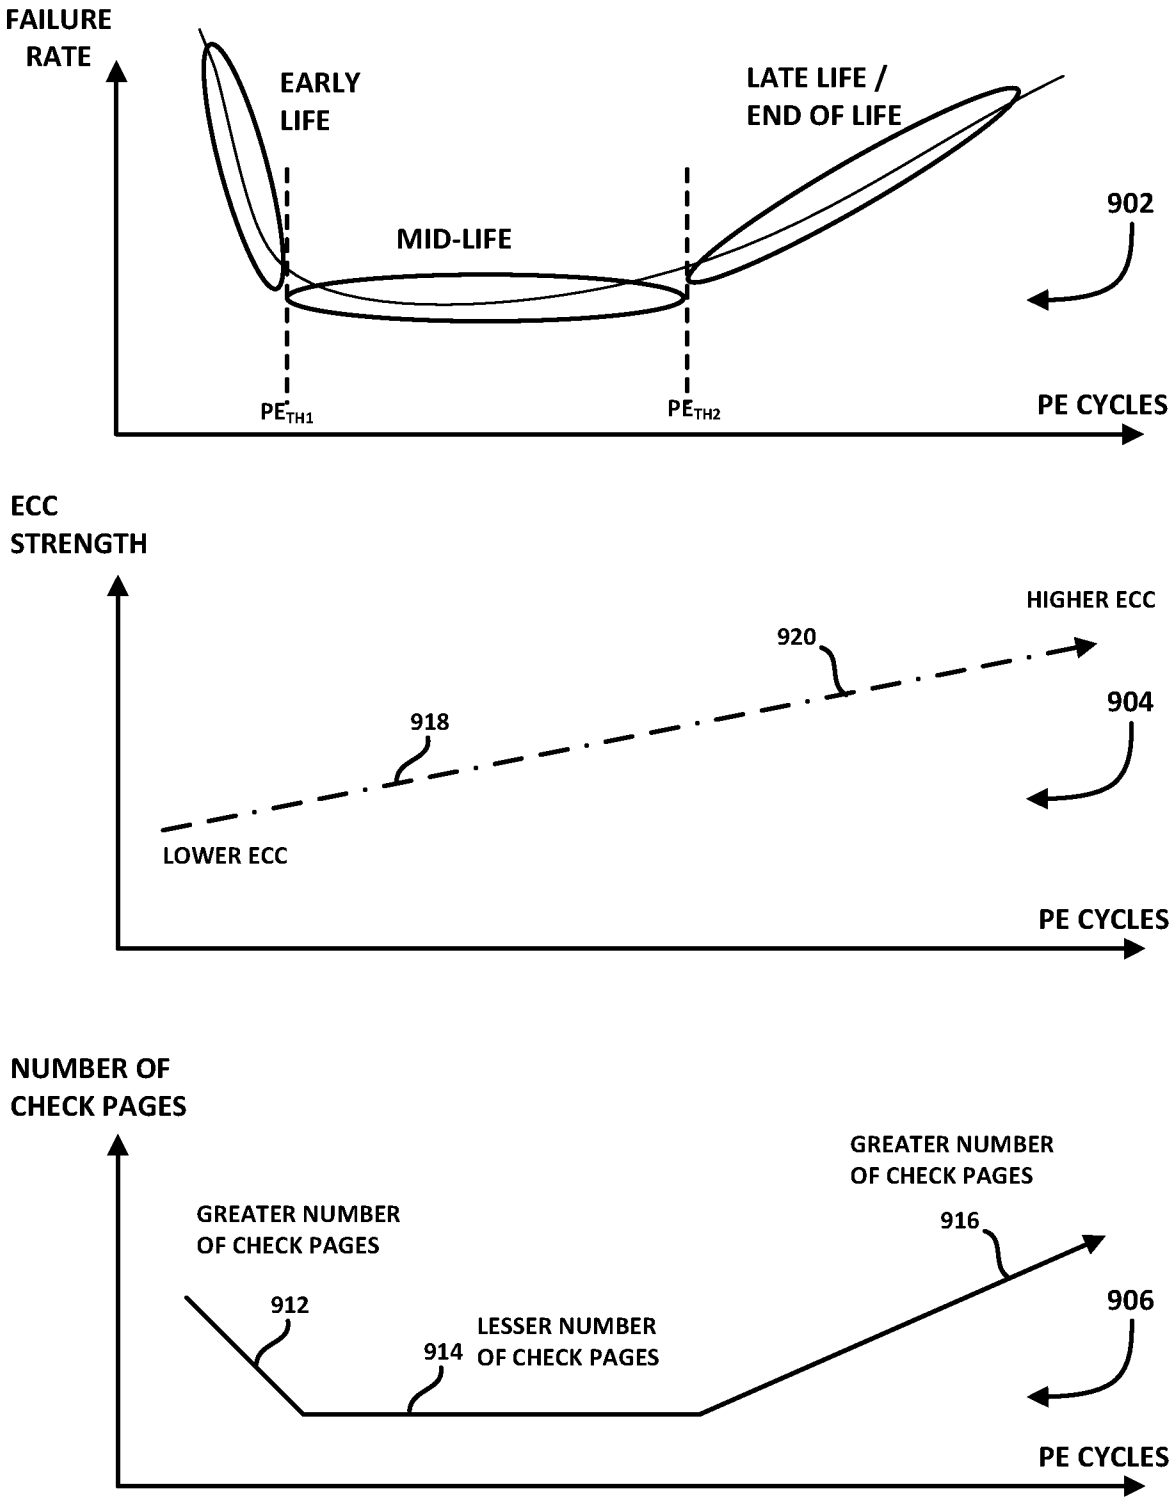

FAILURE RATE
EARLY LIFE
MID-LIFE
LATE LIFE / END OF LIFE
902
PE_TH1
PE_TH2
PE CYCLES
ECC STRENGTH
HIGHER ECC
920
904
918
LOWER ECC
PE CYCLES
NUMBER OF CHECK PAGES
GREATER NUMBER OF CHECK PAGES
916
GREATER NUMBER OF CHECK PAGES
912
906
914
LESSER NUMBER OF CHECK PAGES
PE CYCLES

FIG. 9

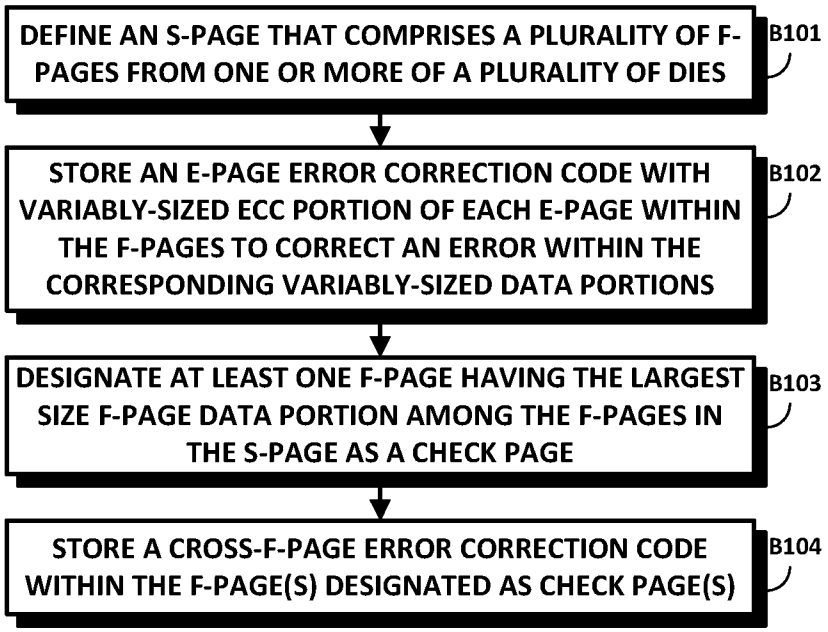

DEFINE AN S-PAGE THAT COMPRISES A PLURALITY OF F-PAGES FROM ONE OR MORE OF A PLURALITY OF DIES
B101
STORE AN E-PAGE ERROR CORRECTION CODE WITH VARIABLY-SIZED ECC PORTION OF EACH E-PAGE WITHIN THE F-PAGES TO CORRECT AN ERROR WITHIN THE CORRESPONDING VARIABLY-SIZED DATA PORTIONS
B102
DESIGNATE AT LEAST ONE F-PAGE HAVING THE LARGEST SIZE F-PAGE DATA PORTION AMONG THE F-PAGES IN THE S-PAGE AS A CHECK PAGE
B103
STORE A CROSS-F-PAGE ERROR CORRECTION CODE WITHIN THE F-PAGE(S) DESIGNATED AS CHECK PAGE(S)
B104

FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/062053

A. CLASSIFICATION OF SUBJECT MATTER

G06F 11/10(2006.01)i, G06F 12/00(2006.01)i, G06F 3/06(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06F 11/10; G06F 12/02; G06F 17/00; G06F 17/30; G06F 12/00; G11C 29/00; G06F 3/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: flash, page, block, check, ECC, error correction code, large, variably-sized, and similar terms.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2012-0072654 A1 (AARON K. OLBRICH et al.) 22 March 2012 See paragraphs 126-955; and figures 6, 13, 31.	1-35
A	US 2009-0259805 A1 (KEVIN L. KILZER et al.) 15 October 2009 See paragraphs 28-44; figures 3A-3B; and claims 1, 8.	1-35
A	US 2011-0231739 A1 (JIN-KI KIM) 22 September 2011 See paragraphs 37-55; and figures 9-11.	1-35
A	US 2009-0193184 A1 (FRANK YU et al.) 30 July 2009 See paragraphs 40-59; and figures 1, 3A-3C.	1-35
A	KR 10-0929371 B1 (KOREA ADVANCED INST. SCI. & TECH.) 02 December 2009 See paragraphs 60-86.	1-35

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents,such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
22 January 2014 (22.01.2014)	**22 January 2014 (22.01.2014)**

Name and mailing address of the ISA/KR
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701, Republic of Korea
Facsimile No. +82-42-472-7140

Authorized officer
BYUN, Sung Cheal
Telephone No. +82-42-481-8262

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2013/062053

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0072654 A1	22/03/2012	CN 101965559 A	02/02/2011
		CN 103150275 A	12/06/2013
		EP 2225642 A1	08/09/2010
		EP 2225642 A4	28/03/2012
		JP 2011-508349 A	10/03/2011
		US 2009-168525 A1	02/07/2009
		US 2009-172257 A1	02/07/2009
		US 2009-172258 A1	02/07/2009
		US 2009-172259 A1	02/07/2009
		US 2009-172260 A1	02/07/2009
		US 2009-172261 A1	02/07/2009
		US 2009-172262 A1	02/07/2009
		US 2009-172263 A1	02/07/2009
		US 2009-172308 A1	02/07/2009
		US 2009-172499 A1	02/07/2009
		US 2013-262753 A1	03/10/2013
		US 7934052 B2	26/04/2011
		US 7978516 B2	12/07/2011
		US 8245101 B2	14/08/2012
		US 8386700 B2	26/02/2013
		US 8533384 B2	10/09/2013
		WO 2009-086357 A1	09/07/2009
		WO 2009-086359 A1	09/07/2009
		WO 2009-086365 A1	09/07/2009
		WO 2009-086371 A1	09/07/2009
		WO 2009-086376 A1	09/07/2009
		WO 2009-086404 A1	09/07/2009
		WO 2009-086412 A1	09/07/2009
		WO 2009-086419 A1	09/07/2009
		WO 2009-086421 A1	09/07/2009
		WO 2009-086424 A1	09/07/2009
US 2009-0259805 A1	15/10/2009	US 2009-0259800 A1	15/10/2009
		US 2009-0259801 A1	15/10/2009
		US 2009-0259806 A1	15/10/2009
		US 2009-0259919 A1	15/10/2009
		US 8028123 B2	27/09/2011
		US 8180954 B2	15/05/2012
		US 8185778 B2	22/05/2012
		US 8566505 B2	22/10/2013
		WO 2009-129338 A2	22/10/2009
		WO 2009-129338 A3	25/02/2010
		WO 2009-129338 A4	22/10/2009
		WO 2009-129338 A8	22/10/2009
		WO 2009-129339 A2	22/10/2009
		WO 2009-129339 A3	04/03/2010
		WO 2009-129339 A4	22/10/2009
		WO 2009-129340 A2	22/10/2009
		WO 2009-129340 A3	21/01/2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2013/062053

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		WO 2009-129340 A4	22/10/2009
US 2011-0231739 A1	22/09/2011	CA 2791931 A1	29/09/2011
		CN 102812519 A	05/12/2012
		EP 2550661 A1	30/01/2013
		EP 2550661 A4	09/10/2013
		KR 10-2012-0137416 A	20/12/2012
		TW 201201008 A	01/01/2012
		WO 2011-116454 A1	29/09/2011
US 2009-0193184 A1	30/07/2009	AU 1999-29734 A1	06/09/1999
		AU 1999-60212 A1	21/03/2000
		AU 1999-61310 A1	21/03/2000
		AU 2000-20200 A1	03/04/2000
		AU 2001-26352 A1	16/07/2001
		AU 2001-269765 A8	17/12/2001
		AU 2001-47725 A1	03/10/2001
		AU 2001-69765 A1	17/12/2001
		AU 2002-15644 A1	29/08/2002
		AU 2002-15644 B2	06/07/2006
		AU 2002-337822 A8	22/04/2003
		AU 2002-362087 A1	23/06/2003
		AU 2002-362087 A8	23/06/2003
		AU 2003-267265 A1	08/04/2004
		AU 2003-301638 A1	13/05/2004
		AU 2003-301638 A8	13/05/2004
		CA 2280865 A1	27/08/1998
		CA 2280865 C	12/08/2008
		CA 2345300 A1	09/03/2000
		CA 2345300 C	24/01/2012
		CA 2345463 A1	23/03/2000
		CA 2345463 C	18/11/2008
		CA 2373569 A1	28/08/2002
		CA 2402552 A1	27/09/2001
		CA 2402552 C	02/10/2007
		CA 2412426 A1	13/12/2001
		CA 2412426 C	04/09/2007
		CA 2461338 A1	17/04/2003
		CA 2461338 C	20/12/2011
		CA 2469001 A1	19/06/2003
		CA 2469001 C	17/06/2008
		CA 2499993 A1	01/04/2004
		CA 2499993 C	06/08/2013
		CA 2521079 A1	04/11/2004
		CA 2762083 A1	09/03/2000
		CA 2762083 C	06/08/2013
		CN 100472856 C0	25/03/2009
		CN 100487678 C	13/05/2009
		CN 100501702 C	17/06/2009
		CN 101097551 A	02/01/2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2013/062053

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 101118783 A	06/02/2008
		CN 101122865 A	13/02/2008
		CN 101122865 B	14/07/2010
		CN 101122887 A	13/02/2008
		CN 101398764 A	01/04/2009
		CN 101398785 A	01/04/2009
		CN 101399075 A	01/04/2009
		CN 101399076 A	01/04/2009
		CN 101409111 A	15/04/2009
		CN 101425324 A	06/05/2009
		CN 101630375 A	20/01/2010
		CN 101644995 A	10/02/2010
		CN 101644995 B	28/12/2011
		CN 101727976 A	09/06/2010
		CN 101727976 B	19/09/2012
		CN 101923512 A	22/12/2010
		CN 101923512 B	20/03/2013
		CN 102469715 A	23/05/2012
		CN 1325584 C0	11/07/2007
		CN 1373166 A0	09/10/2002
		CN 1806356 A	19/07/2006
		EP 0937764 A1	25/08/1999
		EP 0985007 A1	15/03/2000
		EP 0985007 B1	17/05/2006
		EP 0985007 B2	03/11/2010
		EP 1007308 A1	14/06/2000
		EP 1007308 B1	12/11/2003
		EP 1127098 A1	29/08/2001
		EP 1236776 A1	04/09/2002
		EP 1236776 B1	21/12/2005
		EP 1236776 B2	25/11/2009
		EP 1268054 A1	02/01/2003
		EP 1268054 B1	05/12/2012
		EP 1309396 A2	14/05/2003
		EP 1309396 B1	21/09/2011
		EP 1358124 A2	05/11/2003
		EP 1358124 B1	11/03/2009
		EP 1386708 A2	04/02/2004
		EP 1386708 A3	04/06/2008
		EP 1448725 A2	25/08/2004
		EP 1450725 A2	01/09/2004
		EP 1542592 A1	22/06/2005
		EP 1559165 A2	03/08/2005
		EP 1629549 A2	01/03/2006
		EP 1629549 B1	26/10/2011
		EP 1889970 A1	20/02/2008
		JP 03274433 B2	15/04/2002
		JP 03338417 B2	28/10/2002
		JP 04097944 B2	11/06/2008
		JP 04178170 B2	12/11/2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2013/062053

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 04471342 B2	02/06/2010
		JP 04704563 B2	15/06/2011
		JP 11-335658 A	07/12/1999
		JP 2001-005945 A	12/01/2001
		JP 2001-118046 A	27/04/2001
		JP 2001-513697 A	04/09/2001
		JP 2001-513828 A	04/09/2001
		JP 2002-309151 A	23/10/2002
		JP 2002-523610 A	30/07/2002
		JP 2003-527735 A	16/09/2003
		JP 2003-528419 A	24/09/2003
		JP 2004-507341 A	11/03/2004
		JP 2005-511186 A	28/04/2005
		JP 2005-537386 A	08/12/2005
		JP 2006-508501 A	09/03/2006
		JP 2006-524898 A	02/11/2006
		JP 2007-332523 A	27/12/2007
		JP 2008-173635 A	31/07/2008
		JP 2009-084577 A	23/04/2009
		JP 2010-272544 A	02/12/2010
		KR 10-0797125 B1	22/01/2008
		KR 10-0893564 B1	17/04/2009
		KR 10-0988295 B1	18/10/2010
		TW 200813713 A	16/03/2008
		TW 200842887 A	01/11/2008
		TW 200915080 A	01/04/2009
		TW 200917017 A	16/04/2009
		TW 200926394 A	16/06/2009
		TW 201005652 A	01/02/2010
		TW I351599 B	01/11/2011
		TW I351605 B	01/11/2011
		US 06103393 A	15/08/2000
		US 06153123 A	28/11/2000
		US 06159267 A	12/12/2000
		US 6168731 B1	02/01/2001
		US 6180029 B1	30/01/2001
		US 6193908 B1	27/02/2001
		US 6197218 B1	06/03/2001
		US 6210604 B1	03/04/2001
		US 6277169 B1	21/08/2001
		US 6316100 B1	13/11/2001
		US 6338809 B1	15/01/2002
		US 6360562 B1	26/03/2002
		US 6507349 B1	14/01/2003
		US 6547130 B1	15/04/2003
		US 6555022 B2	29/04/2003
		US 6592608 B2	15/07/2003
		US 6602439 B1	05/08/2003
		US 6623856 B1	23/09/2003
		US 6627115 B2	30/09/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2013/062053

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 6635348 B1	21/10/2003
		US 6645398 B1	11/11/2003
		US 6660185 B2	09/12/2003
		US 6660680 B1	09/12/2003
		US 6679937 B1	20/01/2004
		US 6685727 B2	03/02/2004
		US 6689186 B1	10/02/2004
		US 6699304 B1	02/03/2004
		US 6709408 B2	23/03/2004
		US 6730245 B2	04/05/2004
		US 6753108 B1	22/06/2004
		US 6770226 B2	03/08/2004
		US 6780350 B1	24/08/2004
		US 6854984 B1	15/02/2005
		US 6866929 B2	15/03/2005
		US 6872185 B2	29/03/2005
		US 6874044 B1	29/03/2005
		US 6875372 B1	05/04/2005
		US 6887928 B2	03/05/2005
		US 6890309 B2	10/05/2005
		US 6899329 B2	31/05/2005
		US 6908440 B2	21/06/2005
		US 6911412 B2	28/06/2005
		US 6955601 B2	18/10/2005
		US 6967183 B2	22/11/2005
		US 6991754 B2	31/01/2006
		US 6993934 B2	07/02/2006
		US 6994802 B2	07/02/2006
		US 7001410 B2	21/02/2006
		US 7004794 B2	28/02/2006
		US 7004994 B2	28/02/2006
		US 7005085 B2	28/02/2006
		US 7021971 B2	04/04/2006
		US 7022261 B2	04/04/2006
		US 7035110 B1	25/04/2006
		US 7037451 B2	02/05/2006
		US 7044802 B2	16/05/2006
		US 7066976 B2	27/06/2006
		US 7067070 B2	27/06/2006
		US 7069369 B2	27/06/2006
		US 7073010 B2	04/07/2006
		US 7082056 B2	25/07/2006
		US 7083747 B2	01/08/2006
		US 7087198 B2	08/08/2006
		US 7087341 B2	08/08/2006
		US 7094074 B2	22/08/2006
		US 7094370 B2	22/08/2006
		US 7095617 B1	22/08/2006
		US 7097686 B2	29/08/2006
		US 7098163 B2	29/08/2006

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2013/062053

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 7103684 B2	05/09/2006
		US 7103765 B2	05/09/2006
		US 7104848 B1	12/09/2006
		US 7108560 B1	19/09/2006
		US 7125287 B1	24/10/2006
		US 7125919 B2	24/10/2006
		US 7128852 B2	31/10/2006
		US 7130958 B2	31/10/2006
		US 7138159 B2	21/11/2006
		US 7138354 B2	21/11/2006
		US 7141528 B2	28/11/2006
		US 7150920 B2	19/12/2006
		US 7172663 B2	06/02/2007
		US 7174628 B1	13/02/2007
		US 7182646 B1	27/02/2007
		US 7186147 B1	06/03/2007
		US 7211345 B2	01/05/2007
		US 7226547 B2	05/06/2007
		US 7229572 B2	12/06/2007
		US 7243185 B2	10/07/2007
		US 7249978 B1	31/07/2007
		US 7255954 B2	14/08/2007
		US 7257714 B1	14/08/2007
		US 7259967 B2	21/08/2007
		US 7264992 B2	04/09/2007
		US 7269004 B1	11/09/2007
		US 7296345 B1	20/11/2007
		US 7297024 B2	20/11/2007
		US 7299316 B2	20/11/2007
		US 7301776 B1	27/11/2007
		US 7316725 B2	08/01/2008
		US 7316790 B2	08/01/2008
		US 7318117 B2	08/01/2008
		US 7333364 B2	19/02/2008
		US 7347736 B2	25/03/2008
		US 7354471 B2	08/04/2008
		US 7365985 B1	29/04/2008
KR 10-0929371 B1	02/12/2009	JP 05184462 B2	17/04/2013
		JP 2010-218529 A	30/09/2010
		US 2010-0241790 A1	23/09/2010
		US 8117406 B2	14/02/2012