

EUROPEAN PATENT SPECIFICATION

- ④ Date of publication of patent specification: **24.09.86** ⑤ Int. Cl.⁴: **D 02 G 1/02**
⑦ Application number: **80304187.0**
⑧ Date of filing: **21.11.80**

④ **A process for manufacturing a textured multifilament yarn having alternating twists.**

④ Date of publication of application:
02.06.82 Bulletin 82/22

④ Publication of the grant of the patent:
24.09.86 Bulletin 86/39

④ Designated Contracting States:
DE FR GB IT NL

④ References cited:
GB-A-1 406 421
GB-A-2 026 559
GB-B- 815 202
US-A-3 978 647

PATENT ABSTRACTS OF JAPAN, vol. 1, no. 75,
July 19, 1977, page 1393 C 77

PATENT ABSTRACTS OF JAPAN, vol. 1, no.
111, September 26, 1977, page 2618 C 77

⑦ Proprietor: **TORAY INDUSTRIES, INC.**
2, Nihonbashi-Muromachi 2-chome Chuo-ku
Tokyo 103 (JP)

⑦ Inventor: **Negishi, Takao**
10, Sonoyama 2-chome
Otsu-shi Shiga-ken (JP)
Inventor: **Kojima, Teiryō**
3-10, Saigawa 3-chome
Otsu-shi Shiga-ken (JP)
Inventor: **Tomiita, Kazuo**
1-40-10, Gohongi Meguro-ku
Tokyo (JP)

⑦ Representative: **Ellis, John Clifford Holgate et al**
MEWBURN ELLIS & CO. 2/3 Cursitor Street
London EC4A 1BQ (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Description

The present invention relates to the manufacture of a specially designed multifilament textured yarn, by which there can be made a woven or knitted fabric having a handling similar to that obtained by a hard twist yarn or a true twist yarn and providing patterns having a heather like feeling. More specifically, the present invention relates to the manufacture of a novel multifilament textured yarn wherein S-twist yarn portions and Z-twist yarn portions are alternately distributed along the length of the yarn, and either S-twist yarn portions or Z-twist yarn portions have a compact twist yarn structure and the other portions have a bulky twist yarn structure. Due to the effects of mixing the bulky portions and compacted portions, or thick portions and thin portions, an especially high valuable product having a superior handling mentioned above can be obtained.

In the present invention, so called compact undetwisted portions, which are obtained by retaining the twist yarn structure, in a false twist imparting region while being subjected to false twisting, in the yarn after the false twisting operation, are utilized as the above-mentioned compact twist yarn structure. In addition, so called bulky over detwisted portions, which are obtained by untwisting a yarn in the false twist imparting region while being subjected to false twisting to an extent exceeding the twist density in the yarn, are utilized as the above-mentioned bulky twist yarn structure. The yarn structure in alternately twisted conditions comprising the compact undetwisted portions and the detwisted portions results in an effect similar to that obtained by a hard twist yarn or a true twist yarn, and the difference in configuration between the undetwisted portions and the excessively detwisted portions results in a heather like feeling effect.

The term "an undetwisted portion" utilized in this specification means that a yarn is tightly twisted for a certain length as if a series of so called tight spots continuously occur.

Conventionally known are various methods by which undetwisted portions and excessively detwisted portions are alternately formed in a multifilament yarn by means of false twisting. For example, Japanese Patent Publications No. 25065/75, No. 225/76 and No. 42662/76 disclose methods wherein a drawn multifilament yarn made of polyester fibers or polyamide fibers are false twisted by means of a spindle type false twisting device having a twisting peg therein at an excessively high temperature so that the fibers constituting the yarn are partially cohered to each other. Further in Japanese Patent Laid-open No. 143746/76 and No. 143749/76, and Japanese Patent Publications No. 15188/78 and No. 30818/78, methods are disclosed wherein a drawn multifilament yarn is false twisted by means of a false twisting device utilizing a turbulent fluid jet under a high overfeed.

In addition, methods are known in which a multifilament is positively subjected to a non-uniform treatment while it is being false twisted. For example, methods in which contacting conditions between a multifilament yarn and a heating device are varied are described in Japanese Patent Laid-open No. 66928/74, No. 15017/76 and No. 8119/77. Methods in which twists transmitted from a false twisting device toward a heating device are varied are described in Japanese Patent Publication No. 34016/76, and Japanese Patent Laid-open No. 554/74 and No. 121546/75. Japanese Patent Publication No. 8414/74, and Japanese Patent Laid-open No. 108353/74 and No. 61745/78 disclose methods in which the number of twists generated in a multifilament yarn by means of a false twisting device is varied. Methods in which the speed of a multifilament passing through a false twisting device is varied are described in Japanese Patent Laid-open No. 92337/74 and 92354/74. In Japanese Patent Laid-open No. 66722/77, 81749/78 and 101654/74, methods in which a multifilament yarn is irregularly false twisted along the length of the yarn are described.

GB—A—2026559 describes a method of producing a synthetic filament yarn having the character of a crepe yarn by simultaneously drawing a filament yarn and false twisting it, the draw ratio being reduced by at least 0.3 compared to the draw ratio used in conventional drawing-false twist texturing in the production of crimped yarns. By the process there described a yarn can be produced having alternating S-twists and Z-twists without intermediate textured points.

US—A—3978647 concerns the production of a highly coherent synthetic multifilamentary yarn by false twisting and heat setting, the basic object being to provide such a yarn having enhanced coherency, increased rigidity and high torque property. The yarn of this invention also has multiple alternate S- and Z-twist regions successively along the yarn length, some of the component filaments of the yarn being partially fused and adhered to each other, due to the vibration of the yarn on the surface of the heater, this being occasioned by the ballooning of the yarn under the twisting action of the false-twisting means.

The present invention has for its object to provide an improved process for the manufacture of a yarn of the same general type, that is to say yarn having alternately twisted portions to provide in succession lengths of compact undetwisted portions and lengths of overdetwisted portions with substantially no untwisted portions therebetween. A particular object of the invention is to provide a process capable of manufacturing a yarn which will provide a woven or knitted fabric having a handle similar to that obtained by a hard twist yarn or a true twist yarn and more particularly a yarn which will produce patterns with a heather like feeling, especially a relatively slight and uniformly distributed heather like feeling.

The broad object of the invention is achieved by a process in which synthetic multifilament yarn is subjected to false twisting and heat setting under particular conditions. The important parameters in this respect are—

(1) the false twisting and heat setting is to produce in undetwisted portions of the yarn a twist density of at least $17500 \sqrt{\rho/D}$ turns/m where ρ is the specific gravity of the yarn and D is its denier number. A twist density of this order is not new in itself;

5 (2) the false twisting is to be performed along a substantially stationary path using a friction-type false twisting device so as to substantially avoid ballooning;

(3) the yarn is to be subjected to the false twisting and heat setting under a draw ratio equal to or less than the natural draw ratio, and

10 (4) a yarn contacting member is disposed at a location downstream of the false twisting device whereby a front end of false twisted region in the yarn is prevented from being transmitted across the yarn contacting member, and an overdetwisted portion is generated in the yarn located between the false twisting device and the yarn contacting member.

In order to produce a heather-like feeling in the woven and knitted fabrics made from the yarn, the ratio of the lengths of the undetwisted portions of the yarn to the entire length of the yarn should be at least 10%, and the sum of the squares of the lengths (in mm) of the undetwisted portions should be at least 3000 per meter length of the yarn (and preferably at least 5000 per meter length of the yarn).

15 Further preferred features of the invention will be apparent from the specific description which follows by reference to the drawings, and the claims.

In the accompanying drawings—

20 Figure 1 is a diagrammatical elevational view illustrating an example of a process of the present invention for manufacturing a specially designed alternately twisted yarn;

Figure 2 is a model view illustrating a structure of a specially designed alternately twisted yarn obtained according to the present invention; and

Figures 3 through 11 are model views illustrating yarn forming mechanisms through which specially designed alternately twisted yarn according to the present invention are obtained.

25 In the yarn produced by the present invention, so called undetwisted portions, which are obtained by retaining the twist structure, which has been in a yarn in a false twist imparting region while being subjected to false twisting are utilized as a compact twist yarn structure, and so called over detwisted portions, which are obtained by detwisting a yarn in a false twist imparting region while being subjected to false twisting to an extent exceeding the twist density in the yarn, are utilized as a bulky twist yarn structure; and thus obtained alternately twisted yarn comprising the undetwisted portions and the over detwisted portions can result in a woven or knitted fabric having a handling similar to that obtained by a hard twist yarn or a true twist yarn due to the high twist density and a heather like feeling due to the difference in the configurations between the compact undetwisted portions and the over detwisted portions.

35 The following reasons should be pointed out as to why such an alternately twisted yarn has not conventionally been obtained.

(1) It is very important to enhance the twist densities of both the undetwisted portions and the excessively detwisted portions to obtain a handling similar to that obtained by a hard twist yarn or a true twist yarn, i.e., to enhance the twist density of the undetwisted portions and the ratio of their length to the entire length of the yarn. There is a tendency that, if the twist density of a yarn located at the twist imparting region while being false twisted is enhanced, generation of undetwisted portions is decreased; and this tendency is disadvantageous to a yarn similar to that produced by the present invention. Although some attempts have been made in order to increase the generation of undetwisted portions, however, such attempts deteriorate a handling of a woven or knitted fabric obtained from the resulting yarn.

45 (2) In order to obtain a relatively slight heather like feeling, a distinctive difference in the configurations of the undetwisted portions and the over detwisted portions is necessary, since such feeling is obtained only on the basis of the difference in the yarn structures of the undetwisted portions and the over detwisted portions because both the portions are constructed with the same fibers having the same denier and the same filament number. To comply with such a necessity, it is very important that the compactness of the undetwisted portions be increased, and that the bulkiness of the over detwisted portions be enhanced. However, according to conventional false twisting methods, as generally both the undetwisted portions and the over detwisted portions are subjected to the same false twisting, if the undetwisted portions are subjected to a high false twisting in order to enhance the bulkiness of the over detwisted portions, then the generation of the undetwisted portions is degraded because of the reason already described in item (1). Accordingly, it has been difficult to form such a difference in configurations.

55 (3) With respect to a heather like feeling, patterns are important and depend closely on the length, number and amount of the undetwisted portions. According to conventional methods, it was difficult to obtain a suitable heather like feeling, because the length of the undetwisted portions was short and the amount thereof was small.

60 (4) A high tensile strength is required to achieve the object of the present invention. This is because, the undetwisted portions and the over detwisted portions in the yarn must not be decreased by offsetting their twists against each other when they are subjected to a high tension in the yarn while the yarn is formed into a woven or knitted fabric.

65 However, according to conventional methods, there is no method except that fibers are cohered to each other so as to enhance the tensile strength. The inventors of the present invention carefully studied

the supply yarns, the false twisting devices, the texturing conditions, the obtained yarns and the fabrics obtained by weaving the yarns taking the above-explained problems inherent to the conventional methods into consideration in order to achieve the object of the present invention. As a result, the inventors found that a yarn which has been compared with a conventional yarn must satisfy the following requirements in order to achieve the object of the present invention. (1) The yarn does not have an unevenness in dyeability along the length of the yarn. (2) Filaments constituting the yarn have only very little cohesion therein. (3) The twist density in the undetwisted portions is enhanced, the ratio of the length thereof to the entire yarn length is increased, and the individual length thereof is elongated. (4) The tensile strength of the yarn is enhanced.

10 In addition, the inventors also found that it is preferable to adopt the following technical measures in order to achieve the object of the present invention.

First, the most important requirement is that the yarn does not have any unevenness in dyeability along the length thereof, and the requirement can be satisfied when false twisting is carried out under stationary conditions.

15 Second, the cohesion between the filaments constituting the yarn must be as little as possible. This requirement will be satisfied by not only appropriately selecting the false twisting conditions but also by utilizing an undrawn yarn, which has a wide temperature range wherein the filaments intermediately cohere, as a supply yarn, and selecting the molecular orientation in the undrawn supply yarn if necessary.

20 In the present invention, conjugated fibers comprising at least two kinds of materials which are different in their melting points may be utilized, and at least two kinds of fibers which are different in their melting points and which are combined with each other may be utilized. In these cases, polyester fibers may be effectively utilized.

25 Third, a friction type false twisting device must be used as a false twisting device, because such a twisting device imparts only small deflections except for twists into the yarn and does not create substantial ballooning in the yarn.

The process of the present invention is capable of producing a multifilament yarn which is false twisted in such manner that the yarn alternately has compact twist yarn portions and bulky twist yarn portions along the length of the yarn, the twist directions of which are opposite to each other and the length of which are varied irregularly.

30 The term "compact twist yarn portion" described above means a yarn portion which has twists and in which the crimp configuration of the filaments is consistent with the twist structure of the yarn. In other words, when a multifilament yarn having no twists therein is subjected to twisting and then is heat set, such a compact twist yarn portion can be obtained. In the present invention, such a compactly twisted yarn portion is mainly obtained by retaining the twisting yarn structure, which has been in the yarn at a false twisting region while the yarn is false twisted, in the yarn which is obtained after the false twisting operation.

35 The term "bulky twist yarn portion" described above means a yarn portion which has twists and in which the crimp configuration of the filaments appears. In short, such bulky twist yarn portion can be obtained when a multifilament yarn which has no twist but has crimps therein is subjected to a twisting operation. In the present invention, such a bulky twist yarn portion is mainly adopted by an over detwisted yarn which is obtained by detwisting a yarn at a false twisting region under a false twisting operation over the twist density of the yarn.

40 The term "the yarn alternately has compact twist yarn portions and bulky twist yarn portions" described above means that the yarn does not substantially include any portions which are not included in either the compact undetwisted portions or the bulky detwisted portions. However, strictly speaking, there must be non-twisted portions, which do not belong to either the compact undetwisted portions or the bulky over detwisted portions, at the boundaries between the compact untwisted portions and the bulky over detwisted portions. Such non-twisted portions do not have substantial length and usually do not exceed 1 mm.

45 At this point, the relationship between the patterns with a heather like feeling in the obtained woven or knitted fabric and the amount of the undetwisted portions must be taken into consideration. The patterns are also related to the lengths of the undetwisted portions as well as the taste of the consumer; however, in general, if the amount of the undetwisted portions is small, only narrow stripe-like patterns appear on an obtained woven fabric; if the amount of the undetwisted portions exceeds 10%, the probability of undetwisted portions adjacent to each other becomes high and the width of the stripes increases, and therefore, the patterns clearly appear.

50 Strictly speaking, the lengths and the amount of the undetwisted portions are simultaneously related to the patterns with a heather like feeling. For example, when the length of the undetwisted portions is about 5 mm, uneven patterns appear but patterns with a heather like feeling cannot be obtained even if only the length of the undetwisted portions is about 10 mm, when the patterns are elongated from the uneven patterns. If the area of the undetwisted portions increases, i.e., equal to or more than 30%, patterns with a heather like feeling appear. Incidentally, when the length of the undetwisted portions becomes about 40 mm, patterns with a heather like feeling appear if there are about two undetwisted portions per one meter, i.e., about 8% of the total length. According to various tests conducted by the inventors of the

65

present invention, when the sum of the squares of the lengths (in mm) of the undetwisted portions exceeds 3000 per one meter length of the yarn, patterns with a heather like feeling can be recognized.

The yarn made by the process of the present invention has an additional characteristic in that it has at least a twist density (Turn/m) of $1.9 \times 10^3 \sqrt{p/D}$ over the substantially entire yarn portions along the length of the yarn, wherein p is a specific gravity of the filaments and D is the denier number of the yarn. In other words, the yarn has a characteristic similar to that of a twisted yarn. More specifically, if a usual multifilament yarn or a false twisted yarn resulting therefrom is twisted, and if the relationship between the twist density and the handling is researched, a characteristic inherent to a twisted yarn can be recognized when the twist density exceeds a value of $1.9 \times 10^3 \sqrt{p/D}$ Turn/m.

It is preferable for a yarn made by the present invention to have a tensile strength of at least 0.3 g/denier (0.27 g/dtex). The tensile strength of the yarn concerns the deformation of a yarn during a process wherein the yarn is formed into a woven fabric. It is preferable that the yarn has a high tensile strength in order to prevent the deformation of the yarn and that the yarn is subjected to the process under a low tension. If a yarn is subjected to the process under a tension of less than 0.27 g/dtex, the operability of the process and the quality of the obtained woven fabric will deteriorate, and accordingly, a tensile strength of at least 0.27 g/dtex is desirable. If a yarn is utilized after it is additionally twisted or sized so as to enhance the tensile strength, the original yarn is not required to have such a high tensile strength.

If a yarn has a tensile strength of at least 0.27 g/dtex as described above, after the yarn is stretch treated while being delivered between a pair of yarn feed rollers at a yarn speed of 200 m/min under a tension of 0.27 g/dtex, at least a part of compact twist yarn portions remain, and preferably 10% relative to the entire yarn length remain.

When, in a yarn made by the process of the present invention, the outer diameter of the bulky detwisted yarn portions is larger than the outer diameter of the compact undetwisted yarn portions by at least 10%, patterns with a heather like feeling appear clearly in a woven fabric resulting therefrom.

In a yarn made by the process of the present invention, if the twist densities in the compact undetwisted portions and the bulky detwisted portions are higher, they are more preferable, however, the maximum degree of the twist densities is limited by means of the manner in which the devices are operated.

In order to obtain patterns with a slight heather like feeling, it is preferable that the compactness of the undetwisted portions is enhanced and the bulkiness of the over detwisted portions is also enhanced. As described above, the compactness of the undetwisted portions can be obtained by retaining the twist structure in a yarn while being false twisted in a twist imparting region. Contrary to this, the bulkiness of over detwisted portions can be obtained by increasing the crimps after cohesion between the constituent filaments is made as small as possible and crimps imparted to the constituent filaments are made to appear. In this case, it should be noted that the effect of the crimps must be large enough to exceed the negative effect resulting from twists. For your reference, the twist density in a twist imparting region while a yarn is false twisted must be at least $17500 \sqrt{p/D}$ Turn/m in order to obtain clear patterns with a heather like feeling in a woven or knitted fabric.

In conventional false twisting wherein a twist spindle is mainly used, unless high cohesion takes place, the twist density in the undetwisted portions is remarkably lower than that in the false twisting region, and the difference between the twist densities is caused by the fact that the false twisted portions are untwisted. If such untwisting takes place, the structure of the undetwisted portions is partly damaged and sometimes split lines are formed in the twisted lines. As a result, the compactness and the tensile strength of the undetwisted portions may be deteriorated. Such a tendency may be enhanced when the twist density in a twist imparting region of the false twisting is high, and as a result of such tendency, the undetwisted portions may be cut into short portions, and accordingly, the length thereof may become short, and therefore, the total length thereof also may become short. Furthermore, this tendency results in a defect in that the twist density of the over detwisted portions cannot be enhanced.

According to a process of the present invention for manufacturing a yarn, the twist density of a yarn located in a twist imparting region for false twisting can be retained in undetwisted portions without decreasing the density, and if false twisting is carried out under a high twist density, the total length of undetwisted portions with high twist density becomes remarkably long, and a yarn having over detwisted portions with high twist density can be obtained.

It is preferable that the following features be included in the yarn in order to obtain a yarn with an enhanced twist density by retaining the twist structure of a yarn in a twist imparting region for false twisting so as to form compact undetwisted portions and form bulky excessively detwisted portions and not to form non-twisted portions as described above. When a yarn, in a twist imparting region for false twisting, or undetwisted portions, after the yarn is false twisted, are detwisted, the entire twist density is not gradually decreased but only a part thereof is detwisted, substantially remains at a constant level and the length thereof is gradually shortened. The portions which are detwisted are changed into over detwisted portions by absorbing the twists which depend on the twist density of the yarn before being detwisted. To achieve these features, it is preferable that a yarn substantially does not have an unevenness in dyeability along the length of the yarn and that filaments constituting the yarn are almost not cohered to each other or the degree of the cohesion is so weak that filaments can be split without being cut, as would be the case if the filaments cohered to each other.

Accordingly, when a yarn made by the process of the present invention is further twisted, in general the following properties appear. More specifically, when the yarn is further twisted in a direction the same as that of the twists in the undetwisted portions, the undetwisted portions are unchanged and the twist density of the over detwisted portions is decreased. Contrary to this, when the yarn is further twisted in a direction the same as that of the twists in the over detwisted portions, the undetwisted portions become shortened while the twist density thereof is kept unchanged and the over detwisted portions are elongated while the twist density thereof is kept unchanged.

More specifically, the yarn made according to the present invention may be first further twisted in a direction the same as that of the over detwisted portions so that the area of the undetwisted portions is adjusted, and then, further twisted in a direction the same as that of the twists in the undetwisted portions so that the twist density of the undetwisted portions is adjusted to a value (Turn/m) of $1.9 \times 10^3 \sqrt{\rho/D}$ which is a minimum value for achieving the twist effect as described above, and the total length of the undetwisted portions and the twist effect are compared with each other, the existence of the undetwisted portions can actually be recognized if the amount of the undetwisted portions exceeds 10%.

It should be pointed out that with respect to the yarn made according to the present invention which has a total twist of zero, the following requirements are compatible. (1) The lower limit of the undetwisted portions above which limit patterns with a heather like feeling clearly appear is $17500 \sqrt{\rho/D}$ Turn/m. (2) The lower limit of the over detwisted portions above which limit the twist effect can be recognized is $1.9 \times 10^3 \sqrt{\rho/D}$ Turn/m. (3) The ratio of the total length of the undetwisted portions to the entire length of the yarn must be more than 10% and the ratio of the total length of the over detwisted portions to the entire length of the yarn must be less than 90%.

The minimum requirements and some optional features regarding the basic construction of the yarn made according to the present invention have been explained above.

With respect to the field to which the yarn is intended, as already partly explained herebefore, the twist density in the undetwisted portions, the twist density in the over detwisted portions and the ratio of the length of the undetwisted portions to that of the over detwisted portions are of importance. It is obvious that if the twist densities are higher; the effect of handling due to the twist yarn becomes higher, however, it is necessary to create a remarkable effect of handling by means of the effect of the twist that the twist density in the undetwisted portions is at least $17500 \sqrt{\rho/D}$ Turn/m, and that the ratio of the length of the undetwisted portions to the entire yarn length is at least 30% or/and that the twist density over substantially all the portions along the length of the yarn is at least $7500 \sqrt{\rho/D}$ Turn/m. With regard to a yarn having a total twist of zero, all the requirements can be simultaneously satisfied.

As the false twisting number during the false twisting is high, patterns with a heather like feeling become clear, and if the twist density at the false twisted region is at least $22500 \sqrt{\rho/D}$ Turn/m, the patterns can visually be recognized. In this case, the twist density in the undetwisted portions is approximately equal to that at the false twisted region (strictly speaking, in fact the former is slightly smaller than the latter, however, the difference can be disregarded), and due to false twisting with this twist density, crimps appear in the filaments in the over detwisted portions.

In a yarn having a total twist of zero, if the undetwisted portions have the above-described twist density and they occupy a length of more than 30% in the entire yarn, the twist density of the over detwisted portions becomes equal to or more than a value of $9.5 \times 10^3 \sqrt{\rho/D}$ Turn/m, and a yarn which has such a twist density generally belongs to a field having a handling obtained by a hard twist yarn rather than another field having a handling obtained by a usual twist yarn.

Further characteristic patterns with a heather like feeling can be obtained in connection with the length of the undetwisted portions. The length of the undetwisted portions is in general determined by the various conditions for false twisting and can be varied by changing the conditions. If the sum of the squares of the length (mm) of the undetwisted portions per one meter of the yarn is at least 3000, more preferably at least 5000, very splendid patterns with a heather like feeling can be obtained in combination with the above-explained twist effect. This is because, if the above requirement is satisfied, the length of the individual undetwisted portions is made long.

In order to obtain a specially designed false twisted yarn according to the present invention, it is one of the preferable technical features that an undrawn yarn is used as a supply yarn. Any friction type false twisting device may be used, however, it is preferable that a friction surface of the friction type false twisting device is moved in a direction intersecting with a yarn moving direction at an acute angle so that the yarn is subjected to the twisting operation simultaneously with the yarn delivering operation of the friction surface. In addition, the yarn passage, especially a yarn passage located upstream from the false twisting device, or at least adjacent to the false twisting device, is made substantially stationary so that the ballooning of the yarn is substantially prevented from occurring, and the yarn is drawn and simultaneously or sequentially false twisted. The false twist number is in a range between a minimum value, which is a little bit higher than $17500 \sqrt{\rho/D}$ Turn/m, and a maximum value, which is slightly smaller than a certain value of a false-twisting number which is usually used to obtain a usual false twisted yarn, i.e., a so called woolly yarn. As the false twisting temperature increases, the effect becomes better, however, it is necessary to avoid such an excessively high temperature that filaments constituting the yarn and cohered to each other cannot be separated from each other unless the cohered filaments are broken.

Furthermore, in the present invention, it is preferable that a yarn guide which is usually disposed

downstream of a false twisting device in a conventional friction false twisting texturing machine, for example at a position of about 15 mm downstream from the lowermost friction disk in a friction type false twisting device of multiple friction disk type, is removed and under such a condition a yarn is textured. By appropriately selecting the false twisting conditions, such as the removal of the yarn guide, the temperature condition of the false twisting heater, the false twist number and the draw ratio during the draw-false twisting, the twist densities of the undetwisted portions and the over detwisted portions and the lengths thereof can be varied to an extent which cannot be obtained through conventional methods.

The false twist number must be at least $17500 \sqrt{\rho/D}$ Turn/m as described above to produce a yarn having a handling similar to that obtained by a true twist yarn, and it must be at least $22500 \sqrt{\rho/D}$ Turn/m to give a yarn having a handling similar to that obtained by a hard twist yarn. According to the inventors of the present invention, it is adequate if the temperature of the false twist heater is about between 210 and 240°C when a multifilament yarn made of polyester fibers is treated and if the temperature is about between 175 and 190°C when a multifilament yarn made of polyamide fibers, for example nylon 6 is treated. Of course, it is possible to obtain a specially designed false twisted yarn in a temperature region which is different from that mentioned above, and in this case, the temperature is set in accordance with the supply yarn, the desired textured yarn and the remaining texturing conditions.

To obtain a specially designed alternately twisted yarn, it is very important that another mechanism for forming an alternately twisted yarn which mechanism is different from that utilized in conventional process for making an alternating twisted yarn should be used.

According to the knowledge obtained by the inventors of the present invention, the formation of an alternately twisted yarn through a false twisting partly depends on the false twisting device and the upstream side thereof; however, the formation per se of an alternating twisted yarn is effected downstream of the false twisting device. When a yarn located downstream of a false twisting device in a conventional method is observed, various conditions occur wherein undetwisted portions are formed, over detwisted portions are formed and non-twisted portions are formed. Undetwisted portions are formed through various methods which are classified into two cases, i.e., (1) a case wherein undetwisted portions which are being formed are rotated in a false twisting direction at a rotating speed depending upon the twist density, and (2) a case wherein they are rotated at a rotating speed lower than that of case (1) or are not rotated at all. In the second case, the twist number upstream of the false twisting device is decreased. The formation of the over detwisted portions is followed by the increase of the twist number upstream of said false twisting device, and the non-twisted portions are formed as a transient phenomenon or are formed successively between the undetwisted portions and the excessively detwisted portions.

Contrary to this, when a portion just below a false twisting device and a portion further downstream of the portion are observed, no undetwisted portions are newly formed at these portions. When undetwisted portions are formed by rotation of the yarn downstream of the false twisting device, the over detwisted portions are successively formed because the downstream part of the undetwisted portions are untwisted or because the non-twisted portions which are located downstream of the undetwisted portions are twisted. In some cases, the non-twisted portions are formed by offsetting the twists both of the undetwisted portions and the over detwisted portions.

In conventional methods, there were various mechanisms for forming alternately twisted yarn as described above, however, the alternately obtained twisted yarns had many defects as described above.

Contrary to this, the present invention is based on the knowledge that the formation of undetwisted portions just downstream of the false twisting device which can be occasionally observed in the above-described conventional methods is the most effective for forming the desired alternately twisted yarn, and according to the present invention, it is provided that such a formation is approximately always continued, and the twist condition of the undetwisted portion with rotation is brought to a condition similar to a false twisting condition upstream of the false twisting device. In other words, a condition wherein the false twist imparted region transmitted downstream of the false twisting device is always continued. As a result of the application of such condition, the front end of the false twist imparted region located downstream of the false twisting device is rotated, and the rotating portion untwists both the rear portion of the undetwisted portion which has been previously formed and the front end portion of itself so that excessively detwisted portions are successively formed, and so that the front end of the false twist imparted region is moved downstream. The rotation of the front end of the false twist imparted region is stopped when it is held by means of delivery roller, when it contacts with a yarn guide or the like, or when the torque imparted by means of the false twisting device cannot be transmitted. Although the rotation of the front end of the false twist imparted region is stopped, the false twisting device continues to impart torque to the yarn, and therefore, a new detwisting point is created between the front end of the false twist imparted region and the false twisting device at each moment. The new detwisting point becomes a new front end of a new false twist imparted region, and accordingly, the above-mentioned phenomenon is repeated. Thus the undetwisted portions and the over detwisted portions, which are alternately distributed along the yarn, form an alternately twisted yarn. Under the above-described mechanism for forming an alternately twisted yarn, any non-twisted portions are approximately not formed in fact.

As described above, the main characteristics of a mechanism for forming an alternately twisted yarn according to the present invention are that, at least at a location just downstream of the false twisting device, a false twist imparting condition is always taking place, and that the rotation of the front end of the

false twist imparted region is necessarily stopped by being held by means of a delivery roller, by being contacted with a guide or the like, or because the rotational force imparted by the false twisting device cannot be transmitted.

5 Other conditions to realize the mechanism for forming an alternately twisted yarn of the present invention having the above-explained two characteristics are to take some matters which will be described later into consideration.

According to the present invention, there are three types of characteristic mechanisms for forming alternately twisted yarns based on the methods for stopping the rotation of the front end of the false twist imparted region, and the mechanisms respectively provide characteristic yarn.

10 In the first type of mechanism, the front end is positively engaged with a member for preventing the transmission of the rotation of the yarn at the downstream side of the false twisting device, and at the same time, the number of the over detwisted portions generated between the false twisting device and the engaging member, is always one or less than one. In other words, the specially designed alternately twisted yarn is formed by always retaining a false twist imparting condition at the location just downstream
15 of the false twisting device and by preventing the transmission of the rotation of the yarn downstream so that an over detwisted portion equal to or less than one is always formed between the false twisting device and the engaging member. That is, all various front ends of false twist imparted regions, which are generated as time passes, are made to arrive at the engaging member, such as the delivery roller or the guide, where the rotation of the front ends is stopped.

20 The above-explained first type will now be described in detail with reference to the accompanying drawings. In Figure 1, an example of a process according to the present invention for manufacturing a specially designed alternately twisted yarn is illustrated. A pair of feed rollers 1 feed a supply yarn to a pair of first delivery rollers 4 through a first heater device 2 and a false twisting device 3 which imparts
25 twists into the supply yarn, and the twists imparted by means of the false twisting device 3 run back along the yarn to the heater device 2 where the twists are heat set. A second heater device 5 and a pair of second delivery rollers 6 are optionally disposed downstream of the first delivery rollers 4. Of course, in some cases, the second heater device 5 and the second delivery rollers 6 may be omitted.

The member for preventing the transmission of the rotation of the yarn to the downstream may be the first delivery rollers 4; however instead, another engaging member 8 may be disposed at a location
30 between the false twisting device 3 and the first delivery rollers 4 as illustrated by the broken lines. When such additional member is disposed, the member may be of a stationary type; however, it is preferable that a rotational member, for example a rotating guide which rotates as the engaged yarn moves, is disposed because such a member has a high effect for preventing the rotation of the yarn and has a low resistance against the movement of the yarn. A combination of a plurality of members may be utilized as the engaging
35 member 8.

The false twisting device 3 imparts a rotational force to the yarn, and therefore, the yarn located downstream of the false twisting device also has a tendency to rotate in a direction the same as that of the false twisting. Accordingly, it is probable that the yarn located downstream of the false twisting device is rotated and retains the false twist imparting condition while the false twists are not detwisted. Such a false
40 twist imparting condition, i.e., undetwisted condition, may receive a detwisting operation while the yarn is treated in the successive processes. It is preferable that in a yarn made according to the present invention, when its undetwisted portions are subjected to a detwisting operation, the entire twist density thereof is not gradually decreased but only a part of the undetwisted portion is untwisted, and the twist density in the undetwisted portion is substantially unchanged and the length thereof is gradually shortened, and the
45 portions which have been untwisted absorb a lot of twists and change into over detwisted portions. To achieve such a property concerning detwisting, it is preferable that the undetwisted portions have a coherently high compact portion with twist and high torsional rigidity, and once they are detwisted, they lose their cohesion and decrease their torsion rigidity. Such a requirement will be satisfied by, for example an appropriate fusing, i.e., a part of or all the fusing in the undetwisted portions may be removed when they
50 are subjected to detwisting. If a heating temperature is selected taking the material of the supply yarn and the material and quantity of the finishing, such as oil, into consideration, such fusing can be obtained.

In a process according to the present invention, an engaging member, such as the delivery roller or guide, for preventing the transmission of the rotation of the yarn to downstream is specially arranged at a location downstream from the false twisting device.

55 Figures 3, 4, 5 and 6 are model views illustrating mechanisms for forming alternately twisted yarns of this type as time elapses from t_0 to t_1 , t_2 , in these figures, T denotes a stationary false twisting point; G, stationary point for preventing rotation by means of the engaging member; P, a boundary between the undetwisted portion and the over detwisted portion; and Q, a point where detwisting occurs. The length between the false twisting point T and the rotation preventing point G is denoted by L. In Figures 3, 4, 5 and
60 6, a condition is assumed that at time t_0 the front end P_1 of the false twist imparted region arrives at point G. Under this condition, downstream of the point P_1 the over detwisted portion is located, and the upstream of the point P_1 is under a undetwisted condition since the point P_1 is located within the false twisting imparting region. The rotational force is applied to the yarn at point T, and since at the point P_1 , which is located at the point G at time t_0 , cannot be rotated, untwisting occurs at an undetermined point Q_1 located between the
65 point T and the point G.

Thereafter, the point P_1 and the point Q_1 are moved downstream. The portion which has been subjected to detwisting changes to the over detwisted condition and the torque therein is balanced, both ends of the over detwisted portion are denoted by P_2 and P_3 . The portion between the points P_1 and P_2 moves downward while it retains an original over detwisted portion, and the portion between the points P_2 and P_3 moves downstream while its length increases.

The point P_3 moves downstream as the front end of a new false twist imparted region and arrives at point G (at time t_6 in Figure 3; time t_4 in Figure 4; time t_8 in Figure 5; and time t_3 in Figure 6), then a condition similar to that at time t_0 appears. A new undetermined untwisting point Q_2 is formed and procedures similar to those described above are repeated.

It should be noted that under the above-explained condition and in general, the total twist in both a yarn portion which is being treated and a yarn portion which is successive to the former yarn portion is constant and unchanged. The total twist in the yarn portion located upstream of the point T is constant if the false twisting is effected while stationary. In addition, the total twist in the yarn portion located downstream of the point P_1 is unchanged and constant since the yarn portion has already been treated.

Accordingly, the total twist between the point T and the point P_1 is constant. More specifically, The total twist between the point T and the point P_1

$$= \overline{TG} \cdot \alpha \text{ (at time } t_0)$$

$$= \overline{TG} \cdot \alpha - \overline{P_2P_3} \cdot \beta + \overline{P_1P_2} \cdot \alpha \text{ (at time } t_6 \text{ in Figure 3; at time } t_4 \text{ in Figure 4; at time } t_8 \text{ in Figure 5; and at time } t_3 \text{ in Figure 6)}$$

where α denotes the twist density in the undetwisted portion; and β denotes the twist density in the over detwisted portion which is in a torque balanced condition with the undetwisted portion.

Accordingly, the following equation is obtained.

$$-\overline{P_2P_3} \cdot \beta + \overline{P_1P_2} \cdot \alpha = 0$$

Therefore, the equation (1) is obtained.

$$\overline{P_1P_2} : \overline{P_2P_3} = \beta : \alpha \tag{1}$$

The equation (1) thus obtained means that the ratio between the length $\overline{P_1P_2}$ of the undetwisted portion and the length $\overline{P_2P_3}$ of the over detwisted portion which is formed at a location upstream and adjacent thereto is determined by the twist densities and is constant.

A further explanation will now be described in detail with reference to Figures 3 and 4. In Figure 3, a procedure wherein untwisting takes place at only point P_3 is illustrated, and the over detwisted portion between P_2 and P_3 is moved downstream while the length thereof is increased upstream. If it is assumed that the detwisting occurs at a point Q_1 where the distance $\overline{Q_1P_1}$ is equal to l , at time t_6 the equation (4) is satisfied.

$$\overline{P_1P_2} = l \tag{4}$$

Utilizing the equations (1) and (4), the following equation is obtained.

$$\overline{P_2P_3} = l \cdot \alpha / \beta$$

In Figure 4, originally the point P_2 is given priority to be untwisted, the over detwisted portion between P_2 and P_3 is moved downstream while the length thereof is increased downstream. However, after the time t_2 when the point P_2 arrives at the point G, detwisting cannot occur at point P_2 but takes place at the point P_3 , in other words, the length of the over detwisted portion is increased upstream, and the following equation is obtained.

The number of twists between the points T and P_1

$$= \overline{TG} \cdot \alpha \text{ (at time } t_0)$$

$$= \overline{TP_3} \cdot \alpha - \overline{P_2P_3} \cdot \beta + \overline{P_1P_2} \cdot \alpha \text{ (at time } t_2)$$

$$= (\overline{TG} - \overline{P_2P_3}) \cdot \alpha - \overline{P_2P_3} \cdot \beta + \overline{P_1P_2} \cdot \alpha \text{ (at time } t_2)$$

Therefore, the equation (2) is obtained.

$$\overline{P_1P_2} \cdot \alpha = \overline{P_2P_3} \cdot (\alpha + \beta) \tag{2}$$

If it is assumed that the detwisting is commenced at time t_0 at a point Q_1 where the distance between Q_1 and P_1 is equal to l , at time t_2 , following equation is satisfied.

$$l = \overline{Q_1 P_1} = \overline{P_3 P_1} = \overline{P_1 P_2} + \overline{P_2 P_3},$$

accordingly, the equation (3) is obtained.

$$\overline{P_2 P_3} = l - \overline{P_1 P_2} \quad (3)$$

Substituting the equation (3) into equation (2),

$$\overline{P_1 P_2} \cdot \alpha = (l - \overline{P_1 P_2})(\alpha + \beta),$$

and therefore, the equation (5) is obtained.

$$\overline{P_1 P_2} = l(\alpha + \beta) / (2\alpha + \beta) \quad (5)$$

Incidentally, at time t_4 , the following equation is satisfied.

$$\overline{P_1 P_2} = \overline{P_1 P_2} \text{ at time } t_2 = l(\alpha + \beta) / (2\alpha + \beta)$$

Utilizing the above-explained equation (1),

$$\overline{P_2 P_3} = \frac{l \cdot \alpha(\alpha + \beta)}{\beta(2\alpha + \beta)}$$

As explained above, if a member G for preventing the downstream transmission of the rotation in a yarn is utilized, the point P_3 does not move downstream across the point G as illustrated in Figures 3 and 4, and at the same time the length of the undetwisted portion $\overline{P_1 P_2}$ can be controlled. More specifically, in the case illustrated in Figure 3, as described in the equation (4), $\overline{P_1 P_2} = l$, and

In the case illustrated in Figure 4, as described in the equation (5),

$$\overline{P_1 P_2} = l(\alpha + \beta) / (2\alpha + \beta).$$

In an actual process, both cases illustrated in Figures 3 and 4 may occur, and besides, a case which is located at the intermediate of the cases illustrated in Figures 3 and 4 may also take place. In other words, before point P_2 arrives at point G, detwisting may occur alternately at point P_2 and point P_3 (Figure 5) or simultaneously at both points P_2 and P_3 (Figure 6). However, in any case, after point P_2 has arrived at point G, detwisting occurs only at point P_3 . Accordingly, when the detwisting point Q_1 is formed at a point which satisfies $\overline{GQ_1} = l$ and point P_3 advances to point G, the length $\overline{P_1 P_2}$ of the formed undetwisted portion satisfies the following equation.

$$l(\alpha + \beta) / (2\alpha + \beta) \leq \overline{P_1 P_2} \leq l$$

Since it is possible that the point Q_1 may be formed at any point between the points T and G, l satisfies the following equation.

$$0 < l < L$$

Accordingly, $0 < \overline{P_1 P_2} < L$ is probable.

In other words, an over detwisted portion which has a length longer than the length L between the points T and G cannot be formed.

Under the above-explained mechanisms for forming alternately twisted yarns of the present invention, as mentioned above, since the occurrence of the detwisting point Q may take place at a point between the points T and G at a relatively uniform probability, the lengths of the undetwisted portions and the over detwisted portions are distributed along an approximate rectangular shape rather than a normal distribution, and there is great variation in the lengths. The above-described mechanisms are suitable for obtaining alternately detwisted yarns which result in patterns with a uniform heather like feeling.

When a process according to the present invention is carried out, an engaging member contacting only with yarn is disposed downstream of the false twisting device though, if it does not function well to prevent the downstream transmission of the rotation of the yarn, the mechanisms for forming alternately twisted yarns which were explained above with reference to Figures 3, 4, 5 and 6 cannot be achieved. Therefore, such an engaging member is not suitable, and a careful consideration concerning such point should be taken. In conclusion, even if an engaging member is disposed, the engaging member does not serve as a member for preventing the rotation of a yarn according to the present invention when it includes one or both of the following problems—

a. The location where the member is disposed is inappropriate.

b. The member has a very small function for preventing the rotation of the yarn, though the location thereof is adequate, and accordingly, in fact the member does not prevent the transmission of the rotation of the yarn, and as a result, the point Q occurs after the point P₁ or P₃ is transmitted across the point G.

Under such a mechanism for forming alternately twisted yarn, the relationships expressed in the
5 above-described equations cannot be found.

In the most preferable embodiment of the process for manufacturing a specially designed alternately twisted yarn according to the present invention, a thermoplastic synthetic multifilament yarn is subjected to a false twisting by means of a false twisting device, and after the yarn is passed through the false twisting device, the yarn is retained in a false twist imparted condition at a location at least adjacent to the
10 false twisting device, the multifilament yarn is engaged with a member for preventing transmission of the rotation of the yarn disposed downstream of the false twisting device, wherein the member is arranged at such a location that the number of the over detwisted portions, which are generated between the false twisting device and the member for preventing the transmission of the rotation of the yarn is always at most one. According to this embodiment, when a detwisting point Q₁ is formed and a front end P₃ of the
15 false twist imparted region is formed, only after the point P₃ arrives at the point G, a new detwisting point Q₂ is generated. More specifically if the distance L between the points T and G is set relatively short, the generation of a new Q₂ before the point P₃ arrives at the point G can be prevented from occurring. When a yarn is treated, the length of the undetwisted portions are distributed between zero and L as explained above. If the above-explained embodiment is applied to an actual commercial process wherein a number of
20 yarns are simultaneously manufactured, the distribution of the lengths of the compact undetwisted portions can be uniformized between the yarns processed in different treating units.

A model view of a yarn made according to the present invention is illustrated in Figure 2, wherein if the length a_i, denoting the length of either the undetwisted portion or the over detwisted portion, is long, the corresponding length b_i is also long; and if the former a_i is short, correspondingly the latter b_i is also short.
25 On the other hand, between the portions except for the corresponding portions a_i and b_i, there is no predetermined relationship. Accordingly, the length which is the sum of a_i and b_i distributes randomly, and when a woven fabric is manufactured from such a yarn, the woven fabric can provide patterns which are uniformly distributed and have a slight heather like feeling.

Since a yarn made by the process of the present invention is obtained through false twisting, the
30 structure of the yarn is characterized in that the yarn is a multifilament yarn and has false twisted crimps therein, and the Z-twist portion (or S-twist portion) is a compact twist yarn portion wherein the crimp configuration of the filaments is consistent with the twist structure of the yarn, and the S-twist portion (or Z-twist portion) is a bulky twist yarn portion wherein crimp configuration of the filaments appear in the twist structure of the yarn. As to which portion of the S- or Z-portion may be used as a compact or bulky
35 twist yarn portion, this can be selected by setting the false twisting direction at will, and the above explained relationships expressed in the equations can be applied to the portions.

In addition to (1) a case illustrated in Figure 3 wherein the point P₃ is given priority to commence detwisting or (2) a case illustrated in Figure 4 wherein the point P₂ is given priority to commence detwisting, there is (3) a case illustrated in Figure 6 wherein detwisting simultaneously occurs at the points P₃ and P₂,
40 and (4) a case illustrated in Figure 5 wherein detwisting alternately takes place at the points P₃ and P₂. In either case, if the front end P₁ of the false twist imparted region arrives at the point G so that a detwisting point Q₁ is formed, and then a new front end P₃ of a new false twist imparted region arrives at the point G so that a new detwisting point Q₂ is formed, the length $\overline{P_1P_2}$ of the undetwisted portion formed between the points P₁ and P₂ and the length $\overline{P_2P_3}$ of the over detwisted portion formed between the points P₂ and P₃
45 always satisfy the equation (1).

As described above, a specially designed alternately twisted yarn made by the present invention has: the length of undetwisted portions $\overline{P_1P_2}$ formed when the front end P₃ of the false twist imparted region arrived at the point G; and the length of an over detwisted portion $\overline{P_2P_3}$ formed adjacent to and upstream of the undetwisted portion. The lengths $\overline{P_1P_2}$ and $\overline{P_2P_3}$ satisfy the equation (1); however the length of the over
50 detwisted portion does not have any predetermined relationship with the length of a undetwisted portion which is formed adjacent to and upstream of the excessively detwisted portion. In short, an alternately twisted yarn of the present invention alternately has S-twist portions and Z-twist portions which vary in their lengths distributed along the length of the yarn, and there is a positive high correlation between lengths of the S-twist portion and the length of the Z-twist portion adjacent at one direction of the
55 corresponding S-twist portion, but there is low correlation between the length of the S-twist portion and the length of the Z-twist portion adjacent at the opposite direction of the corresponding S-twist portion.

A model view of a structure of an alternately twisted yarn made by the process of the present invention is exemplified in Figure 2. The term "positive high correlation" means that the correlation coefficient which will be defined below is at least 0.7, and the term "low correlation" means that the
60 correlation coefficient is in a range between -0.3 and 0.3. More specifically the following equations (I) and (II) are satisfied.

5

$$0.7 \leq \frac{\sum_{i=1}^n (\bar{a}-a_i)(\bar{b}-b_i)}{\sqrt{\sum_{i=1}^n (\bar{a}-a_i)^2 \times \sum_{i=1}^n (\bar{b}-b_i)^2}} \quad (I)$$

10

$$-0.3 < \frac{\sum_{i=1}^n (\bar{a}-a_{i-1})(\bar{b}-b_i)}{\sqrt{\sum_{i=1}^n (\bar{a}-a_{i-1})^2 \times \sum_{i=1}^n (\bar{b}-b_i)^2}} < 0.3 \quad (II)$$

15

In the present invention the number n used in the above equations (I) and (II) must be between 100 and 600. The symbols "ā" and "b̄" means an average of a_i and b_i (wherein i=1, 2, . . . n), respectively.

20 In a second type of mechanism for forming alternately twisted yarn according to the process of the present invention, S-twist portions and Z-twist portions are made relatively long, and the lengths of these portions are randomly varied. More specifically, a process for manufacturing a specially designed alternately twisted yarn is characterized in that a thermoplastic synthetic multifilament yarn is subjected to false twisting by means of a false twisting device, and after the yarn is passed through the false twisting device, the yarn is retained in a false twist imparted condition at a location at least adjacent to the false twisting device, and in addition, an over detwisted portion always exists between the false twisting device and a member, which the yarn from the false twisting device contacts first.

25 The above-described term "member which the yarn contacts first" means a member, such as a delivery roller or a yarn guide utilized to change a yarn passage, which is similar to the member which was explained in connection with the first type mechanism and which was used to prevent the downstream transmission of the rotation of the yarn, and the term does not include a member which only contacts a yarn and which substantially does not have the function of preventing the transmission.

30 In this type of mechanism the stoppage of the rotation of the front end of the false twist imparted region is carried out by applying a mechanism wherein the rotational force imparted by the false twisting device cannot be transmitted, and a contacting member is so arranged that an over detwisted portion always exists between the false twisting device and the member, which the yarn from the false twisting device contacts first. To carry out the above explained manufacturing mechanism of the present invention, a false twisting texturing machine illustrated in Figure 1 can be utilized.

35 Figures 7, 8, 9 and 10 are model views illustrating mechanisms for forming alternately twisted yarns in the process of the present invention belonging to this type, wherein the changes are illustrated as time elapses from t₀ to t₁ and t₂. In these figures, T denotes a false twisting point; G, a contacting point where the yarn departing from the false twisting device contacts first; P, a boundary between a undetwisted portion and an over detwisted portion; and Q, an untwisting commencing point.

40 In Figures 7, 8, 9 and 10, it is assumed that at time t₀ the front end P₁ of the false twist imparted region reaches an undetermined point X, located upstream of the point G, where the rotational force imparted by the false twisting device cannot be transmitted downstream to an extent, that the portion located downstream of the point P₁ is an over detwisted portion, and that the portion located upstream of the point P₁ is a false twist imparted region and is under compact undetwisted condition. The portion located at the point P₁ cannot now be rotated, and accordingly, detwisting is commenced at an undetermined point Q₁, located between the point T and the point P₁.

45 Thereafter, the points P₁ and Q₁ are moved downstream at a speed equal to that of the yarn. The detwisted yarn portion changes into an excessively detwisted condition, and torque therein is balanced. Both ends of the over detwisted portion are denoted by P₂ and P₃. The portion between the points P₁ and P₂ is moved downstream as an undetwisted portion, and the portion between the points P₂ and P₃ is moved downstream as an over detwisted portion while the length thereof increases.

50 The point P₃ moves downstream as a front end of a new false twist imparted region, and finally it reaches an undetermined point Y where the rotational force imparted by the false twisting device cannot be transmitted downstream (at time t₂ in Figures 7 through 10), and then a condition similar to that at time t₀ takes place, and procedure similar to that described above is repeated.

55 In the case illustrated in Figure 7, detwisting occurs only at the point P₃, and the over detwisted portion between the points P₂ and P₃ moves downstream while the length thereof is increased upstream. In Figure 8, the point P₂ has a priority for detwisting at the first stage, and the over detwisted portion between the points P₂ and P₃ moves downstream while the length thereof is increased downstream. However, after the time t₁, the detwisting does not occur at the point P₂ but at the point P₃, i.e., a detwisting wherein the length thereof is increased upstream takes place. In Figure 9, as time elapses from time t₀ to t₂, the detwisting is simultaneously advanced downstream and upstream from the point Q₁, and accordingly, the length of the

60

65

over detwisted portion between the points P_2 and P_3 is increased in both upstream and downstream directions. The front end P_3 of the new false twist imparted region moves downstream. In Figure 10, only at the point P_2 detwisting occurs after the point Q_1 is formed and before the point Q_2 is formed. In an actual and commercial texturing process, the above described various procedures for forming over detwisted portions take place at random.

As will be apparent from Figures 7 through 9, the number of the over detwisted portions located between T and G is one at times t_0 and t_2 and is two at time t_1 . In this type of mechanism an over detwisted portion always exists between T and G.

As will be obvious from Figures 7 through 10, if the position of the contacting member, i.e., the point G, by which the yarn passage is changed, is set at a position which is reached by the front end of the false twist imparted region, i.e., a mechanism wherein any over detwisted portion does not exist temporarily is utilized, the length of the formed undetwisted portion is restricted by the point G, and correspondingly also the length of the over detwisted portions is restricted. Accordingly, long S-twist portions or long Z-twist portions cannot be formed, and such a location is not preferable.

According to this type of mechanism, a yarn of the present invention can be obtained which has relatively long S-twist portions and Z-twist portions. In addition, since the points X and Y, especially, detwisting commencing points Q_1 and Q_2 , in Figures 7 and 10 may be located at random between T and G, (more specifically, the point Q_1 may be located at random between X and T and the point Q_2 may be located randomly between Y and T), the lengths of the portions can be varied.

A third type mechanism for forming alternately twisted yarn by the process of the present invention provides a method of manufacturing a specially designed alternately twisted yarn, in which relatively long undetwisted portions and over detwisted portions can be formed and in which, the coefficients of variation, i.e., the variations in the average lengths, of the undetwisted portions and the over detwisted portions can relatively be equalized even when many yarns are simultaneously manufactured by means of a multiplicity of yarn treating units in a machine. Accordingly, this type of mechanism is desirable for a commercial operation. If alternately twisted yarn having relatively long S-twist and Z-twist portions is utilized as a warp of a woven fabric in a weaving operation, the S- and Z-twists may not be diminished when the yarn is beaten, in other words, the S- and Z-twists in the yarn may probably remain, and accordingly, the obtained woven fabric can have a handling similar to that obtained by a hard twist yarn and patterns with a slight heather like feeling.

To obtain the above described object, a process for manufacturing an alternately twisted yarn of this type of the present invention has the following characteristics. At a location just downstream of the false twisting device a false twist imparted condition is always retained; and an engaging member is arranged close to the furthest downstream position which can be reached by this yarn portion retained in the false twist imparted condition while the yarn is being rotated (i.e., the ultimate position where the rotation of the yarn is stopped). There are two cases, i.e., case (1), wherein the furthest downstream end of the yarn in the false twist imparted condition arrives at the engaging member by which downstream transmission of the rotation of the yarn is prevented, and case (2), wherein the end does not arrive at the engaging member. As time elapses, both cases (1) and (2) occur randomly.

An embodiment of this type will now be explained in detail with reference to the accompanying drawings.

A false twisting texturing machine having a construction similar to that illustrated in Figure 1 can be utilized to carry out the above-described process for manufacturing an alternately twisted yarn according to the present invention.

The present mechanism for forming alternately twisted yarn comprises the procedure illustrated in Figure 3 through 6 concerning the first type mechanism and the procedure illustrated in Figures 7 through 10 regarding the second type mechanism, and these procedures occur randomly as time elapses. Figure 11 is a model view illustrating a mechanism of this type from time t_0 to t_1 . . . as time elapses. In Figure 11, it is assumed that the front end P_1 of the false twist imparted region reaches the point G at time t_0 . In this case, the portion located downstream of the point P_1 is an over detwisted portion, and the portion located upstream of the point P_1 is a false twist imparted region and is under undetwisted condition. A rotational force is applied at the point T, however, the point P_1 now located at the point G cannot rotate, and accordingly, detwisting is commenced at an undetermined point Q_1 located between the points T and P_1 .

Thereafter, the points P_1 and Q_1 advance downstream at a speed equal to that of the yarn. A yarn portion which has been detwisted is changed to an over detwisted condition, and the torque therein is balanced, and the both ends of the over detwisted portion are designated by P_2 and P_3 . The portion between the points P_1 and P_2 is a undetwisted portion and moves downstream, and the portion between the points P_2 and P_3 is an over detwisted portion and moves downstream while the length thereof is increased.

The point P_3 moves downstream as a new front end of a new false twist imparted region, and finally arrives an undetermined point X where the rotation cannot be transmitted (at time t_2) so that a condition wherein the rotation cannot be transmitted similar to that at time t_0 occurs. Accordingly, a new detwisting point Q_2 which is undetermined is formed, and then a procedure similar to that described above repeats.

In an actual process, there are various modes wherein an over detwisted portion between the points P_2 and P_3 moves downstream while the length thereof is increased, for example, modes illustrated in Figures

3 through 10 which were explained above, and these various modes take place alternately and in combination with the same yarn treating unit.

In the present type of mechanism for forming an alternating twisted yarn by the process of the present invention, since the detwisting point Q is generated relatively randomly at a relatively uniform probability at an undetermined location between the point T and the point G or X, and since the location of the point X is undetermined, the distributions of the obtained undetwisted portions and the over detwisted portions form an rectangular distribution rather than a normal distribution, and have a large variation. Therefore, this mechanism is suitable to obtain an alternately twisted yarn by which a woven or knitted fabric having uniformly distributed patterns with a heather like feeling can be manufactured.

When this type of mechanism is actually utilized, if the furthest downstream end of a yarn portion in a false twist imparted condition moving downstream always engages with an engaging member and the rotation of the end is stopped, the length of the undetwisted portion formed there is restricted, and at the same time the length of the corresponding over detwisted portion is also restricted. Accordingly, relatively long undetwisted portions and over detwisted portions cannot be formed, and therefore the above-described condition is not desirable. Contrary to this, if the rotation of the front end always stops before the front end engages with the engaging member, i.e., the location where the front end P₃ of the false twist imparted region is entirely free, the average lengths of the undetwisted portions and the over detwisted portions may result in unevenness between the treating units when yarns are treated at a multiplicity of treating units. Therefore, only this condition is also undesirable. It is very important that the location where the engaging member is disposed is appropriately adjusted. In conclusion, it is preferable for an actual and commercial operation that only when a front end P₃ of a false twist imparted region abnormally advances beyond the length usual for a normal treating operation so that an excessive length which is longer than a desired length may be formed, the front end is permitted to reach the point G so that generation of a new detwisting point Q is enforced; and that in such a manner the upper limit of the undetwisted portion is provided as desired so that unevenness between the operational units can be reduced.

In all the embodiments of the present invention, it is preferable that a specially designed alternating twist yarn of the present invention has S-twist portions and Z-twist portions, the length of which are randomly distributed, and that the coefficient of variation, i.e., the variation of the lengths, is at least 50%. In this case, if the lengths of S-twist portions and/or Z-twist portions are extremely randomly distributed, a woven fabric having patterns with a uniformly distributed heather like feeling can be obtained.

Based on the knowledge obtained by the inventors of the present invention during the present inventive activity, it is preferable that the following requirements and conditions be satisfied.

(1) The operation of a false twisting system comprising a supply means, a heating means, a false twisting means and delivery means is not substantially varied while it is being operated.

(2) The obtained yarn is in hard twist condition and has a twist contraction of between several and about 20%, and accordingly, overfeed condition corresponding to the twist contraction and/or a supply yarn having a sufficient elongation should be utilized.

(3) When the undetwisted portion in the yarn is exposed to a detwisting operation, the entire twist density of the said portion is not gradually decreased but only a part of said portion is detwisted, and the portion which is not detwisted substantially retains its original twist density and gradually becomes short, whereby the detwisted portion is successively changed into an over detwisted portion. Therefore, this property should fully be utilized.

(4) Since the twist density in the false twisting remains as that in the undetwisted portions, it is preferable that the twist number of the false twisting be high. However, if the false twist number is excessively high, double twists may be caused and result in that the twists transmitted across the false twisting device may be varied or that the twisting force of the false twisting device becomes almost the holding limit or exceeds the limit so that the yarn is discontinuously twisted, and accordingly, non-twist portions may be created. It is preferable that the false twist number is set at a value relatively lower than that of usual false twisting.

(5) Ballooning should be as small as possible during the yarn treating operation, and it is preferable that the treatment be carried out under a stationary ballooning condition where ballooning cannot visually be recognized.

(6) It is preferable that the tension in the yarn located downstream of the false twisting device be as low as possible, taking the construction of the false twisting device and any yarn guide, and the treatment conditions into consideration so that the resistance from the false twisting device and the yarn guide can be small. Especially a yarn guide should not be used if possible, and if such a yarn guide is indispensable, it is preferable that a rotatable member be used instead of the fixed member. Furthermore, if such a fixed member is indispensable, the total contacting angles, over which a yarn wraps around the fixed member, should be at most 30 degrees.

(7) It is necessary to keep the types and the constructions of the false twisting device and the yarn guides, and the yarn treating conditions in mind, so that yarn is not subjected to a high abrasion or a change of yarn passage which has a large curvature.

The requirements and conditions which are desirable to carry out a method of the present invention are not limited to the above-mentioned seven items, however, when a thermoplastic multifilament yarn is

false twisted, if the above-mentioned seven items are satisfied, the object of the present invention can be achieved.

Examples

5 Several examples of the present invention will now be explained.

Example 1

Polyethylene terephthalate was melt spun and was taken up at a speed of 3000 m/min so that a multifilament yarn of 137 denier/36 filament was obtained.

10 The yarn was drawn at a draw ratio of 1.4 and was false twisted at the drawing zone, the heating temperature was 238°C and the number of the false twists was 3200 Turn/m. The heating device was a contacting plate, the length of which was 1.5 m and the radius of curvature of which was 30 m, having a semi-circular groove, the radius of which was 2 mm and which extended along the yarn passage. The false twisting device was of an outer surface friction type provided with three shafts. The distance between the heating device and the false twisting device was 65 cm and a second contacting plate, the length of which was 50 cm, the radius of curvature of which was 10 m, was disposed therebetween and was maintained at a temperature of 40°C. The distance between the false twisting device and the delivery device was 40 cm, and the delivery speed was 520 m/min.

20 Furthermore, a rotatable guide having a diameter of 10 mm was disposed at a position 20 mm downstream of the false twisting device, and the yarn was wrapped therearound.

A yarn alternately having undetwisted portions and over detwisted portions was obtained. The twist density of the undetwisted portions was 3000 Turn/m, the average length thereof was 8.3 mm, the maximum length thereof was 20 mm, and the ratio of the lengths thereof to the entire yarn length was 36.5%. The twist density of the over detwisted portions was 1720 Turn/m, the average length thereof was 14.4 mm, the maximum length thereof was 32 mm, and the ratio of the lengths thereof to the entire yarn length was 63.5%.

25 The correlation coefficient between the lengths of the undetwisted portions (a_i) and the lengths of the over detwisted portions (b_i) located adjacent to and upstream thereof during the treating operation, which coefficient was calculated by the right term in equation (I), was 0.79. Least squares method was applied to (a_i , b_i) and the following equation was obtained.

$$b = 1.50a + 2.0 \text{ (mm)}$$

35 This equation means that a is approximately proportional to b , and that, in addition, a constant term "2.0 mm" is included. The inventors of the present invention discovered that the constant term corresponds to a yarn length which was moved after the front end of the false twist-imparted region arrived at the point G and before the detwisting point was generated.

40 The correlation coefficient between the lengths of the undetwisted portions (a_i) and the lengths of the over detwisted portions (b_i) located adjacent thereto and downstream thereof during the treating operation was 0.14.

If the distribution of the lengths (a_i) of the undetwisted portions is shown in a histogram with a width of 1 mm, the frequency between zero and 12.5 mm was almost constant, the frequency between 12.5 and 20 mm was gradually and linearly decreased as the length increased, and the length more than 20 mm was zero. The coefficient of variation of a_i was 60.0%.

45 The outer diameter of the undetwisted portions was approximately uniform and was 100 μm , and the outer diameter of the over detwisted portions was 130 μm in their average.

50 The yarn obtained through the above-explained process was further heat treated and then a woven fabric (structure: plain weave fabric; warp density: 87/inch (3425/m); and weft density: 84/inch (3300/m)) was manufactured. In the woven fabric, the undetwisted portions were transparent and formed an ornamental effect in a combination of the warps and wefts, and the patterns were visually uniform.

55 Since the fabric was hard due to the cohesion in the yarn and due to the hard twist effect, it was treated by means of caustic soda so that its weight was decreased by 23%, and a hand similar to that of cotton voile was obtained.

The thus obtained fabric had an ornamental effect, which was superior to that obtained by a conventional yarn, and had a splendid handling.

Example 2

60 In Example 1, the rotational guide disposed downstream of the false twisting device and the engagement of the yarn therewith were changed as follows, and the other conditions were the same as those in Example 1.

Test No. 1: The wrapping and contacting angle between the rotational guide and the yarn was set at 45°.

65 Test No. 2: A second rotational guide similar to the rotational guide was disposed 14 mm downstream from the first rotational guide so that the yarn was passed along a zigzag (S-line) passage, and the contacting angle of each guide was 45°.

The yarns thus obtained did not have any substantial difference from those of Example 1.

It was confirmed that the contacting angle of 45° in Test No. 1 was sufficient to prevent the rotation of the yarn from being transmitted.

5 It seemed to the inventors of the present invention that the second rotational guide in test No. 2 did not contribute to prevent the rotation of the yarn, however, it served to change the yarn passage. Accordingly, such a rotational guide may be required in an actual process.

When the method of test No. 2, wherein the yarn was wrapped around the two rotational guides along a S-line and was fed to a desired direction, was compared with the method of Example 1, wherein the yarn was wrapped around on rotational guide for 360°, the operability of the former method was superior to that
10 of the latter method.

Example 3

In Example 1, the location of the rotational guide is displaced to a position being 30 mm from and downstream of the false twisting device, and the other conditions were the same as those in Example 1.

15 The twist density of the undetwisted portions in the obtained yarn was 3000 Turn/m, the average length thereof was 12.4 mm, and the maximum length thereof was 30 mm, and the ratio of the lengths thereof to the entire length of the yarn was 37.6%.

The twist density of the over detwisted portions in the obtained yarn was 1810 Turn/m, the average length thereof was 20.6 mm, the maximum length thereof was 47 mm, and the ratio of the lengths thereof
20 to the entire length of the yarn was 62.4%.

Example 4

In the Example 1, the rotational guide disposed at a position being 20 mm from and downstream of the false twisting device was replaced by a fixed guide made of titanium oxide ceramic and having a diameter
25 of 8 mm, and the contacting angle of the yarn was 45°. The other conditions were the same as those in Example 1.

A yarn approximately similar to that of Example 1 was obtained. More specifically, the over detwisted portions were slightly longer than those of Example 1, and the twist density thereof was a little bit lower than that of Example 1. During the false twisting, 100 photographs of the yarn running between a location
30 just downstream of the false twisting device and a location 5 mm downstream from the false twisting device were taken utilizing a stroboscope and then enlarged. In all 100 photographs, the yarn located just downstream from the false twisting device was in undetwisted condition. There were six photographs illustrating that over detwisted portions of 5 mm in length were included in the yarn.

35 Example 5

False twisting was carried out under the same conditions as those in Example 1 except that any member engaging with the yarn was not additionally disposed.

The obtained yarn alternately had undetwisted portions and over detwisted portions. The twist density of the undetwisted portions was 3000 Turn/m, the average length thereof was 70 mm, the
40 maximum length thereof was 200 mm, the ratio of the lengths thereof to the entire length of the yarn was 39.4%, and outer diameter thereof was approximately 100 μm. The twist density of the over detwisted portions was 1950 Turn/m, the average length was 107.5 mm, the ratio of the lengths thereof to the entire yarn length was 60.6%, and the outer diameter thereof was 128 μm.

The yarn obtained through the above explained process was subjected to a heat treatment by passing
45 through a heating zone, which was disposed subsequent to the above-explained process, which was heated at a temperature of 237°C and the length of which was 1.2 m, and then it was taken up at a speed of 520 m/min so that the torque of the yarn was decreased and the tensile strength thereof was increased. Thereafter, a woven fabric (structure: plain weave fabric; warp density: 85/inch (3350/m); and weft density: 82/inch (3330/m) was obtained. In the thus obtained fabric, the undetwisted portions were transparent-like,
50 and several undetwisted portions were continuously gathered on the fabric. The gathered undetwisted portions in the wefts and the warp form special patterns with a heather like feeling on the fabric. Although the fabric was partially not uniform and uneven, when it was visually observed as a whole, it felt uniform and had a splendid ornamental appearance.

Since the fabric was hard due to the cohesion and hard twist effects in the yarn, it was treated by
55 means of caustic soda so that its weight was decreased by 22%. A novel and comfortable hand of crepe georgette like and voile like utilizing a sea island cotton was obtained.

In the above-explained process, a traverser was disposed at a position 50 mm upstream from the take up device so that the yarn engaging position in the take up device was varied and so that the take up device was protected. This traverser almost had no effect on the formation of the yarn.
60

Example 6

In Example 5, the take up device positioned 40 cm downstream from the false twisting device along the rotational axis thereof was further displaced in a perpendicular direction by 5 cm, so that a yarn passed through the false twisting device was introduced along the rotational axis and was wrapped around a first
65 rotational guide for 45°, and then was wrapped around a second rotational guide for 45° and introduced in

the rotational axis, whereby the yarn was engaged with the take up device. The other conditions were the same as those in Example 1.

The distance L (mm), which was equal to the yarn passage between the false twisting device and the first rotational guide, was varied between 7 and 300 mm. The relationships between the distance L and the average lengths and the maximum lengths of the undetwisted portions in the obtained yarns were researched.

The average lengths were approximately proportional to the distance L if L was between 7 and 100 mm, and the average length was 40.5 mm for L equal to 100 mm. When the distance L was between 100 and 200 mm, the degree of increase of the average length due to the increase of the distance L was gradually decreased, and the average length was almost constant, i.e., about 70 mm for the distance L of between 200 and 300 mm.

The maximum length was approximately equal to L if L was between 7 and 200 mm. In a range wherein L was between 200 and 300 mm, the maximum length was about 200 mm and almost did not vary.

From these results, it was confirmed that almost all the front ends of the false twist imparted regions, which ends were repeatedly generated as time elapsed, arrived at the first rotational guide when L was equal to or less than 100 mm; that when L exceeded 200 mm, almost none of the front ends reached the first rotational guide; and that if L was between 100 and 200 mm, the case wherein the ends arrived at the guide and the cases wherein the ends did not arrive randomly occurred.

From the above-described results, it was understood that some members, such as a take up device, a guide which changes yarn passage so as to introduce it to the take up device, which are needed to be engaged with a yarn at a location downstream of a false twisting device should be separated from the false twisting device by a distance of at least 200 mm. This is because the maximum arrival distance of each end of a false twist imparted region is 200 mm in a direction downstream of the false twisting device.

Example 7

In Example 6, in addition to the temperature of 237°C for the false twisting machine, 235° and 240° were utilized, and the maximum arrival distances of the front ends of false twist imparted region were measured. When the temperature was 235°C, the distance was 100 mm; and at 240°C, 250 mm.

Example 8

In Example 5, under four conditions, wherein between a location 200 mm downstream from the false twisting device and the take up device, one fixed guide, two and three fixed guides, and one fixed guide and one rotational guide were disposed, the yarn engaging conditions were researched.

As a result, it was confirmed that whether or not a rotational guide is disposed or wrapped at a contacting angle there was almost no effect on the formation of a yarn, and that if the total wrapped contacting angle about a fixed guide exceeds 30°, the ratio of the lengths of undetwisted portions to the entire yarn length was decreased.

It was also confirmed that when it is necessary to change a yarn passage between a false twisting device and a take up device, the fixed guide can be used if the turning angle is equal to or less than 30°; and if the turning angle is more than 30°, the wrapped contacting angle may be less than 30° by utilizing a rotatable member.

Example 9

According to a false twisting method which was the same as that of Example 5 except that the temperature of the heating plate was 240°C, a polyethylene terephthalate multifilament yarn was treated.

The obtained yarn had undetwisted portions and over detwisted portions which portions were alternately distributed.

The average lengths of the undetwisted portions, which were calculated based on the operating units, were between 70 and 92 mm. These yarns were used as a weft yarn to form a plain weave fabric (warp yarn: a multifilament yarn of 50 denier/24 filament; warp density: 150/inch (5900/m); and weft density: 85/inch (3350/m)) a clear difference was felt between the part of the fabric wherein the yarn having an average length of undetwisted portions of 70 mm was used and the part of the fabric wherein the yarn having an average length of 92 mm was used.

Next a rotatable guide having a diameter of 10 mm was disposed at a location 160 mm downstream from the false twisting device, and the yarn was wrapped around this guide so that a treatment could be carried out. As a result, the average length of the undetwisted portions which had been 70 mm was changed to 62 mm, and similarly 92 mm was changed to 68 mm. These yarns were woven to form a plain weave fabric in which no substantial difference was visually recognized.

The heating temperature in the treating unit, wherein the yarn having the longest average length of undetwisted portions was manufactured, was 240°C, and contrary to this the heating temperature in the unit, wherein the yarn with the shortest average length was manufactured, was 237°C.

After the setting of the heating device was changed to 243°C, a yarn was treated without utilizing the rotatable guide, and a yarn with an average length of undetwisted portions of 91 mm was obtained in the yarn treating unit wherein the yarn having the average length of the undetwisted portions of 71 mm had been manufactured.

From the above-explained tests, it was confirmed the variation in the average lengths of undetwisted portions between yarn treating units was mainly based on the difference in the heating temperatures, and that the variation between the yarn treating units could be reduced if a rotatable guide was utilized.

Utilizing a single yarn treating unit and a rotatable guide, for the two heating temperatures, i.e., 237°C and 240°C, the distance L (mm) which was measured along the yarn passage between the false twisting device and the rotatable guide was variously changed within a range of between 7 and 300 mm, and the relationship between the distance L, and the average length and the maximum length of undetwisted portions in the yarn obtained by the corresponding distance L was observed.

When the heating temperature was 237°C (240°C), the average lengths were approximately proportional to the distance L in a range wherein the distance L was 7 and 100 mm (7 and 120 mm), i.e., 40.5 mm (51 mm) at L of 100 mm (120 mm). In a range wherein the distance L was between 100 mm (120 mm) and 200 mm (250 mm), the degree of the increase of the average length was gradually decreased as the distance L increased, and when the distance L exceeded 200 mm (250 mm) until it reached 300 mm, the average length of about 70 mm (92 mm) was almost unchanged.

Contrary to this, the maximum length was approximately equal to L when the distance L was in a range between 7 and 200 mm (7 and 250 mm), and it was almost 200 mm (250 mm) and unchanged when the distance L was in a range of between 200 and 300 mm (250 and 300 mm).

From this observation, it was confirmed that front ends of the false twist imparted region, which ends were repeatedly generated as time elapsed, almost all arrived at the rotatable guide when the distance L was equal to or less than 100 mm (120 mm); that they almost all did not arrive at the rotatable guide when the distance L was larger than 200 mm (250 mm); and that when the distance L was between 100 and 200 mm (120 and 250 mm), the times wherein they arrived at the guide and the times wherein they did not arrive at the guide were mixed as time elapsed.

Please note that in this Example, the figures enclosed by parentheses indicate the conditions and data when a heating temperature of 240° was used.

Claims

1. A process for manufacturing alternately twisted yarn wherein a thermoplastic synthetic multifilament yarn is subjected to false twisting and heat setting to give in undetwisted portions of the yarn a twist density of at least $17500 \sqrt{\rho/D}$ turns/m wherein ρ is the specific gravity of the yarn and D is its denier number, characterised in that the false twisting is performed along a substantially stationary path using a friction-type false twisting device to substantially avoid ballooning, the yarn is subjected to the false twisting and heat setting under a draw ratio equal to or less than the natural draw ratio and that a yarn contacting member is disposed at a location downstream of the false twisting device whereby a front end of false twisted region in the yarn is prevented from being transmitted across the yarn contacting member, and an overdetwisted portion is generated in the yarn located between the false twisting device and the yarn contacting member.

2. A process for manufacturing yarn according to claim 1 wherein, in the yarn manufactured by the process, the ratio of the lengths of the undetwisted portions to the entire length of the yarn is at least 10% and the sum of the squares of the lengths (in mm) of the undetwisted portions is at least 3000 per meter length of the yarn.

3. A process for manufacturing yarn according to claim 2 wherein the said sum of the squares is at least 5000 per meter length of the yarn.

4. A process for manufacturing yarn according to any preceding claim wherein the twist density in the undetwisted portions is at least $22500 \sqrt{\rho/D}$ turns/m.

5. A process for manufacturing yarn according to any preceding claim, wherein the outer diameter of said manufactured yarn at said overdetwisted portion is larger than the outer diameter of said yarn at said undetwisted portions by 10%.

6. A process for manufacturing yarn according to any preceding claim, wherein, in both the undetwisted and overdetwisted portions, a part of constituent filaments are connected to each other by means of fusing.

7. A process for manufacturing yarn according to claim 6, wherein conjugated fibers comprising at least two kinds of materials with differing melting points are utilized.

8. A process for manufacturing yarn according to claim 6, wherein at least two kinds of fibers with differing melting points are utilized.

9. A process for manufacturing yarn according to any preceding claim wherein polyester fibers are utilized.

10. A process for manufacturing yarn according to any preceding claim, wherein not more than one overdetwisted portion is generated between said false twisting device and said yarn contacting member.

11. A process for manufacturing yarn according to any one of claims 1 to 9 wherein the occasions in which there is not more than one overdetwisted portion between said false twisting device and said yarn contacting member, and the occasions in which there is more than one overdetwisted portion between the said members occur randomly as time passes.

12. A process for manufacturing yarn according to any preceding claim, wherein said yarn contacting member is a rotatable member.
13. A process for manufacturing yarn according to any preceding claim, wherein said yarn contacting member is so arranged that the yarn passage is deflected while contacting therewith along a zigzag passage.
14. A process for manufacturing yarn according to any preceding claim, wherein no additional means which contacts with said yarn is disposed between said false twisting device and said yarn contacting member.
15. A process for manufacturing yarn according to any preceding claim, wherein the total contacting angle of said yarn between said false twisting device and take up device is at most 30 degrees.
16. A process for manufacturing yarn according to any preceding claim, wherein said friction-type false twisting device is provided with a friction surface, which is moved in a direction intersecting with a yarn moving direction at an acute angle.
17. A process for manufacturing yarn according to any preceding claim, wherein said supplied yarn is an undrawn yarn.

Patentansprüche

1. Verfahren zur Herstellung eines alternierenden Drall aufweisenden Garnes, bei dem ein synthetisches Multifilamentgarn einem Falschdrallvorgang und einer Thermofixierung unterworfen wird, um in nicht aufgedrehte Garnabschnitte eine Dralldichte von mindestens $17500 \sqrt{\rho/D}$ Drehungen/m einzugeben, wobei ρ das spezifische Gewicht des Garnes und D die Denierzahl bezeichnen, dadurch gekennzeichnet, daß man den Falschdrall längs eines im wesentlichen stationären Laufweges erzeugt, wobei man eine mit Reibung arbeitende Falschdrall-Vorrichtung verwendet, um eine Ballonbildung im wesentlichen zu verhindern, daß man das Garn dem Falschdrallvorgang und der Thermofixierung unter einem Verzugsverhältnis unterwirft, welches gleich oder kleiner ist als das natürliche Verzugsverhältnis, und daß sich in Laufrichtung hinter der Falschdrall-Vorrichtung ein am Garn zur Anlage kommendes Bauteil befindet, wobei ein vorderes Ende des Falschdrall-Bereiches daran gehindert wird, sich über das am Garn zur Anlage kommende Bauteil hinweg zu bewegen, und wobei man im Garn einen übermäßig aufgedrehten Abschnitt erzeugt, der sich zwischen der Falschdrall-Vorrichtung und dem am Garn zur Anlage kommenden Bauteil befindet.
2. Verfahren nach Anspruch 1, dadurch gekennzeichnet, daß in dem hergestellten Garn das Verhältnis der Länge der nicht aufgedrehten Garnabschnitte zur Gesamtlänge des Garnes mindestens 10% und die Summe der Quardratzahlen der Länge (in mm) der nicht aufgedrehten Abschnitte mindestens 3000/m Garnlänge betragen.
3. Verfahren nach Anspruch 2, dadurch gekennzeichnet, daß die Summe der Quardratzahlen mindestens 5000/m Garnlänge beträgt.
4. Verfahren nach den Ansprüchen 1 bis 3, dadurch gekennzeichnet, daß die Dralldichte in den nicht aufgedrehten Abschnitten mindestens $22500 \sqrt{\rho/D}$ Drehungen/m beträgt.
5. Verfahren nach den Ansprüchen 1 bis 4, dadurch gekennzeichnet, daß der Außendurchmesser des hergestellten Garnes in dem übermäßig aufgedrehten Abschnitt um 10% größer ist als der Außendurchmesser des Garnes in den nicht aufgedrehten Abschnitten.
6. Verfahren nach den Ansprüchen 1 bis 5, dadurch gekennzeichnet, daß sowohl in den nicht aufgedrehten als auch in den übermäßig aufgedrehten Abschnitten ein Teil der Garnfilamente durch einen Schmelzvorgang miteinander verbunden wird.
7. Verfahren nach Anspruch 6, dadurch gekennzeichnet, daß man konjugierte, aus mindestens zwei Materialien mit unterschiedlichen Schmelzpunkten bestehende Fasern verwendet.
8. Verfahren nach Anspruch 6, dadurch gekennzeichnet, daß man mindestens zwei Arten von Fasern mit unterschiedlichen Schmelzpunkten verwendet.
9. Verfahren nach den Ansprüchen 1 bis 8, dadurch gekennzeichnet, daß man Polyester-Fasern verwendet.
10. Verfahren nach den Ansprüchen 1 bis 9, dadurch gekennzeichnet, daß man zwischen der Falschdrall-Vorrichtung und dem am Garn zur Anlage kommenden Bauteil nicht mehr als einen übermäßig aufgedrehten Abschnitt erzeugt.
11. Verfahren nach den Ansprüchen 1 bis 9, dadurch gekennzeichnet, daß Verfahrensabläufe, bei denen sich zwischen der Falschdrall-Vorrichtung und dem am Garn zur Anlage kommenden Bauteil nicht mehr als ein übermäßig aufgedrehter Abschnitt befindet, und Verfahrensabläufe, bei denen sich zwischen diesen Teilen mehr als ein übermäßig aufgedrehter Abschnitt befindet, im zeitlichen Ablauf der Herstellung willkürlich verteilt sind.
12. Verfahren nach den Ansprüchen 1 bis 11, dadurch gekennzeichnet, daß man als am Garn zur Anlage kommendes Bauteil ein drehbares Teil verwendet.
13. Verfahren nach den Ansprüchen 1 bis 12, dadurch gekennzeichnet, daß man das am Garn zur Anlage kommende Bauteil in der Weise anordnet, daß das Garn abgelenkt wird, während es sich in Berührung mit dem Bauteil auf einem zickzackförmigen Laufweg vorwärts bewegt.
14. Verfahren nach den Ansprüchen 1 bis 13, dadurch gekennzeichnet, daß man zwischen der

Falschdrall-Vorrichtung und dem am Garn zur Anlage kommenden Bauteil keine weiteren, am Garn zur Anlage kommenden Vorrichtungsteile anordnet.

15. Verfahren nach den Ansprüchen 1 bis 14, dadurch gekennzeichnet, daß der gesamte Berührungswinkel des Garnes zwischen der Falschdrall-Vorrichtung und der Aufwickelvorrichtung höchstens 30° beträgt.

16. Verfahren nach den Ansprüchen 1 bis 15, dadurch gekennzeichnet, daß die mit Reibung arbeitende Falschdrall-Vorrichtung eine Reibfläche aufweist, die in einer den Laufweg des Garnes in einem spitzen Winkel schneidenden Richtung bewegt wird.

17. Verfahren nach den Ansprüchen 1 bis 16, dadurch gekennzeichnet, daß als zugeführtes Garn ein unverstrecktes Garn zur Verwendung kommt.

Revendications

1. Procédé de fabrication d'un fil à torsions alternées dans lequel un fil multifilament synthétique thermoplastique est soumis à une fausse torsion et à un fixage thermique afin qu'il donne, dans des parties non détordues du fil, une densité de torsions d'au moins $17500 \sqrt{\rho/D}$ tr/m, ρ étant la densité du fil et D son denier, caractérisé en ce que la fausse torsion est réalisée uniquement suivant un trajet sensiblement stationnaire à l'aide d'un dispositif de fausse torsion du type à friction afin que le ballonnement soit pratiquement évité, le fil est soumis à la fausse torsion et au fixage thermique avec un rapport d'étirage égal ou inférieur au rapport naturel d'étirage, et en ce qu'un organe de contact avec le fil est disposé à un emplacement qui se trouve en aval du dispositif de fausse torsion, si bien qu'une extrémité avant de la région de fausse torsion formée dans le fil ne peut pas être transmise au-delà de l'organe de contact avec le fil, et une partie excessivement détordue est créée dans le fil qui se trouve entre le dispositif de fausse torsion et l'organe de contact avec le fil.

2. Procédé de fabrication d'un fil selon la revendication 1, dans lequel, dans le fil fabriqué par mise en oeuvre du procédé, le rapport des longueurs des parties non détordues et de la longueur totale du fil est au moins égal à 10% et la somme des carrés des longueurs (exprimée en mm) des parties non détordues est au moins égale à 3000 par mètre de longueur du fil.

3. Procédé de fabrication d'un fil selon la revendication 2, dans lequel ladite somme des carrés est au moins égale à 5000 par mètre de longueur du fil.

4. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel la densité de torsions des parties non détordues est au moins égale à $22500 \sqrt{\rho/D}$ tr/m.

5. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel la diamètre externe du fil fabriqué, dans la partie excessivement détordue, est supérieure au diamètre externe du fil dans les parties non détordues de 10%.

6. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel, à la fois dans les parties non détordues et dans les parties excessivement détordues, une partie des filaments constituants sont connectés les uns aux autres par fusion.

7. Procédé de fabrication d'un fil selon la revendication 6, dans lequel des fibres conjuguées contenant au moins deux types de matériaux ayant des températures différentes de fusion, sont utilisées.

8. Procédé de fabrication d'un fil selon la revendication 6, dans lequel deux types de fibres au moins ayant des températures différentes de fusion sont utilisées.

9. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel les fibres de polyester sont utilisées.

10. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel une partie excessivement détordue au plus est créée entre le dispositif de fausse torsion et l'organe de contact avec le fil.

11. Procédé de fabrication d'un fil selon l'une quelconque des revendications 1 à 9, dans lequel les occasions dans lesquelles une partie excessivement détordue au plus est comprise entre le dispositif de fausse torsion et l'organe de contact avec le fil, et les occasions dans lesquelles plus d'une partie excessivement détordue est présente entre ces éléments, apparaissent de manière aléatoire au cours du temps.

12. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel l'organe de contact avec le fil est un organe rotatif.

13. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel l'organe de contact avec le fil est disposé de manière que le passage du fil soit dévié lors du contact avec cet organe, le long d'un passage sinueux.

14. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel aucun dispositif supplémentaire placé au contact du fil n'est disposé entre le dispositif de fausse torsion et l'organe de contact avec le fil.

15. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel l'angle total de contact du fil, entre le dispositif de fausse torsion et le dispositif de prélèvement, est au plus égal à 30 degrés.

16. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel

0 052 678

le dispositif de fausse torsion du type à friction comporte une surface de friction qui est déplacée en direction recoupant une direction de déplacement du fil, avec un angle aigu.

17. Procédé de fabrication d'un fil selon l'une quelconque des revendications précédentes, dans lequel le fil transmis est un fil non étiré.

5

10

15

20

25

30

35

40

45

50

55

60

65

Fig. 1

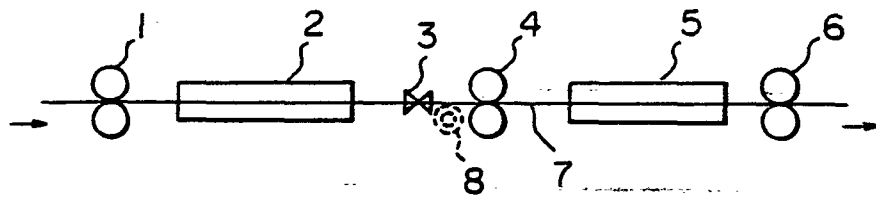


Fig. 2

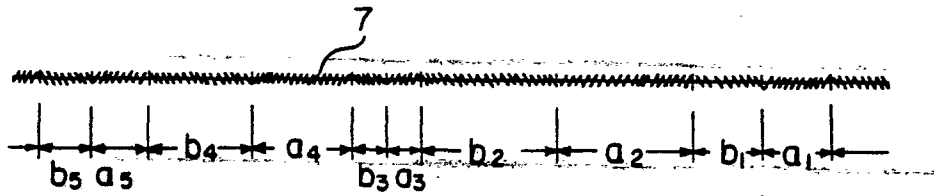


Fig. 3

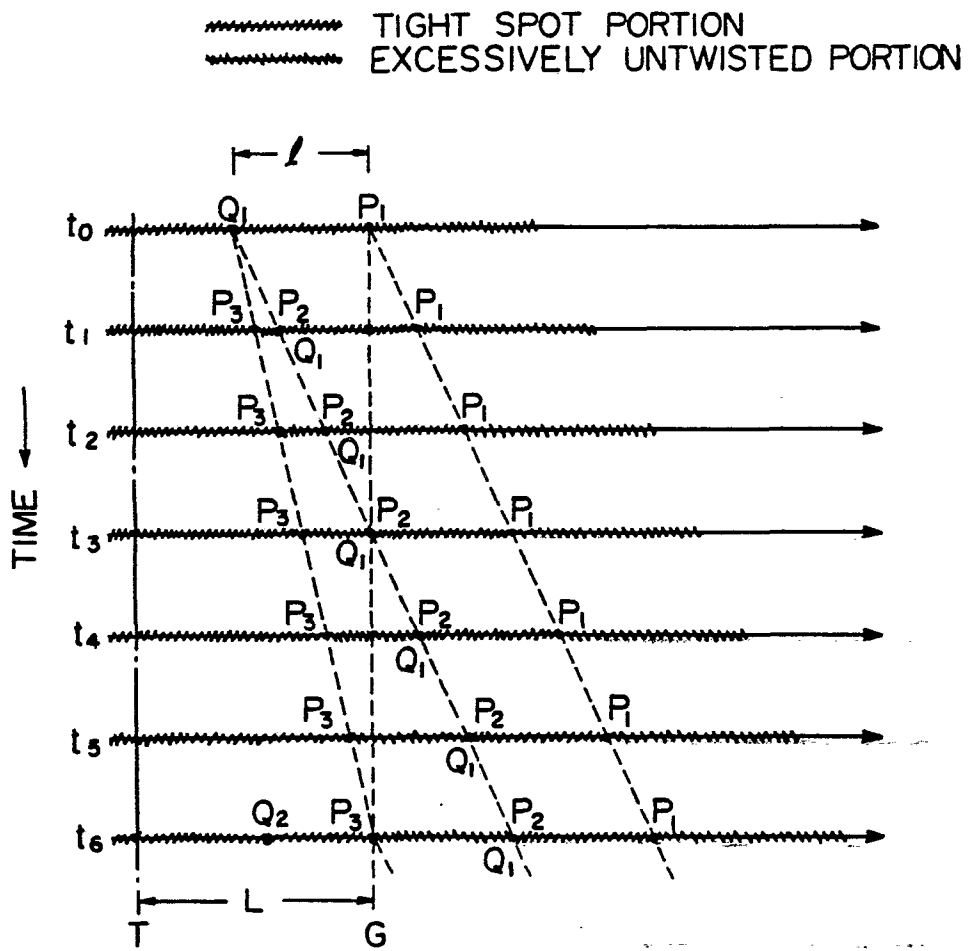
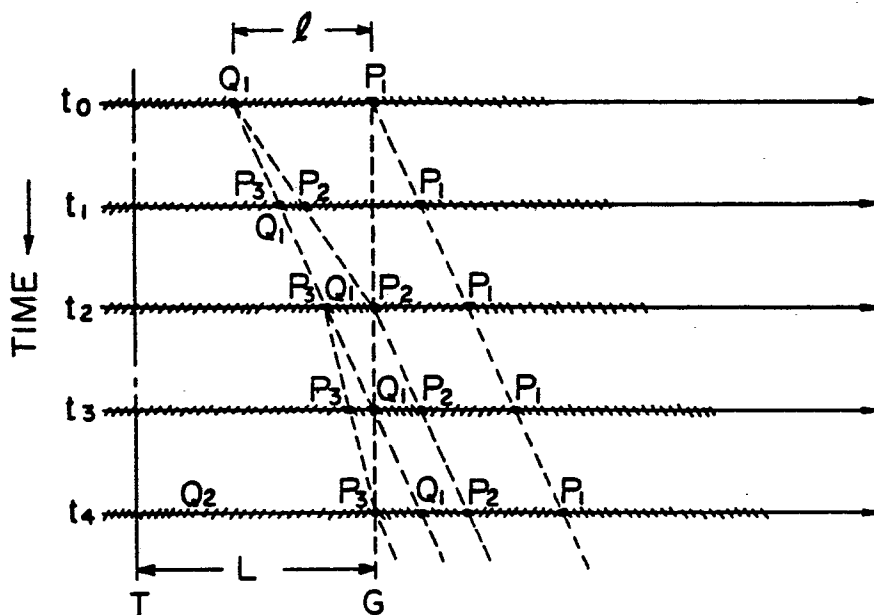


Fig. 4



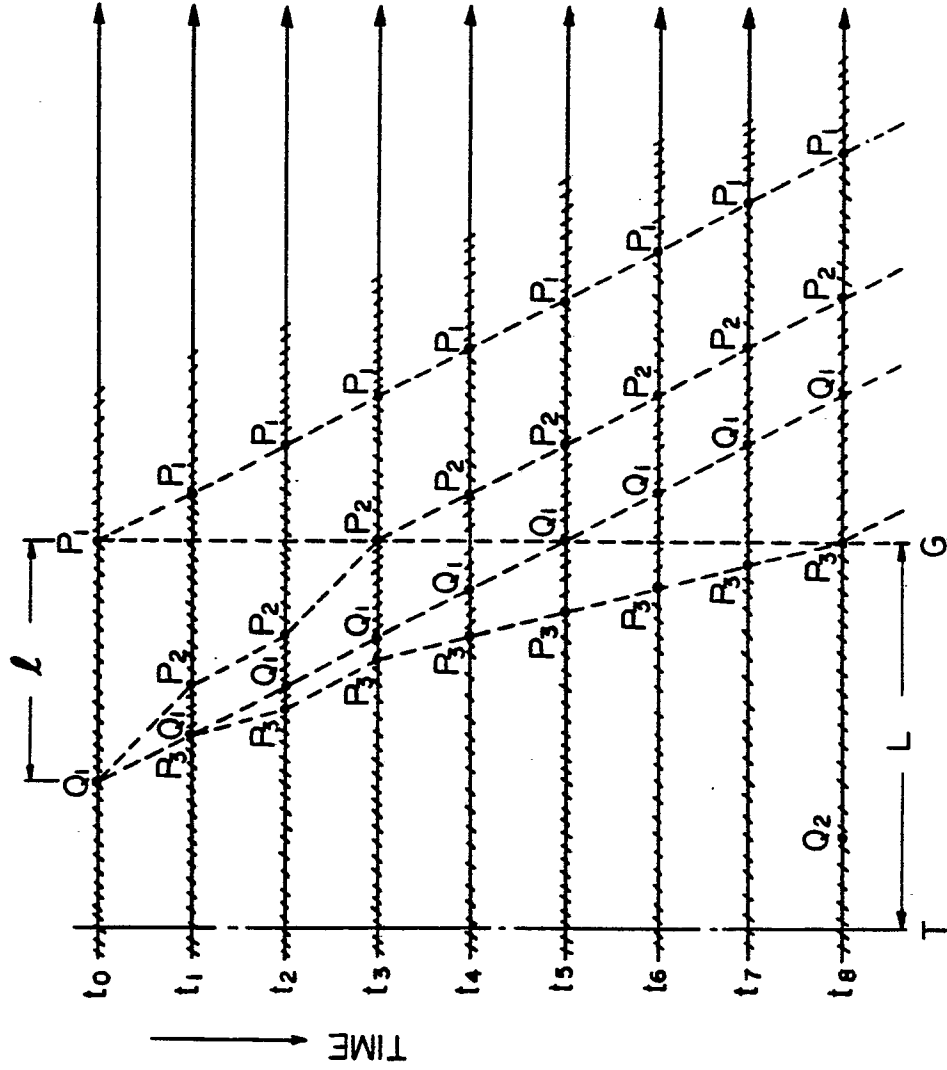


Fig. 5

... sai
... gins ...
... wister ...

Fig. 6

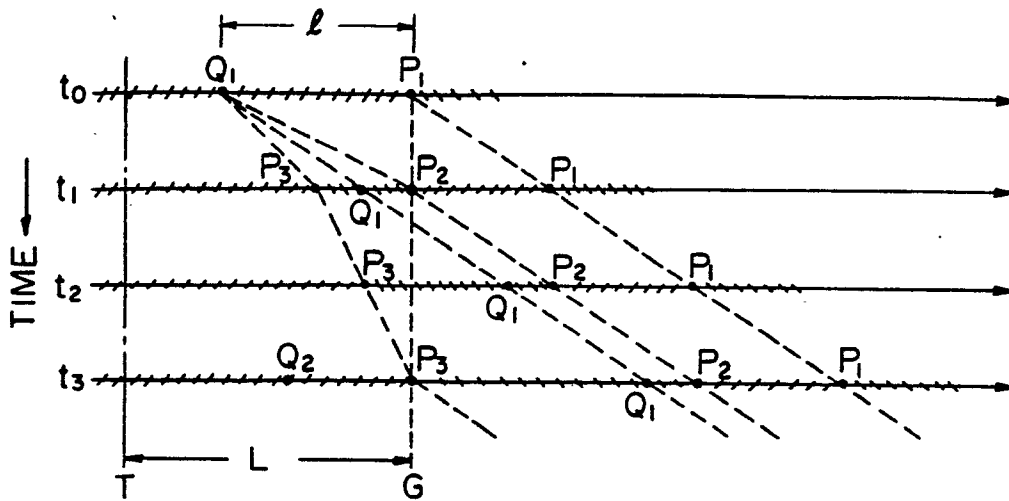


Fig. 7

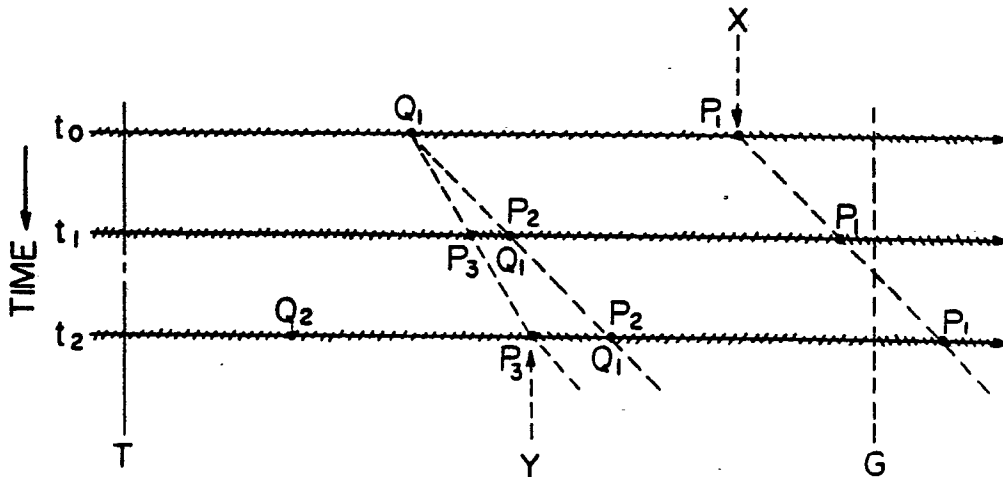


Fig. 8

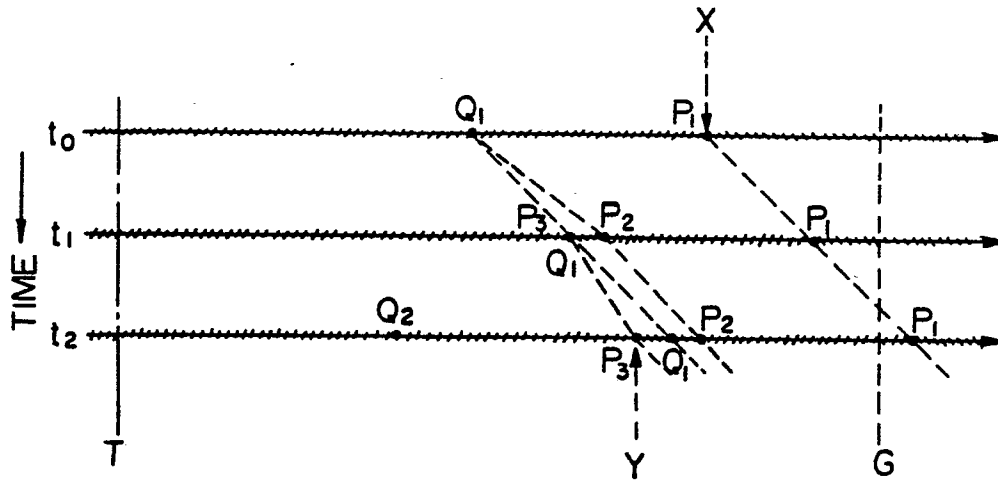


Fig. 9

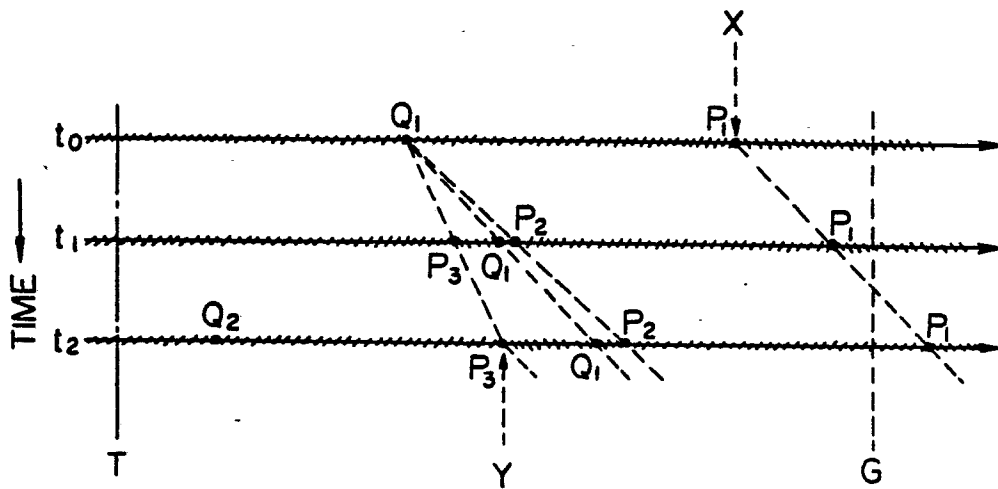


Fig. 10

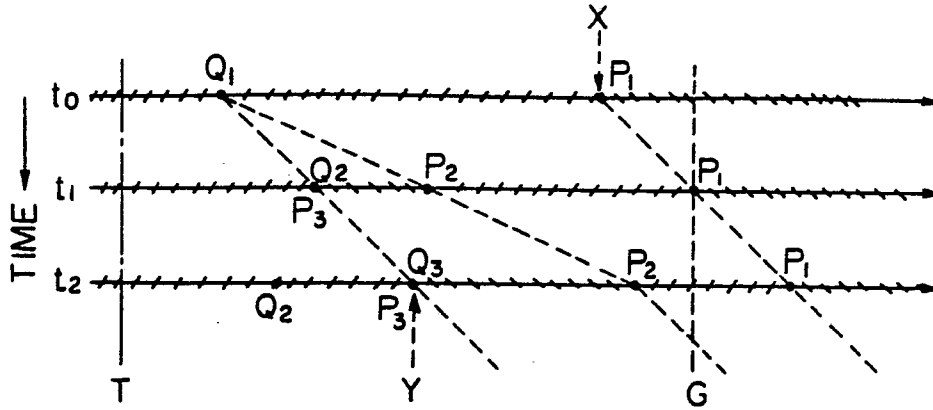


Fig. 11

