



(86) Date de dépôt PCT/PCT Filing Date: 2011/08/05

(87) Date publication PCT/PCT Publication Date: 2012/02/09

(45) Date de délivrance/Issue Date: 2020/09/01

(85) Entrée phase nationale/National Entry: 2013/02/04

(86) N° demande PCT/PCT Application No.: EP 2011/003940

(87) N° publication PCT/PCT Publication No.: 2012/016711

(30) Priorités/Priorities: 2010/08/06 (US61/371,368);
2010/08/06 (EP10 008 244.5)

(51) Cl.Int./Int.Cl. *C12M 3/06* (2006.01),
C12N 5/07 (2010.01)

(72) Inventeurs/Inventors:

MARX, UWE, DE;
LINDNER, GERD, DE;
HORLAND, REYK, DE;
HOFFMANN, SILKE, DE;
LAUSTER, ROLAND, DE


(73) Propriétaire/Owner:

TISSUSE GMBH, DE

(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : SYSTEME DE CIRCULATION AUTONOME ET SON PROCEDE D'UTILISATION

(54) Title: SELF-CONTAINED CIRCULATION SYSTEM AND METHOD OF USE THEREOF

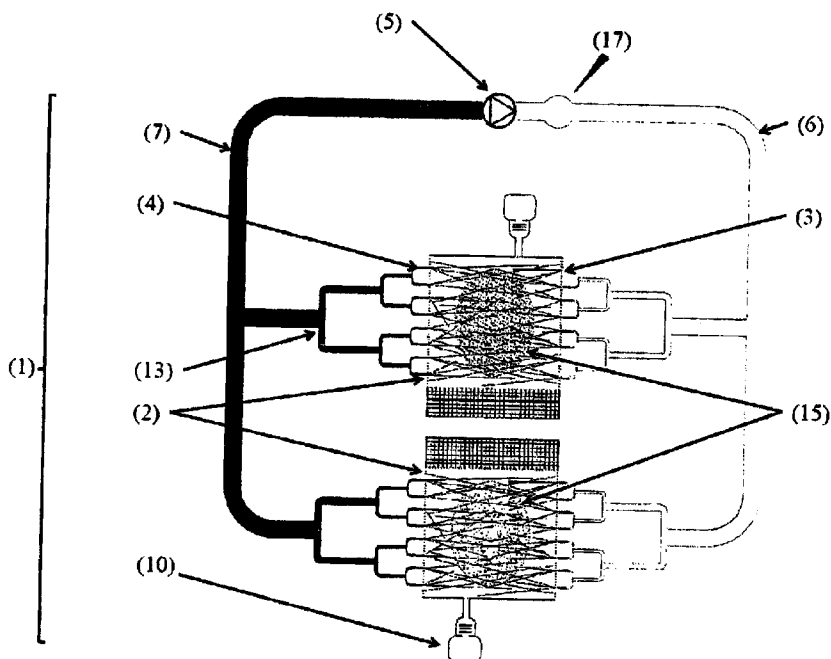

(57) Abrégé/Abstract:

This invention concerns a self-contained circulation system, which supports the formation of capillaries in capillary growth sections and allows the formation of micro organoids and/or micro tissue sections for monitoring the effect of one or more test compounds and determining efficacy, side-effects, biosafety, metabolites, mode of action or organ regeneration as well as methods of establishing such micro organoids and/or micro tissue in said self-contained circulation system.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
9 February 2012 (09.02.2012)(10) International Publication Number
WO 2012/016711 A1(51) International Patent Classification:
C12M 3/06 (2006.01) *C12N 5/07* (2010.01)Strasse 55, 10627 Berlin (DE). **HOFFMANN, Silke** [DE/DE]; Kreuzstrasse 17d, 13187 Berlin (DE). **LAUSTER, Roland** [DE/DE]; Stephanstrasse 9, 10559 Berlin (DE).(21) International Application Number:
PCT/EP2011/003940(74) Agents: **VOSSIUS, Volker** et al.; Geibelstrasse 6, 81679 Munich (DE).(22) International Filing Date:
5 August 2011 (05.08.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10 008 244.5 6 August 2010 (06.08.2010) EP
61/371,368 6 August 2010 (06.08.2010) US(71) Applicant (for all designated States except US): **TECHNISCHE UNIVERSITÄT BERLIN** [DE/DE]; Strasse des 17. Juni 135, 10623 Berlin (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MARX, Uwe** [DE/DE]; Markgrafenstrasse 18, 15528 Spreehagen (DE). **LINDNER, Gerd** [DE/DE]; Zehntwerderweg 159, 13469 Berlin (DE). **HORLAND, Reyk** [DE/DE]; Krumme


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,

[Continued on next page]

(54) Title: CIRCULATION SYSTEM

Figure 1

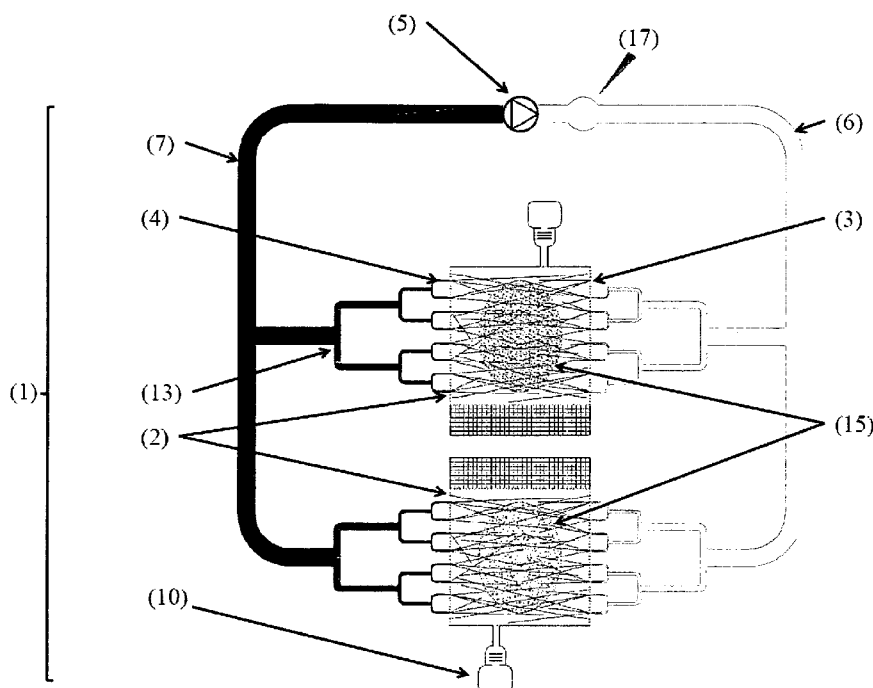

(57) Abstract: This invention concerns a self-contained circulation system, which supports the formation of capillaries in capillary growth sections and allows the formation of micro organoids and/or micro tissue sections for monitoring the effect

[Continued on next page]

WO 2012/016711 A1



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, **Published:**

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, ML, MR, NE, SN, TD, TG).

— with international search report (Art. 21(3))

Self-Contained Circulation System and Method of Use Thereof

Introduction

This invention concerns a self-contained circulation system, which supports the formation of capillaries in capillary growth sections and allows the formation of micro organoids and/or micro tissue sections for monitoring the effect of one or more test compounds and determining efficacy, side-effects, biosafety, metabolites, mode of action or organ regeneration as well as methods of establishing such micro organoids and/or micro tissue in said self-contained circulation system.

Background of the Invention

Enormous efforts have been made to develop circulation systems for physiological nutrient supply and waste removal of in vitro cultured tissues. These developments are aiming for in vitro generation of organ equivalents such as liver, lymph nodes (Giese et al., 2010, Journal of Biotechnology 148, 38–45) and lung (Huh et al., 2010, Science, (328) 5986, pp. 1662 - 1668) or even multi-organ systems (Sonntag et al, 2010, Journal of Biotechnology 148, 70–75) for substance testing, research on organ regeneration or for transplant manufacturing. Initially technical perfusion systems based on membranes, hollow fibres (Catapano and Gerlach. Bioreactors for Liver Tissue Engineering. 2. Topics in Tissue Engineering, Vol. 3, 2007.1-42 Eds. N Ashammakhi, R Reis & E Chiellini) or networks of micro channels (Du et al., Chapter 7: Microfluidic Systems for Engineering Vascularized Tissue Constructs". 2008 (Book chapter)) were used for these purposes.

In a liver support system developed by Gerlach and co-workers three bundles of hollow-fibres are cross-woven with each other, forming multiple identical micro culture spaces for plasma perfusion and oxygen supply. Human plasma perfusion is assured by two micro-filtration hollow fibre membrane bundles, whereas oxygenation takes place through a liquid-impermeable oxygen transport membrane. Liver support systems based on this principle have well-performed over several weeks, being included in a plasma flow circuit of patients.

Du et al. summarised fluidic platforms for generating micro-vascularised tissue constructs on the basis of hydrogels and micro-fabrication techniques. The overview highlights the technical ability to form blood-capillary-network like channel structures within

polymeric materials for efficient liquid perfusion through tissue cultures. The majority of the resulting micro systems were used for highly efficient technical perfusion not including endothelial cells.

Such systems are limited to the use of culture media or plasma, but do not allow for whole blood perfusion due to clotting phenomena. In addition they do not provide the natural blood tissue barrier, which in vivo is composed by closed endothelial cell layer. This allows for active transport through the cell layer, as well as for signalling from the tissue into the capillary network. Different approaches were developed to line technical perfusion systems (Song et al., 2005, *Anal.Chem.*, 2005, 77, 3993-3999) or synthetic or biological matrices (Zhang et al., 2009, *Biomaterials*, 30(19): 3213-3223; Walles, 2010, *Journal of Biotechnology* 148, 56-63) up with endothelial cells.

Song and co-workers developed a micro circulatory support to culture endothelial cells under defined shear stresses. Closed monolayers of endothelial cells could be established in individual cell culture compartments, located between technical transport channels.

To generate tissue-engineered vascular grafts (TGVG) Zhang et al. developed a tissue-engineered construct that mimicked the structure of blood vessels using tubular electrospun silk fibroin scaffolds with suitable mechanical properties. They seeded human coronary artery smooth muscle cells (HCASMCs) and human aortic endothelial cells (HAECs) onto the luminal surface of the tubular scaffolds and cultivated under physiological pulsatile flow, which was generated within the dual loop bioreactor using external tubing and pumps.

A fully biological matrix for the establishment of an endothelialised vasculature in vitro was used by Walles et al., connecting polymeric tubing and controlled pumping system to an acellularised animal gut segment. In this system the capillaries which are entirely covered by endothelial cells are limited to the functionally relevant areas of the biomatrix.

However, none of the prior art circulation systems was suitable for long-term tissue culture based on whole blood as provided in this application.

The present invention relates to a closed and self contained circulation system emulating the natural blood perfusion environment of vertebrates at tissue level. The system uses a miniaturised physiological blood circulation to provide circulation of micro litre-volume to support milligrams of tissue. This mimics the physiological ratio of humans, where litres of blood-volume support kilograms of tissue at a chip-compatible micro scale. The self-contained circulation system contains at least one capillary growth section located between the micro inlets and micro outlets of the system.

A capillary growth section for formation of blood capillaries, supporting nutrient exchange, is integrated into the circulation, in addition to a miniaturised pump and transport channels.

5

Brief Summary of the Invention

In a first aspect the present invention relates to a circulation system (1), which is self-contained and comprises:

- a. at least one capillary growth section (2), comprising at least two micro inlets (3) and two micro outlets (4),
- 10 b. a directional pumping device (5), and
- c. an arteriolar transport channel (6) connecting the directional pumping device (5) and the at least two inlets (3) and a venular transport channel (7) connecting the directional pumping device (5) and the at least two outlets (4).

In a second aspect the present invention relates to a method of establishing a
15 circulation system (1) of the invention, comprising the steps of

- a. seeding endothelial cells into the circulation system (1), and
- b. incubating at least until capillaries (14) have formed in the capillary growth section (2) and/or until an endothelial cell layer has formed in the transport channels and/or until an endothelial cell layer has covered all inner surfaces of the pumping device (5).

20 In a third aspect the present invention relates to a circulation system (1) producible by the method of the present invention.

In a fourth aspect the present invention relates to the use of the circulation system (1) according to the present invention or producible according to the present invention for monitoring the effect of one or more test compounds and/or for determination the efficacy,
25 side-effects, biosafety, metabolites, mode of action or organ regeneration.

Detailed Description of the Invention

Before the present invention is described in detail below, it is to be understood that this invention is not limited to the particular methodology, protocols and reagents described
30 herein as these may vary. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to limit the scope of the present invention which will be limited only by the appended claims. Unless defined

otherwise, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art.

Preferably, the terms used herein are defined as described in "A multilingual glossary of biotechnological terms: (IUPAC Recommendations)", Leuenberger, H.G.W, Nagel, B. and Klbl, II. cds. (1995), Helvetica Chimica Acta, CH-4010 Basel, Switzerland) and as described in "Pharmaceutical Substances: Syntheses, Patents, Applications" by Axel Kleemann and Jurgen Engel, Thieme Medical Publishing, 1999; the "Merck Index: An Encyclopedia of Chemicals, Drugs, and Biologicals", edited by Susan Budavari et al., CRC Press, 1996, and the United States Pharmacopeia-25/National Formulary-20, published by the United States Pharmacopeial Convention, Inc., Rockville Md., 2001.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated feature, integer or step or group of features, integers or steps but not the exclusion of any other feature, integer or step or group of integers or steps. In the following passages different aspects of the invention are defined in more detail. Each aspect so defined may be combined with any other aspect or aspects unless clearly indicated to the contrary. In particular, any feature indicated as being preferred or advantageous may be combined with any other feature or features indicated as being preferred or advantageous.

Several documents are cited throughout the text of this specification. Nothing herein is to be construed as an admission that the invention is not entitled to antedate such disclosure by virtue of prior invention.

In the following, some definitions of terms frequently used in this specification are provided. These terms will, in each instance of its use, in the remainder of the specification have the respectively defined meaning and preferred meanings:

"Cells" means cell lines or primary cells of vertebrates or invertebrates.

"Organoids" means artificial, *de novo* generated, functional cell aggregates of different types of cells *in vitro* that show at least one organ or tissue function, preferably shows the majority of or essentially all organ or tissue functions.

"Tissues" stands for biopsy material or explants taken from patients or animals or *in vitro* generated tissues.

"Differentiation" means the development of tissue specific functions of cultured cells.

“Maintenance” describes the ability to keep all functions of a given tissue constant within a given cell culture process, preferably without significant signs of cell death and/or apoptosis .

5 “Medium” (plural form: “media”) means growth supporting liquid with nutrients and substances for cultivation of cells. Examples of suitable media comprise DMEM, Ham’s F12 and RPMI.

10 “Matrix” means substances or mixtures of substances, which maintain viability, enhance proliferation, differentiation, and function of cells and/or organoid or organ formation. Matrix material is preferably provided in a form which can be fitted to fill the space of the capillary growth section (2). Matrixes usable in the context of the present invention can take a variety of shapes comprising, e.g. hydrogels, foams, fabrics or non-woven fabrics. The matrix material may comprise naturally occurring matrix substances like extracellular matrix proteins, preferably collagens, laminins, elastin, vitronectin, fibronectin, small matricellular proteins, small integrin-binding glycoproteins, growth factors or
15 proteoglycans or may include artificial matrix substances like non degradable polymers such as polyamid fibres, methylcellulose, agarose or alginate gels or degradable polymers, e.g. polylactid.

“Inner surface” means those surfaces of the circulation system (1), which are in direct contact with the circulating media, plasma and/or blood, e.g. whole blood.

20 To overcome the problems associated with prior art cell culturing systems, the present invention provides a circulation system (1), which is self-contained and comprises:

- a. at least one capillary growth section (2), comprising at least two micro inlets (3) and two micro outlets (4),
- b. a directional pumping device (5), and
- 25 c. an arteriolar transport channel (6) connecting the directional pumping device (5) and the at least two inlets (3) and a venular transport channel (7) connecting the directional pumping device (5) and the at least two outlets (4).

30 “Self-contained” refers to the fact that the fluid in the system is circulated within the system, i.e. between the directional pumping device (5) the capillary growth section (2) or sections, and that preferably there is no fluidic connection for continuously providing fluid, e.g. medium, blood, from an external fluid reservoir into the circulation system (1). “External” in this context means that the fluid reservoir is not an integral part of the circulation system, e.g. is connected via tubing to the circulation system.

If substances, e.g. nutrients and/or fluids, have to be replenished during the course of incubation it is preferred that such nutrients or fluids are supplied discontinuously through an injection port (17), which is preferable located in an arteriolar or venular transport channel or connected to the capillary growth section. In the former case the substances, e.g. nutrients and/or fluids, are directly injected into the interior of the capillaries. This injection potentially leads to injury of the endothelial cells lining the opening of the injection port (17) on the inner surface of the circulation system (1). In the later case the injection increases the fluid pressure in the extracapillary space around the capillaries formed in the capillary growth section. Fluids and nutrients will dissipate into the circulation through the capillaries due to the increased partial pressure in the extracapillary space. To avoid an increase in the pressure in the system over time and with repeat injections of substances to be replenished, it is preferred that the circulation system further comprises a pressure compensating reservoir. If the injection port (17) is arranged to allow injection into the interior of the capillaries, it is preferred that the pressure compensating reservoir is connected to the extracapillary space. Conversely, if the injection port (17) is arranged to allow injection into the extracapillary space, it is preferred that the pressure compensating reservoir is connected to the interior or the capillaries. In some preferred embodiment the pressure compensating reservoir has an opening, preferably a small bore hole or a one way valve, to release gas from the pressure compensating reservoir. This opening is preferably configured in a way to only release gas into the surrounding, if a set threshold pressure is reached. Suitable means are, e.g. spring loaded one-way valves or silicon plugs with a slit. By this means it is possible to prevent over pressurising the circulation system, which may damage the capillary formed. Given the small total liquid volumes comprised in the system, it is preferred that very small volumes, e.g. less than 10% of the total volume are injected at any given time. The preferable method to load fluids and/or cells into the circulation is the introduction of an injector, preferably an injection needle, into the injection port and to injection fluids and/or cells into the circulation by an injector movement speed adjusted to the movement speed of endothelial cells. This is particularly preferred once a closed endothelial cell monolayer has been formed. It is preferred that the injection port is self-sealing, i.e. closes liquid and preferably also air tight once the injection device, e.g. syringe, has been withdrawn. Examples of such self-sealing injection ports are well known in the art and include, one-way valves and silicon plucks.

In preferred embodiments the injection port (17) and/or the pressure compensating reservoir is separated from the circulation or the extracapillary space by a cell retention membrane, i.e. a membrane having an average pore size smaller than the average size of the

cells growing in the circulation system (1) of the invention or by cell exclusion channels, which are sized to exclude the cells growing in the circulation system (1) of the invention to prevent clogging or escape of cells.

It is possible that gas is co-injected with fluids either during the initial filling of the system or during later injections. To avoid blockage of the circulation by trapped gas bubbles, it is preferred that one or more traps for gas bubbles are provided in the circulation system (1). Such traps may have the form of cavities or notches on the upward-facing side of an arteriolar or venular transport channel.

Additionally, it is preferred that gaseous medium, e.g. O_2/CO_2 , is provided to the capillary growth section (2) in a passive manner, e.g. by diffusion into the capillary growth section (2) through a gas permeable biocompatible matrix (8) and/or through the arteriolar transport channels (6).

It is one advantage of the circulation system (1) that it is possible to maintain two or more different tissues and/or organoids (15) within one self-contained system, which are perfused by the same circulating fluid and, thus, are in fluidic connection as in the natural environment. The number of capillary growth sections (2) is generally determined by the number of separate tissues and/or organoids (15) to be maintained. Thus, in a preferred embodiment of the circulation system (1) of the present invention the circulation system (1) comprises at least two capillary growth sections (2); preferably it comprises 3, 4, 5, 6, 7, 8, 9 or 10 capillary growth sections (2).

The exchange of gases, e.g. of O_2/CO_2 is preferably effected by providing gas permeable alveolar and venular transport channels (7), i.e. the alveolar and venular transport channels comprise or consists of a gas permeable material. Depending on the total fluid volume in the system and the total surface area of the transport channel (5, 6) the perfusion of O_2/CO_2 through the inner surface of the transport channels may not be sufficient to maintain the cells and/or organoids (15) in the circulation system (1). In these cases it is preferred that the material of one of the capillary growth section (2) is at least in part gas permeable and thereby functions as a "micro-lung" supplying O_2 to the entire circulation system (1). Accordingly, it is preferred that one or more walls of the capillary growth section comprise or consist of a gas permeable material. Suitable gas permeable materials are known in the art. Preferably, the material that is used to form one or more walls of the capillary growth section is polydimethylsiloxane (PDMS).

The capillary growth section (2) is a space that is provided for assembly of capillaries (14) by endothelial cells and optionally smooth muscle cells that are seeded into the system.

The capillary growth section is preferably filled with a matrix (8) which serves the purpose of providing a growth scaffold for the capillaries (14) which are formed naturally once endothelial cells are seeded into the system and fluid is circulated through the capillary growth section (2). It is, thus, preferably that the biocompatible matrix (8) comprises micro channels, structures and/or networks, which allow and support formation of capillaries (14) by endothelial cells. Preferably, these structures themselves do not have the shape of the later capillaries but merely provide attachment points and/or guidance for the capillaries formed. It is preferred that the capillary growth section (2) comprises or consists of a semi-solid, biocompatible matrix (8). Once endothelial cells are seeded into the system the capillaries (14) will start to form typically beginning at the micro inlets (3) and will grow directed by the fluid flow to eventually connect with one of the micro outlets (4). Alternatively, biocompatible hollow fibres (9) are provided either alone or embedded in a biocompatible matrix (8) as set out above. These are preferably connected at one side to the micro inlet and at the other side to the micro outlet (4), thereby guiding the growth of the endothelial cells. To maintain the elasticity of the resulting capillaries (14) it is preferred that the material of the biocompatible hollow fibre (9) is biodegradable; since this allows its removal over time once the capillary has formed.

Preferably the biocompatible matrix (8) comprises or consists of matrigel, fibrin gel, agarose gel, alginate gel, synthetic gel, cross-linkable polymers and the biocompatible hollow fibre (9) preferably consists of a material selected from the group consisting of polylactic acid (PLA), polylactide-co-glycolide (PLGA), polycaprolactone (PCL) and poly(fumaric-co-sebacic anhydride, polyvinyl alcohol, acrylic acid ethylene co-polymer, polyacrylic acid, polyglycolide, polylactide, cellulose derivatives, carbomethoxy/ethyl/hydroxypropyl, hyaluronic acid, folate linked cyclodextrin/dextran, sarcosine/amino acid spaced polymer, carrageenan, pectin/chitosan, chitosan, dextran, collagen or mixtures thereof. Preferred cross-linkable polymers are PEG derivatives of the formula $\text{PEG}-(\text{DCR}-\text{CG})_n$, where PEG is poly(ethylene glycol), DCR is a degradation control region, CG is a cross-linking group, and n is equal to or greater than 3. Particularly preferred materials for the biocompatible hollow fibre (9) are PLA and PLGA.

The choice of the materials of the matrix and/or hollow fibre as well as of the arteriolar or venular transport channels ascertains that the inner surface of the circulation system of the invention is rapidly and completely covered with endothelial cells.

Analysis of oxygen transport has led to the concept that the tissue site most distant from the inflow end of the capillary builds a lethal corner (Intaglietta et al, 1996,

Cardiovascular Research 32, 632-643). As areas of low O₂ partial pressure are also present in the body, e.g. in tumour tissue, it is an aim of the present invention to establish a so-called “neovascularisation” region (16) within the capillary growth section (2), i.e. a section wherein no capillaries (14) are formed during the initial establishment of the capillaries (14) in the circulation system (1) of the present invention. This is achieved by providing a sub-section (16) within the capillary growth section (2) that is devoid of micro inlets (3) and outlets (4). If this sub-section (16) is sufficiently far removed from corresponding micro inlets (3) and micro outlets (4) the formation of capillaries (14) is impaired in this sub-section. The subsection is sufficiently far removed, if no capillaries are formed therein, preferably it is removed at least 100 µm and up to 500 µm preferably the subsection has a distance from the micro inlets (3) and/or micro outlets in the range of 100 µm to 300 µm. It is then possible to place any tissue or organoid of choice in this area, e.g. tumour tissue, to investigate the cues for building of capillaries (14) or regeneration processes. As outlined in more detail below it is preferred that one part of the material delimiting the capillary growth section (2) can be removed to allow access to the capillary growth section (2). It is envisioned that cells and/or organoids are introduced through this opening into the capillary growth section (2). Afterwards the opening is covered to be fluid tight. The material of the cover is preferably selected from translucent materials, e.g. glass or plastic, which allow microscopic inspection of the capillary growth section (2) by microscopy. Preferably, the material is not gas-permeable. However, in the embodiment, wherein one or more capillary growth section have the function of a „micro-lung“ such capillary growth sections are covered with a gas-permeable cover. Preferably, the capillary growth section (2) is molded or ground into a solid block of a given material, preferably in cuboid form. In this embodiments it is preferred that the opening is at the upper side of the block and extends over the entire surface area of the capillary growth section (2).

The formation of capillaries (14) by endothelial cells is promoted, if the area to be vascularised is not supplied with oxygen. In addition the maximum length of capillaries (14) should not exceed 4 mm, because surrounding tissues at natural densities fully consumes nutrients, especially oxygen, provided through such capillaries (14) within that distance.

Accordingly, in a preferred embodiment the distance between the micro inlets (3) and micro outlets (4) which are to be connected by newly formed capillaries (14) should not exceed this maximum distance to foster the growth of the capillaries (14). Accordingly, it is preferred that the distance between a micro inlet (3) and the nearest micro outlet (4) is in the range of 0.2 mm to 4 mm, more preferably 0.3 to 2 mm, even more preferably 0.4 mm to 1

mm preferably about 0.5 mm. The width of the capillary growth section (2) is between 0.5 mm and 1.5 mm, preferably 1.0 mm and/or the height of the capillary growth section (2) is between 0.3 to 0.7 mm, preferably 0.5 mm. The volume of the capillary growth section (2) is between 0.03 μl to 4.2 μl , preferably between 0.5 μl to 1.0 μl . The total volume of the capillary growth section (2), the arteriolar transport channels (6), the venular transport channel (7) and the directional pumping device (5) is between 1.0 μl to 100 μl , preferably between 5.0 μl to 15 μl

To promote the growth of linear capillary connections it is preferred that each of the micro inlets (3) and micro outlets (4) are arranged at opposite ends of the capillary growth section (2). It is preferred that the capillary growth section has an essentially cuboid, preferably cubic shape. Preferably, the micro inlet and micro outlet are arranged on to opposite faces of the cuboid. The length of the cuboid is then determined by the distance between the micro inlets and micro outlets. It is particularly preferred that each micro inlet (3) is directly lined up with a corresponding micro outlet (4).

It is desired that the oxygen is provided to the capillary growth sections through the capillaries, accordingly, it is preferred that the material forming the walls of the capillary growth section has a low or no gas permeability. If, however, one or more capillary growth sections have the function of a micro-lung, these growth sections are designed as outlined above. Preferably, the wall material is selected from the group consisting of glass or plastics.

As set out above the capillaries (14) form autonomously within the capillary growth section (2) once it is seeded with endothelial cells. An important directional cue for the endothelial cells is the flow of the fluid through the system. To promote the growth of capillaries (14) of the correct size it is preferred that the diameter of the micro inlets (3) and/or micro outlets (4) is between 5 μm to 50 μm , more preferably 15 μm to 30 μm . The capillaries (14) formed have a diameter in the range of 1 to 10 μm , preferably of 5 to 6 μm . As will be set out in more detail below the number of micro inlets and micro outlets in the capillary growth section corresponds to the surface area of the arteriolar and venular transport channels. To provide sufficient oxygen to tissues the respective number of micro inlets and micro outlets are preferably distributed over the surface of the respective side of the capillary growth chamber. For the same reason the distance between two capillaries formed should not be below 30 μm . Accordingly, it is preferred that the distance between the micro inlets (3) is in the range of 30 μm to 500 μm , preferably in the range of 80 μm to 200 μm and/or that the distance between the micro outlets (4) is in the range of 30 μm to 500 μm , preferably in the

range of 80 μm to 200 μm . In a preferred embodiment the micro inlets (3) and/or micro outlets (4) are arranged in one, two, three or four rows.

It is envisioned that tissues and/or organoids (15) are placed in the capillary growth section(s) (2), which will perform their natural function. Accordingly, in a preferred embodiment the capillary growth section (2) further comprises an extra-capillary fluid and/or waste collector (10). The drainage of extra capillary fluid is driven by intra-capillary pressure differences. This serves the purpose of draining fluids away from the tissues and/or organoids (15), e.g. pancreas, kidney, gut, which secrete fluids extra capillary. Preferably, the waste collector (10) is separated from the biocompatible matrix (8) and/or biocompatible hollow fibre (9) in a way, which prevents the efflux of blood cells and/or tissue or organoid cells from the capillary growth section (2). Preferably the extra-capillary fluid and/or waste collector (10) is separated from the remaining capillary growth section (2) by a cell retention membrane (11), i.e. a membrane having an average pore size smaller than the average size of the cells growing in the circulation system (1) of the invention or by cell exclusion channels, which are sized to exclude the cells growing in the circulation system (1) of the invention.

To monitor the status of the system it is preferred that one or more sensors (12) are arranged in the circulation system (1) of the invention, preferably in a alveolar and/or venular transport channel (7), in the extra capillary fluid and/or waste collector (10), and/or the directional pumping device. Sensors (11), which may be used include but are not limited to pH sensors, pO_2 sensors; analyte capture sensors, conductivity sensors, plasmon resonance sensors, temperature sensors, CO_2 sensors; NO sensors, chemotaxis sensors, cytokine sensors, ion sensors, pressure sensors, potentiometric sensors, amperometric sensors, flow-through sensors, fill sensors, impedance sensors, conductivity sensors, electromagnetic field sensors, surface acoustic wave sensors, and metabolic sensors. The sensors (12) used in this system may be sensors, which monitor the capillary growth section (2) and/or the medium flowing out of the capillary growth section (2) or may be sensors (12) located within the waste channel and/or reservoir (10).

The transport channels mimic the smaller arteries and veins in a blood system and serve as a connection between the directional pumping device (5) and the capillary growth section (2). Therefore, it is preferred that the transport channels are suitable to be coated with smooth muscle cells and endothelial cells. Transport channels of the desired diameter and form can be provided by micromachining the respective structure in a biocompatible matrix (8) or can be biocompatible hollow fibres (9). However, it is also possible to use decellularized biological arterioles and/or venules. The surface area of the transport channels

(6, 7) is sufficient to provide the required O₂ to most systems unless there are too many capillary growth sections (2). It is therefore preferred that said biocompatible matrix (8) or biocompatible hollow fibre (9) is at least in part gas permeable, preferably comprises or consists of PDMS. PDMS is a silicon-based organic polymer, optical clear, visco-elastic and
5 can be directly patterned, e.g. by surface-charge lithography.

In a preferred embodiment of the invention the diameter of the arteriolar transport channel (6) and/or the venular transport channel (7) at its connection with the directional pumping device (5) is between 300 µm and 2.0 mm, preferably 500 µm. It is desirable that the speed of the fluid flow in the circulation systems (1) does not change significantly throughout
10 the system during circulation of the fluid. Preferably, the flow rate in the system is in the range of 0.02 cm/s to 0.1 cm/s, more preferably 0.03 to 0.07 cm/s most preferably about 0.05 cm/s. However, the micro inlets (3) and micro outlets (4) generally have a smaller diameter and, thus, smaller surface area than the arteriolar micro inlets (3) and venular micro outlets (4), respectively, which would lead to an increase of the flow rate when the fluid enters the
15 micro inlets (3). Accordingly, it is preferred that the arteriolar transport channel (6) branches of at least once to connect with the at least two inlets and the venular transport channel (7) branches of at least once to connect with the at least two outlets (4), respectively. To prevent significant variations of the fluid flow it is preferred that the combined cross-sectional area of the arteriolar channels after the branching point (13) is essentially identical to the cross-
20 sectional area of the arteriolar channel in front of the branching point (13) and/or the combined cross-sectional area of the venular transport channels (7) after the branching point (13) is essentially identical to the cross-sectional area of the venular channel in front of the branching point (13). Usually, the arteriolar (6) or venular channel (7) connected to the directional pumping device (5) branches of into two or three smaller diameter arteriolar and
25 venular channels (6, 7). The number of branching points (13) and/or the number of branches required to reduce the diameter of the arteriolar and venular channel to the diameter of the respective micro inlet (3) and micro outlet (4) is determined by the relative cross-sectional area of the arteriolar channel (6) and venular channel (7) and the diameter and cross-sectional area, respectively of the micro inlets (3) and micro outlets (4) to which they connect. If, for
30 example, the arteriolar channel (6) has a diameter of 1 mm and the diameter of the micro inlet (3) is 50 µm then 400 micro inlets (3) have the same surface area as the arteriolar channel (6) at the directional pumping device (5). Accordingly, it is required to provide as many two-way, three-way, four-way or more branching points (13) as required to connect each individual micro inlet with a branched of arteriolar channel (6). In a preferred embodiment the branching

point (13) are two-way branching points (13) and accordingly, the number of micro inlets (3) is determined by the formula 2^n , wherein n is the number of branching points (13) in each flow path. In cases where in the circulation system (1) comprises two or more capillary growth sections (2) the flow path is branched to connect both capillary growth section (2) separately. It is not required that both branches have the same cross-sectional area in as long as the combined cross-sectional area after the branching point (13) is identical or essentially identical to the cross-sectional area in front of the branching point (13). For example, in cases where a "micro-lung" has been formed in one capillary growth section (2) it may not be required that a similar amount of fluid is directed to this organoid (15) as to the capillary growth section (2) of another organoid (15). Thus, at the branching point (13) the arteriolar branch connecting the lung-organoid will have a smaller surface area than the arteriolar branch connecting another capillary growth section (2). The combined cross-sectional area of all inlets (3) is essentially identical to the cross-sectional area of said arteriolar channel and/or arteriolar channels and the combined cross-sectional area of all outlets (4) is essentially identical to the cross-sectional area of said venular channel and/or venular channels preferably are the cross-sectional areas of arteriolar (6) and venular channels (7).

Preferably the directional pumping device (5) is a biological pump, hydraulic pump, piezoelectric pump peristaltic pump, pneumatic pump, electro-magnetic pump or magnetic pump. A biological pump is formed, e.g. by cardiomyocytes, which are seeded preferably on elastic polymers of a shape supporting pulsate flow at cardiomyocyte contraction (Tanaka et al., 2006, Lab Chip, 6, 362-386). The twitching of the cardiomyocytes provides the contraction necessary for the pumping action. The directionality of the flow, i.e. from the venular channels into the arteriolar channels of the pumping device (5), may be established by the mode of actuation of the pump (5) which leads to the expulsion of fluid only on one side of the pumping device (5) or in cases, wherein the pumping device (5) merely pulsates by further elements that foster a directional flow into the arteriolar channels. Accordingly, in a preferred embodiment the directional pumping device (5) comprises one or more directional flow elements, preferably selected from the group consisting of a jet-like element and a one-way valve element. The flow elements may be arranged in the flow path out of the venular transport channel (7) in front of the directional pumping device (5) and/or in the flow path into the arteriolar channel after the directional pumping device (5). In case of jet-like elements it is preferred that they are arranged at both ends of the directional pumping device (5). Preferably the pumping mechanism is based on the pulsations of the preferred elastic PDMS-

matrix/membrane actuated by the pumping chamber to generate a continuous peristaltic flow of the medium.

Preferably, the inner surface of said transport channels and/or the directional pumping device (5) is coated with a substance selected from the group consisting of peptides or proteins promoting cell adhesion on biocompatible polymers or a mixture thereof. The adhesion molecules suitable for maintaining the cells are selected from the group consisting of integrins, albumins, fibrins, adhesines and/or collagens, or mixtures thereof. This coating fosters the complete coverage of the inner surface of the circulation system (1) with endothelial cells and/or smooth muscle cells.

In a preferred embodiment of the circulation system (1) of the present invention further comprising capillaries (14) and/or organoids (15) formed in the capillary growth section (2).

Preferably, the capillary growth section (2), the directional pumping device, the arteriolar transport channel(s) (6) and the venular transport channel (7) are made as one piece.

The one-piece may be composed of different materials which are adhered to each other. For example the directional pumping device (5), the arteriolar transport channel(s) (6) and the venular transport channel (7) are formed, e.g. by micro-machining or casting, in a block of gas permeable material, e.g. PDMS. The part comprising the capillary growth section and the micro inlets and micro outlets is formed in a non-gas permeable material, which is adhered to the other part in a way that each micro inlet and micro outlet, respectively aligns with an arteriolar transport channel (6) and venular transport channel (7), respectively. As it is also preferred that the matrix (8) and/or hollow fibres which is (are) arranged in the capillary growth section is (are) made from a different material than the capillary growth section, it is preferred that this part is separately produced and inserted into the capillary growth section.

Preferably, the capillary growth section is then covered by a non-gas permeable cover unless it serves the function of a micro-lung.

Preferably, the dimensions of a circulation system (1) of the invention support the continuous circulation of 4-8 μ l of whole blood through a system the inner surfaces of which are completely covered with endothelial cells, preferably a mono layer thereof. Preferably this circulation system is configured to provide nutrients for at least two different micro-organoids each of microliter scale over several month of culture. The use of blood, preferably whole blood ascertains a strong buffer system, provides all necessary proteins of the plasma to the tissues, supports oxygen transport through the erythrocytes and provides an immunological activities against contaminating microorganisms through white blood cells.

The present invention provides a method of establishing a circulation system (1), comprising the steps of

- a. seeding endothelial cells into the circulation system (1), and
- b. incubating at least until capillaries (14) have formed in the capillary growth section (2) and/or until an endothelial cell layer has formed in the transport channels and/or until an endothelial cell layer has covered all inner surfaces of the pumping device (5).

Endothelial cells are capable of forming capillaries (14), if placed in an environment that provides a growth scaffold, nutrients and oxygen and optionally angiogenic factors like FGF and/or Vascular Endothelial Cadherine (VEC). Accordingly, the endothelial cells are seeded into the system, preferentially through the access port and are incubated until capillaries (14) are formed, which usually takes between 2 to 10 days, preferably 2 to 6 days depending on the number of endothelial cells seeded, the distance between the micro inlets (3) and micro outlets (4), which are to be connected and the total inner surface of the circulation system (1) of the present invention to be covered with endothelial cells. Typically, in the range of 500 to 5,000 cells are seeded into a system with a total fluid volume in the range of 1 μ l to 100 μ l, preferably in the range of 5 μ l to 50 μ l. Naturally arteriolar and venules are composed not only of endothelial cells, but also comprise smooth muscle cells and biocompatible matrices. The smooth muscle cells provide flexibility to the arteriolar and venules and render them impermeable to fluids. Accordingly, in a preferred embodiment of the method further comprises the seeding of smooth muscle cells either prior, concomitantly with or after the endothelial cells. Preferably the ratio of endothelial cells and smooth muscle cells seeded is between 5 to 1 and 0.5 to 1, preferably 2 to 1.

Preferably, the method of the invention further comprises the step of injecting whole blood into the microcirculation once an endothelial cell monolayer has covered all surfaces. During the incubation period the endothelial cells are more likely to form intact capillaries (14), if they are exposed constantly to mechanical forces, therefore preferably step b) is carried out under shear force. The shear forces are created by circulating medium through the circulation system (1) of the present invention. Preferably, the flow at the micro inlet (3) and micro outlets (4) are in the range of 5 to 20 dyn/cm². To allow adherence of the cells to the inner surface of the circulation system (1) and/or migration to the capillary growth chamber (2) the circulation system (1) is filled with a fluid. Accordingly, in a preferred embodiment the seeding cells are comprised in media, plasma or blood, preferably whole blood. A particular preferred "seeding medium" which is also used during the incubation step leading to the formation of the capillaries (14) contains, e.g. endothelial cell basal medium-2 (EBM-2)

supplemented with hydrocortisone, fetal calf serum (FCS), porcine VEGF, human basic fibroblast growth factor (hbFGF), human epidermal growth factor (hEGF), insulin-like growth factor (R3 IGF), ascorbic acid, penicillin, streptomycin if the seeding medium is plasma or blood, it is preferred that these are supplemented with one or more of above
 5 indicated substances. To determine whether capillaries (14) have formed in step b) micro sensors (12) and/or visual inspection is used. Suitable micro sensors (12) measure transendothelial electrical resistance (TEER). Preferably, one or more non-endothelial cell types are seeded into the circulation system (1), preferably into the capillary growth section (2) to establish tissues and/or organoids (15) in the capillary growth sections (2). This further
 10 cells may be seeded prior to, concomitantly with step a), after step a) or after step b). The tissue types from which the cells are derived are preferably selected from the group consisting of liver, skin, lung, kidney, gut, neuronal, cardiac muscle and/or tumours.

The present invention provides a circulation system (1) producible by the described method, e.g. a circulation system with established capillaries and or organoids

15 The present invention provides the use of the circulation system (1) for monitoring the effect of one or more test compounds and/or for determination the efficacy, side-effects, biosafety, metabolites, mode of action or organ regeneration. Preferably, such testing is carried out by injecting one or more test compounds through the injection port.

Item 1 relates to a circulation system (1), which is self-contained and comprises:

- 20 a. at least one capillary growth section (2), comprising at least two micro inlets (3) and two micro outlets (4),
- b. a directional pumping device (5), and
- c. an arteriolar transport channel (6) connecting the directional pumping device (5) and the at least two inlets (3) and a venular transport channel (7) connecting the directional
 25 pumping device (5) and the at least two outlets (4).

Item 2 relates to the circulation system (1) of item 1, wherein the circulation system (1) comprises at least two capillary growth sections (2).

Item 3 relates to the circulation system (1) of any of item 1 or 2, wherein one capillary growth section (2) is at least in part gas permeable.

30 Item 4 relates to the circulation system (1) of any of items 1 to 3, wherein the capillary growth section (2) comprises or consists of a semi-solid, biocompatible matrix (8) and/or semi-solid, biocompatible hollow fibres (9).

Item 5 relates to the circulation system (1) of item 4, wherein the biocompatible hollow fibre (9) is biodegradable.

Item 6 relates to the circulation system (1) of item 4 or 5, wherein the biocompatible matrix (8) comprises or consists of a material selected from the group consisting of matrigel, fibrin gel, agarose gel, alginate gel, synthetic gel, cross-linkable polymers and the biocompatible hollow fibre (9) consists of a material selected from the group consisting of polylactic acid, polylactide-co-glycolide or mixtures thereof.

Item 7 relates to the circulation system (1) of any of items 4 to 6, wherein the biocompatible matrix (8) comprises micro channels, structures and/or networks, which allow formation of capillaries (14) by endothelial cells.

Item 8 relates to the circulation system (1) of any item 1 to 7, wherein a section of the capillary growth section (2) is devoid of micro inlets (3) and outlets (4).

Item 9 relates to the circulation system (1) of any of items 1 to 8, wherein the distance between the micro inlets (3) and micro outlets (4) is 0.2 mm to 4 mm, preferably 0.5 mm.

Item 10 relates to the circulation system (1) of any of items 1 to 9, wherein the width of the capillary growth section (2) is between 0.5 mm and 1.5 mm, preferably 1.0 mm and/or the height of the capillary growth section (2) is between 0.3 to 0.7 mm, preferably 0.5 mm.

Item 11 relates to the circulation system (1) of any of item 1 to 10, wherein the volume of the capillary growth section (2) is between 0.03 μ l to 4.2 μ l.

Item 12 relates to the circulation system (1) of any of items 1 to 11, wherein the micro inlets (3) and micro outlets (4) are arranged at opposite ends of the capillary growth section (2).

Item 13 relates to the circulation system (1) of any of items 1 to 12, wherein the diameter of the micro inlets (3) and/or micro outlets (4) is between 10 to 50 μ m.

Item 14 relates to the circulation system (1) of any of items 1 to 13, wherein the capillary growth section (2) further comprises an extra-capillary fluid and/or waste collector (10).

Item 15 relates to the circulation system (1) of any of items 1 to 14, wherein the extra-capillary fluid and/or waste collector (10) is separated from the biocompatible matrix (8) and/or biocompatible hollow fibre (9) by a cell retention membrane or by cell exclusion channels (11).

Item 16 relates to the circulation system (1) of item 14 or 15, wherein at least one sensor (12) is arranged in the extra capillary fluid and/or waste collector (10).

Item 17 relates to the circulation system (1) of item 16, wherein the at least one sensor (12) is selected from the group consisting of pH sensor, pO₂ sensor; analyte capture sensor, conductivity sensor, plasmon resonance sensor, temperature sensor, CO₂ sensor; NO sensor,

chemotaxis sensor, cytokine sensor, ion sensor, pressure sensors, potentiometric sensor, amperometric sensor, flow-through sensor, fill sensor, impedance sensor, conductivity sensor, electromagnetic field sensor, surface acoustic wave sensor, and metabolic sensor.

Item 18 relates to the circulation system (1) of any of items 1 to 17, wherein the
5 transport channel has been micromachined into a biocompatible matrix (8) or is a biocompatible hollow fibre (9), wherein said biocompatible matrix (8) or biocompatible hollow fibre (9) is at least in part gas permeable, preferably comprises or consists of PDMS.

Item 19 relates to the circulation system (1) of any of items 1 to 18, wherein the
10 diameter of the arteriolar transport channel (6) and/or the venular transport channel (7) at its connection with the directional pumping device (5) is between 300 μm and 2.0 mm, preferably 500 μm .

Item 20 relates to the circulation system (1) of any of items 1 to 19, wherein the
arteriolar transport channel (6) branches of at least once to connect with the at least two inlets (3) and the venular transport channel (7) branches of at least once to connect with the at least
15 two outlets (4), respectively.

Item 21 relates to the circulation system (1) of item 20, wherein the combined cross-sectional area of the arteriolar channels after the branching point (13) is essentially identical to the cross-sectional area of the arteriolar channel in front of the branching point (13) and/or the combined cross-sectional area of the venular transport channels (7) after the branching
20 point (13) is essentially identical to the cross-sectional area of the venular channel in front of the branching point (13).

Item 22 relates to the circulation system (1) of any of items 20 and 21, wherein the combined cross-sectional area of all inlets (3) is essentially identical to the cross-sectional area of said arteriolar channel and/or arteriolar channels and the combined cross-sectional
25 area of all outlets (4) is essentially identical to the cross-sectional area of said venular channel and/or venular channels, preferably are the cross-sectional areas of arteriolar and venular channels identical.

Item 23 relates to the circulation system (1) of any of items 1 to 22, wherein the directional pumping device (5) is a biological pump, hydraulic pump, piezoelectric pump
30 peristaltic pump, pneumatic pump, electro-magnetic pump or magnetic pump.

Item 24 relates to the circulation system (1) device of any of items 1 to 23, wherein the directional pumping device (5) comprises one or more directional flow elements, preferably selected from the group consisting of a jet-like element and a one-way valve element.

Item 25 relates to the circulation system (1) of any of items 1 to 24, wherein at least the inner surface of said transport channels and/or the directional pumping device (5) is coated with a substance selected from the group consisting of peptides or proteins promoting cell adhesion on biocompatible polymers or a mixture thereof.

5 Item 26 relates to the circulation system (1) of item 25, wherein peptides or proteins promoting cell adhesion are selected from the group consisting of integrins, albumins, fibrins, adhesines, collagens.

Item 27 relates to the circulation system (1) according to any of items 1 to 26, further comprising capillaries (14) and/or organoids (15) formed in the capillary growth section (2).

10 Item 28 relates to a method of establishing a circulation system (1) according to any of items 1 to 27, comprising the steps of

- a. seeding endothelial cells into the circulation system (1), and
 - b. incubating at least until capillaries (14) have formed in the capillary growth section (2) and/or until an endothelial cell layer has formed in the transport channels and/or until an
- 15 endothelial cell layer has covered all inner surfaces of the pumping device (5).

Item 29 relates to the method of establishing a circulation system (1) according to item 28, wherein the seeding cells are comprised in media and plasma.

Item 30 relates to the method of establishing a circulation system (1) according to item 28 or 29, wherein the method further comprises the step seeding of smooth muscle cells either

20 prior to, concomitantly with or after step a).

Item 31 relates to the method of establishing a circulation system (1) according to any of items 28 to 30, wherein the method further comprises the step of injecting whole blood into said circulation system.

Item 32 relates to the method of establishing a circulation system (1) according to any

25 of items 28 to 31, wherein step b) is carried out under shear force.

Item 33 relates to the method of establishing a circulation system (1) according to any of items 29 to 32, wherein cells of one or more cell types are seeded into said capillary growth section (2), preferably after step b).

Item 34 relates to the method of establishing a circulation system (1) according to item

30 33, wherein the cells are selected from the group consisting liver cells, skin cells, lung cells, kidney cells, gut cells, neuronal cells, cardiomyocytes and/or tumour cells.

Item 35 relates to a circulation system (1) producible by the method of any of items 28 to 34.

Item 36 relates to a use of the circulation system (1) according to item 27 or 35 for monitoring the effect of one or more test compounds and/or for determination the efficacy, side-effects, biosafety, metabolites, mode of action or organ regeneration.

5

List of reference numbers

- (1) self-contained circulation system
- (2) capillary growth section
- (3) micro inlet
- 10 (4) micro outlet
- (5) directional pumping device
- (6) arteriolar transport channel
- (7) venular transport channel
- (8) biocompatible matrix
- 15 (9) biocompatible hollow fibre
- (10) extra-fluid and/or waste collector
- (11) retention membrane or cell exclusion channel
- (12) sensors
- (13) branching point
- 20 (14) capillaries
- (15) tissues and/or organoids
- (16) neovascularisation region
- (17) injection port

25

Brief Description of the Figures

Fig. 1: Top-down view of a preferred embodiment of a self-contained circulation system (1) comprising two capillary growth sections (2), the directional pumping device (5) and the arteriolar (6) and venular transport channels (7). In a preferred embodiment the pumping device (5) and the two capillary growth sections (2) are parallel arranged.

30 The transport channels (6, 7) serve as a connection between the directional pumping device (5) and the capillary growth section (2). In a preferred embodiment an injection port (17) for i.e. support of buffer is located in close proximity to the micro pump. Usually, the arteriolar (6) or venular channel (7) connected to the directional pumping device (5) branches of into two or three smaller diameter arteriolar and venular

35 channels at the branching points (13). The capillary growth sections (2) are preferably

populated by different tissues and/or organoids (15), which are perfused by the same circulating fluid and allows, e.g. the testing of the effect of one compound on more than one organoid simultaneously.

5 Fig 2: Top-down view of a preferred embodiment of the capillary growth section (2) of the self-contained circulation system (1). The capillary growth sections (2) are the spaces that are provided for assembly of capillaries (14) by e.g. endothelial cells between the micro inlets (3) and outlets (4). To provide an appropriate environment for growth of the capillaries (14) it is preferred that the capillary growth section (2) comprises or
10 consists of a semi-solid, biocompatible matrix (8). Alternatively, biocompatible hollow fibres (9) are provided which connected at one side to the micro inlet (3) and at the other side to the micro outlet (4). The tissue site most distant from the inflow end of the capillary (14) builds a neovascularisation region (16) within the capillary growth section (2), i.e. a section wherein no capillaries (14) are formed during the
15 basis establishment of the capillaries (14) in the circulation. Preferably the capillary growth section (2) further comprises an extra-capillary fluid and/or waste collector (10), which is separated from the remaining capillary growth section (2) by a cell retention membrane (11). To monitor the status of the system one or more sensors (12) are arranged in the extra capillary fluid and/or waste collector (10).

20

Fig 3: Top-down view of a preferred embodiment of the self-contained circulation system used in the example experiment equipped with a peristaltic pump (5), three valves for liquid displacement, an insert (15) and two collectors (10) supporting fill and flush of the system.

25

Fig 4: CalceinAM viability staining of a particular segment of the channels of the self-contained micro circulation system fully covered with human endothelial cells after seven days of perfused cultivation.

30 Fig 5: CellMask[®] fluorescent plasma membrane staining of the self-contained circulation system chip fully covered with human endothelial cells after seven days of perfusion.

Example

A self-contained circulation system (1) has been established over a period of 14 days by fully covering all channels and surfaces of a bioreactor prototype chip as shown in figure 3 with living human endothelial cells in sterile medium. A peristaltic micro-pump (5) was used to create the liquid circulation through the tissue culture space (15). The collectors for extra-fluid and waste (10) were used in combination with valves A, B and C to manage the liquid levels and exchange in the system. The chip was casted by using a master and PDMS. The PDMS-layer was then transferred onto a glass slide and was inserted into a holder. Metal inserts for cell and tissue inoculums (15) and extra-fluid or waste collection (10) were fixed to the bioreactor chip through a carbonate plate on the top of the PDMS-slide. A fully assembled self-contained circulation system chip is shown in figure 4.

Human dermal microvascular endothelial cells (HDMECs) obtained from Promocell were used between passages 4-7. Prior to use they were grown in T-75 flasks with Endothelial Cell Growth Medium MV-2 (Promocell, 5%FCS, 1%penicillin-streptomycin) at 37°C and 5%CO₂ (humidified incubator) and passaged at 80% confluency. For the experiment, cells were collected by washing once with PBS and adding 2ml of a 0.25% Trypsin/EDTA solution. Detaching of the cells occurred within 5min incubation at 37°C. After neutralizing the trypsin solution with 10%FCS in DMEM, cells were centrifuged 5min at 300xg and counted using a hemocytometer.

A sterile self-contained circulation system chip was flushed with 80%ethanol for 10 minutes. Using a syringe, PBS was then injected into the channels and incubated for another 10 minutes. After replacement of PBS by flushing the channels with HDMEC-Medium, the chip was incubated at 4°C over night.

For seeding the HDMEC into the microchannels, cell pellet was resuspended in HDMEC-Medium to a final concentration of 2×10^7 cells/ml. Cell suspension was transferred to the empty insert (figure 3, 15). To create a difference in hydrostatic pressure between the insert space and the collectors (figure 3, 10), medium from the collectors was removed. The peristaltic pump was then opened to let the cells fill the channels. Additionally, valve A was opened to ensure a homogeneous filling of the whole chip.

To allow attachment and spreading of the endothelial cells on the channel surfaces, the self-contained circulation system chip was incubated at 37°C and 5% CO₂ for 2h. Afterwards, 50µl HDMEC-medium was added to the insert and cells were resuspended to fill the channels, in the same manner as described above. Collectors were then filled up with

medium, closed tightly and the device was turned upside down to let the cells attach to the ceiling of the channels, too. After 5h of static incubation the chip was connected to the pneumatic pump device and valve B and C were closed to create a circulating flow. The chip was incubated for 14 days at a pumping frequency of 0,16Hz and a pressure of 0,3bar.

- 5 Medium of the insert and collector space was replaced every day.

The effect of shearing on endothelial cell shape and fully closed coverage of all channel surfaces by endothelial cells was determined by fluorescence microscopy (figures 4 and 5).

CLAIMS:

1. A circulation system which is self-contained and comprises:
at least one capillary growth section, comprising at least two micro inlets and two micro outlets,
directional pumping device,
an arteriolar transport channel connecting the directional pumping device and the at least two inlets, and
a venular transport channel connecting the directional pumping device and the at least two outlets,
wherein a sub-section within the capillary growth section is provided which is devoid of micro inlets and outlets and wherein the sub-section is spaced from corresponding micro inlets and micro outlets to impair formation of capillaries in this sub-section.
2. The circulation system of claim 1, wherein the circulation system comprises at least two capillary growth sections.
3. The circulation system of claim 1 or 2, wherein one capillary growth section is at least in part gas permeable.
4. The circulation system of any one of claims 1 to 3, wherein the capillary growth section comprises or consists of a semi-solid, biocompatible matrix or semi-solid, biocompatible hollow fibres, wherein the biocompatible matrix optionally comprises micro channels, structures or networks, which allow formation of capillaries by endothelial cells.
5. The circulation system of any one of claims 1 to 3, wherein the capillary growth section further comprises an extra-capillary fluid or a waste collector.
6. The circulation system claim 4, wherein the capillary growth section further comprises an extra-capillary fluid or a waste collector.

7. The circulation system of claim 6, wherein the extra-capillary fluid or the waste collector is separated from the biocompatible matrix or biocompatible hollow fibre by a cell retention membrane or by cell exclusion channels and, wherein optionally at least one sensor is arranged in the extra capillary fluid or the waste collector.
8. The circulation system according to any one of claims 1 to 7, further comprising capillaries or organoids formed in the capillary growth section.
9. The circulation system according to any one of claims 1 to 8, wherein two or more different tissues or organoids are maintained within one self-contained system, which are perfused by a common circulating fluid.
10. The circulation system according to any one of claims 1 to 9, wherein the sub-section has a distance from at least 100 μm and up to 500 μm from the micro inlets or micro outlets.
11. The circulation system according to claim 10, wherein the sub-section has a distance of from 100 μm to 300 μm from the micro inlets or micro outlets.
12. The circulation system according to any of claims 1 to 11, wherein the arteriolar transport channel branches off at least once to connect with the at least two inlets, and the venular transport channel branches off at least once to connect with the at least two outlets.
13. The circulation system of claim 12, wherein the combined cross-sectional area of the arteriolar transport channels after the branching point is identical to the cross-sectional area of the arteriolar transport channel in front of the branching point, or the combined cross-sectional area of the venular transport channels after the branching point is identical to the cross-sectional area of the venular transport channel in front of the branching point.
14. The circulation system of claim 12 or 13, wherein the combined cross-sectional area of all inlets is identical to the cross-sectional area of said arteriolar transport channel or channels, and

the combined cross-sectional area of all outlets is identical to the cross-sectional area of said venular transport channel or channels.

15. The circulation system of claim 13 or 14, wherein the cross-sectional areas of the arteriolar transport channels and the venular transport channels are identical.

16. A method of establishing the circulation system according to any one of claims 1 to 15, comprising the steps:

- (a) seeding endothelial cells into the circulation system, and
- (b) incubating the cells at least until capillaries have formed in the capillary growth section or until an endothelial cell layer has formed in the transport channels or until an endothelial cell layer has covered all inner surfaces of the pumping device.

17. The method of establishing the circulation system according to claim 16, wherein the method further comprises the step of injecting whole blood into said circulation system.

18. The method of establishing the circulation system according to claim 16 or 17, wherein step (b) is carried out under shear force.

19. A use of the circulation system according to any one of claims 1 to 15, for monitoring the effect of one or more test compounds; for determination of efficacy, side-effects, biosafety, metabolites, or mode of action; or for organ regeneration.

Figure 1

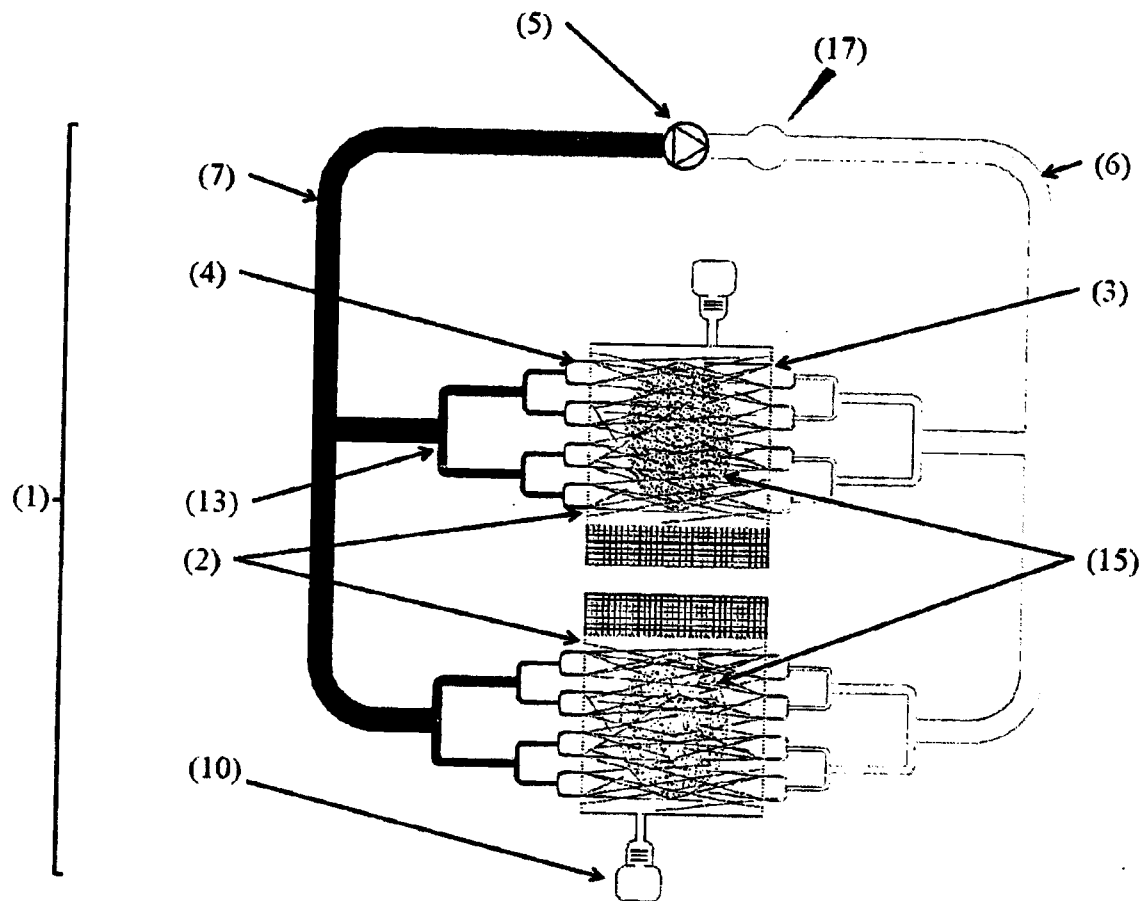


Figure 2

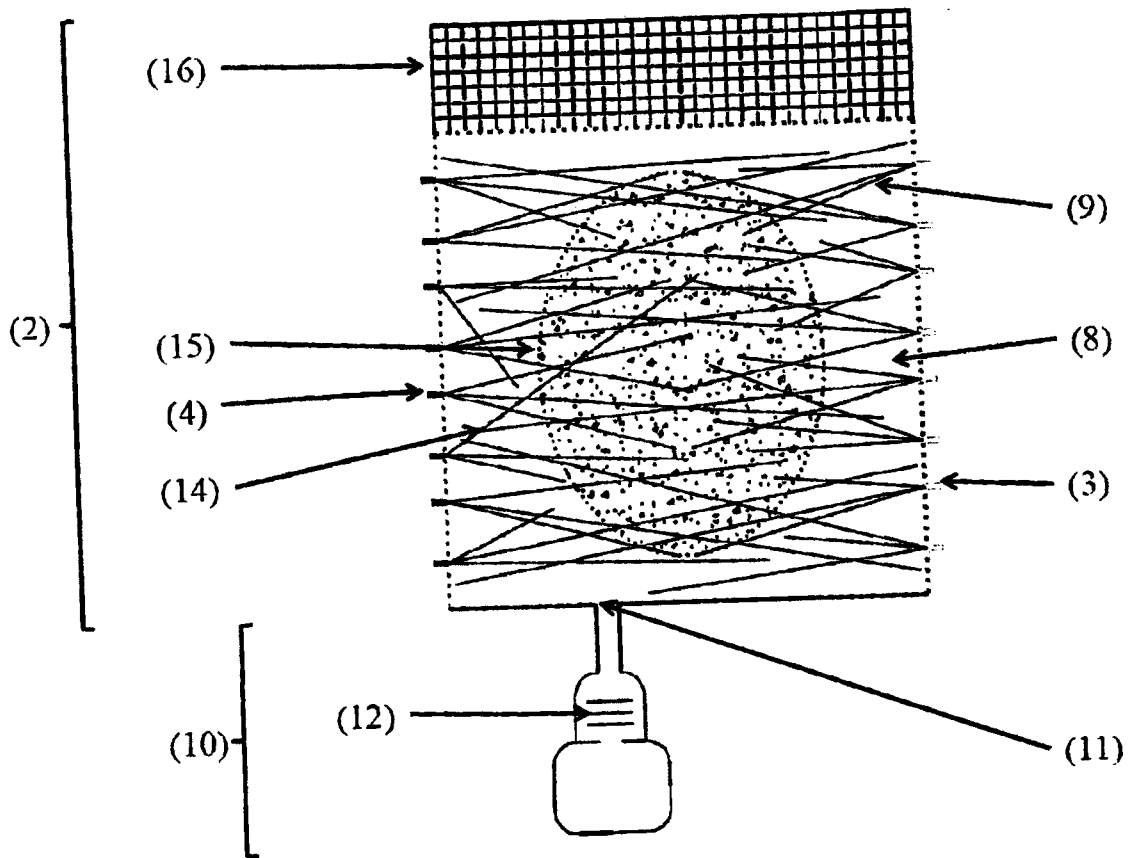


Figure 3

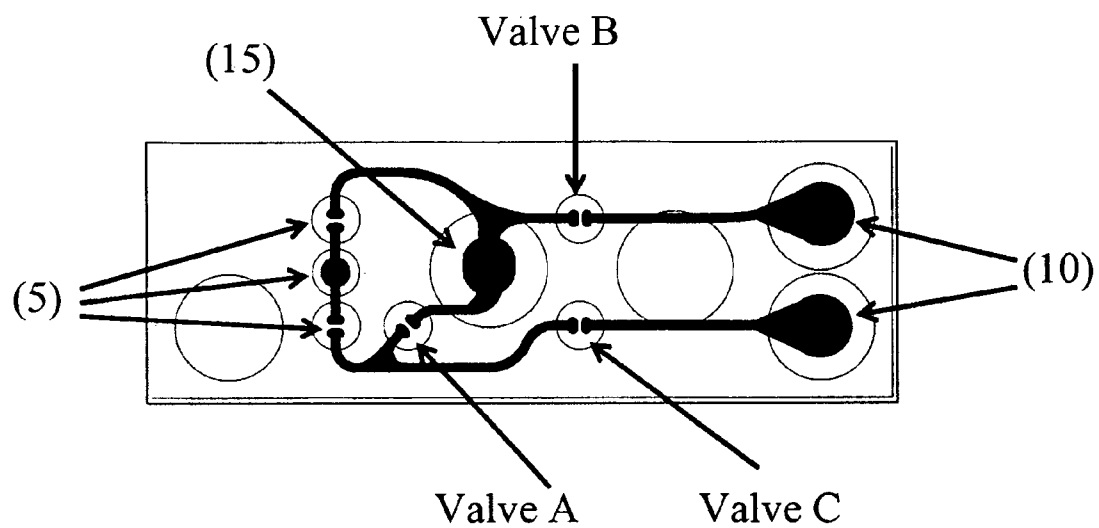


Figure 4

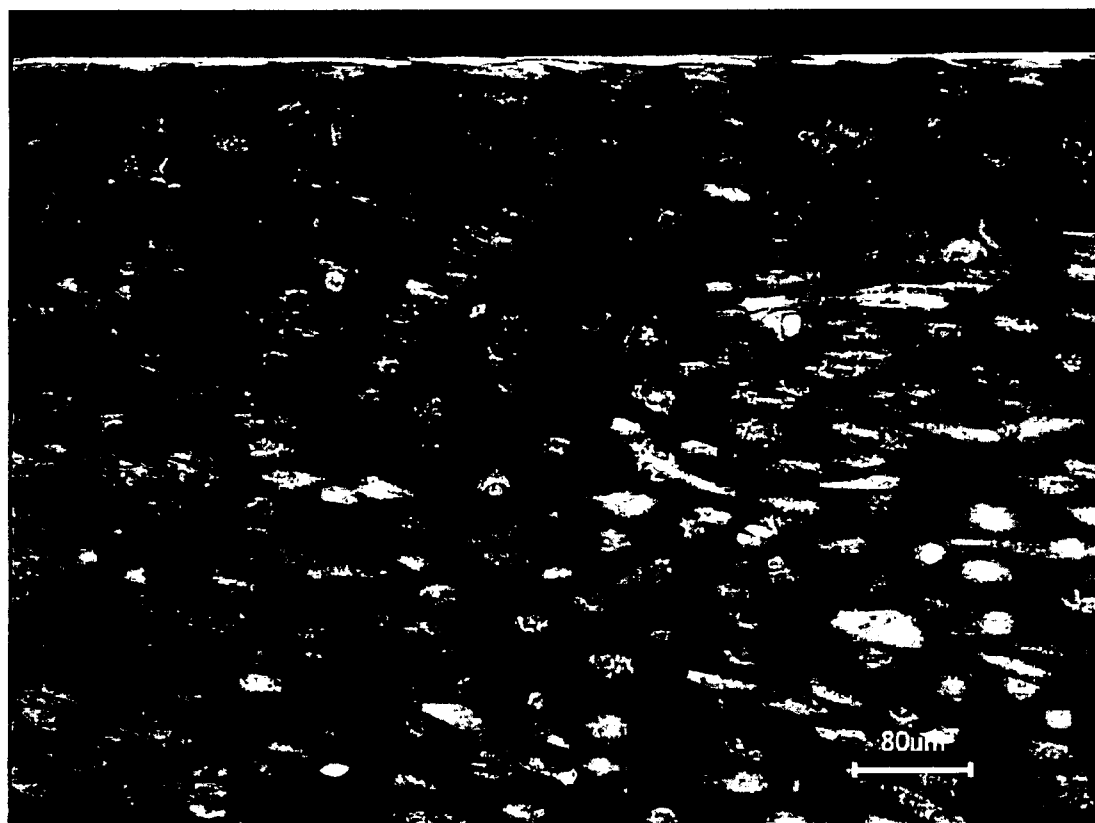


Figure 5

