

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 July 2007 (12.07.2007)

PCT

(10) International Publication Number
WO 2007/078093 A1

(51) International Patent Classification:
H04L 12/24 (2006.01)

(21) International Application Number:
PCT/KR2006/005792

(22) International Filing Date:
28 December 2006 (28.12.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/755,098 3 January 2006 (03.01.2006) US
10-2006-0026985 24 March 2006 (24.03.2006) KR

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**
[KR/KR]; 416, Maetan-dong, Yeongtong-gu, Suwon-si,
Gyeonggi-do 442-742 (KR).

(72) Inventors: **KIM, Bong-Seon**; 903-411 Cheongsol Maeul
Jugong, 9-danji Apt., Geumgok-dong, Bundang-gu,
Seongnam-si, Gyeonggi-do 463-724 (KR). **YOON,
Young-Sun**; 511-704 Sangrok Apt., Gwonseon-dong,
Gwonseon-gu, Suwon-si, Gyeonggi-do 441-742 (KR).
NAM, Su-Hyun; (102) 435-26 Bangbae 2-dong, Seo-
cho-gu, Seoul 137-817 (KR).

(74) Agent: **Y.P.LEE, MOCK & PARTNERS**; Koryo Build-
ing, 1575-1, Seocho-dong, Seocho-gu, Seoul 137-875
(KR).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT,
LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ,
NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU,
SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, UZ, VC, VN, ZA, ZM, ZW.

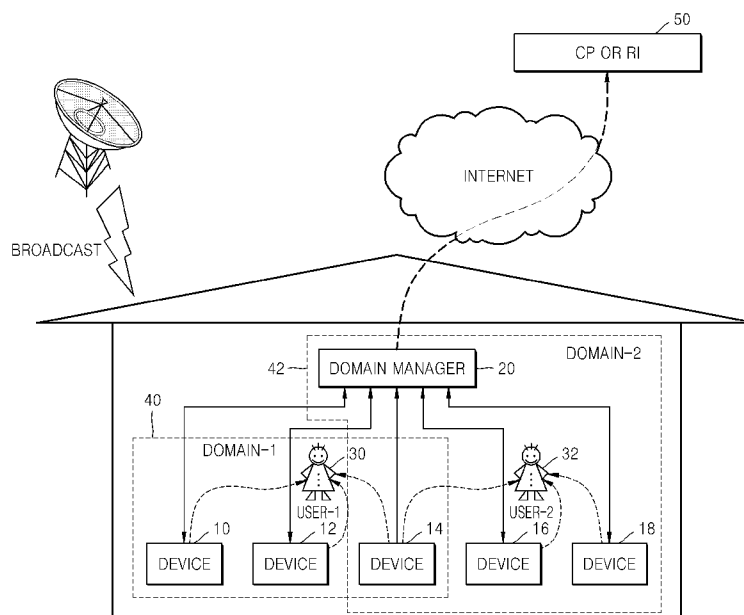
(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND APPARATUS FOR MANAGING DOMAIN



(57) Abstract: A method and an apparatus for managing domains are provided. The method of managing one or more domains performed by a domain manager located in a home network includes determining whether to register a first device located in the home network to a domain, and providing data required to share content between the first device and a second device registered to the domain according to the determination. In the method and apparatus, content can be shared by connecting the devices with one another including a user, and the burden of content providers for management can be reduced.

WO 2007/078093 A1

Description

METHOD AND APPARATUS FOR MANAGING DOMAIN

Technical Field

- [1] This application claims the benefit of U.S. Provisional Patent Application No. 60/755,098, filed on January 3, 2006, in the U.S. Patent and Trademark Office, and Korean Patent Application No. 10-2006-0026985, filed on March 24, 2006, in the Korean Intellectual Property Office, the disclosures of which are incorporated herein in their entirety by reference.
- [2] The present invention relates to a method and an apparatus for managing domains, and more particularly, to a consumer-oriented method and a consumer-oriented apparatus for managing domains constituting a set of home apparatuses capable of playing and sharing content.

Background Art

- [3] Recently, the demands of consumers for the convenient sharing of content among various home devices have increased, reflecting a trend that various home devices for broadcasting, music, and games have emerged. In response to these demands, research into consumer-oriented home network domains which enable users to connect the devices and to share the content of the devices has been actively conducted.
- [4] FIG. 1 is a diagram for explaining a conventional method of sharing content in a home network. Referring to FIG. 1, a content provider (CP) or a rights issuer (RI) provides content or a license for the content. A user 5 can obtain and use the content after registering user information to the CP or RI 6. In order to set domains, devices 1, 2, 3, and 4, and the user 5, should connect and register through the Internet or communication lines to the CP 6 or RI 6 that have a function of managing domains, and receive domain information and information required to share the content in the domains. Here, domains are a set of devices of which content is shared, and the domains are set and managed by the CP 6 or the RI 6 connectable through the Internet.
- [5] In other words, the devices to be used by the user 5, together with the user 5, should be registered to the CP 6 or the RI 6 through the Internet and receive the information required to share the content. After this registration process, it is possible to share the content among the registered devices.
- [6] However, in this method, the content provider or rights issuer such as the CP 6 or the RI 6 having a function of managing domains should be connected with the user 5 and the devices 1, 2, 3, and 4 through the Internet, that is an external network, other than an internal home network. In other words, an Internet connection is required to update domain related data and security data for content sharing, security, and other management.

- [7] Accordingly, the conventional method described above in which all of the devices should be connected to an external network through the Internet for sharing content is inefficient and inconvenient in terms of user convenience. In addition, managing information for each user and a domain for each user is a considerable burden on the CP 6 or the RI 6 on the Internet.

Disclosure of Invention

Technical Problem

- [8] The present invention provides a method and an apparatus for managing domains capable of sharing content by connecting devices in a customer-oriented approach.

Technical Solution

- [9] According to an aspect of the present invention, there is provided a method of managing one or more domains by a domain manager located in a home network, comprising: determining whether to register a first device located in the home network to a domain; and providing data required for sharing content between the first device and a second device registered to the domain according to the determination.
- [10] According to another aspect of the present invention, there is provided a device for managing one or more domains located in a home network, the device comprising a domain data providing unit determining whether to register a first device located in the home network to a domain and providing data required to share content between the first device and a second device registered to the domain according to the determination.

Advantageous Effects

- [11] According to the present invention, a domain manager located in a home network provides other devices with information on domains set in the home network, information required to use content in the domains, security information related to domain security, so that the domain manager can manage and maintain domains effectively and securely with a user, and domain registration and other domain-related operations can be performed when all the devices included in the domain do not have a function to connect to an external network. Additionally, according to the present invention, a user can maintain the same domain although content from various content sources are used, and the content from various content sources in the domain can be shared together with the devices in the domain, and inconvenience of registration with each content provider, which is experienced when a domain is set to each content source, can be avoided.

Description of Drawings

- [12] The above and other features and advantages of the present invention will become more apparent by describing in detail exemplary embodiments thereof with reference

to the attached drawings in which:

- [13] FIG. 1 is a diagram for explaining a conventional method of sharing content in a home network;
- [14] FIG. 2 is a diagram of a system including a domain manager according to an embodiment of the present invention;
- [15] FIG. 3 is a detailed block diagram of the domain manager of FIG. 2 according to an embodiment of the present invention;
- [16] FIG. 4 is a flowchart of a method of managing domains according to an embodiment of the present invention including processes of domain generation, member registration, and data transfer;
- [17] FIG. 5 is a flowchart of a data update process included in a method of managing domains according to an embodiment of the present invention;
- [18] FIG. 6A is a flowchart of a method of managing domains providing secure time according to an embodiment of the present invention;
- [19] FIG. 6B is a flowchart of a method of managing domains providing a device revocation list according to an embodiment of the present invention; and
- [20] FIG. 7 is a flowchart of a deregistering process included in a method of managing domains according to an embodiment of the present invention.

Mode for Invention

- [21] Now, embodiments of the present invention will be described in detail with reference to the accompanying drawings.
- [22] The present invention relates to a method and an apparatus for managing home network domains in which devices are connected with one another from a consumer perspective, and content of the devices is shared. In other words, a domain manager having a function of managing domains corresponding to user devices is located in a home network, so that user convenience can be improved, and the burden on the content provider can be relieved.
- [23] FIG. 2 is a diagram of a system including a domain manager according to an embodiment of the present invention. Referring to FIG. 2, the system includes five devices 10, 12, 14, 16, and 18 of a user, a domain manager 20, and a CP or RI 50.
- [24] The domain manager 20 according to the current embodiment of the present invention is located in a home network and performs a role of managing a domain-1 40 and a domain-2 42. Here, examples of operations for managing domains include generating a domain in an initial stage, registering a home device to the generated domain in accordance with the domain policy of the domain, managing the domain, and canceling the domain registration of a device. Here, an example of the generation of a domain in the initial stage is to generate a domain identifier and a domain key. The registered device is managed, so that the registered device can securely share or play

content corresponding to the domain. Detailed examples of the management of a registered device are domain registration of the device, deregistering of the device, link generation, domain membership management, and domain key generation/update. According to an embodiment of the present invention, the domain manager 20 can connect to the CP or RI 50 through the Internet as the representative of other devices 10, 12, 14, 16, and 18 and receives an authorization to use the content of the CP or RI 50. The domain manager 20 can receive authorization without providing information pertaining to the other devices 10, 12, 14, 16, and 18 to the CP or RI 50, which is different from a conventional method.

[25] In addition, according to an embodiment of the present invention, the domain manager 20 can register itself to the domain-1 40, and use the content in the domain-1 40. This is feasible, since the domain manager 20 is an apparatus belonging to a user, while the conventional CP or RI 50 described above having a function of domain management is an external apparatus.

[26] Referring to FIG. 2, the domain-1 40 and the domain-2 42 are set for a user-1 30 and a user-2 32, respectively. The devices 10, 12, and 14 are included as members of the domain-1 40, and the devices 16 and 18 are included as members of the domain-2 42. However, it is apparent to those skilled in the art that the present invention can be applied to a digital rights management (DRM) policy managing domains including a set of devices only, other than user-based domains.

[27] FIG. 3 is a detailed block diagram of the domain manager 20 according to an embodiment of the present invention. Referring to FIG. 3, the domain manager 20 includes an interface 300, a domain information management unit 310, a domain information providing unit 320, a domain data management unit 330, a domain data providing unit 340, a proximity check unit 350, a device information management unit 360, and a security data providing unit 370.

[28] The interface 300 communicates with other devices 10, 12, 14, 16, and 18.

[29] The domain information management unit 310 receives a user's input, generates at least one domain, and sets and manages information on the generated domain. Here, examples of the information which is initialized and set by the user's input include a domain identifier for each domain, a domain policy identifier, user information, and location information on devices providing data required to use content in the domain. In addition, a domain key stored in the domain data management unit 330 can be set by a user's input, which will be described later. Here, examples of the user information include a user identifier and a password. The user information can be related to the domain identifier or the domain key described above, and examples include information that the domain belongs to a user determined by the user identifier by providing the user identifier when the domain information is provided, which will be

described later, and information regarding the generation or encryption of a domain key using the user information. In addition, the user information related to the domain can be used in a user authorization process which is performed when a device is registered to the domain, or registration of the apparatus to the domain is cancelled.

- [30] The domain information providing unit 320 reads the information on the generated domain from the domain information management unit 310 and provides the information to the devices 10, 12, 14, 16, and 18 located inside the home network. Examples of methods of providing the information include providing the information according to a request of the devices 10, 12, 14, 16, and 18 and providing the information at a regular interval regardless of a request. However, the method is not limited thereto. Here, an example of the information provided is information stored in the domain information management unit 310.
- [31] The domain data management unit 330 stores data required to share content in a domain. Here an example of the stored data is a domain key used for decoding content in the domain.
- [32] The domain data providing unit 340 determines whether to register an apparatus located inside the home network to the domain and provides data required to share content in the domain to the device which is determined to be registered. Here, examples of the provided data include a domain key and information pertaining to a validity of a domain membership. The information on the validity of the domain membership will be described later.
- [33] When the domain policy is set to register only devices that satisfy a proximity condition and a validity condition of apparatus information, the domain data providing unit 340 determines whether to register the device according to the proximity check and whether the validity condition of the device is satisfied. Here, the validity check of the device comprises checking whether the device is a device to be managed by the domain manager 20. An example of the proximity check comprises checking whether a physical distance from the domain manager 20 satisfies a physical distance limitation condition. However, the check method is not limited thereto.
- [34] The proximity check unit 350 checks proximity of the device from the domain manager 20 itself and provides a result of the proximity check to the domain data providing unit 340.
- [35] The device information management unit 360 stores information on devices which have been determined to be registered. Here, examples of the device information include a device identifier and a device key received from the device which has requested registration and domain validity information which has been generated by the domain data providing unit 340 in a registration determination process. The device key can be used for encrypting data in a transfer path from the domain manager 20 to a

device. An example of the data is a domain key. The domain membership validity information represents a valid qualification as a registered device to the domain. An example of the domain membership validity information is time information representing a valid period of a domain member of the registered device.

[36] Domain generation, domain member registration and provision of data required to share content have been mainly described as above, and a process of updating data required to share the content will now be described with reference to FIG. 3.

[37] The domain data providing unit 340 updates data required for sharing content, in addition to the function described above, stores the updated data in the domain data management unit 330, and informs the registered device of the updated result. Here, an example of a method of determining whether to update the data is by detecting a change in registered devices or security risk. In addition, the domain data providing unit 340 reads the updated data from the domain data management unit 330 in response to a request of the device which has been informed of the update result and provides the updated data to the device which made the request.

[38] The security data providing unit 370 provides a registered device with security data such as secure time and a revocation list. Here, the secure time is time information relating to the calculation of a valid time of contents in the domain and used when contents are imported. The revocation list is information on apparatuses which have been revoked for predetermined reasons. The revoked apparatus cannot share content with other devices anymore.

[39] The domain data providing unit 340 removes device information on a device, which has requested to cancel the registration to the domain, from the device information management unit 360, when a request for the cancellation is received from the device through the interface 300 and updates data required to share content in the domain to which the cancellation of the registration is requested.

[40] FIG. 4 is a flowchart of a method of managing domains according to an embodiment of the present invention including processes of domain generation, member registration, and data transfer.

[41] Referring to FIG. 4, the domain manager 20 generates at least one domain, and information on the generated domain is stored in the domain information management unit 310 (S400). In other words, the domain information management unit 310 is initialized by a user's input information, and the input information is stored securely. Examples of the initialized information include a domain identifier, a domain policy identifier, a domain key for each domain, user information, and location information on a device providing data for sharing content in a domain. In addition, the domain manager 20 can register itself to a domain and store data required to share content in the domain in operation S400 or after operation S400. Examples of the data include a

domain key and domain membership validity information.

- [42] Thereafter, the domain information providing unit 320 receives a request for information on the generated domain from the device 12 reads the information from the domain information management unit 310 and provides the information to the device 12 which has made the request, as a response (S410). Thereafter, the device 12 is determined to be registered to the domain-2 42 according to the received information and requests the domain manager 20 to be registered. Here, when a registration is requested, a device identifier, an apparatus key, and the like of the device 12 are provided to the domain manager 20, and the provided information is transferred to the domain data providing unit 340 through the interface 300.
- [43] The domain data providing unit 340 determines whether to register the device 12 to the domain-2 42 according to a proximity check of the proximity check unit 350 and a validity check of the device 12 (S420). The check is performed in accordance with a domain policy of the domain-2 42.
- [44] The domain data providing unit 340 provides the data required to share content in the domain to the device 12 securely(S430). An example of a process performed by the domain data providing unit 340 in order to provide the data is a process in which, domain membership validity information for the device 12 is generated, a domain key and the like are read from the data management unit 350, the read domain key and the generated domain membership validity information are encrypted using the device key provided in operation S410. As examples of the provided data, only the domain key and the domain membership validity information have been mentioned, however, it is apparent to those skilled in the art that link information indicating that the device 12 belongs to the domain-2 42 can be also provided.
- [45] Thereafter, the domain data providing unit 340 stores the domain membership validity information generated in operation S430 and the device identifier, the device key, and the like provided in operation S410 in the device information management unit 360 (S440).
- [46] Thereafter, the device 12 can play or share the content belonging to domain-2 42 through a decoding process using the domain key and the like.
- [47] FIG. 5 is a flowchart of a data update process included in a method of managing domains according to an embodiment of the present invention. In other words, FIG. 5 is a flowchart illustrating a method of updating data required to share content in a domain according to an embodiment of the present invention, and the method will now be described with reference to FIG. 3 on a premise of a data update status of the domain-2 42 in FIG. 2.
- [48] At first, the domain data providing unit 340 determines whether to update data required to share content in the domain (S500). An example of the determining method

is to determine whether to update the data by detecting a change in a domain member such as revocation of a registered device or security risk such as a leakage of the domain key.

[49] Thereafter, the domain data providing unit 340 updates data according to the determination, stores the updated data in the domain data management unit 330, and informs the devices 14, 16, and 18 registered to the domain of the data update (S510). An example of the updated data is a domain key.

[50] Thereafter, upon a request of the device 14 which has been informed of the data update, the domain data providing unit 340 securely transfers the data updated in operation S510 to the device 14 (S520). In addition, an update notice in operation S510 and the transferred data in operation S520 may undergo an encryption process using the stored device information. An example of the encryption method is to encrypt using the device key of the device 14.

[51] The device 14 which has received the updated data through operation S520, stores the updated data. Thereafter, content in the domain is encrypted and shared using the updated domain key, so that a device that is deregistered or has a security risk such as hacking cannot share the content thereafter since the device has not received the updated domain key.

[52] FIGS. 6A and 6B are flowcharts of security data providing processes in a method of managing domains according to an embodiment of the present invention. Here, the security data is data including secure time and device revocation information as described above.

[53] FIG. 6A is a flowchart of a method of managing domains providing secure time according to an embodiment of the present invention. It is assumed that domain generation and device registration have been performed previous to operation S600, even though these operations are not illustrated in FIG. 6A.

[54] Referring to FIG. 6A, at first, the security data providing unit 370 receives a request for the secure time from a device registered to a domain (S600). An example of a case when a device requests the secure time is when the device imports content. When content is imported, a time stamp indicating from when the content is used for the domain is required, and a reference time is the secure time. This time stamping is used as a method in which the content shared before a device cancels the registration can continuously be used by the registration-cancelled device which was a domain member when importing was performed by comparing the registration canceling time and the importing time.

[55] Thereafter, the security data providing unit 370 provides the secure time to the device which has made the request (S610). Thereafter, the device imports the content using the provided secure time.

- [56] FIG. 6B is a flowchart of a method of managing domains providing a device revocation list according to an embodiment of the present invention. It is assumed that domain generation and device registration have been preformed previous to operation S600, even though these operations are not illustrated in FIG. 6B.
- [57] Referring to FIG. 6B, at first the security data providing unit 370 determines whether security data stored in the devices registered to each domain is the most current (S650). Here, it is determined whether the device revocation list stored in the devices registered to the domain is the most current information, so as not to share content with a device which has been revoked after the device revocation list is issued when the device registered to the domain has a previous device revocation list, and the device revocation list stored in the registered device is updated according to the determination.
- [58] Thereafter, when it is determined that there is a device not having the most current data, the security data providing unit 370 provides the most current revocation list to the device (S660).
- [59] Thereafter, devices in the domain can share content in the domain securely using the device revocation list received from the domain manager 20.
- [60] FIG. 7 is a flowchart of a registration canceling process included in a method of managing domains according to an embodiment of the present invention. The registration canceling process will be described with reference to FIG. 3 on the basis that the device 18 cancels a registration to the domain-2 42.
- [61] Referring to FIG. 7, at first, the domain data providing unit 340 receives a registration cancel request from the device 18 (S700). In other words, the domain data providing unit 340 receives a registration cancel request from a device among devices registered to the domain which does not want to share contents in the domain.
- [62] Thereafter, the domain data providing unit 340 removes device information of the device 18 which has requested to cancel the registration from the device information management unit 360 and updates data required to share content in the domain in accordance with a domain policy of the domain (S710). Thereafter, an update result and updated data are transferred as described with reference to FIG. 5. As a result, the user device cannot share content which has come into the domain after the device cancels the registration, since the device uses a previous domain key.
- [63] When the domain policy is set to limit the number of devices to be registered to each domain or the number of domains to which each device registers, the domain manager 20 performs a registration process according to the policy. According to a management method having this domain policy, there is an advantage that a management burden for both the domain manager 20 and the content providers, is decreased.

- [64] The invention can also be embodied as computer readable codes on a computer readable recording medium. The computer readable recording medium is any data storage device that can store data which can be thereafter read by a computer system. Examples of the computer readable recording medium include read-only memory (ROM), random-access memory (RAM), CD-ROMs, magnetic tapes, floppy disks, optical data storage devices, and carrier waves such as data transmission through the Internet. The computer readable recording medium can also be distributed over network coupled computer systems so that the computer readable code is stored and executed in a distributed fashion. Also, functional programs, codes, and code segments for accomplishing the present invention can be easily construed by programmers skilled in the art to which the present invention pertains.
- [65] While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the appended claims.

Claims

- [1] A method of managing one or more domains by a domain manager located in a home network, comprising:
determining whether to register a first device located in the home network to a domain; and
providing data required for sharing content between the first device and a second device registered to the domain according to the determination.
- [2] The method of claim 1, further comprising, registering the domain manager with the domain.
- [3] The method of claim 1, further comprising performing a proximity check of the first device, wherein the determining of the registration of the first device is based on the proximity check.
- [4] The method of claim 1, wherein the data comprises information on domain membership validity indicating valid qualification as a device registered to the domain.
- [5] The method of claim 1, wherein the data comprises a domain key used for decoding the content.
- [6] The method of claim 1, further comprising, providing information on the managed domains to one or more devices located in the home network.
- [7] The method of claim 1, further comprising updating the data and informing registered devices of the update.
- [8] The method of claim 7, further comprising detecting a change in the devices registered to the domain or a security risk and determining whether to update the data according to the detection.
- [9] The method of claim 7, further comprising providing the updated data in response to a request of the devices which have been informed of the update.
- [10] The method of claim 1, further comprising providing security data comprising at least one of a secure time and a device revocation list to devices registered to the domain,
wherein the secure time is time information which is a reference for calculating a valid time of content in the domain, and
wherein the device revocation list is information on revoked devices.
- [11] The method of claim 10, wherein the providing of the security data comprises:
receiving a request for the security data from a registered device; and
providing the security data to the registered device which has requested the security data.
- [12] The method of claim 10, wherein the providing of the security data comprises:

determining whether the security data of devices registered to each domain is the most current; and

providing the most current security data to one or more devices which do not have the latest security data, when it is determined that there are one or more devices which do not have the most current security data.

[13] The method of claim 1, further comprising removing stored device information on a device in response to a request to deregister the device from the domain and updating data required to share content in the domain.

[14] The method of claim 1, further comprising limiting the number of registered devices to each domain or the number of domains to which each device is registered to a predetermined number.

[15] An apparatus for managing one or more domains located in a home network, the device comprising a domain data providing unit determining whether to register a first device located in the home network to a domain and providing data required to share content between the first device and a second device registered to the domain according to the determination.

[16] The apparatus of claim 15, further comprising a proximity check unit performing a proximity check of the first device, wherein the domain data providing unit determines whether to register the first device according to the proximity check.

[17] The apparatus of claim 15, further comprising a domain information providing unit providing information on the managed domains to one or more devices located in the home network.

[18] The apparatus of claim 15, wherein the domain data providing unit updates the data and informs registered devices of the update.

[19] The apparatus of claim 15, further comprising a security data providing unit providing security data comprising at least one of a secure time and a device revocation list to devices registered to the domain, wherein the secure time is time information which is a reference for calculating a valid time of content in the domain, and wherein the device revocation list is information on revoked devices.

[20] The apparatus of claim 15, further comprising a device information storage unit storing device information on the registered devices, wherein the domain data providing unit removes stored device information on a device in response to a request to deregister the device from the domain and updates data required to share content in the domain.

[21] A computer readable storage medium having embodied thereon a computer program for the method of claim 1.


[22] A method of registering a device with a domain, the method comprising:

requesting domain information to a domain information providing unit of the domain;
receiving the domain information from the domain information providing unit;
requesting registration of the device with the domain to a domain data providing unit using the domain information; and
receiving a domain key of the domain from the domain information providing unit.

- [23] The method of claim 22, wherein the domain information comprises:
a domain identifier; and
information on the location of the domain data providing unit of the domain corresponding to the domain identifier.
- [24] The method of claim 23, wherein the domain information further comprises:
a domain policy identifier of the domain corresponding to the domain identifier;
and
user information.
- [25] The method of claim 22, further comprising storing device information.
- [26] The method of claim 25, wherein the device information comprises:
a device identifier; and
domain membership validity information of the device.
- [27] The method of claim 26, wherein the domain membership validity information indicates a valid term for which the device is validated as a member of the domain.
- [28] The method of claim 22, further comprising checking the proximity of the device and the domain data providing unit.
- [29] A method of registering a device with a domain, the method comprising:
receiving a request for domain information from the device;
transmitting the domain information to the device;
receiving a request of registration with the domain from the device;
measuring the physical distance between the device and the domain; and
transmitting a domain key of the domain to the device.
- [30] The method of claim 29, wherein the domain information is transmitted by a domain information providing unit, and the domain key is provided by a domain data providing unit.
- [31] The method of claim 30, wherein the domain information comprises:
a domain identifier; and
information on the location of the domain data providing unit of the domain corresponding to the domain identifier.
- [32] The method of claim 31, wherein the domain information further comprises:

- a domain policy identifier of the domain corresponding to the domain identifier;
and
user information.
- [33] The method of claim 29, further comprising storing device information.
- [34] The method of claim 33, wherein the device information comprises:
a device identifier; and
domain membership validity information of the device.
- [35] The method of claim 34, wherein the domain membership validity information indicates a valid term for which the device is validated as a member of the domain.
- [36] A method of generating content that is usable in a domain, the method comprising:
requesting a secure time to a security data providing unit of the domain;
receiving the secure time; and
setting the secure time as a point of time at which the content that is usable in the domain is generated.
- [37] The method of claim 36, further comprising:
requesting a device revocation list of the domain; and
controlling the generation of the content according to the device revocation list of the domain.
- [38] The method of claim 37, further comprising stopping the generation of the content when the device revocation list includes information on the device which generates the content.
- [39] The method of claim 36, further comprising requesting a domain key for encrypting the content.
- [40] The method of claim 39, further comprising encrypting the encryption key of the content using the domain key.
- [41] A method of generating content, the method comprising:
receiving a request for a secure time, which is a point of time at which content that is usable in a domain is generated, from a device which is a member of the domain;
receiving a request for a device revocation list, which includes information on a device which is not a member of the domain, from the device which is a member of the domain; and
providing the device revocation list.
- [42] The method of claim 41, further comprising:
receiving a request for a domain key of the domain; and
transmitting the domain key.

FIG. 1

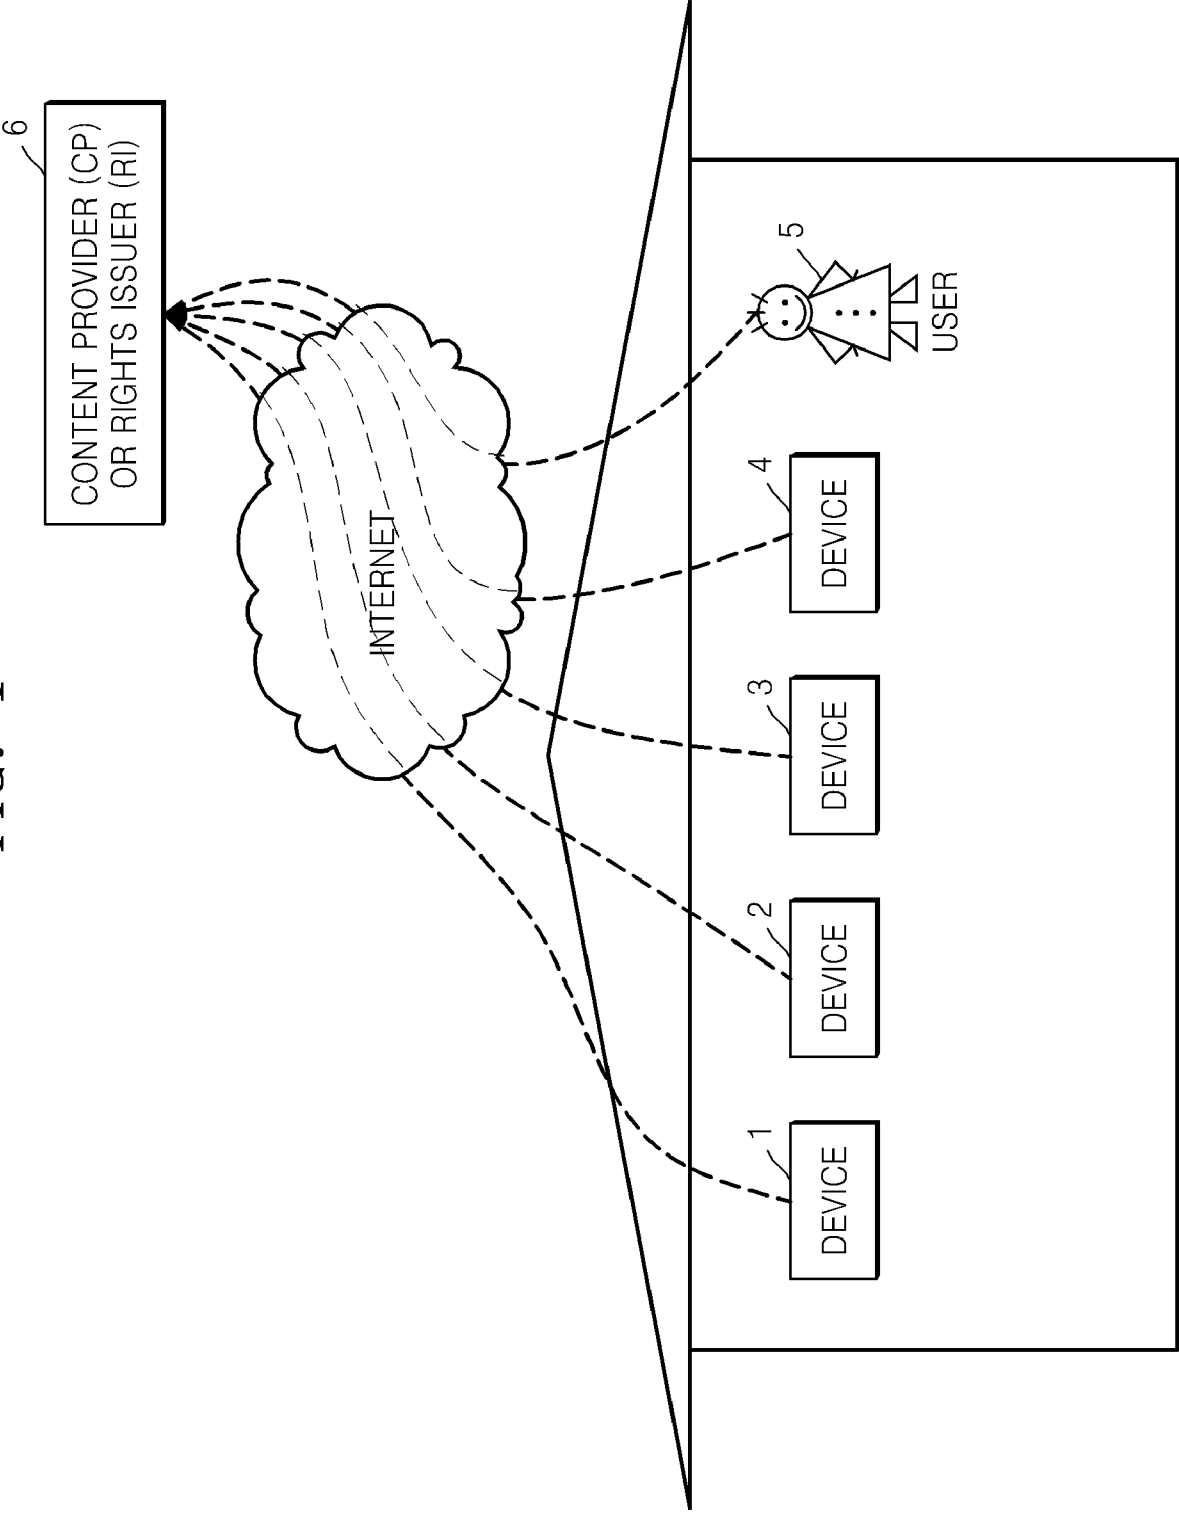

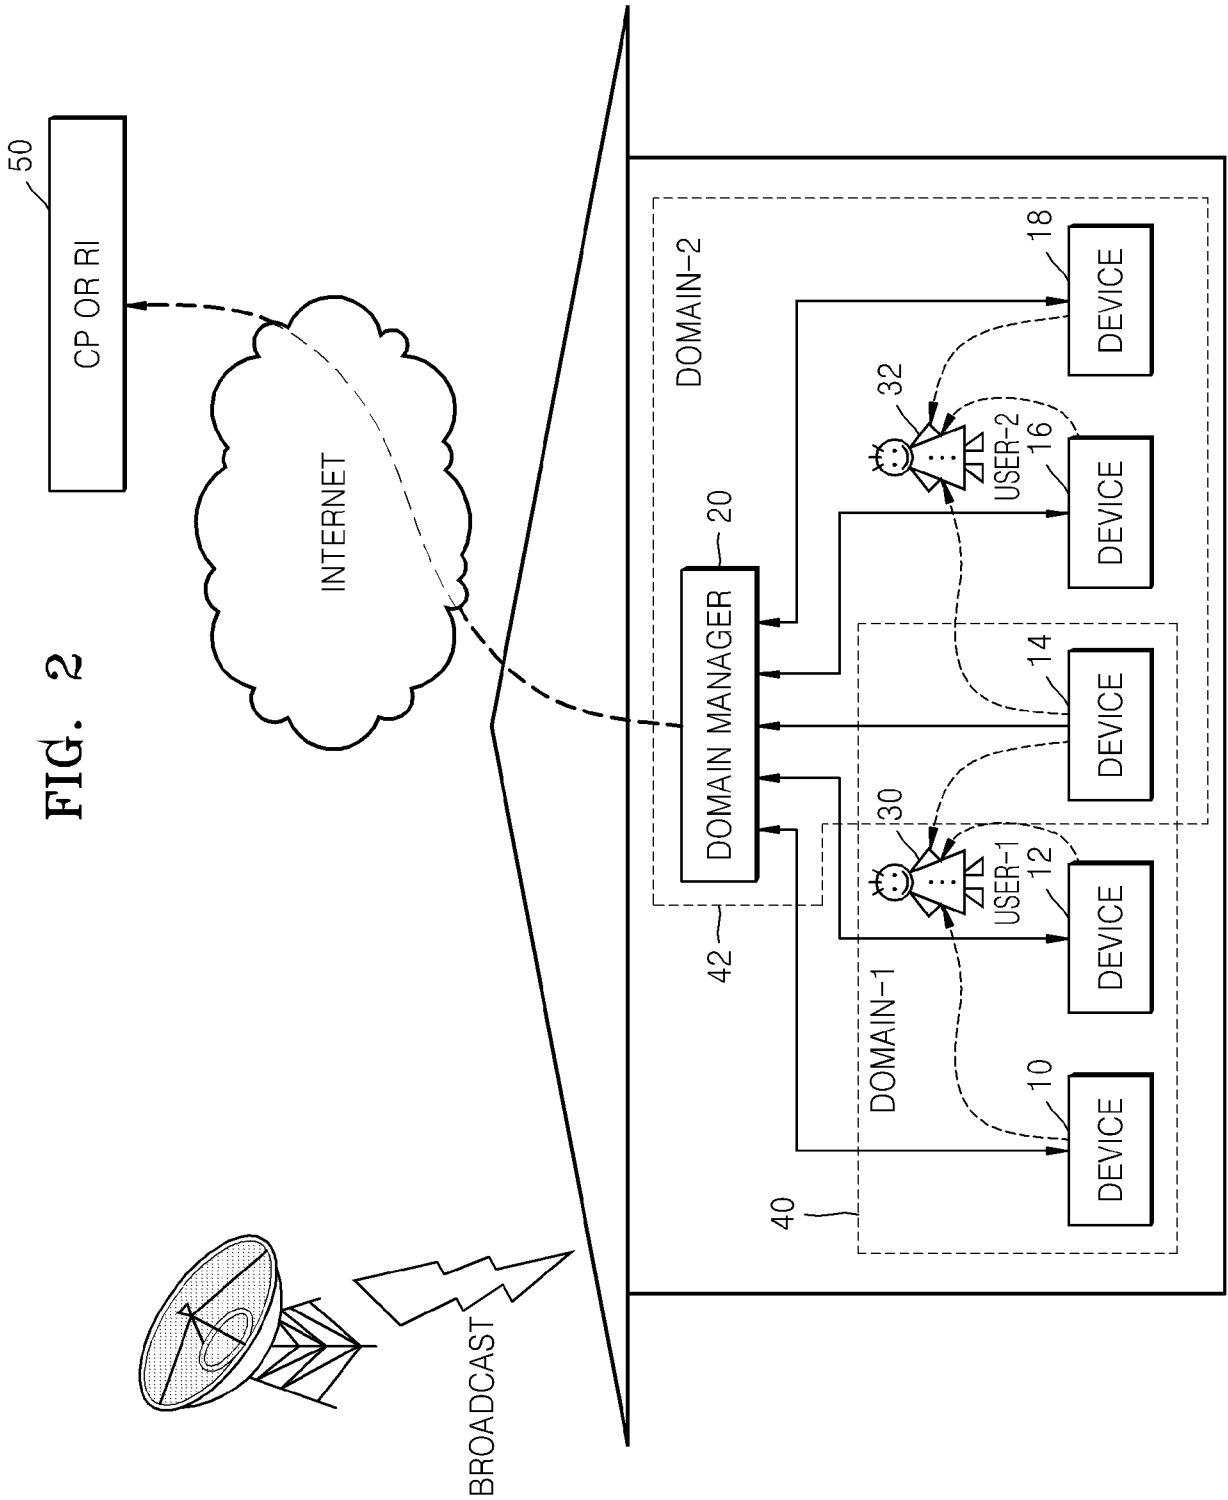


FIG. 3

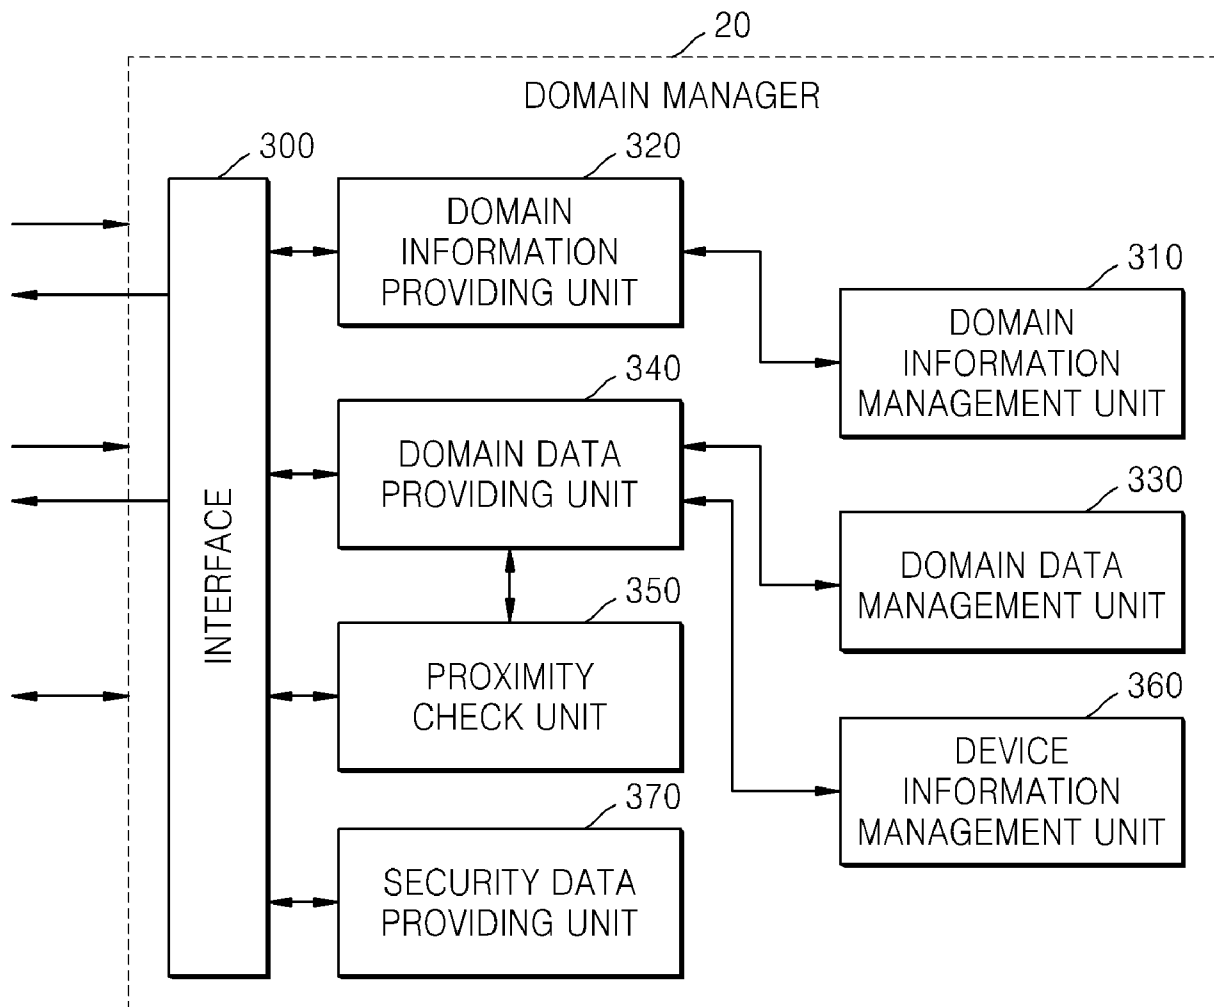


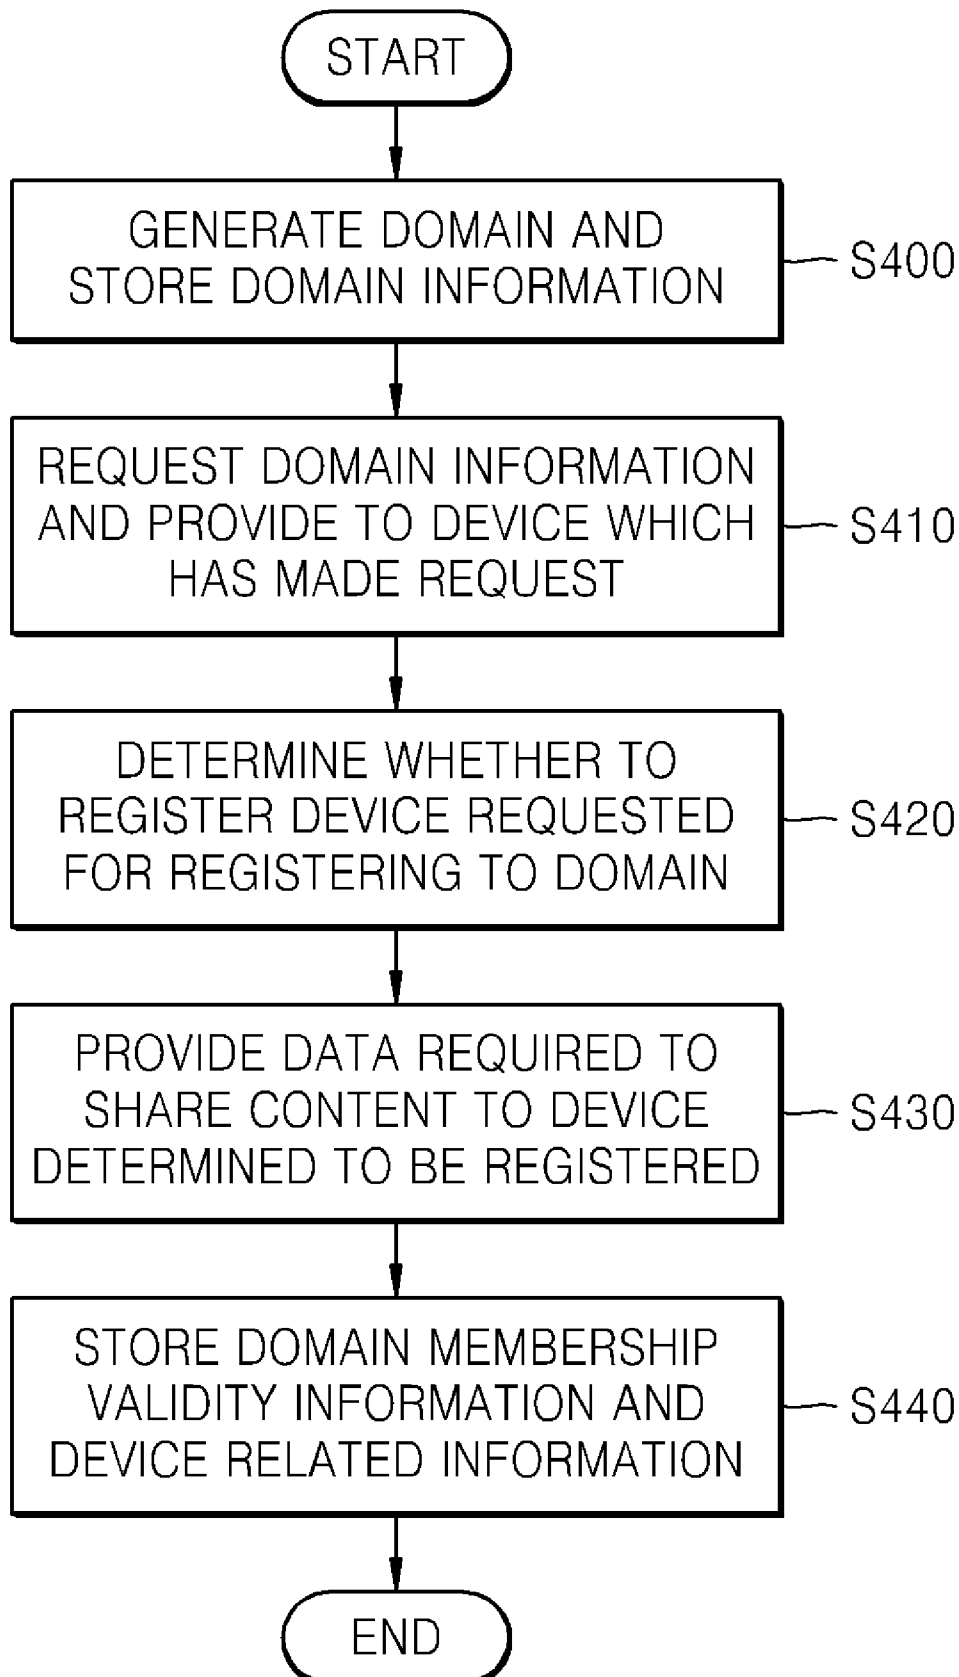
FIG. 4

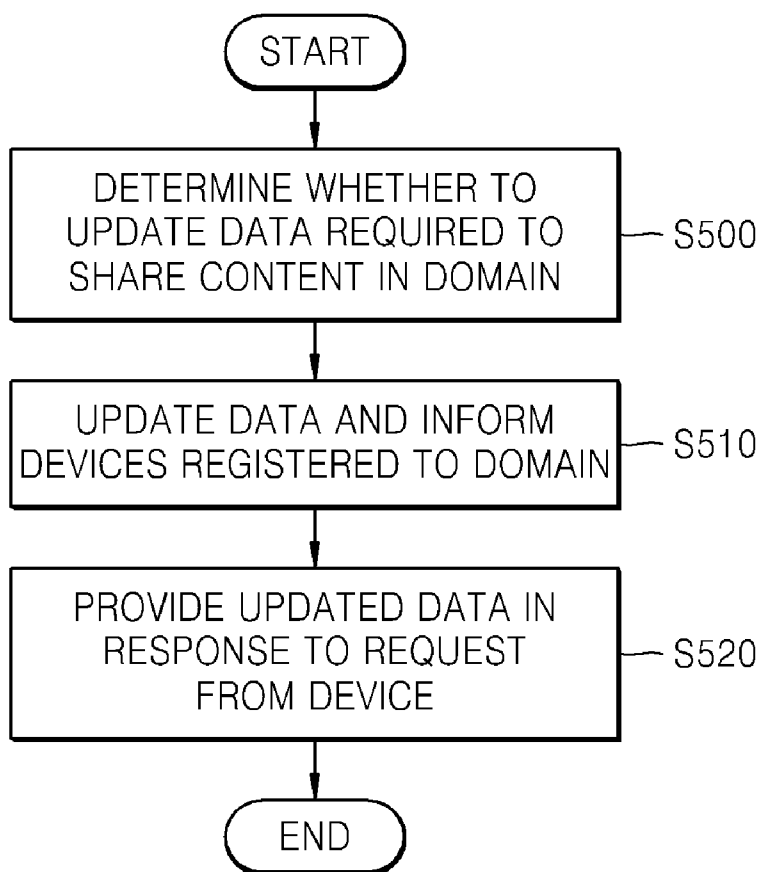
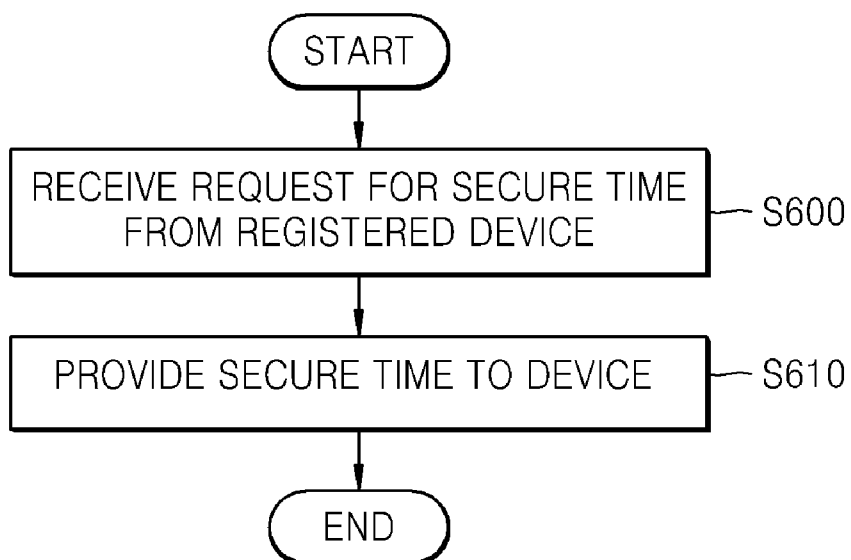
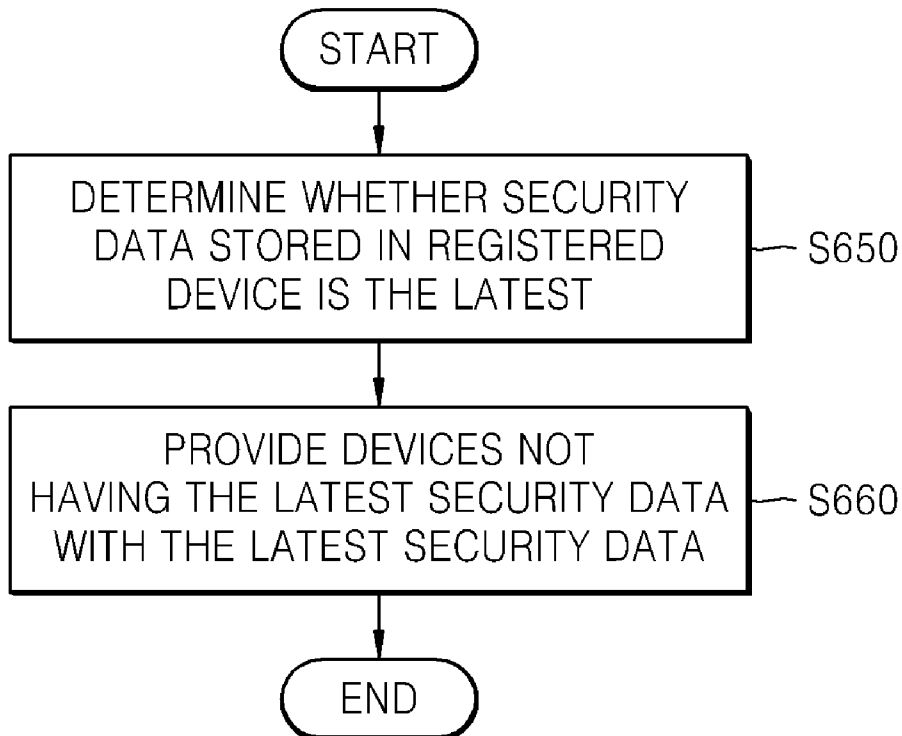
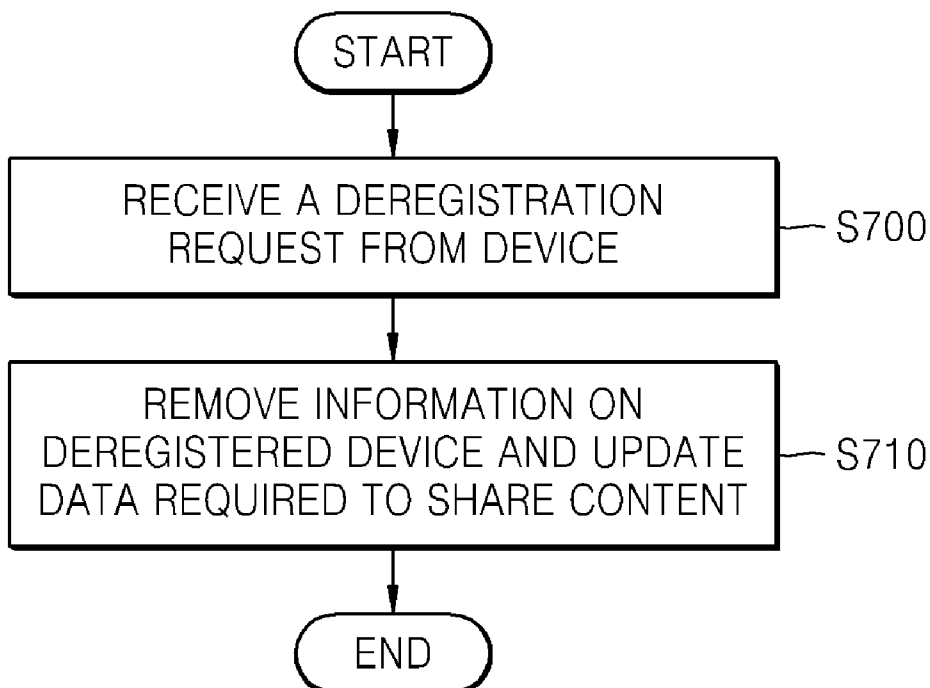
FIG. 5**FIG. 6A**

FIG. 6B**FIG. 7**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2006/005792**A. CLASSIFICATION OF SUBJECT MATTER****H04L 12/24(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC8 H04L 12/24

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility Models and Applications for Utility Models since 1975

Japanese Utility Models and application for Utility Models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKIPASS (KIPO internal) : "Keyword : home network, domain, content share "

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO2005055521A1 (SAMSUNG ELECTRONICS CO., LTD.) 16.06.2005 see abstract; Figures 13-18; Paragraphs [114] - [140].	1 - 42
Y	KR1020020017926 (FEELAMINT NETWORKS, INC.) 07.03.2002 see abstract; Figures 3, 5-7; Page 5, line 15 - Page 7, line 17.	1 - 42
A	WO2005073871A1 (SAMSUNG ELECTRONICS CO., LTD.) 11.08.2005 see abstract; Figure 1; Paragraphs [26]- [52].	1 - 42
A	WO9910825A1 (I2 TECHNOLOGIES INC) 04.03.1999 see abstract; Page 5, line 26 - Page 12, line 23.	1 - 42
A	US6167052A (VPNX.COM, INC.) 26.12.2000 see abstract ; Column 2, line 16 - Column 4, line 65.	1 - 42



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

06 APRIL 2007 (06.04.2007)

Date of mailing of the international search report

06 APRIL 2007 (06.04.2007)

Name and mailing address of the ISA/KR


Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

SHIN, Sung Kil

Telephone No. 82-42-481-5688



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2006/005792

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
----- W02005055521A1	16.06.2005	BR200417068A CA2546670AA CN1906888A EP01690370A1 EP01690375A1 KR1020050052978 KR1020050053471 US2005120216AA US2005120246A1 US2005120246AA US20060049316A1	13.03.2007 16.06.2005 31.01.2007 16.08.2006 16.08.2006 07.06.2005 08.06.2005 02.06.2005 02.06.2005 02.06.2005 09.03.2006
----- KR1020020017926	07.03.2002	NONE	
----- W02005073871A1	11.08.2005	CN1771493A EP01711903A1 EP1711903A1 KR2005042223A KR2005078766A US2005169118A1 US2005169118AA	10.05.2006 18.10.2006 18.10.2006 06.05.2005 08.08.2005 04.08.2005 04.08.2005
----- W09910825A1	04.03.1999	AU9112298A W09910825A1	16.03.1999 04.03.1999
----- US6167052A	26.12.2000	AU199935729A1 AU3572999A1 BR9909754A CA2330385AA CA2330385A1 CN1298592 CN1298592T CN1298592A EP01075749A1 EP1075749A1 IL138974A0 JP14513245 JP2002513245T2 KR1020010052273 NO20005087A NO20005087A0 US06167052 US6167052A W09956436A1	16.11.1999 16.11.1999 19.12.2000 04.11.1999 04.11.1999 06.06.2001 . .T 06.06.2001 14.02.2001 14.02.2001 25.11.2001 08.05.2002 08.05.2002 25.06.2001 05.12.2000 09.10.2000 26.12.2000 26.12.2000 04.11.1999
=====			