

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 June 2006 (22.06.2006)

PCT

(10) International Publication Number
WO 2006/065488 A1

(51) International Patent Classification:
G03B 42/02 (2006.01)

(21) International Application Number:
PCT/US2005/042664

(22) International Filing Date:
23 November 2005 (23.11.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/015,906 17 December 2004 (17.12.2004) US

(71) Applicant (for all designated States except US): **EASTMAN KODAK COMPANY** [US/US]; 343 State Street, Rochester, NY 14650-2201 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KRALLES, Christopher, John** [US/US]; 26 Cedar Wood Road, Rochester, NY 14617 (US). **WENDLANDT, William, Carl** [US/US]; 1347 Middle Road, Rush, NY 14543 (US).

(74) Common Representative: **EASTMAN KODAK COMPANY**; 343 State Street, Rochester, NY 14650-2201 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MULTICASSETTE AUTOLOADER FOR A STORAGE PHOSPHOR READER

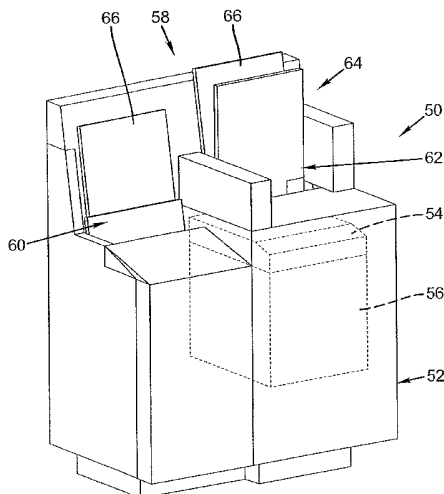

(57) Abstract: A storage phosphor reader includes a multicassette autoloader for vertically oriented storage phosphor cassettes, the autoloader having a front, back, and opposite sides. The autoloader includes an input bin for receiving multiple vertically oriented storage phosphor cassettes stacked together in face-to-face contact such that said cassette faces face front and back; wherein each of said cassettes contains a storage phosphor which is removable from said cassette; and an output bin located beside said input bin, said output bin having a storage phosphor read location at which a storage phosphor is removed from and replaced in a storage phosphor cassette positioned at said storage phosphor read location, and having an output region for read cassettes to be subsequently removed from said output bin.



WO 2006/065488 A1

**MULTICASSETTE AUTOLOADER FOR A STORAGE PHOSPHOR
READER**

FIELD OF THE INVENTION

5 The invention relates generally to the field of computed radiography, and in particular to a multicassette autoloader for a storage phosphor reader. More specifically, the invention relates to a multicassette autoloader which receives a stack of vertically oriented storage phosphor cassettes in an input bin, moves the cassettes serially in a short U path
10 from the input bin to a storage phosphor read location in an output bin and then to an output region of the output bin.

BACKGROUND OF THE INVENTION

 Conventional film/screen radiography uses radiographic films
15 which are not reusable. Computed radiography solves this problem by using reusable storage phosphors that can be exposed, read out, erased and reused many times. In order to protect the storage phosphor from damage during use, it is contained in a cassette from which it is removed during the reading and erasing process. One type of storage phosphor reader receives cassettes, one at a time,
20 oriented horizontally. The cassette containing an exposed storage phosphor is presented to the reader horizontally, the storage phosphor is removed from the cassette and moved along a horizontal path, where it is read and then erased before the storage phosphor is replaced in its cassette. The cassette is then removed and a new cassette manually presented to the reader. In order to increase storage
25 phosphor reader throughput and to relieve the reader user of sequentially loading and unloading storage phosphor cassettes, a multi-cassette autoloader was developed (See: US Patent 5,324,957, issued Jun. 28, 1994, inventor Hejazi). The autoloader disclosed in the latter patent is a separate piece of equipment from the storage phosphor reader and utilizes cog belts to index a plurality of horizontally
30 oriented cassettes to a read site where the storage phosphors are removed from the cassettes and transported into and out of the storage phosphor reader. Because the

cog belts are designed to accept only one size of cassette, the largest, and because many sized cassettes are used in the medical imaging field, pallets are used to handle smaller sized cassettes.

Although the latter autoloader is useful and successful for its
5 intended purposes, it has certain drawbacks. Because the autoloader is a separate piece of equipment, substantial floor space is required to accommodate both the reader and the autoloader. Moreover, the use of pallets requires additional manual operations for the operator and creates storage problems when the pallets are not being utilized. A more compact storage phosphor reader is disclosed in US Patent
10 6,437,359 B1, issued Aug. 20, 2002, inventors Hall et al. As disclosed in the latter patent, the storage phosphor reader receives a storage phosphor cassette in a vertical orientation, removes the storage phosphor from the cassette, transports the storage phosphor along a vertical path where it is read and erased and replaces the storage phosphor in the cassette. An autoloader for such a vertically oriented
15 storage phosphor reader is disclosed in US Patent 5,493,128, issued Feb. 20, 1996, inventor Boutet. The disclosed autoloader is combined with the storage phosphor reader resulting in the need for less floor space for the combined equipment. Moreover, the vertical autoloader automatically handles storage phosphor cassettes of varying sizes without the use of pallets. The vertical autoloader
20 includes a cassette loading station and a cassette unloading station separated by a read site where an exposed storage phosphor is removed from and replaced in the storage phosphor cassette for vertical processing by the storage phosphor reader. Each of the cassette loading and cassette unloading stations includes a plurality of cassette locating slots defined by movable rear and bottom separators and
25 indexers. The operator must load each cassette individually into a loading slot before the next cassette can be loaded. Moreover, the cassette must be loaded with the face oriented 90 degrees from the direction of loading in order to position it correctly into a cassette location slot.

Another generally vertically oriented storage phosphor reader is
30 disclosed in US Patent 4,893,011, issued Jan. 9, 1990, inventors Bauer et al. The disclosed apparatus occupies a large floor area and is not provided with an

autoloader to handle multiple cassettes of varying sizes. Moreover, the storage phosphor is removed from the cassette at one location and replaced in the cassette at another location resulting in inefficiencies.

While such systems may have achieved certain degrees of success
5 in their particular applications, there is a need to provide an autoloader for vertically oriented storage phosphor cassettes of varying sizes which is easy to use, which allows the operator to load multiple cassettes at a time without regard to size and which is easily accessible.

10 SUMMARY OF THE INVENTION

According to the present invention, there is provided a solution to the problems and a fulfillment of the needs discussed above.

According to one aspect of the invention, there is provided a multicassette autoloader for vertically oriented storage phosphor cassettes, the
15 autoloader having a front, back, and opposite sides, comprising:

an input bin for receiving multiple vertically oriented storage phosphor cassettes stacked together in face-to-face contact such that said cassette faces face front and back; wherein each of said cassettes contains a storage phosphor which is removable from said cassette; and

20 an output bin located beside said input bin, said output bin having a storage phosphor read location at which a storage phosphor is removed from and replaced in a storage phosphor cassette positioned at said storage phosphor read location, and having an output region for read cassettes to be subsequently removed from said output bin.

25 The invention has the following advantages.

1. An autoloader is provided for a storage phosphor reader which handles vertically oriented storage phosphor cassettes of varying sizes and which is located at the top of the reader, thus occupying the same footprint as the reader.

2. The autoloader is easy to use and easily accessible by an operator
30 to load multiple cassettes at a time without regard to size and without the necessity of positioning individual cassettes in the autoloader.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other features, and advantages of the invention will be apparent from the following more particular description of the

5 embodiments of the invention, as illustrated in the accompanying drawings.

The elements of the drawings are not necessarily to scale relative to each other.

FIG. 1 is a block diagram showing a computed radiography system including an embodiment of the present invention.

10 FIGS. 2 and 3 are respective left and right front perspective views showing a storage phosphor reader including the present invention.

FIGS. 4 and 5 are respective front perspective and side elevational, diagrammatic views showing a vertical scanning assembly which can be incorporated in the storage phosphor reader shown in FIGS. 2 and 3.

15 FIG. 6 is a top plan, diagrammatic view of the embodiment of the present invention shown in FIGS. 2 and 3.

FIG. 7 is a top plan, diagrammatic view of the embodiment of FIG. 6 showing the storage phosphor cassette flow path.

20 FIGS. 8, 9, 10, and 11 are respective side elevational, diagrammatic views of the embodiment of FIG. 6 showing a sequence of cassette handling operations in the input bin.

FIG. 12 is a top, plan diagrammatic view of the embodiment of FIG. 6 showing the stripping of a storage phosphor cassette from the input bin past the bar code scanner.

25 FIG. 13 is a top, plan diagrammatic view of the embodiment of FIG. 6 showing the stripping of a storage phosphor cassette to the side shuttle at the pre-read location of the output bin.

FIG. 14 is a top, plan diagrammatic view of the embodiment of FIG. 6 showing the homing of the stripper, cassette stack pullback, and cassette lifter mechanism.

30 FIGS. 15, 16 and 17 are respective top, plan diagrammatic views of the embodiment of FIG. 6 showing translation of the storage phosphor cassette

from the pre-read location of the output bin to the read location where a storage phosphor is removed from and replaced in the storage phosphor cassette.

FIG. 18 is a top, plan diagrammatic view of the embodiment of FIG. 6 showing engagement of the size changer/light curtain.

5 FIG. 19 is a top, plan diagrammatic view of the embodiment of FIG. 6 showing engagement of the clamps at the read location.

FIGS. 20 – 22 are top, plan diagrammatic views of the embodiment of FIG. 6 showing operations preparing for the next scan cycle.

10 FIG. 23 is a top, plan diagrammatic view of the embodiment of FIG. 6 showing transport of the read storage phosphor cassette from the read location to a post-read location of the output bin and transport of the next unread storage phosphor cassette into the read location.

15 FIGS. 24 and 25 are top, plan diagrammatic views of the embodiment of FIG. 6 respectively showing transport of the read storage phosphor cassette into a collator and indexing of the collator by one position for eventual removal from the output bin.

DETAILED DESCRIPTION OF THE INVENTION

20 The following is a detailed description of the preferred embodiments of the invention, reference being made to the drawings in which the same reference numerals identify the same elements of structure in each of the several figures.

25 The multicassette vertical autoloader of the present invention is used with a storage phosphor reader which is part of a computed radiography system. In general, computed radiography utilizes the principle that exposure of a storage phosphor to a radiographic image produces a corresponding latent image in the storage phosphor. If the storage phosphor is raster scanned (e.g., by means of a laser) in a storage phosphor reader with light of a first wavelength, the latent image will be emitted as a light image at a second wavelength. The emitted light
30 image is converted into a digital image which can be processed, stored, displayed, and used to produce a hardcopy (film, paper) radiographic image.

Fig. 1 shows a generic computed radiography system 10 including the present invention. X-ray source 12 irradiates object of interest 14 (such as a body part) to produce a radiographic image which exposes storage phosphor (SP) 16. The latent radiographic image stored in storage phosphor 16 is read out in storage phosphor read and erase 18 as a digital radiographic image 20. The storage phosphor 16 is erased in SP read and erase 18 so that it can be reused. The digital radiographic image 20 can be processed to enhance the image, stored for later use, displayed on a display monitor for diagnostic purposes, transmitted to a remote location and/or used to produce a hard copy print (film or paper).

Figs. 2 and 3 are respective left front and right front perspective views of a storage phosphor reader including an embodiment of the multicassette vertical autoloader of the present invention. As shown, storage phosphor reader 50 includes a housing 52 for supporting the components of reader 50, such as read module 54 and erase module 56 (both shown in dashed lines in Fig. 2). Multicassette, vertical autoloader 58 is mounted on the top of and forms an integral part of reader 50 and thus occupies the same footprint as reader 50. Autoloader 58 includes an input bin 60, an output bin 62 located beside input bin 60, and a storage phosphor read location 64 located in output bin 62 (shown in greater detail later). Autoloader 58 also includes a front 51, back 53, and opposite sides 55 and 57 (Fig. 6).

One or more storage phosphor cassettes 66 (each of which contains a storage phosphor which is removable from cassette 66) are loaded as a stack into input bin 60 in face-to-face contact and such that the cassette faces face front and back. The foremost cassette 66 in the stack of cassettes 66 is transported from input bin 60 to the storage phosphor read location 64 of output bin 62. At read location 64, the storage phosphor contained in cassette 66 is removed from cassette 66 and transported vertically past read module 54 and erase module 56. The read and erased storage phosphor is then replaced in cassette 66 which is transported out of read location 64 to an output region of output bin 62.

Referring now to Figs. 4 and 5 there is shown an exemplary vertical assembly for transporting a storage phosphor from cassette 66, past read and erase modules 54, 56 and then back to cassette 66 (The assembly described in greater detail in US Patent 6,437,359 B1, issued Aug. 20, 2002, inventors Hall et al. can be used or any other suitable assembly). As shown, storage phosphor cassette 66 is held at storage phosphor read location 64 of storage phosphor reader 50 by clamps 68 and 70. A storage phosphor transport assembly 72 removes storage phosphor 74 from cassette 66 and transports storage phosphor 74 vertically past read module 54 and erase module 56. Transport assembly 72 then transports storage phosphor 74 vertically to replace it in cassette 66. The vertical transport directions of storage phosphor 74 are represented by bidirectional arrow 76.

Referring now to Figs. 6 – 25 there will be described in greater detail, the structure and operation of an embodiment of the present invention shown in Figs. 2 and 3. Referring to Fig. 6, autoloader 58 includes side-by-side input bin 60 and output bin 62. Storage phosphor read location 64 is located in output bin 62. Input bin 60 has a first inclined bottom wall 78 and a second reverse inclined bottom wall 80 (Fig. 8) having guides 82 (Fig. 6) to assist in gravity feeding of cassettes 66. Cassette stack pullback 84 and cassette lifter mechanism 86 are also located in input bin 60. Cassette stripper 88 transports a cassette 66 from input bin 60 to output bin 62 past bar code scanner 90. Output bin 62 includes fixed clamp 92, movable clamp 94, loaders 96, unloaders 98, side shuttle 100, ejector 102, stripper 104, size changer/light curtain 106, side cog belt 108, and bottom belts 110. Cassettes 66 are shown in Fig. 6 in input bin 60 and output bin 62. A cassette 66 is also shown at read location 64.

Fig. 7 is a diagrammatic view showing the short-U transport path of cassettes in autoloader 50. As shown, storage phosphor cassettes 66 of different sizes are stacked face-to-face in input bin 60 such that the cassette faces face front and back (arrows 120 and 122). The leading unread cassette 66 in input bin 60 is transported from input bin 60 to output bin 62 (arrows 124 and 126). The unread cassette 66 is then transported to storage phosphor read location 64 (arrow 128). After the storage phosphor has been replaced in a cassette 66 at read location 64,

the cassette 66 is transported out of read location 64 and into cog belt 108 (arrows 130 and 132) which transports the cassette to the front of output bin 62 for removal from autoloader 50 from the front, diagonally, and/or from the side (arrows 134, 136, 138).

5 Referring now to Figs. 8 – 11, there will be described the operation of cassette stack pullback 84 and cassette lifter mechanism 86. Cassettes 66 are first guided along first inclined bottom wall 78 before being deposited on second inclined bottom wall 80 in a face-to-face stack against front wall 79 through the assistance of gravity (See Fig. 8). Cassette lifter mechanism 86 lifts the leading
10 cassette 66 (arrow 85) to expose the bottom edge of the next cassette 66 (Fig. 9). Stack pullback 84 pulls the stack of cassettes 66 in the direction of arrow 140 away from the foremost cassette 66 up bottom wall 80 in order to reduce the load on the foremost cassette 66 and to separate the cassettes (Fig. 10). Cassette lifter mechanism 86 raises the foremost cassette 66 in the direction of arrow 142 for
15 stripping while cassette stack pullback 84 continues to hold the other cassettes 66 in the stack away from the foremost cassette 66 (Fig. 11).

Cassette 66 is first transported by cassette stripper 88 (arrow 201) to a barcode scan position (Fig. 12) where the barcode on cassette 66 is read by bar code scanner 90 and verified, and then to a pre-read location 200 in output bin 62
20 in the direction of arrow 202 (Fig. 13) into contact with side shuttle 100 and loaders 96. Cassette stripper 88 is returned to the home position (arrow 204) in input bin 60 in preparation for transport of the next cassette 66 (Fig. 14). Cassette stack pullback 84 and cassette lifter mechanism 86 are also returned to their home positions. Loaders 96 and side shuttle 100 now transport cassette 66 from the pre-
25 read location 200 to the storage phosphor read location 64 as indicated by arrows 150 (Figs. 15 and 16). Ejector 102 ejects cassette 66 in the direction of arrow 205 out of side shuttle 100, and side shuttle 100 and loaders 96 are returned to their home position in the direction of arrows 206 (Fig. 17). Size changer /light curtain 106 is moved in the direction of arrow 208 into place to bias the cassette 66
30 (Fig.18), and movable clamp 94 is moved in the direction of arrow 210 into contact with cassette 66 to clamp it with fixed clamp 92 during the read cycle

(Fig. 19). Ejector 102 and side shuttle 100 are then returned to their home positions to prepare for the next cycle as indicated by arrows 160, 162 (Fig. 20).

Fig. 21 shows transport of the next unread cassette 66 into the pre-read location 200 by cassette stripper 88 as indicated by arrow 164. A pre-read location is desirable in order to reduce the total cycle time of the device. This is accomplished by allowing the simultaneous reading of the SP with the next unread cassette being stripped into the pre-read location. After the read cycle is completed and the storage phosphor replaced in cassette 66, clamp 94 is moved out of contact with the read cassette 66, size changer 106 moves cassette 66 in the direction of arrow 212 into side shuttle 100, and unloaders 98 are moved in the direction of arrow 214 into contact with read cassette 66 (Fig. 22). Read cassette 66 is then moved by side shuttle 100 and unloaders 98 into a post read location 170 (arrows 162) and loaders 96 and side shuttle 100 move the next unread cassette 66 into read location 64 (Fig. 23- arrows 164.). Stripper 104 now transfers read cassette 66 from side shuttle 100 to side cog belt 108 and bottom belts 110 (Fig. 24 –arrow 172). Finally, stripper 104 is returned to the home position (arrow 174) and side cog belt 108 and bottom belts 110 transport the read cassette 66 forward (arrow 176) to output region 178 of output bin 62 for subsequent removal.

The invention has been described in detail with particular reference to a presently preferred embodiment, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention. The presently disclosed embodiments are therefore considered in all respects to be illustrative and not restrictive. The scope of the invention is indicated by the appended claims, and all changes that come within the meaning and range of equivalents thereof are intended to be embraced therein.

PARTS LIST

- 10 – computed radiography system
- 12 – X-ray source
- 14 – object of interest (body part)
- 16 – storage phosphor (SP)
- 18 – storage phosphor read and erase
- 20 – digital radiographic image
- 50 – storage phosphor reader
- 51 - front
- 52 – housing
- 53 - back
- 54 – read module
- 55 - side
- 56 – erase module
- 57 - side
- 58 – vertical autoloader
- 60 – input bin
- 62 – output bin
- 64 - storage phosphor read location
- 66 - storage phosphor cassette
- 68, 70 - clamps
- 72 – storage phosphor transport assembly
- 74 – storage phosphor
- 76 – bidirectional arrow
- 78 - first inclined bottom wall
- 79 – front wall
- 80 – second reverse inclined bottom wall
- 82 – guides
- 84 – cassette stack pullback
- 85 - arrow
- 86 – cassette lifter mechanism

88 – cassette stripper
 90 – bar code scanner
 92 – fixed clamp
 94 – movable clamp
 96 – loaders
 98 – unloaders
 100 – side shuttle
 102 – ejector
 104 - stripper
 106 – size changer/light curtain
 108 – side cog belt
 110 - bottom belts
 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142 – arrows
 150 – arrow
 160, 162, 164 – arrows
 170 – post read location
 172, 174, 176, - arrows
 178 – output region of output bin 62
 200 – pre-read location
 201, 202, 204, 205, 206, 208, 210, 212, 214 – arrows

WHAT IS CLAIMED IS:

1. A multicassette autoloader (58) for vertically oriented storage phosphor cassettes (66), the autoloader (58) having a front (51), back (53),
5 and opposite sides(55, 57), comprising:
an input bin (60 for receiving multiple vertically oriented storage phosphor cassettes (66) stacked together in face-to-face contact such that said cassette faces face front and back; wherein each of said cassettes (66) contains a storage phosphor (74) which is removable from said cassette (66); and
10 an output bin (62) located beside said input bin (60), said output bin (62) having a storage phosphor read location (64) at which a storage phosphor (74) is removed from and replaced in a storage phosphor cassette (66) positioned at said storage phosphor read location (64), and having an output region (178) for read cassettes (66)to be subsequently removed from said output bin (62).
15
2. The autoloader of claim 1 including an assembly for transporting a storage phosphor cassette in a short U path from said input bin, to said storage phosphor read location in said output bin and then to said output region of said output bin for subsequent removal from said output bin.
20
3. The autoloader of claim 1 wherein said input bin has an inclined bottom wall to assist in gravity feeding a received stack of cassettes.
4. The autoloader of claim 2 wherein said assembly includes a
25 stripper for transporting a cassette from said input bin to said output bin.
5. The autoloader of claim 4 wherein said assembly includes in said input bin a cassette stack pullback mechanism and a cassette lifter mechanism operating in cooperation with said stripper to facilitate transport of a
30 cassette from said input bin by said stripper.

6. The autoloader of claim 1 including a bar code scanner and wherein as a cassette is transported from said input bin to said output bin it passes said bar code scanner which scans a barcode on said cassette.

5 7. The autoloader of claim 4 wherein said output bin includes a pre-read location in advance of said read location and wherein said cassette is transported by said stripper to said pre-read location in said output bin.

8. The autoloader of claim 7 wherein said assembly includes a
10 side and bottom shuttle in said output bin for transporting said cassette from said pre-read location to said read location and then to a post-read location.

9. The autoloader of claim 1 wherein said output bin includes a clamp to hold a cassette at said read location.

15

10. The autoloader of claim 2 wherein said assembly includes in said output bin a cog shuttle for transporting read cassettes to said output region of said output bin for removal.

20 11. The autoloader of claim 1 including a storage phosphor reader, wherein said autoloader is mounted on the top of said reader.


12. The autoloader of claim 11 wherein said autoloader is integral with said storage phosphor reader.

25


13. The autoloader of claim 11 wherein said storage phosphor reader includes a read module, an erase module, and a vertical assembly positioned at said read location for removing a storage phosphor from a cassette positioned at said read location, for transporting said removed storage phosphor past said read and erase modules, and for replacing said storage phosphor in said
30 cassette.

1/25

10 →

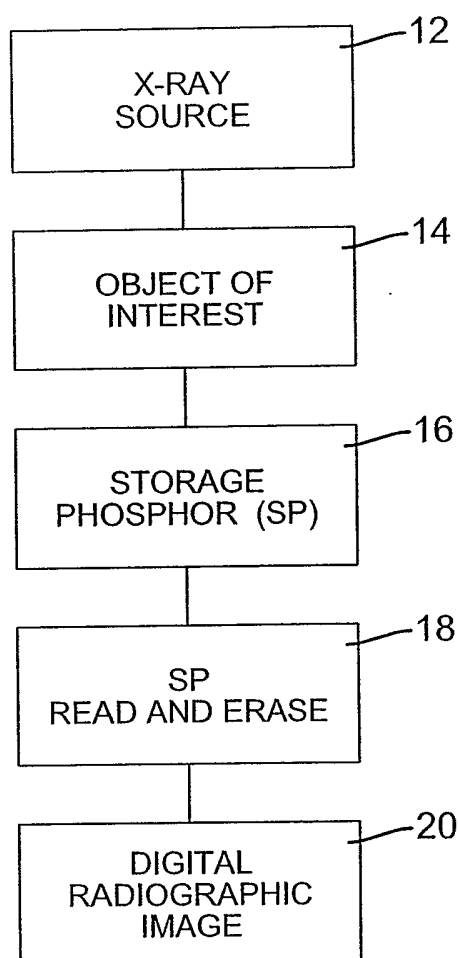**FIG. 1**

2/25

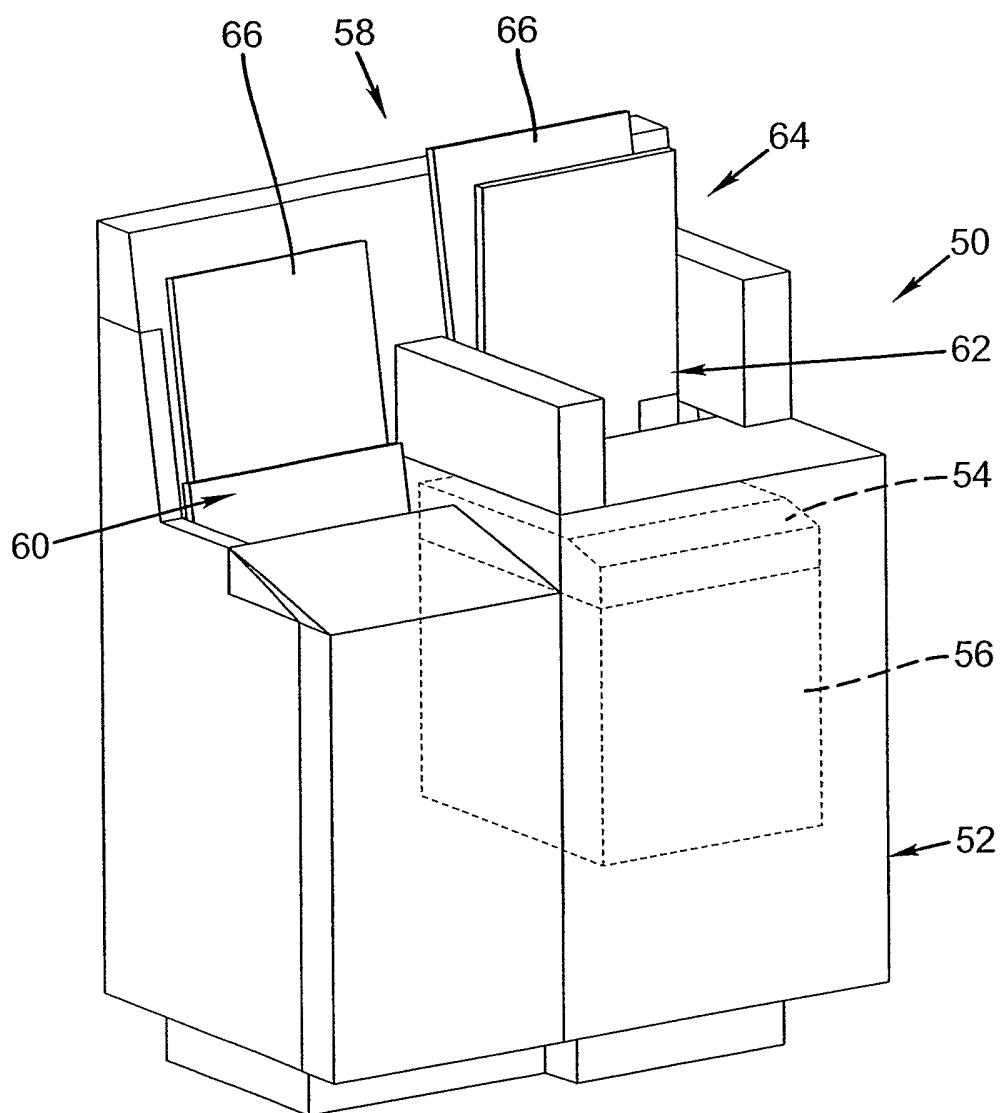**FIG. 2**

3/25

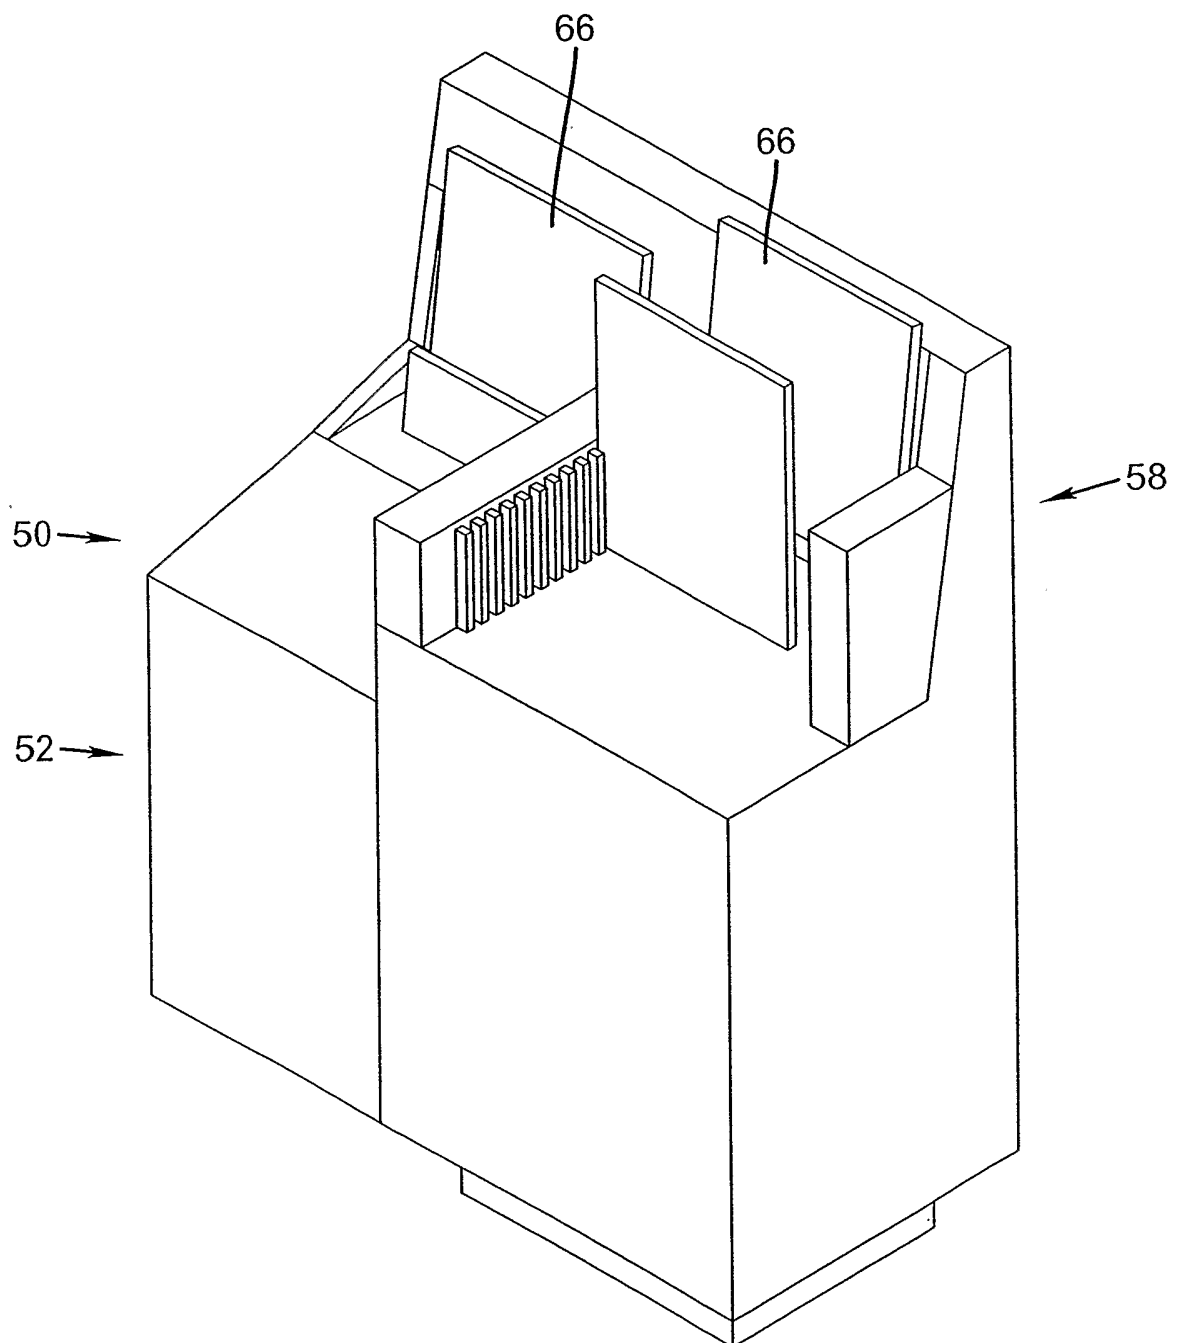


FIG. 3

4/25

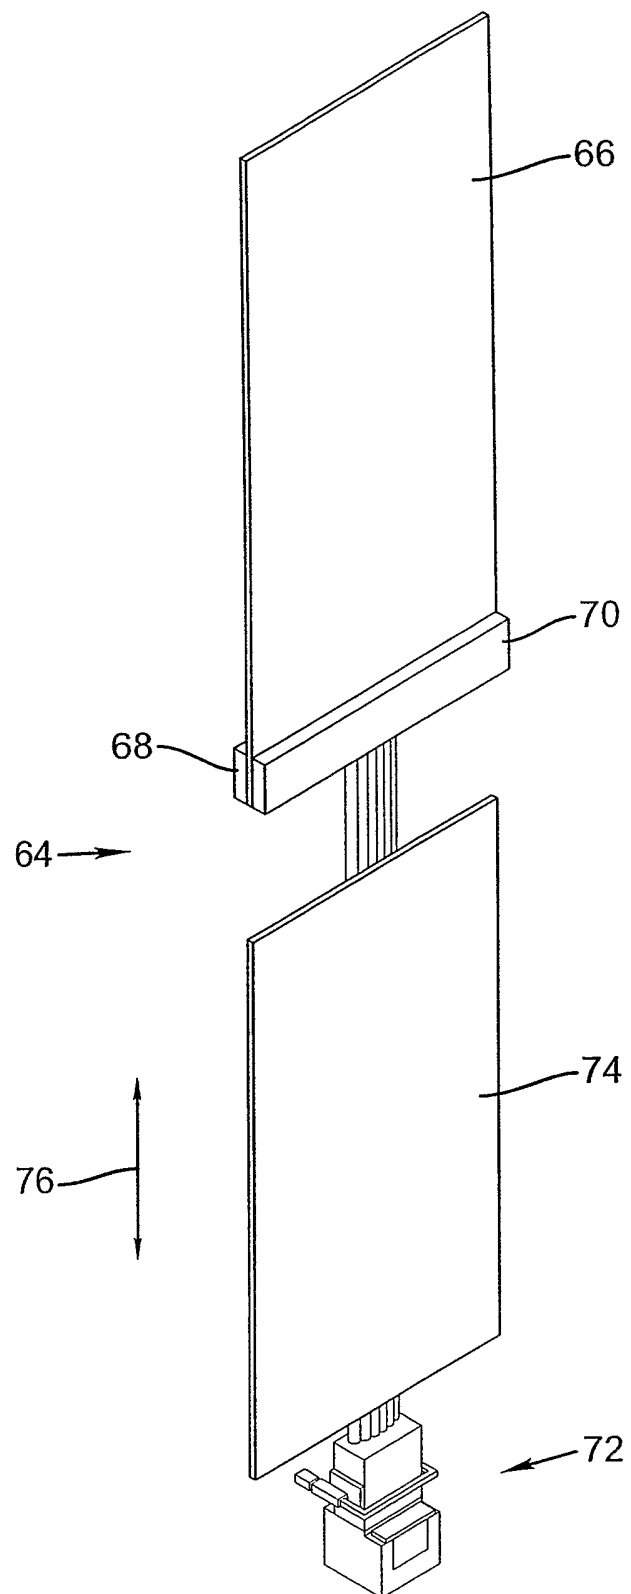


FIG. 4

5/25

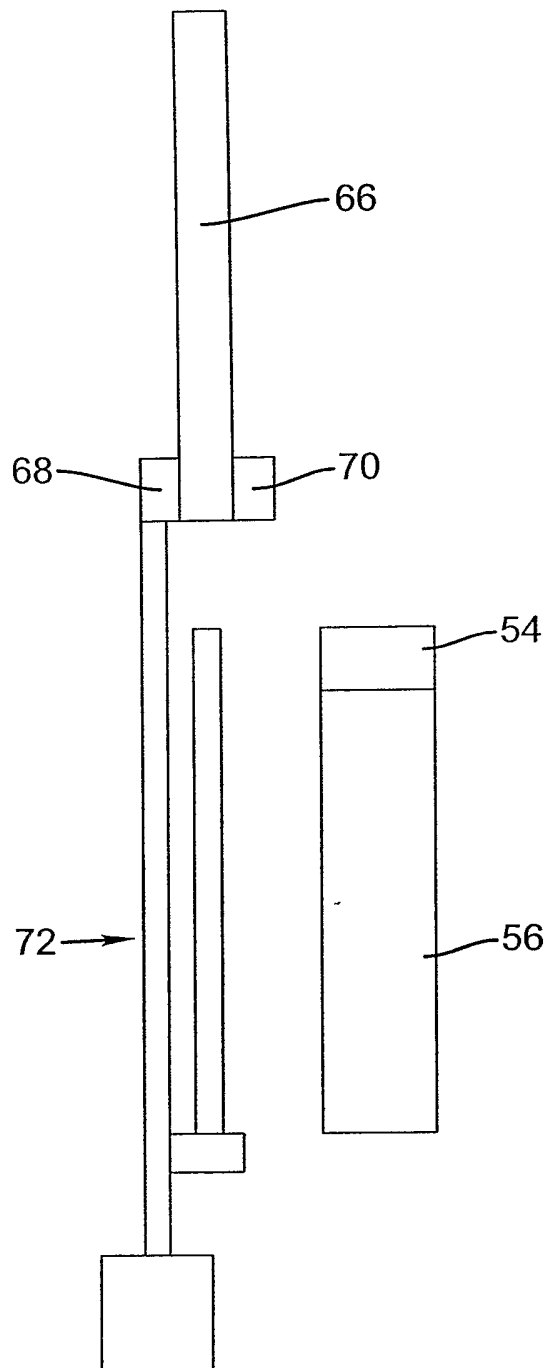


FIG. 5

6/25

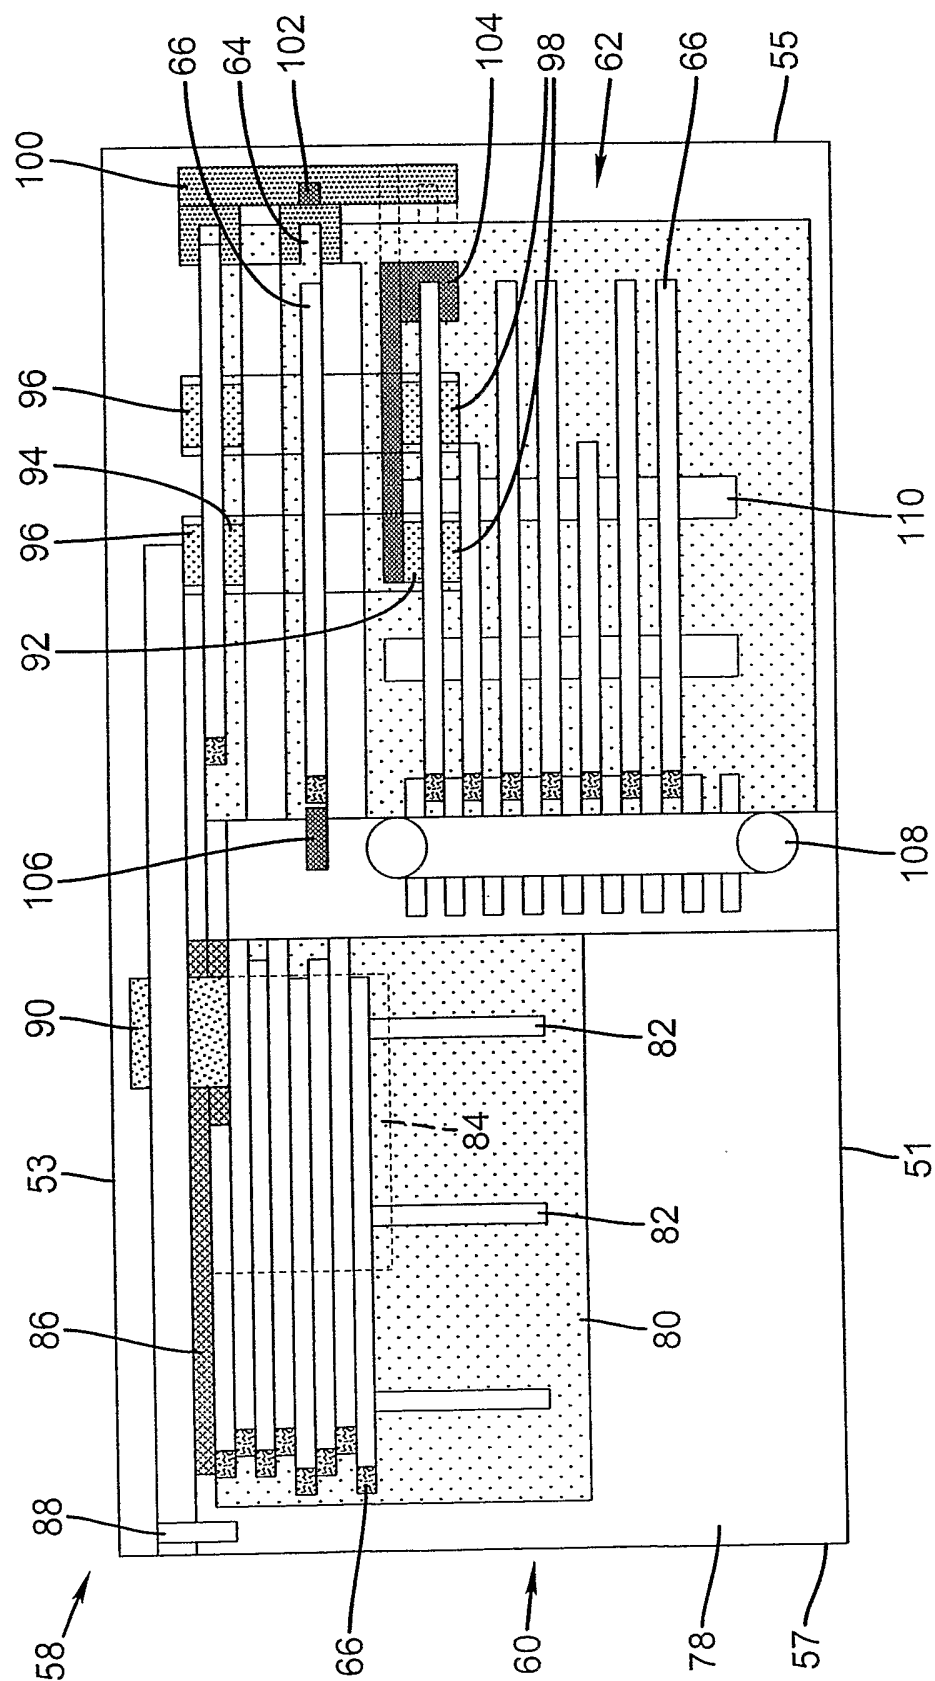


FIG. 6

7/25

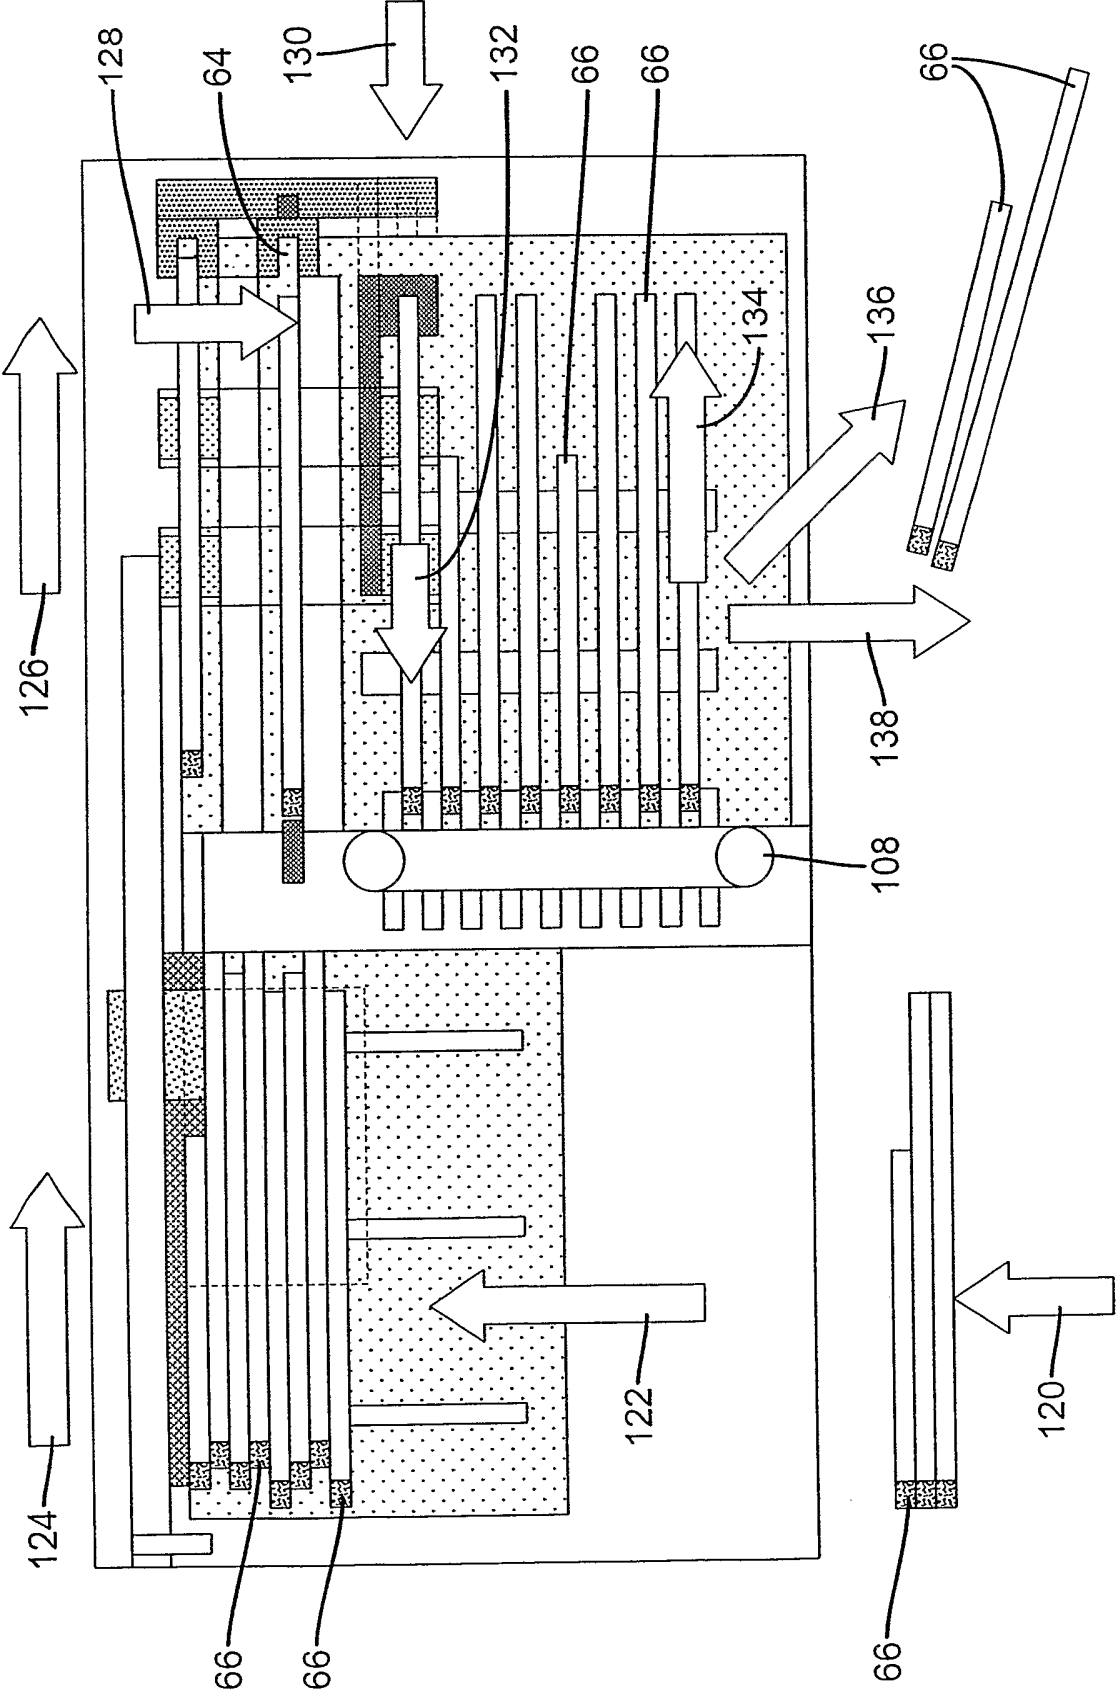


FIG. 7

8/25

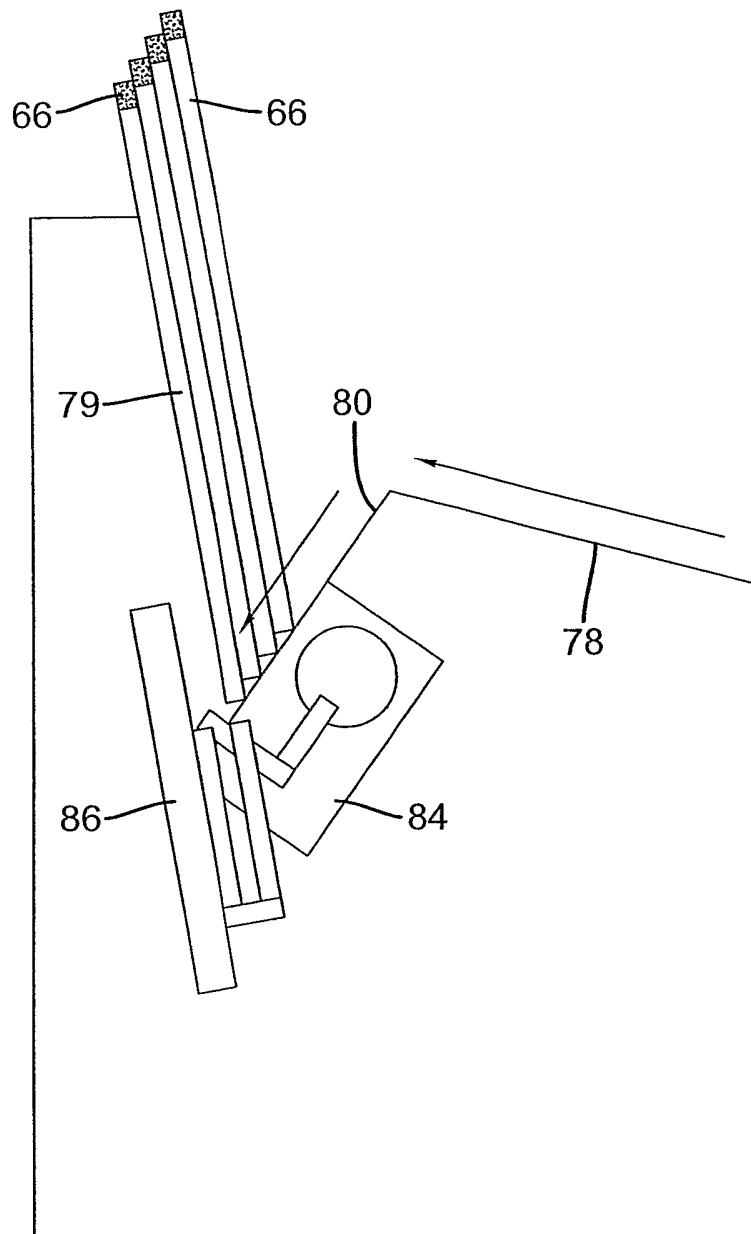


FIG. 8

9/25

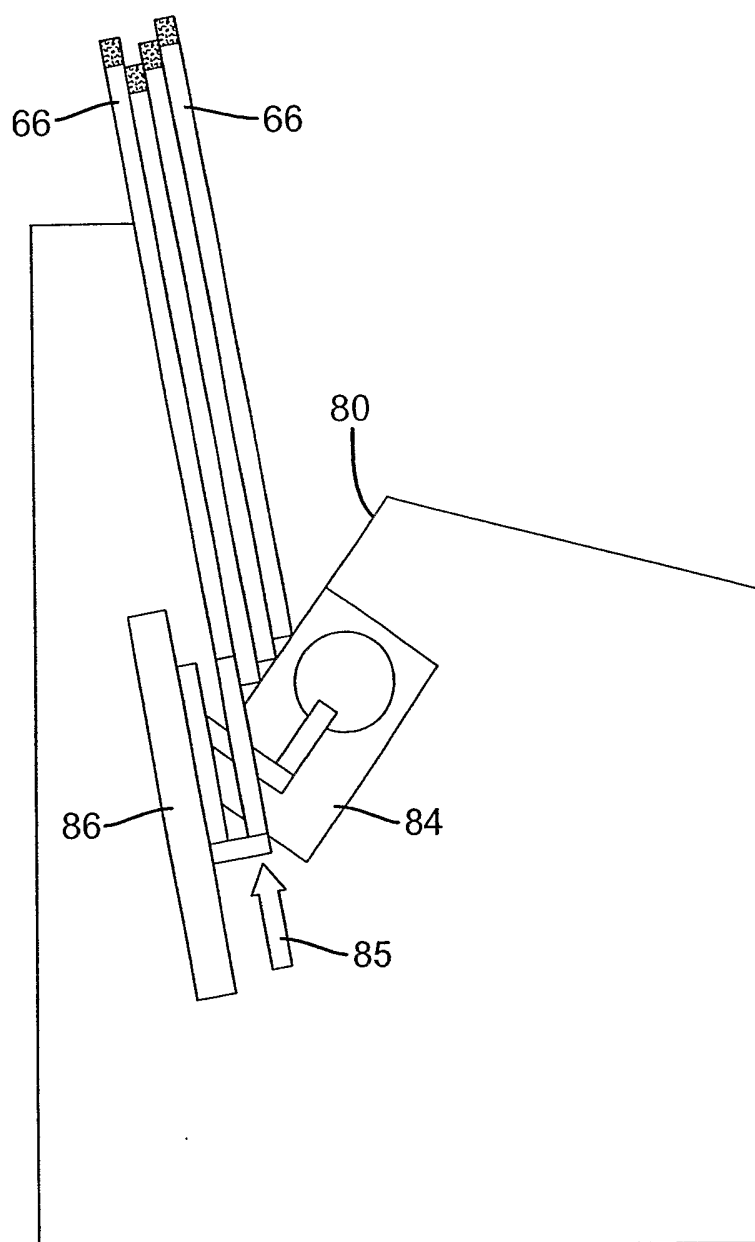
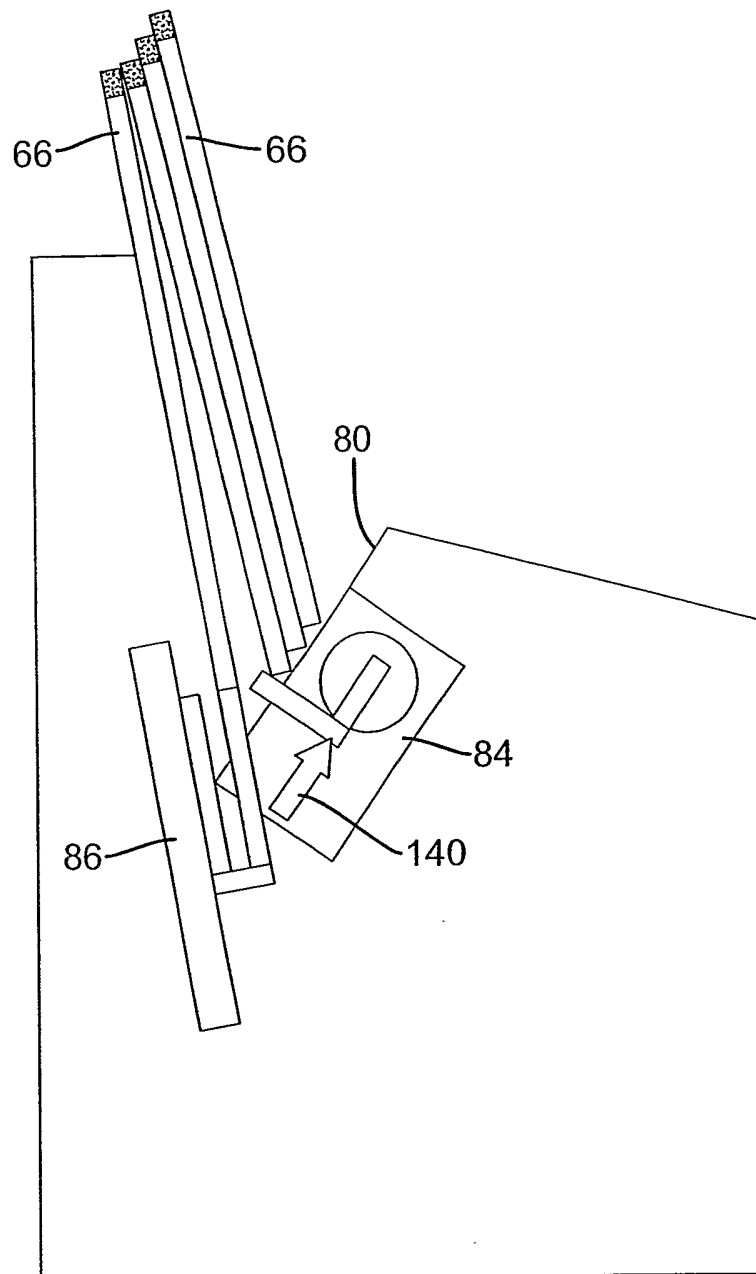
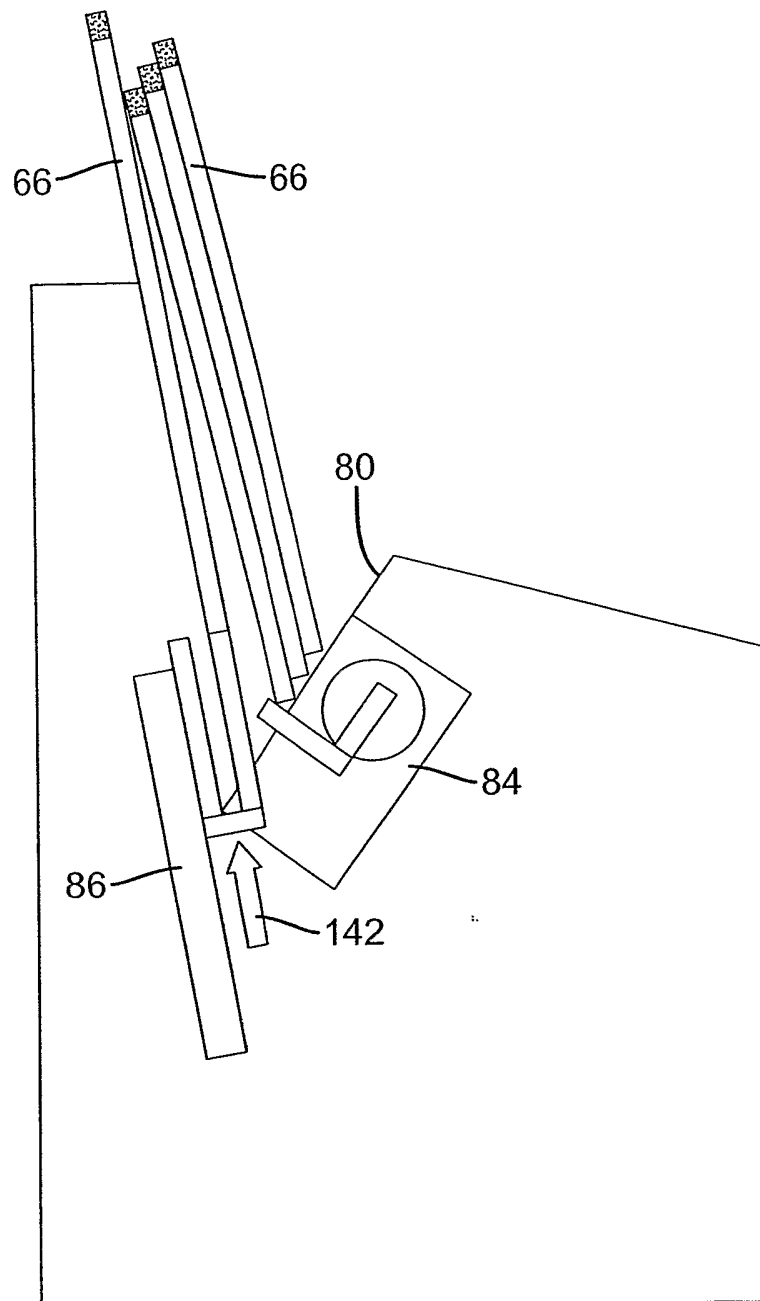


FIG. 9

10/25

**FIG. 10**

11/25

**FIG. 11**

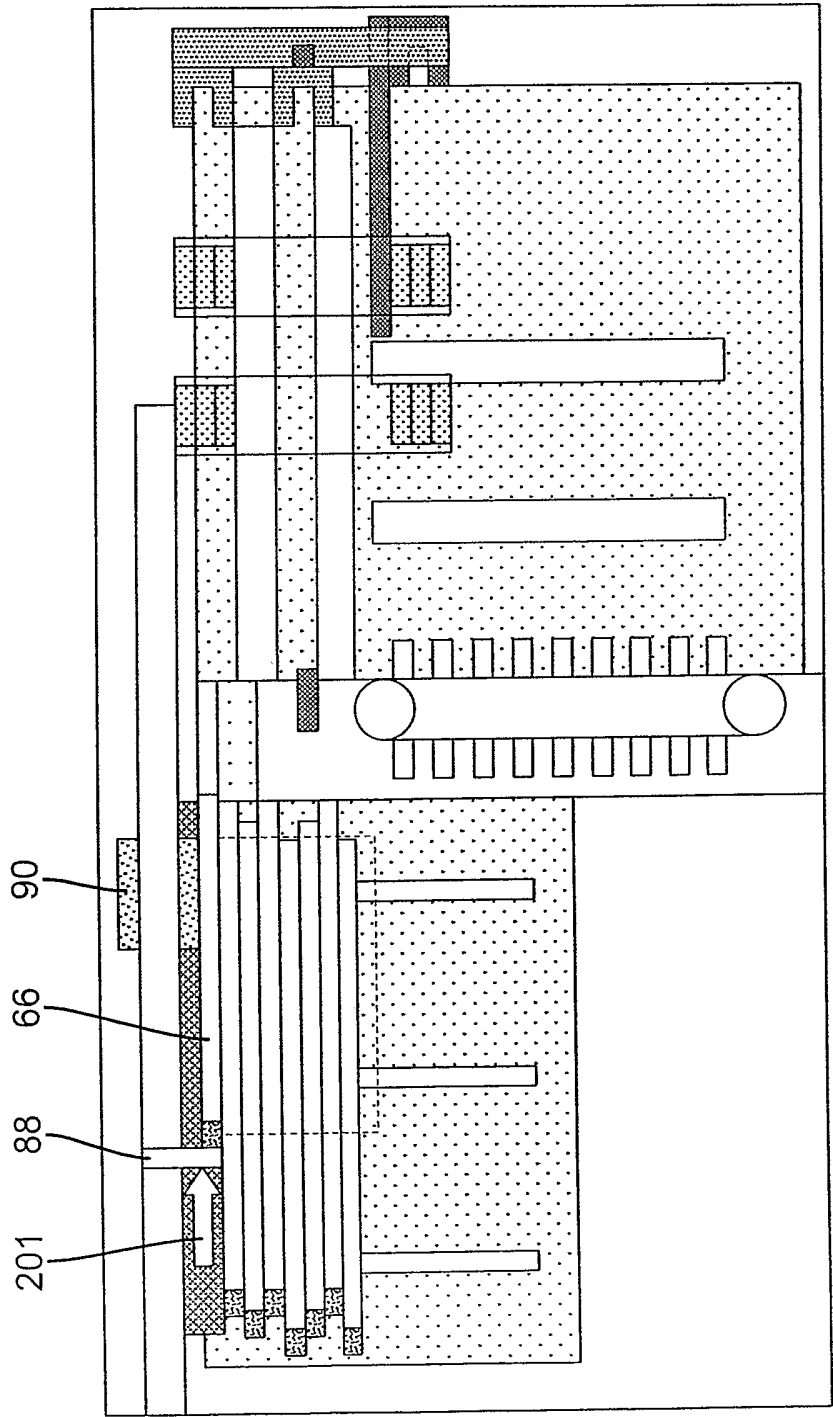


FIG. 12

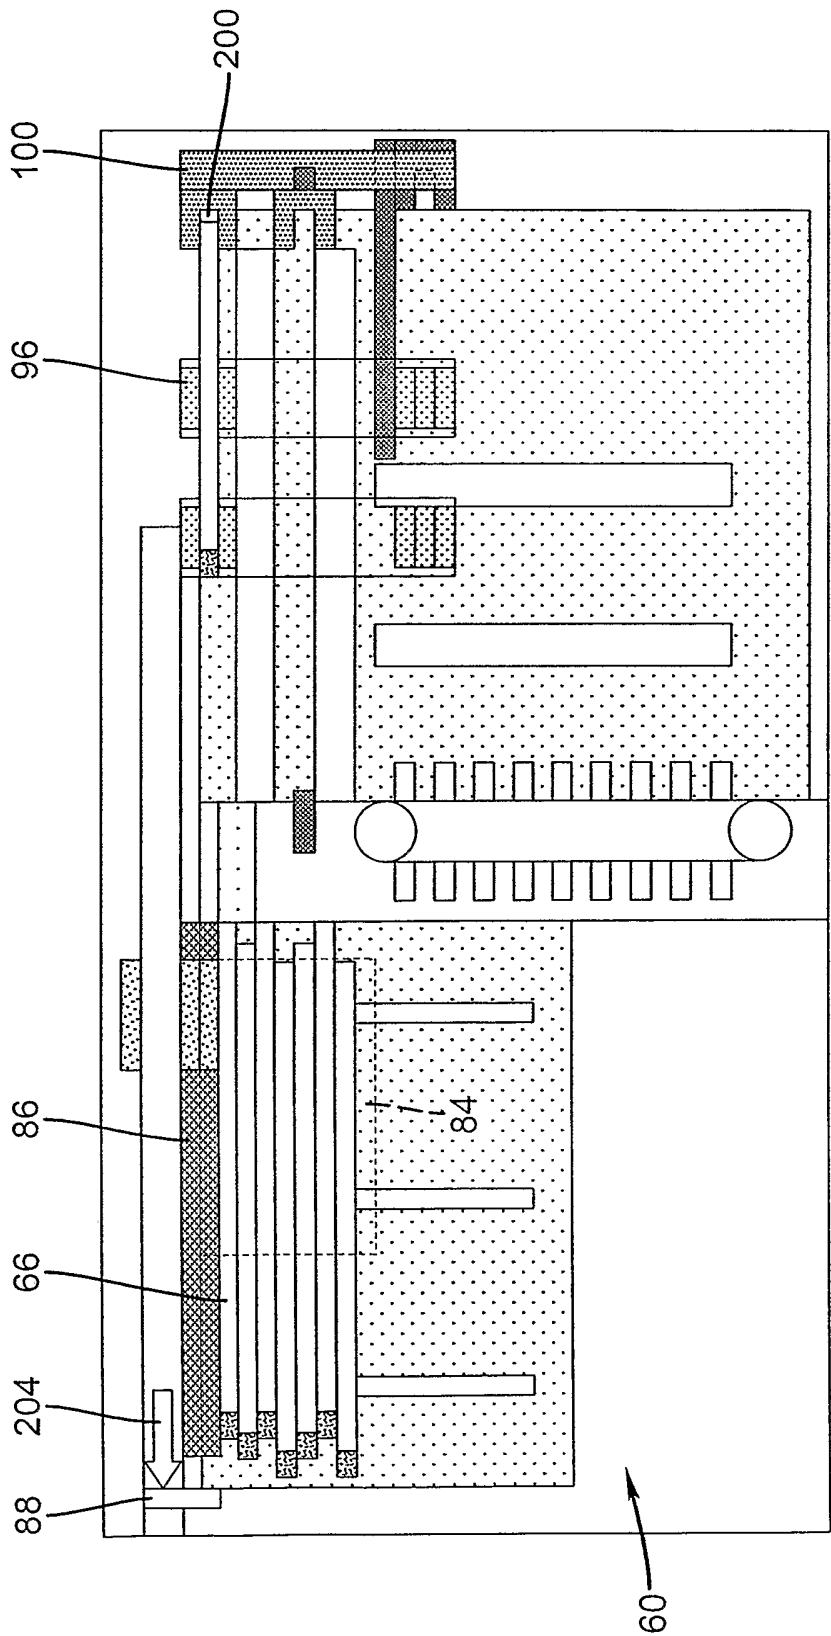


FIG. 14

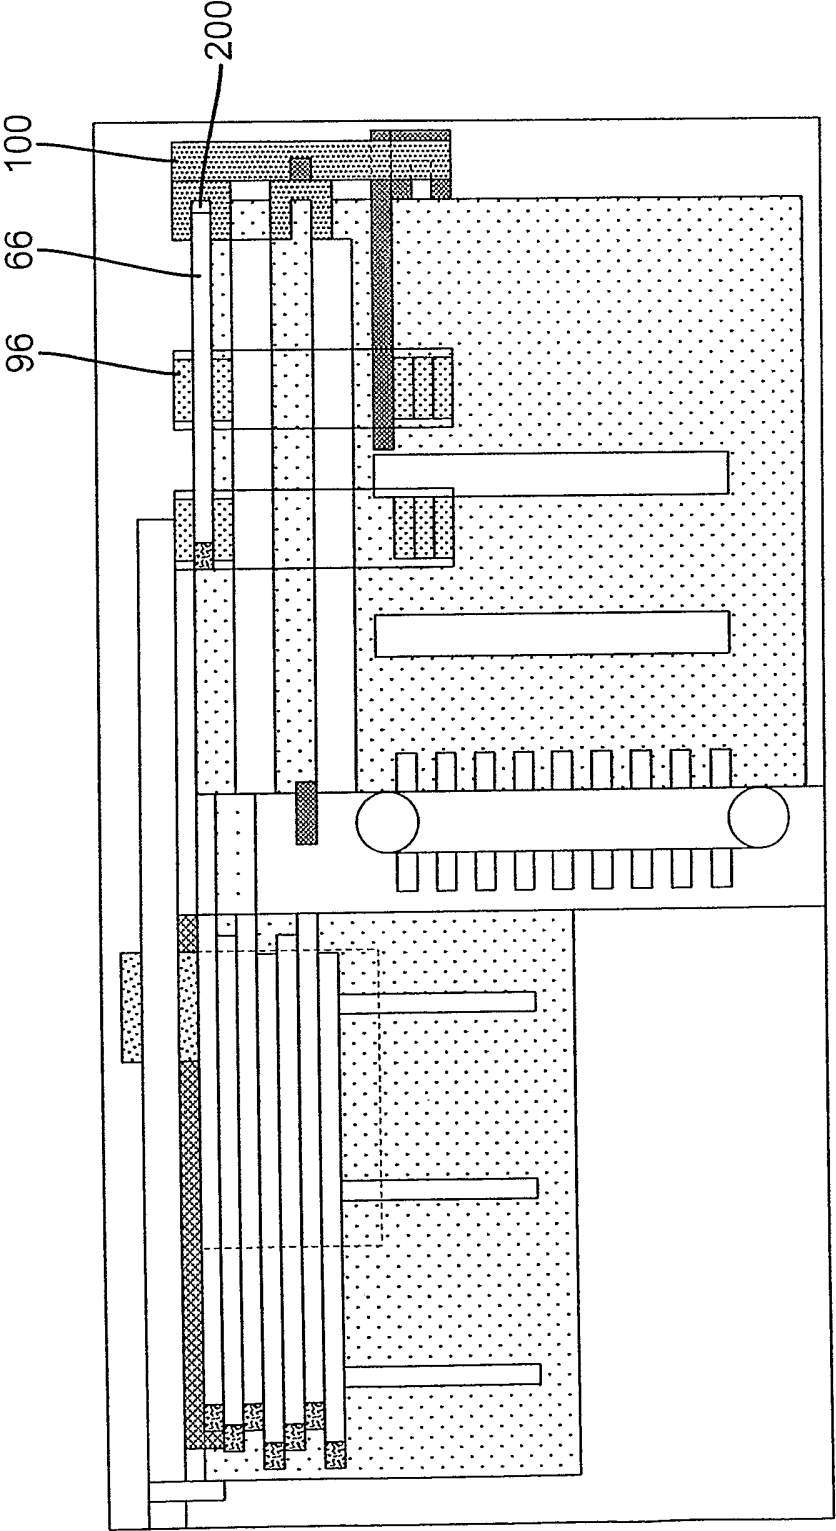


FIG. 15

16/25

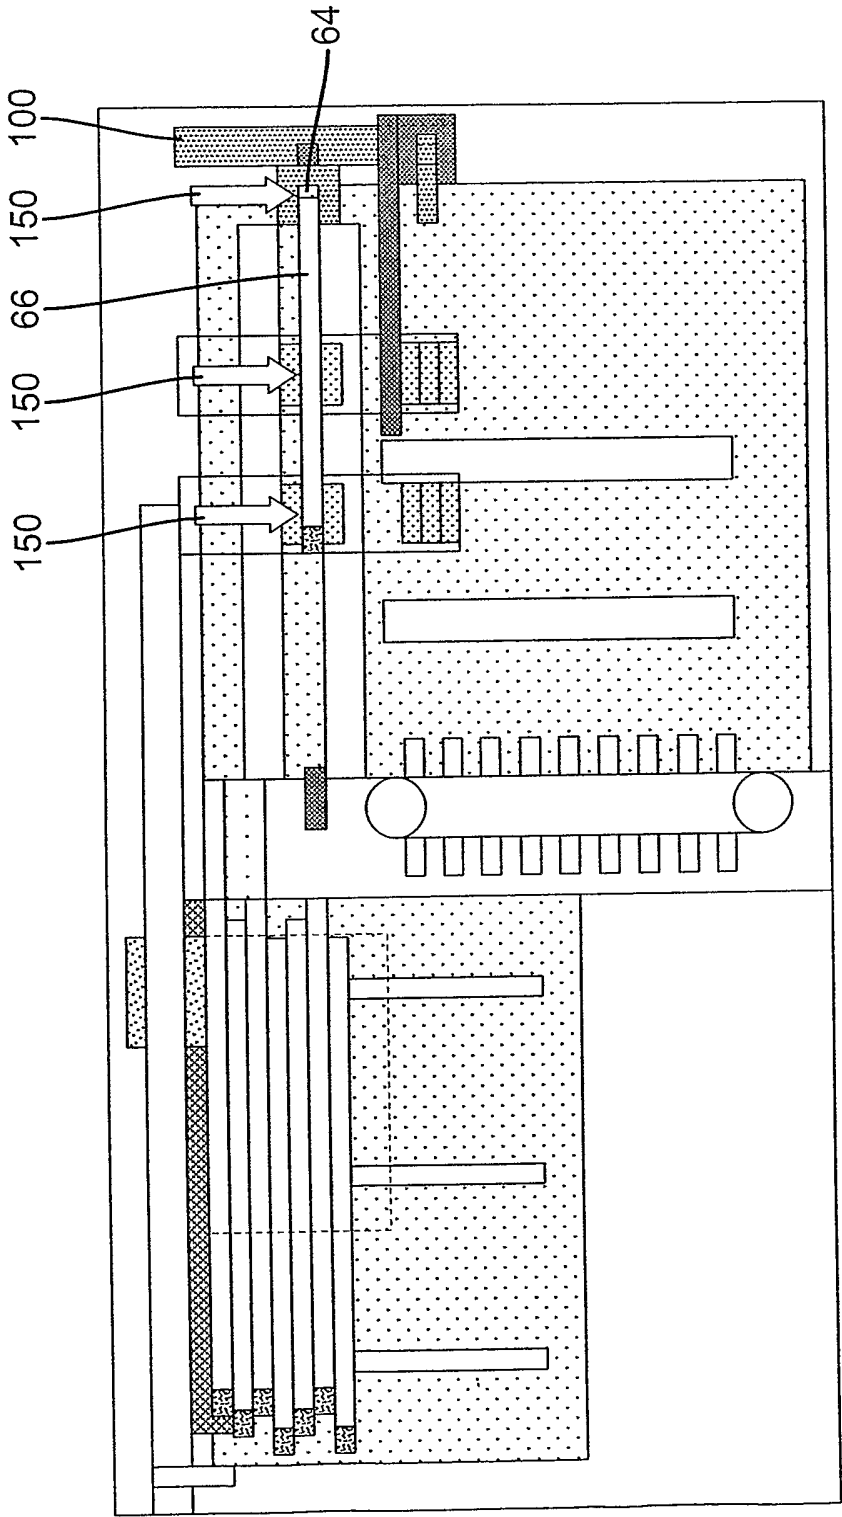


FIG. 16

17/25

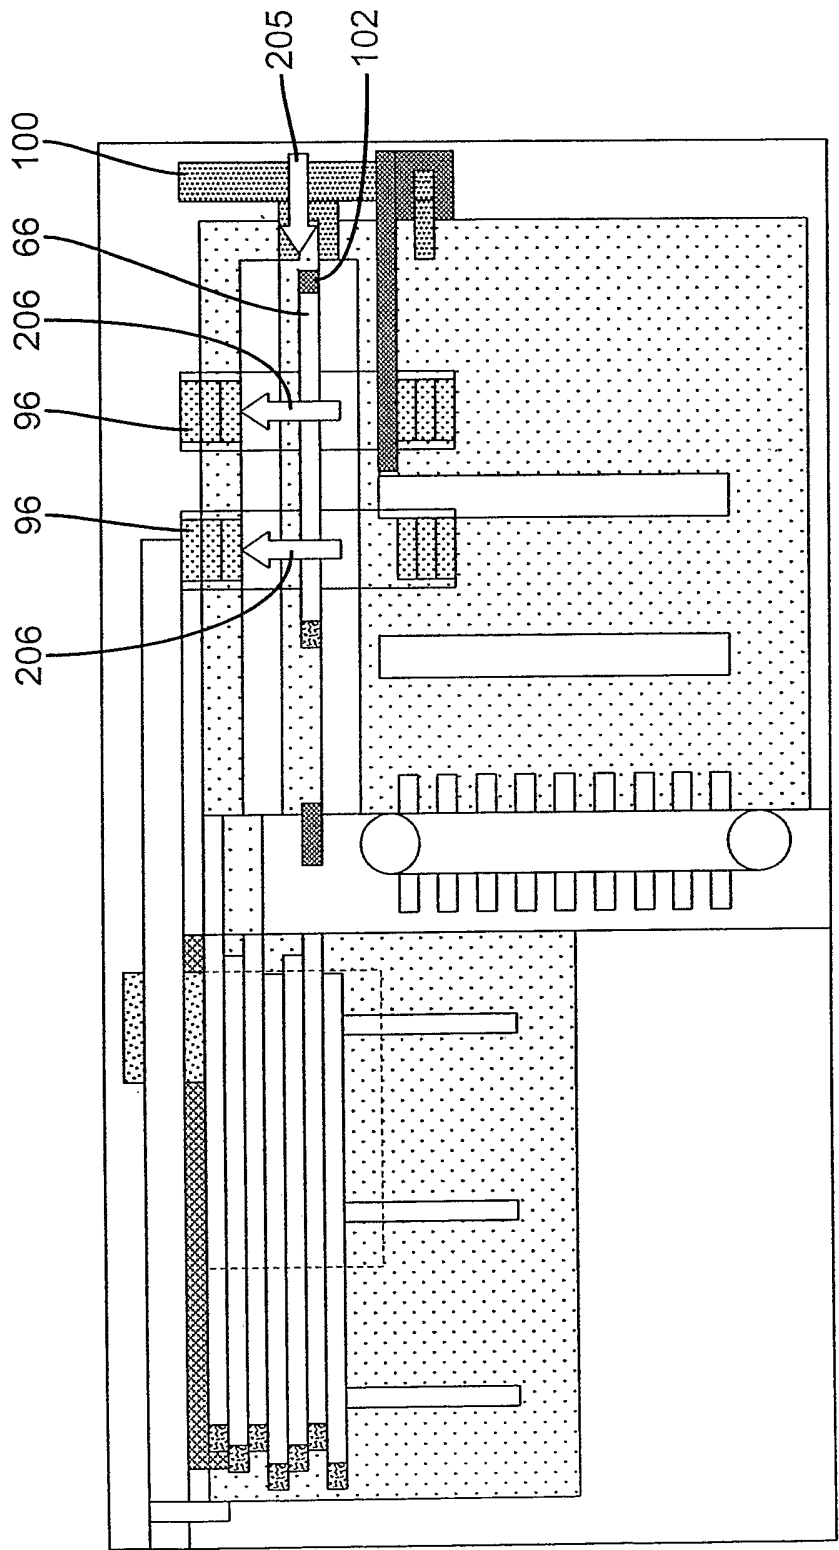


FIG. 17

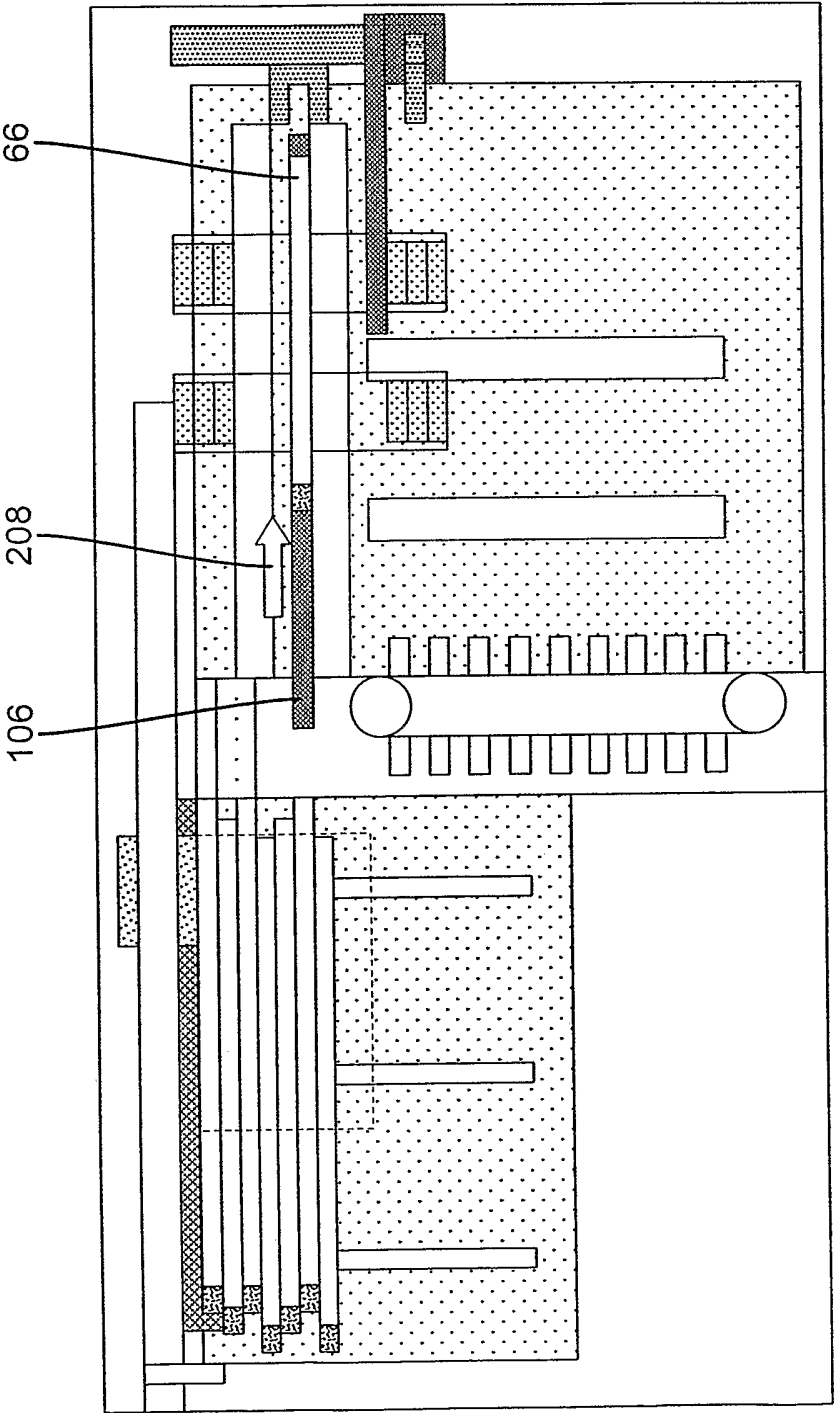


FIG. 18

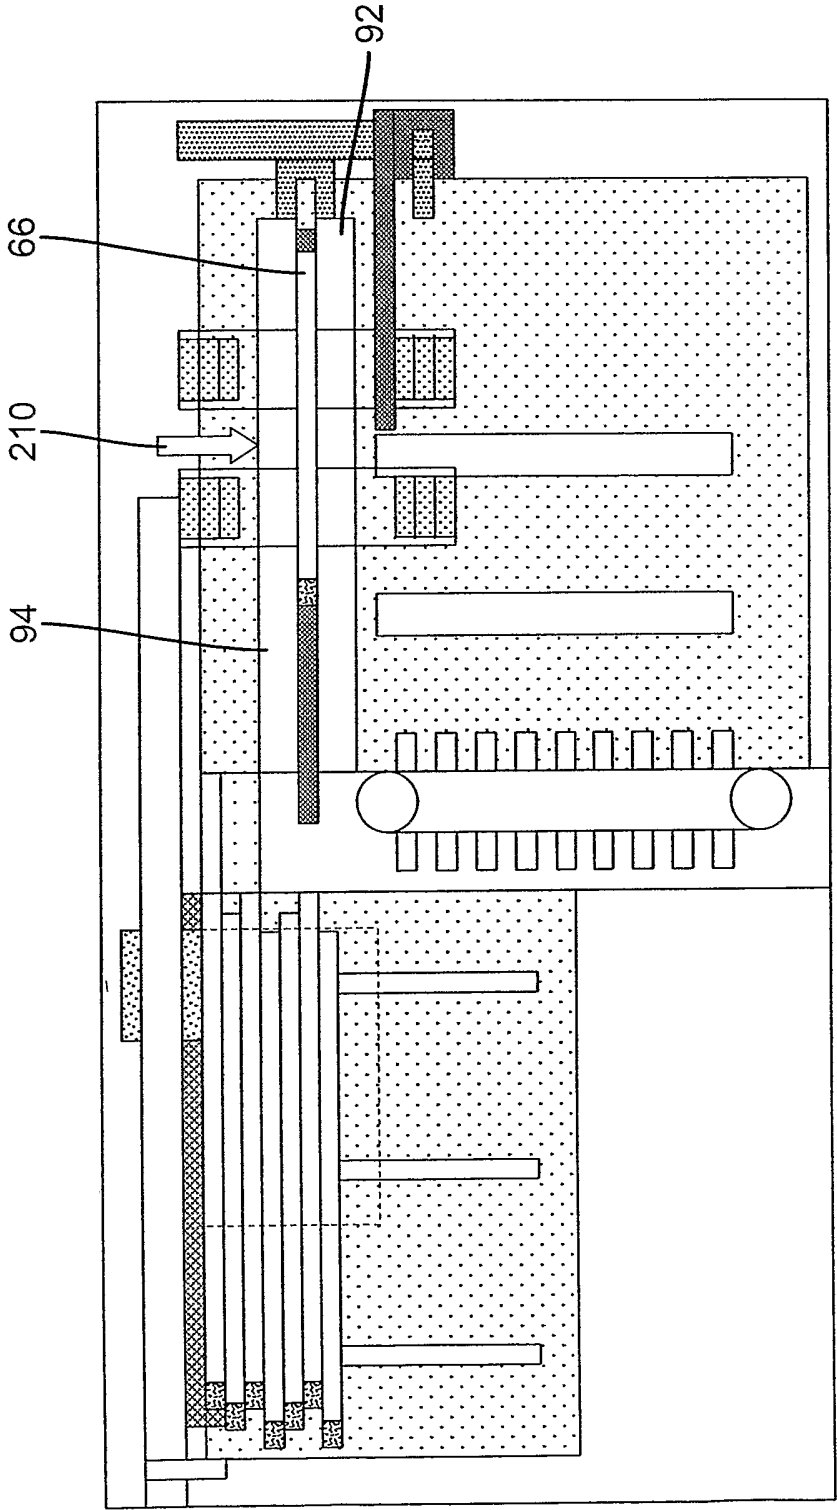


FIG. 19

20/25

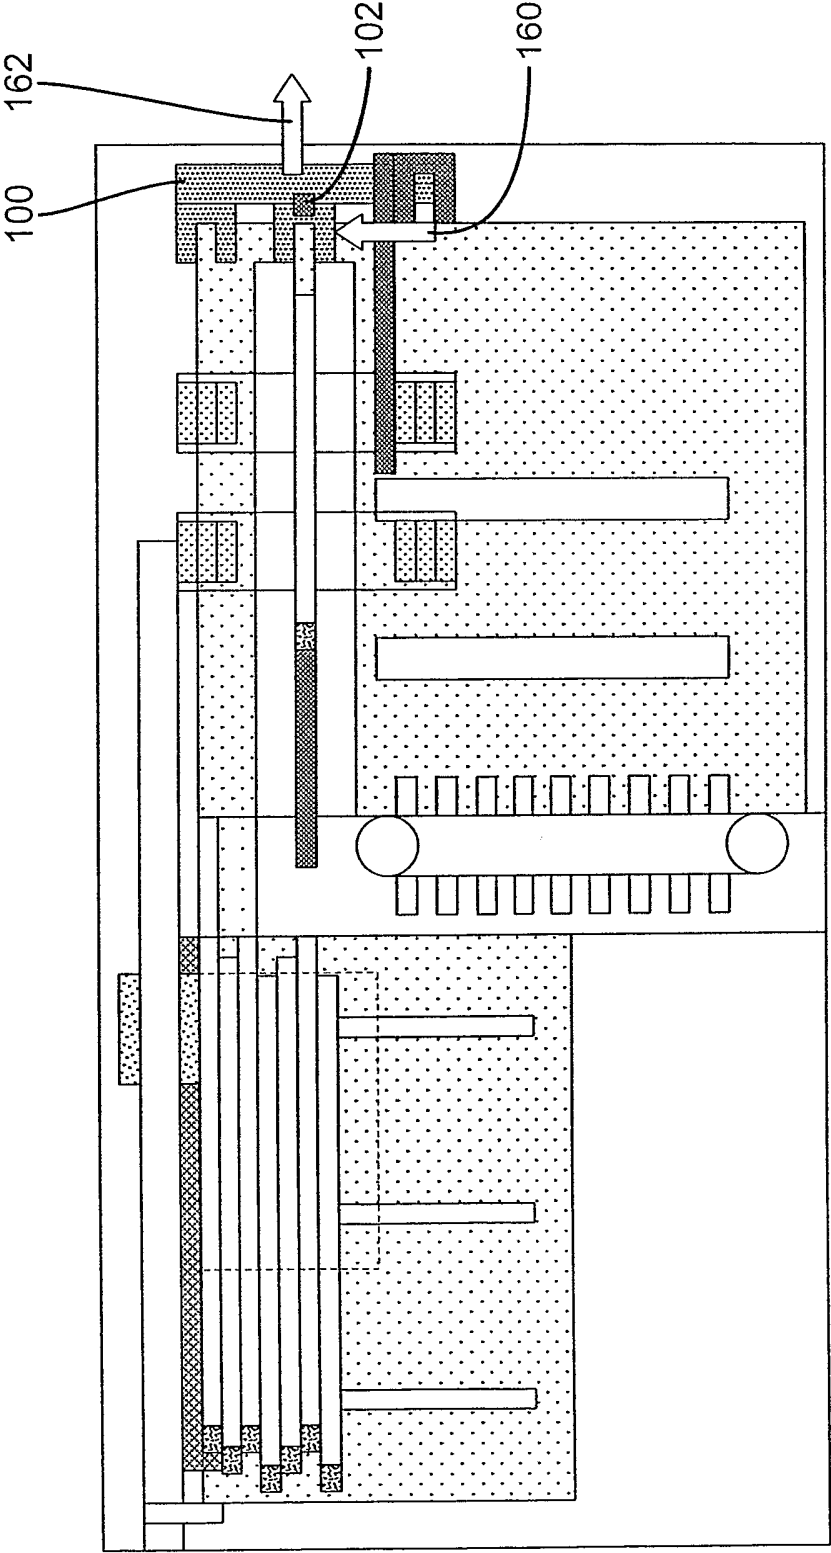


FIG. 20

21/25

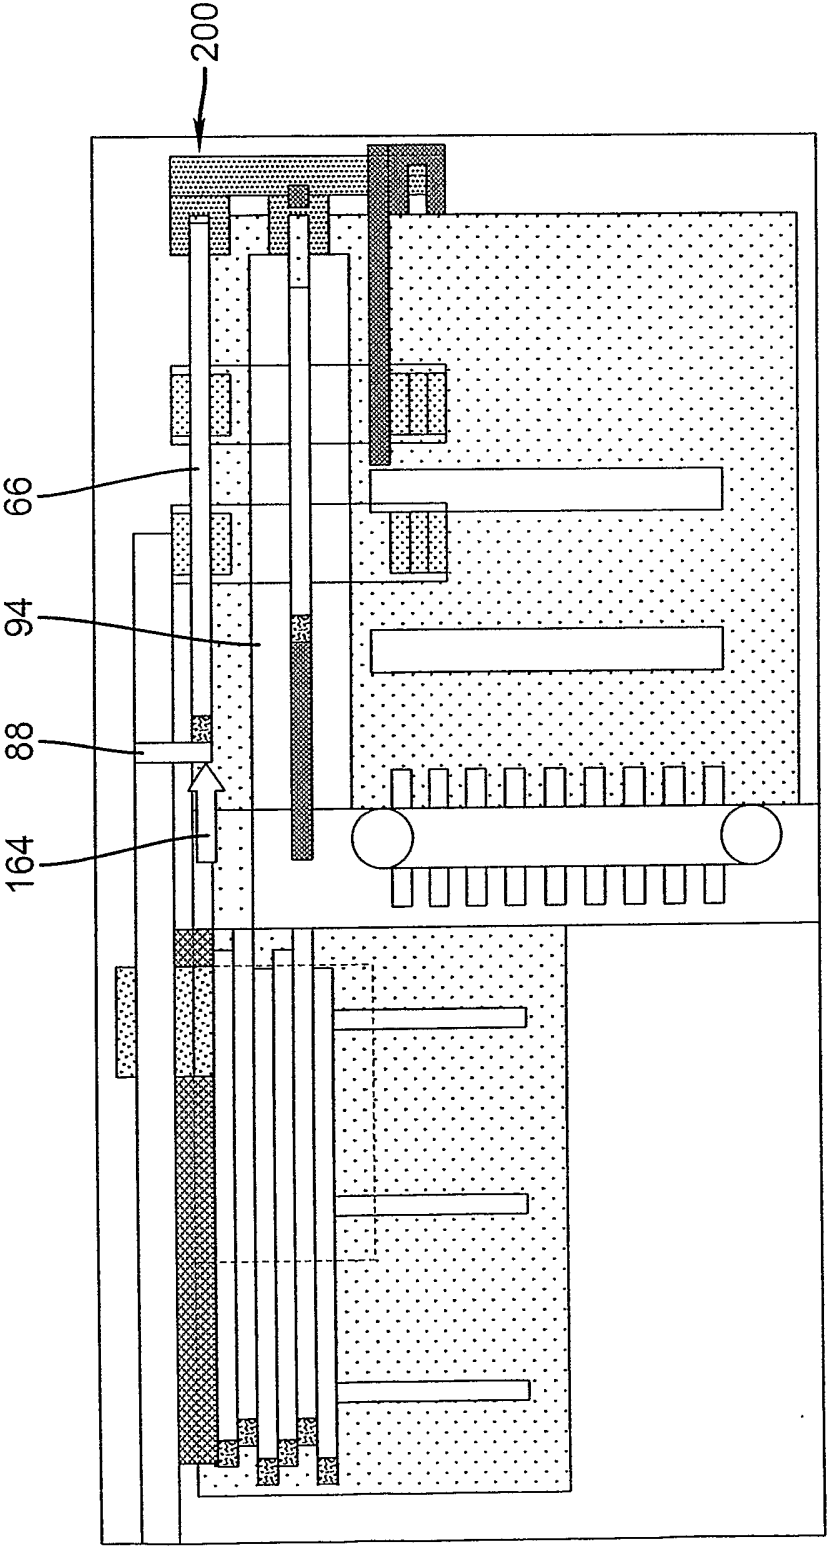


FIG. 21

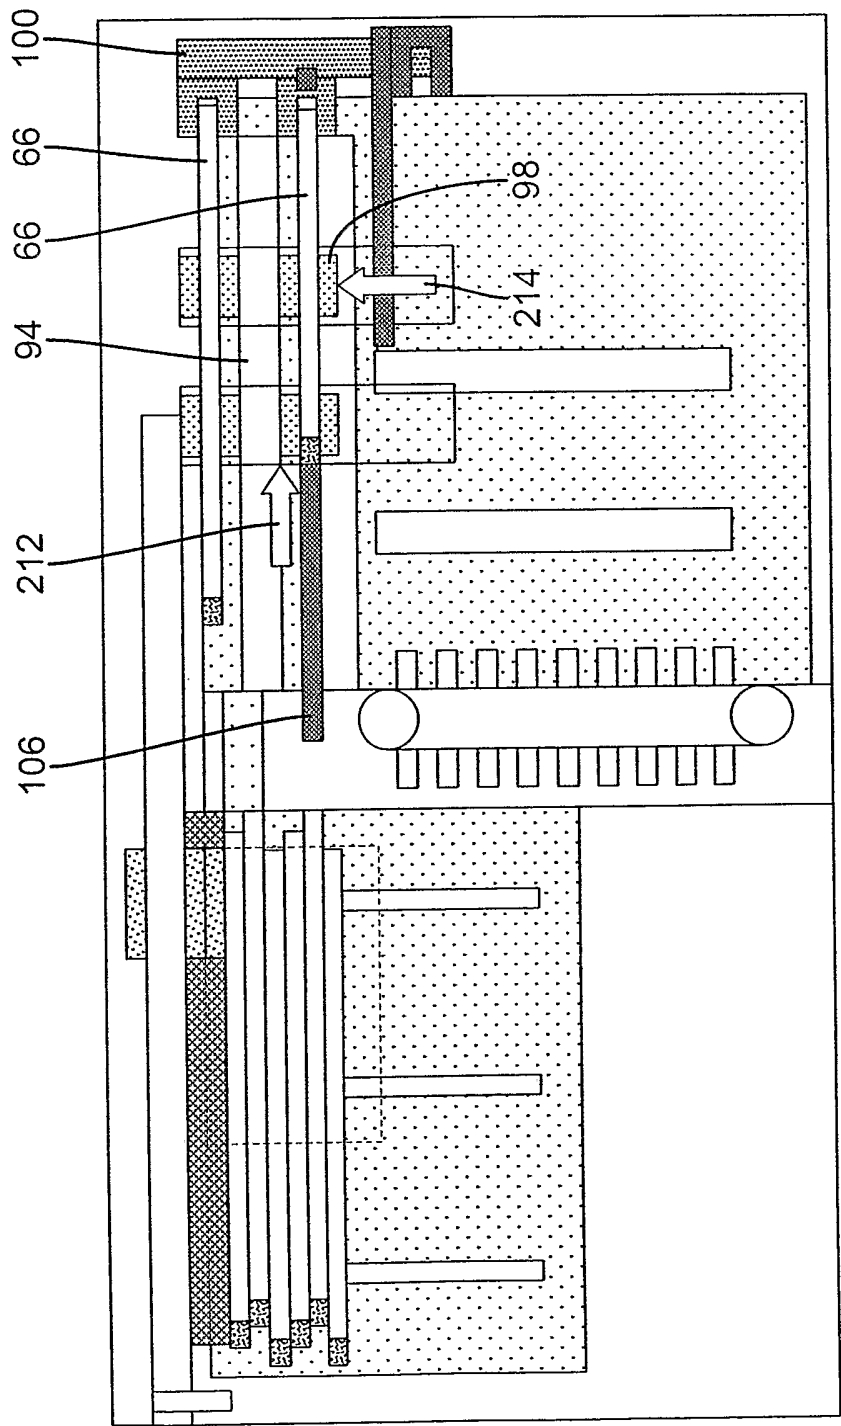


FIG. 22

23/25

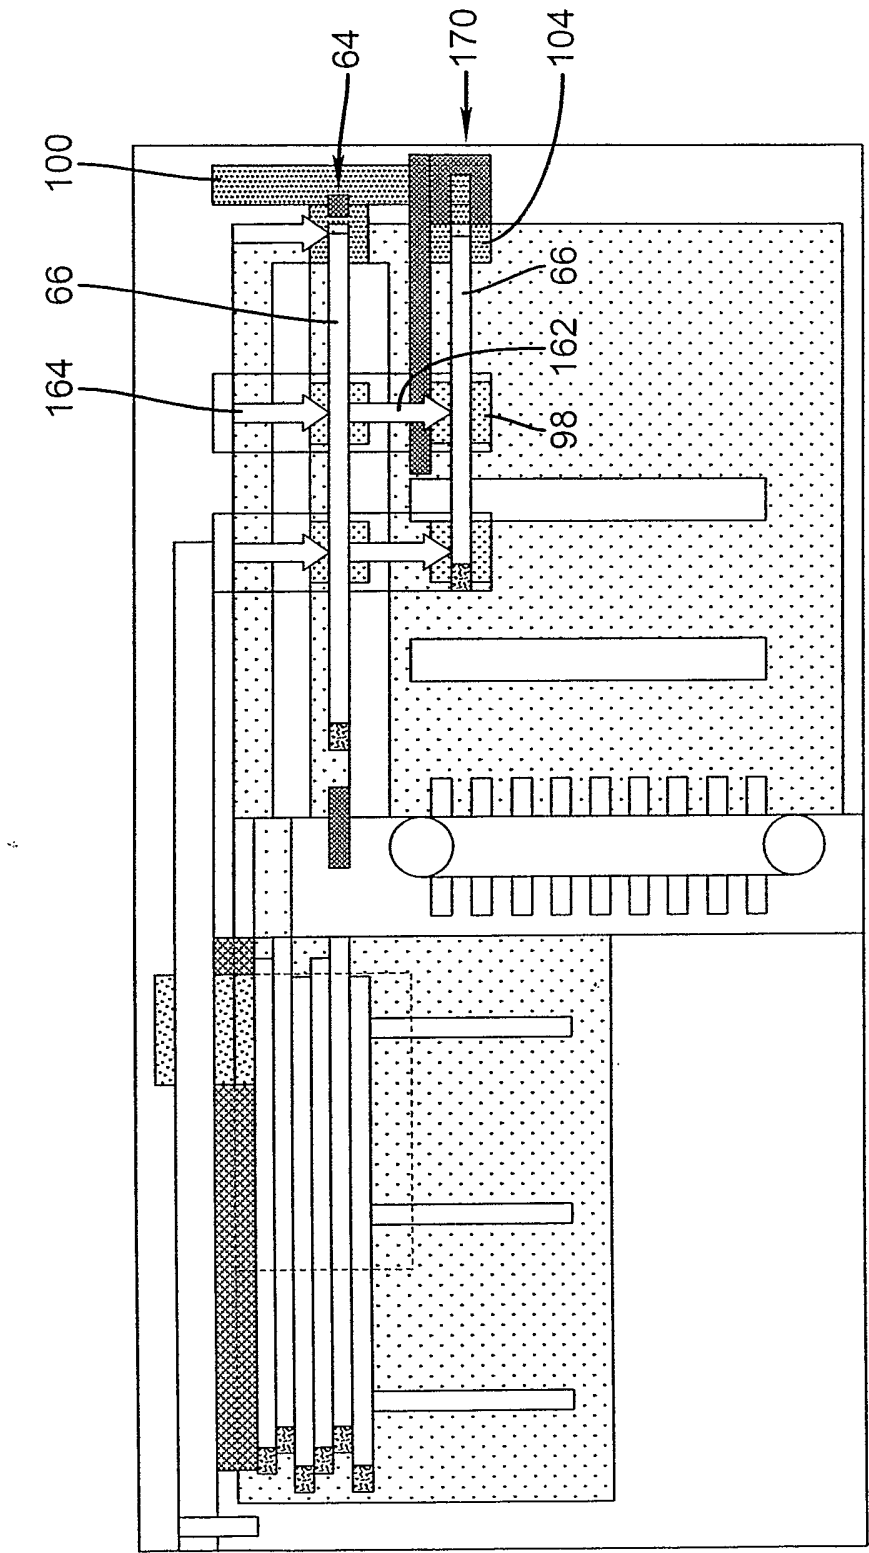


FIG. 23

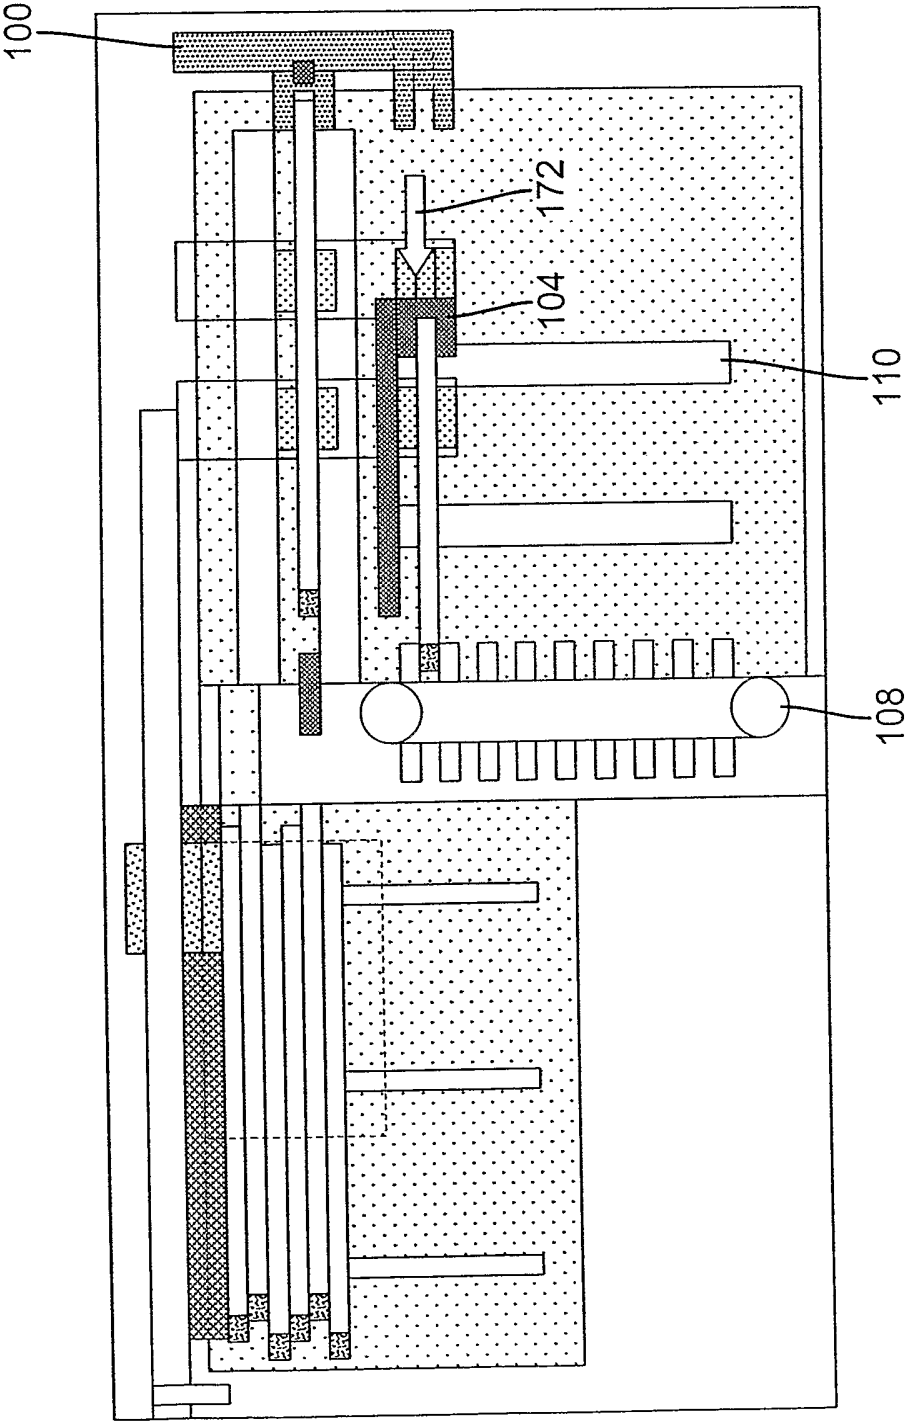


FIG. 24

25/25

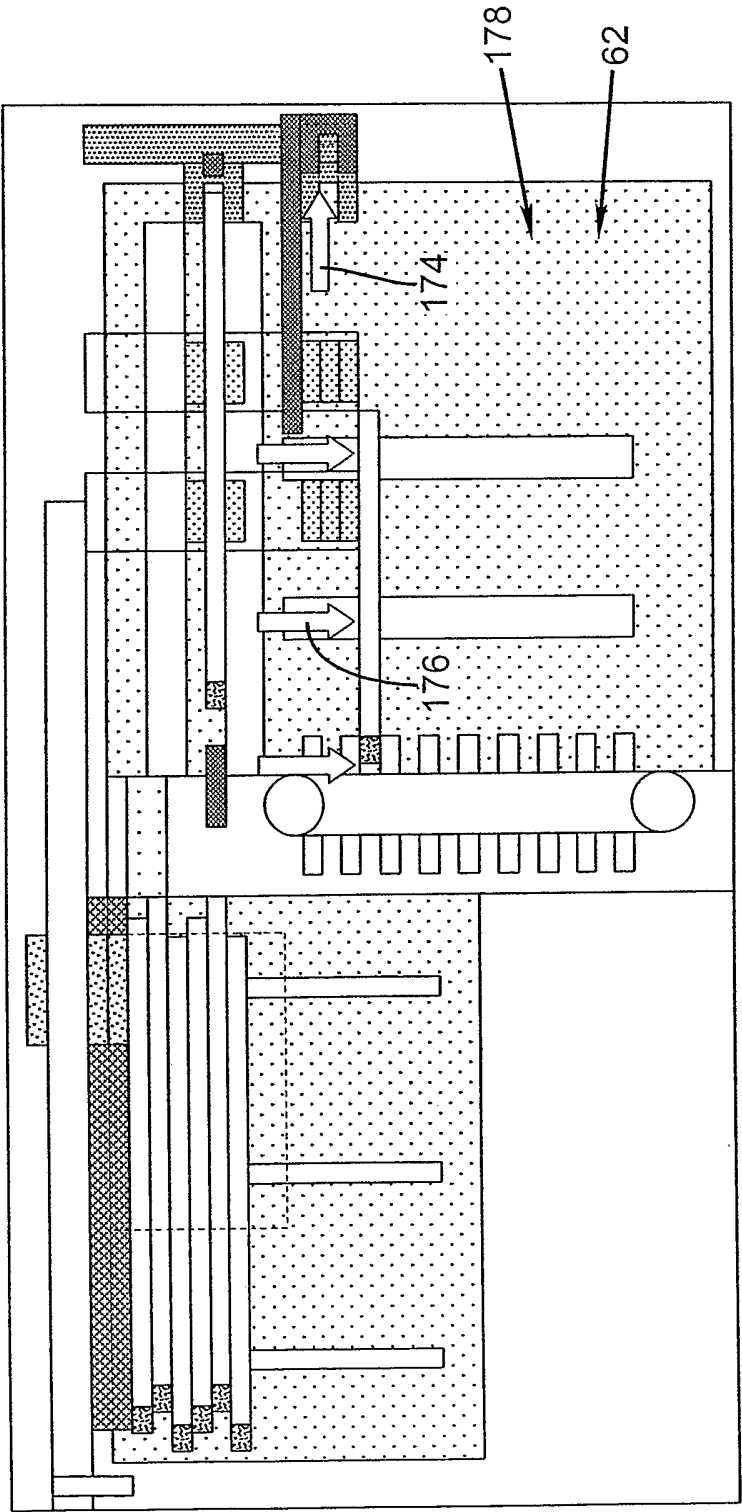


FIG. 25

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2005/042664

A. CLASSIFICATION OF SUBJECT MATTER

INV. G03B42/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 908 514 A (BAUER ET AL) 13 March 1990 (1990-03-13) the whole document -----	1-13
X	US 5 340 995 A (VERBEKE ET AL) 23 August 1994 (1994-08-23) the whole document -----	1-13
X	EP 0 919 857 A (KONICA CORPORATION) 2 June 1999 (1999-06-02) figures 1,2,11-14 figures 20-29 -----	1-13
X	EP 1 102 118 A (EASTMAN KODAK COMPANY) 23 May 2001 (2001-05-23) the whole document -----	1-13
	-/--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search

13 April 2006

Date of mailing of the international search report

25/04/2006

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

PAVON

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2005/042664

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2001/006223 A1 (HOITZ GERD) 5 July 2001 (2001-07-05) the whole document -----	1-13

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2005/042664

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4908514	A	13-03-1990	DE 3733191 A1	20-04-1989
			EP 0309874 A1	05-04-1989
			JP 1109342 A	26-04-1989
			JP 1760435 C	20-05-1993
			JP 4048379 B	06-08-1992
US 5340995	A	23-08-1994	DE 69311433 D1	17-07-1997
			DE 69311433 T2	02-01-1998
			EP 0567171 A1	27-10-1993
			JP 3313814 B2	12-08-2002
			JP 6043565 A	18-02-1994
EP 0919857	A	02-06-1999	US 6365909 B1	02-04-2002
EP 1102118	A	23-05-2001	DE 60009008 D1	22-04-2004
			DE 60009008 T2	21-10-2004
			JP 2001183765 A	06-07-2001
			US 6437359 B1	20-08-2002
US 2001006223	A1	05-07-2001	DE 19745012 A1	15-04-1999