



- (51) International Patent Classification:
E21B 19/16 (2006.01) E21B 33/03 (2006.01)
B23K 1/00 (2006.01)
- (21) International Application Number: PCT/US2015/067057
- (22) International Filing Date: 21 December 2015 (21.12.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 62/095,879 23 December 2014 (23.12.2014) US
- (71) Applicant (for US only): SHELL OIL COMPANY [US/US]; One Shell Plaza, P.O. Box 2463, Houston, Texas 77252-2463 (US).
- (72) Inventors: CUIPER, Glen H.; 17731 Seven Pines Dr., Spring, Texas 77379 (US). HARIHARAN, Peringandoor Raman; 17531 Bending Post Drive, Houston, Texas 77095 (US). JABS, Matthew Jay; 5042 Tramonte Trail, Katy, Texas 77494 (US). PORTAS, William Robert; 116 de la Pointe Dr., Gautier, Mississippi 39553 (US).
- (74) Agent: STOUT, Myron S.; Shell Oil Company, One Shell Plaza, P.O. Box 2463, Houston, Texas 77252-2463 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

[Continued on next page]

(54) Title: RUNNING TOOL APPARATUS AND METHOD

(57) Abstract: An apparatus may include a body having a first end configured to engage an elevator and a second end configured to sealingly engage a tubular. The apparatus may also include a purging passage extending through the body and an opening in the body configured to allow for an umbilical to pass from an exterior of the body through the body and out the second end of the body. The apparatus may include a seal configured to prevent flow through the opening when the umbilical is in place. The second end may be configured to rotate relative to the first end. A method may include providing the apparatus described above. The method may also include providing a tubular and connecting the second end of the body to the tubular.

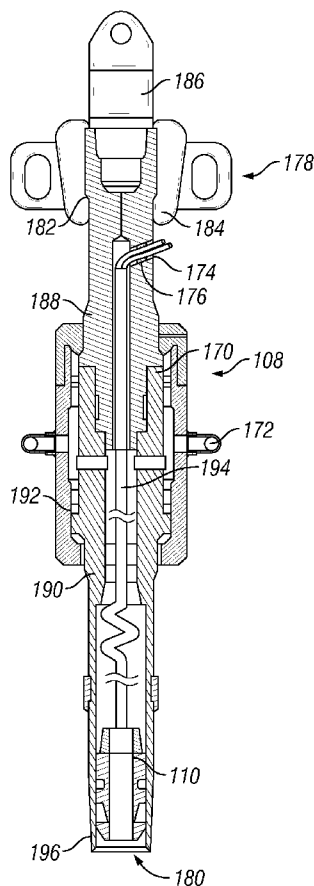


FIG. 4





BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

RUNNING TOOL APPARATUS AND METHOD

FIELD OF THE INVENTION

[0001] The present invention relates to methods of making up tubulars and more particularly to a running tool apparatus and method for use in making up tubulars.

BACKGROUND

[0002] For quite some time, hydrocarbon exploration, production, and transportation
5 has involved tubulars (e.g., casing) connected via threads in male and female ends (known as “pin” and “box”) to form a string. Traditionally, such casing stings, drill strings, pipelines, and the like have been formed by “making up” connections by rotating a section to be added relative to the rest of the string. However, such connections may not be as strong as the other portions of the tubular string. Additionally, in some instances, threaded
10 connections may leak to an extent. One alternative to the tubular string is coiled tubing. However, coiled tubing is not appropriate for all applications involving tubulars. Moreover, connecting two sections of coiled tubing has disadvantages.

SUMMARY OF THE INVENTION

[0003] The present disclosure includes an apparatus including a body having a first end
15 configured to engage an elevator and a second end configured to sealingly engage a tubular. The apparatus also includes a purging passage extending through the body and an opening in the body configured to allow for an umbilical to pass from an exterior of the body through the body and out the second end of the body. The apparatus includes a seal configured to prevent flow through the opening when the umbilical is in place. The second
20 end is configured to rotate relative to the first end.

[0004] The present disclosure also includes a method including providing the apparatus described above. The method also includes providing a tubular and connecting the second end of the body to the tubular.

BRIEF DESCRIPTION OF THE FIGURES

25 [0005] Figure 1 shows a system for making up a connection between tubulars.

[0006] Figure 2 shows a brazing thermal chamber apparatus of the system of Figure 1.

[0007] Figure 3 shows a plug apparatus of the system of Figure 1 within the brazing thermal chamber apparatus of Figure 2.

[0008] Figure 4 shows a running tool apparatus of the system of Figure 1.

DETAILED DESCRIPTION

5 [0009] Generally, the present disclosure describes methods and apparatuses for use in creating a connection that may provide enhanced strength as compared to traditional threaded connections used in hydrocarbon production. Specifically, it is believed that the methods and apparatuses described herein may provide a stronger connection with enhanced sealability due to a metallurgical bond formed between threads. In some
10 instances, the strength of the connection may approach that of the rest of the tubular. Broadly, a method may include providing a first casing or other tubular having threads thereon, providing a second tubular having threads therein, and rotating one tubular relative to the other to form a connection before using a heater to braze the connection. The heater used may provide a bond between the threads that rivals strength provided by a weld
15 in a non-threaded connection, but at a much lower temperature. Due to the lower temperature and the various features described below, such brazing may occur at a well site while remaining safe.

[0010] Referring now to Figure 1, a system 100 for making up a connection 102 (shown in Figure 3) between a first tubular 104 and a second tubular 106 is shown. The
20 system includes a running tool apparatus 108, a plug apparatus 110, and a brazing thermal chamber apparatus 112. The apparatuses may be used individually or collectively to provide the connection 102 between an end portion 114 of the first tubular 104 and an end portion 116 of the second tubular 106, each of which may be hollow and elongated (e.g., casing joints). The end portions 114 and 116 may have threads such that the connection
25 102 is a threaded connection provided by rotating one tubular relative to the other. In accordance with one aspect of the present disclosure, the second tubular 106 may be rotated about a longitudinal axis such that it spins relative to the first tubular 104 until the tubulars join to form a tubular string (e.g., a casing string).

[0011] Generally, the first tubular 104 may be placed in a position where a portion
30 extends downward through a rig floor 118 and into a bore hole 120 and another portion

extends upward from the rig floor 118. The first tubular 104 may be held in place by powered slips 122 that prevent rotation as well as axial movement of the first tubular 104. The running tool apparatus 108 may be used to lift and place the second tubular 106 in position to engage the first tubular 104. The end portions 114, 116 of the tubulars 104, 106
5 may be lined up in close proximity to a heater 124 inside the brazing thermal chamber apparatus 126. This alignment may involve moving the brazing thermal chamber apparatus 126 into place over the end portion 114 of the first tubular 104, and using the running tool apparatus 108 to align and lower the end portion 116 of the second tubular 106 into the brazing thermal chamber apparatus 112. The running tool apparatus 108 may then allow
10 the second tubular 106 to lower and rotate relative to the first tubular 104, thus making up the connection 102 between the tubulars 104, 106, with isolation outside the tubulars 104, 106 being provided by the brazing thermal chamber apparatus 126. Isolation between the interior of the connection 102 and hydrocarbon vapors from the bore hole 120 may be provided with the plug apparatus 110 and certain features of the brazing thermal chamber
15 apparatus 112. The plug apparatus 110 may be at least partially lowered into the first tubular 104 and activated to provide an isolation inside the tubulars 104, 106. The isolated areas may be purged with inert gas before the heater 124 is activated, providing heat to braze the connection 102 between the tubulars 104, 106. The powered slips 122 may then be disengaged and the tubing string, including both tubulars 104, 106, may be lowered a
20 distance before the powered slips 122 are re-engaged and the running tool apparatus 108 is disengaged from the second tubular 106. The second tubular 106 may pass through the thermal chamber 112 as it goes into the bore hole 120. Alternatively, the thermal chamber 112 may at least partly deconstruct to allow passage of the second tubular 106 into the borehole and reconstruct for subsequent connections. In either alternative, the plug
25 apparatus 110 may be removed for subsequent use. The process may then be repeated in the same manner for one or more additional tubulars (not shown) until the tubular string reaches the desired length.

[0012] Referring now to Figure 2, the brazing thermal chamber apparatus 112 may be used to isolate a section of the exterior of a tubing string from the environment to allow for
30 brazing without the potential undesirables associated with brazing near a bore hole. The brazing thermal chamber apparatus 112 may provide a protective enclosure to isolate a thermal brazing process as related to making the connection 102 (e.g., a casing connection).

The brazing thermal chamber apparatus 112 may provide containment of heated gases derived from the thermal brazing.

5 [0013] The brazing thermal chamber apparatus 112 may provide an enclosure around the connection 102 between the tubulars 104, 106 and the area within the brazing thermal chamber apparatus 112 may be purged with inert gas. While various seals may be present to ensure isolation, the inert gas may be provided at a pressure greater than ambient, providing assurance that ambient fluids do not enter the brazing thermal chamber apparatus 112 during brazing.

10 [0014] The brazing thermal chamber apparatus 112 may include a housing 126 and the heater 124. The housing 126 may have a first opening 128, a second opening 130, and a purge opening 132. The housing 126 may be configured to contain the end portion 114 of the first tubular 104 and the end portion 116 of the second tubular 106. The first opening 128 may be configured to permit placement of the end portion 114 of the first tubular 104 within the housing 126 during brazing. Thus, a first flared section 129 may be associated with the first opening 128 to assist with such placement. Similarly, the second opening 130 may be configured to permit placement of the end portion 116 of the second tubular 106 within the housing 126 during brazing, and a second flared section 132 may be associated with the second opening 130 to assist with such placement. The housing 126 may include a lower assembly 134 and an upper assembly 136. Various elements and sections of the brazing thermal chamber apparatus 112 may be connected via flanged sections and corresponding bolts or other connectors and optional seals. The elements associated with the thermal chamber apparatus 112 may be circular, rectangular, or any other suitable shape, and may be constructed of materials such as carbon steel or other similar materials capable of focusing heat and keeping energy loss to a minimum.

25 [0015] The brazing thermal chamber apparatus 112 may also include a plurality of seals configured to allow a positive pressure of inert gas to be provided during brazing of the end portions 114, 116. The positive pressure may remove or prevent entry of hydrocarbons or other undesirable substances during thermal brazing or any time when the heater 124 is activated. For example, a first seal 138 may seal the interface between the first opening 128 and the first tubular 104 and a second seal 140 may seal the interface between the second opening 130 and the second tubular 106. The seals 138, 140 may

30

provide dynamic sealing, allowing for rapid insertion of the second tubular 106 during the thermal brazing process. The seals may be resilient seals or may be configured to retract and extend or otherwise engage and disengage (e.g., via springs). Some degree of flow past the seals may be acceptable, and thus low pressure seals may be used, when positive
5 pressure is present. Regardless of the particular configuration, the brazing thermal chamber apparatus 112 may be designed to provide positive pressure purging to prevent ingress of volatile gasses into the housing 126 and creating an explosive ignition risk. The design of the brazing thermal chamber apparatus 112 may provide rapid cooling of the housing 126. For example cooling to 270°C may occur in 10 minutes or less.

10 **[0016]** The purge opening 132 may be configured to provide inert gas (e.g., nitrogen) to the housing 126 before, during, and/or after thermal brazing. The purge opening 132 may be an inlet or an outlet and the dimensions may vary depending upon pipe size and other parameters of a particular site. An additional purge opening 142 may be provided and may also be either an inlet or an outlet. As illustrated, purge opening 132 is an inlet and
15 purge opening 142 is an outlet. Such a configuration may allow for inert gas to be flushed through the housing 126 to purge material (e.g., volatile gas, or heated brazing effluent) from the housing 126.

[0017] The heater 124 may be configured to provide heat to the end portions 114, 116 during brazing. In one aspect of the present disclosure, the heater 124 may be an induction
20 heater. For example, an electric induction heater. In some applications, the heater 124 may be configured to provide heat in the range of 600°C to 900°C. The heater 124 may be configured to fit partially or entirely within the housing 126. To that end, the housing 126 may have an opening 144 for electrical supply and access to the heater 124. The heater 124 may be sized, shaped, or otherwise configured to encircle one or both of the end portions
25 114, 116 of the tubulars 104, 106. The heater 124 may be connected to a power supply via a water cooled conductor, secured to the housing 126. The heater 124 may be insulated to maintain electrical isolation.

[0018] The brazing thermal chamber apparatus 112 may include a control circuit configured to monitor hydrocarbon gas concentration in the housing 126. The control
30 circuit may be configured to shut off brazing of the end portions 114, 116 when the hydrocarbon gas concentration exceeds a predetermined value. Sensors (not shown) with a

power supply may be provided with one or more set points and may provide feedback for controlling the brazing process. Thus, the brazing thermal chamber apparatus 112 may provide the ability to sense penetration of various devices for real-time data gathering.

[0019] The brazing thermal chamber apparatus 112 may be useful in methods of brazing tubulars. For example, methods may include providing the brazing thermal chamber apparatus 112 in any of the forms and variations described above, providing the first tubular 104, and providing the second tubular 106. The end portion 114 of the first tubular 104 may be placed in the first opening 128 of the housing 126 and the end portion 116 of the second tubular 106 may be placed in the second opening 130 of the housing 126. Once in place, the heater 124 may be activated so as to cause brazing of a connection 102 between the end portions 114, 116 of the tubulars 104, 106. Brazing may be enhanced by providing a coating on threads or other exposed areas of the end portions 114, 116 prior to activating the heating. The coating of at least a portion of the end portions 114, 116 may include the use of flashing or other materials known in the art of brazing. Coating may precede make-up of the connection 102. Some or all of the length of the connection 102 may be coated to provide a seal. Some exemplary brazing materials may include silver, copper, etc. The particular material used may be selected depending on the specific application.

[0020] While brazing provides a connection, it may be useful to have a stronger connection than that provided by brazing alone. Thus, when threads are present, the first tubular 104 may be rotated relative to the second tubular 106 to provide the connection 102. Brazing may be initiated after the tubulars 104, 106 are threadedly or otherwise connected such that the brazing enhances the connection 102. Thus, when threaded connections are present, rotating of the first tubular 104 may occur before the heater 124 is activated.

[0021] Circulation of inert gas may be activated before, during, and/or after the brazing, thereby causing circulation through the purge opening. The gas may be compressed using pumps or other means. Some exemplary gases include nitrogen, carbon dioxide, helium, etc. Circulation may be at flow rates sufficient to displace any combustible gas present.

[0022] Referring now to Figure 3, the plug apparatus 110 may be used to isolate a section of the interior of a tubing string from the environment to allow for brazing (e.g., within the brazing thermal chamber apparatus 112) without the potential undesirables

associated with brazing near a bore hole. The plug apparatus 110 may provide an internal protective enclosure to isolate the thermal brazing process as relates to making the connection 102 (e.g., casing connection). The plug apparatus 110 may provide containment of heated gases derived from the thermal brazing. The plug apparatus 110 may be any
5 pneumatically, manually, or otherwise activated plug or sleeve deployed inside the tubing string to isolate well bore fluids from contacting hot internal surfaces of connections. Preventing well bore fluids from contacting hot surfaces may serve to mitigate the risk of ignition of such well bore fluids.

[0023] The plug apparatus 110 may an isolated portion 146 proximate the connection
10 102 of the tubulars 104, 106 and the isolated portion 146 may be purged with inert gas. While various seals may be present to ensure isolation, the inert gas may be provided at a pressure greater than ambient, providing assurance that ambient fluids do not enter the isolated portion 146 during brazing. Regardless of the particular configuration, the plug apparatus 110 may be designed to provide positive pressure purging to prevent ingress of
15 volatile gasses into the housing isolated portion 146. The design of the plug apparatus 110 may provide rapid cooling of the isolated portion 146.

[0024] The plug apparatus 110 may include a body 148, slips 150, a packing element 152, an actuator 154, and a purge opening 156. The slips 150 may be connected to the body 148 and configured to engage an interior of a tubular string formed by the first
20 tubular 104 and the second tubular 106. The body 148 may be of singular construction and may be an elongated generally tubular member. When the body 148 is of singular construction, one set of slips 150 and packing element 152 may be sufficient to provide the isolated portion 146 (e.g., interior of tubing string above the packing element).

[0025] The body 148 may include an upper portion 158 and a lower portion 160 joined
25 by a tether 162. A second packing element 164 may be connected to the body 148 and configured to engage the interior of the tubular string at a location above the connection 102 between the first tubular 104 and the second tubular 106. When the body 148 includes the upper portion 158 and the lower portion 160, the packing element 152 may be provided in the lower portion 160 and the second packing element 164 may be provided in the upper
30 portion 158. When two packing elements 152, 164 are provided, the isolated portion 146 may be limited to the area between the packing elements 152, 164. Slips may be provided

for each of the upper portion 158 and the lower portion 160. Whether structurally independent (e.g., joined by a tether but not by a structural element) or not, upper portion 158 and lower portion 160 may have separate slips and packing elements. When structurally independent, the lower portion 160 may include slips 150 configured to engage
5 the interior of the tubular string at a location below the connection 102 between the first tubular 104 and the second tubular 106 and the upper portion 158 may include additional slips 166 configured to engage the interior of the tubular string at a location above the connection 102 between the first tubular 104 and the second tubular 106.

[0026] The packing element 152 may be connected to the body 148 and configured to
10 engage the interior of the tubular string at a location below the connection 102 between the first tubular 104 and the second tubular 106 of the tubular string. When structurally independent, the lower portion 160 may include the packing element 152 configured to engage the interior of the tubular string at a location below the connection 102 between the first tubular 104 and the second tubular 106 and the upper portion 158 may include the
15 packing element 164 configured to engage the interior of the tubular string at a location above the connection 102 between the first tubular 104 and the second tubular 106. The packing element may be a compressible elastomeric material, Teflon®, or any other material suitable for providing sealing isolation. Thus, the plug apparatus 110 may provide dynamic sealing methods during insertion and locking or setting of the plug apparatus 110
20 into the interior or bore of the tubulars 104, 106.

[0027] The actuator 154 may be configured to move the slips 150 and packing element 152 into engagement with the interior of the tubular string. The actuator 154 may assist in rapid insertion, extraction, and locking methods for handling the plug apparatus 110. The actuator 154 may be a mechanical device connected to the body 148. Alternatively, or
25 additionally, the actuator 154 may be pneumatic pressure. Additionally or alternatively, the actuator 154 may be an electrical signal.

[0028] The purge opening 156 may be configured to provide inert gas to an isolated portion 146 of the interior of the tubular string. The isolated portion 146 may include the connection 102 between the first tubular 104 and the second tubular 106. The isolated
30 portion 146 may extend up into the running tool apparatus 108 when only the lower portion 160 is used. Alternatively, when the plug apparatus 110 has the upper portion 158 and the

lower portion 160, the isolated portion 146 may be formed by the space confined by the interior of the tubular string and by the upper and lower portions 158, 160 of the plug apparatus 110.

[0029] The purge opening 156 may be an inlet or an outlet and an additional purge opening 168 may be provided and may also be an inlet or an outlet. Thus, the plug apparatus 110 may include a purge inlet and a purge outlet such that inert gas may be flushed through the isolated portion 146.

[0030] The plug apparatus 110 may be provided with sensors to detect temperature, pressure, gas content, etc. Such detected parameters may be communicated through wires or wirelessly. The tether 162 may be present in any of the designs above and may be an armored umbilical useful for sensing devices and gas tubes and for real-time data gathering. Another umbilical 169 may transmit measurements (e.g., temperature) from sensors associated with the plug apparatus 110.

[0031] When mechanical actuation is used, the plug apparatus 110 may have the upper portion 158 and the lower portion 160 and the actuator 154 may include one or more mechanical mechanisms to engage the respective packing elements 164, 152. In such a configuration, pulling the tether 162 may allow for disengagement and retrieval of both portions 158, 160. Such mechanical mechanisms may operate manually using levers or using air pressure.

[0032] When pneumatic actuation is used, the plug apparatus 110 may include only the lower portion 160 and the actuator may not be mechanical as illustrated but may instead involve the use of pressurized nitrogen to energize the packing element 152, and expand the slips 150. In the pneumatic variation, air pressure may activate a piston which activates a lever, causing the slips and/or seals to move laterally outwards. Lowering of the pressure may reverse the operation and disengage the slips 150 and packing element 152.

[0033] When electrical actuation is used, the plug apparatus 110 may include only the lower portion 160 and the actuator may include 2 motors (e.g., solenoid or sealed motor-screw device) to expand and secure the packing element 152 and the slips 150 and may provide electrical pressure sensing of the isolated portion 146. The electrical motor causes the rotation of a lead screw which moves the actuator and causes the seals and/or slips to

move laterally (i.e., inward or outward), thus allowing engagement or disengagement of the seals and/or slips.

[0034] The plug apparatus 110 may be useful in methods of brazing tubulars. For example, methods may include providing the first tubular 104, providing the second
5 tubular 106 configured to connect to the first tubular 104 to form a tubular string, providing the plug apparatus 110 in any of the forms and variations described above, placing at least a portion of the plug apparatus 110 inside the first tubular 104, connecting the first tubular 104 to the second tubular 106, and activating the actuator 154 so as to move the slips 150 and packing element 152 into engagement with the interior of the
10 tubular string. Placing the plug apparatus 110 inside the first tubular 104 may involve lowering the plug apparatus 110 through the second tubular 106 and at least partially into the first tubular 104 until a position indicator indicates that the plug apparatus 110 is in the desired location.

[0035] The engagement of the slips 150 and packing element 152 may occur either
15 prior to or subsequent to rotating or otherwise providing the connection 102. However, the slips 150 and packing element 152 are preferably set prior to the purging and prior to the thermal brazing. In designs where there are multiple sets of slips and packing elements, some or all of the slips 150, 166 and/or packing elements 152, 164 may be configured to engage the interior of the tubulars 104, 106 before a tubular string is formed by connecting
20 the first tubular 104 and the second tubular 106.

[0036] When a purge inlet and a purge outlet are both present in the plug apparatus 110, methods may include flushing inert gas through the isolated portion 146. Such flushing may occur after the packing element 152 has engaged the interior of the tubular string.

[0037] In versions where the body 148 has the upper portion 158 and the lower portion
25 160, placing at least a portion of the plug apparatus 110 inside the tubular includes placing at least part of the lower portion 160 inside the first tubular. The method may further include placing the upper portion 158 inside the second tubular 106.

[0038] Placement using the various methods may allow for the plug apparatus 110 to be placed so as to provide isolation between the isolated portion 146 and a portion of the
30 interior of the tubular string below the isolated portion 146. In versions with the upper

portion 158 and the lower portion 160, the plug apparatus 110 may be placed so as to also provide isolation between the isolated portion 146 and a portion of the interior of the tubular string above the isolated portion 146.

5 [0039] In some versions, the first tubular 104 and the second tubular 106 may be casing joints and the corresponding tubular string may be a casing string.

[0040] Referring now to Figure 4, the running tool apparatus 108 may be used in conjunction with or separately from the apparatus described above. The running tool apparatus 108 may include a body 170, a purging passage 172 extending through the body 170, an opening 174 in the body 170, and a seal 176. Power for rotation may be provided 10 through hydraulic tongs (not shown) or through a motor (also not shown) in the running tool apparatus 108.

[0041] The body 170 may have a first end 178 configured to engage an elevator and a second end 180 configured to sealingly engage the second tubular 106. The first end 178 may have a profile 182 configured to engage an elevator unit 184. The running tool 15 apparatus 108 may also include a shop lifting plug 186. As illustrated, the shop lifting plug 186 may be disposed proximate the first end 178. The second end 180 may be open. The second end 180 may be configured to rotate relative to the first end 178 about a central longitudinal axis extending from the first end 178 to the second end 180. The body 170 may have a first portion 188 which includes the first end 178 and a second portion 190 20 which includes the second end 180. Bearings 192 may be provided between the first portion 188 and the second portion 190 such that the second portion 190 is configured to rotate relative to the first portion 188.

[0042] The purging passage 172 may be configured to communicate with the second tubular 106 through the open second end 180.

25 [0043] The opening 174 in the body 170 may be configured to allow for an umbilical 194 to pass from an exterior of the body 170 through the body 170 and out the second end 180 of the body 170.

[0044] The seal 176 may be configured to prevent flow through the opening 174 when the umbilical 194 is in place. The umbilical 194 and plug apparatus 110 may be provided 30 independent of the running tool apparatus 108. Whether provided separately or jointly with

the running tool apparatus 108, the plug apparatus 110 may be configured to pass through the second tubular 106 and sealingly engage the interior of the first tubular 104. Thus, the space above the first tubular 104 may be isolated, allowing for purging and thermal brazing.

[0045] An external seal 196 may be provided at the second end 180 to provide for
5 sealing engagement between the running tool apparatus 108 and the second tubular 106.

[0046] The running tool apparatus 108 may be useful in methods of connecting tubulars. For example, methods may include the running tool apparatus 108 in any of the forms and variations described above, providing the second tubular 106, and connecting the second end 180 of the body 170 to the second tubular 106. The connecting may be
10 done by rotating the second portion 190 of the body 170 when threads are present.

[0047] An additional tubular may be provided and the second tubular 106 may be connected to the additional tubular. The additional tubular may be a subsequently introduced tubular or the additional tubular may be the first tubular 104 already in place in the bore hole 120. When the second portion 190 is configured to rotate relative to the first
15 portion 188, the method may include rotating the second portion 190 relative to the first portion 188 and may provide the connection 102 between the first tubular 104 and the second tubular 106. During this process, the first tubular 104 may be held in place by the powered slips 122 on the rig floor 118 such that rotating the second portion 190 relative to the first portion 188 makes up a threaded connection. Torque and other parameters
20 associated with making up the threaded connection may be determined based on the particular connection.

[0048] Either before or after the connection 102 is provided, the umbilical 194 and the plug apparatus 110 may be provided and the plug apparatus 110 may be lowered into the second tubular 106. The method may also include providing the first tubular 104 and
25 lowering the plug apparatus 110 into the first tubular 104, and, with the plug apparatus 110, sealingly engaging an interior of the first tubular 104. The method may also include connecting the second tubular 106 and the first tubular 104. The method may include purging air from within the second tubular 106 through the purging passage 172. The method may include thermally brazing the connection 102 between the second tubular 106
30 and the first tubular 104. The method may include providing the brazing thermal chamber apparatus 112 and placing the end portion 116 of the second tubular 106 and the end

portion 114 of the first tubular 104 in the brazing thermal chamber apparatus 112 prior to brazing. Brazing may include activating the heater 124 in the brazing thermal chamber apparatus 112. Once brazing occurs, the method may include cooling via circulation through the purging passage 172.

- 5 [0049] After optional brazing and optionally cooling are complete, the method may include removing the plug apparatus 110 and disconnecting the second end 180 of the body 170 from the second tubular 106 before repeating the steps with a new tubular.

[0050] The running tool apparatus 108 may provide a means of running a tubular (e.g., casing joint) while plugging the box end to allow for flushing, purging and filling the
10 interior volume, as related to making a tubular connection. The running tool apparatus 108 may provide for tubular rotation during threading operation, as well as vertical displacement during same. The running tool apparatus 108 may provide positive pressure purging to prevent ingress of volatile gases surrounding the tubular on a drilling rig. The running tool apparatus 108 may provide an armored umbilical for sensing devices and gas
15 tubes, for real time data gathering, as connected to an isolation plug. The running tool apparatus 108 may provide an internal slip type latching means for attaching to the tubular, for handling the tubular string weight below. The running tool apparatus 108 may provide rapid insertion, extraction and locking methods for handling of an isolation plug.

[0051] Those of skill in the art will appreciate that many modifications and variations
20 are possible in terms of the disclosed embodiments, configurations, materials, and methods without departing from their scope. For example, rotating a first element relative to a second element may involve actual rotation of the first element while the second element is maintained in a static position. However, in some instances, relative rotation of the first element relative to the second element may involve rotation of the second element with or
25 without rotation of the first element. Accordingly, the scope of the claims and their functional equivalents should not be limited by the particular embodiments described and illustrated, as these are merely exemplary in nature and elements described separately may be optionally combined.

CLAIMS

1. An apparatus comprising:
 - a body having a first end configured to engage an elevator and a second end configured to sealingly engage a tubular;
 - a purging passage extending through the body;
 - 5 an opening in the body configured to allow for an umbilical to pass from an exterior of the body through the body and out the second end of the body; and
 - a seal configured to prevent flow through the opening when the umbilical is in place;
 - wherein the second end is configured to rotate relative to the first end.
- 10 2. The apparatus of claim 1, wherein the body comprises a first portion comprising the first end, a second portion comprising the second end, and bearings therebetween such that the second portion is configured to rotate relative to the first portion.
3. The apparatus of claim 1, comprising an external seal at the second end to provide for the sealing engagement of the tubular.
- 15 4. The apparatus of claim 1, wherein the first end has a profile configured to engage an elevator unit.
5. The apparatus of claim 1, comprising a shop lifting plug.
6. The apparatus of claim 1, wherein the second end is open and wherein the purging passage is configured to communicate with the tubular through the open second end.
- 20 7. The apparatus of claim 1, comprising the umbilical and a plug configured to pass through the tubular and sealingly engage an interior of an additional tubular.

8. A method comprising:
- providing an apparatus comprising a body having a first end configured to engage an elevator and a second end configured to sealingly engage a tubular, a purging passage extending through the body, an opening in the body configured to allow for an umbilical to pass from an exterior of the body through the body and out the second end of the body, and a seal configured to prevent flow through the opening when the umbilical is in place;
- 5 providing a tubular; and
- connecting the second end of the body to the tubular.
9. The method of claim 0, comprising providing an additional tubular and connecting the tubular to the additional tubular.
- 10
10. The method of claim 9, wherein the body comprises a first portion comprising the first end, a second portion comprising the second end, and bearings therebetween such that the second portion is configured to rotate relative to the first portion; and wherein connecting the tubular to the additional tubular comprises rotating the second portion relative to the first portion.
- 15
11. The method of claim 0, comprising providing the umbilical and a plug; and lowering the plug into the tubular.
12. The method of claim 11, comprising providing an additional tubular; lowering the plug into the additional tubular; and, with the plug, sealingly engaging an interior of the additional tubular.
- 20
13. The method of claim 12, comprising connecting the tubular and the additional tubular.
14. The method of claim 13, comprising purging air from within the tubular through the purging passage.
- 25
15. The method of claim 14, comprising thermally brazing a connection between the tubular and the additional tubular.

16. The method of claim 15, comprising providing a brazing thermal chamber; and placing an end portion of the tubular and an end portion of the additional tubular in the brazing thermal chamber prior to brazing; wherein brazing comprises activating a heater in the brazing thermal chamber.
- 5 17. The method of claim 16, comprising cooling via circulation through the purging passage.
18. The method of claim 17, comprising removing the plug and disconnecting the second end of the body from the tubular before repeating the steps with a new tubular.

1/4

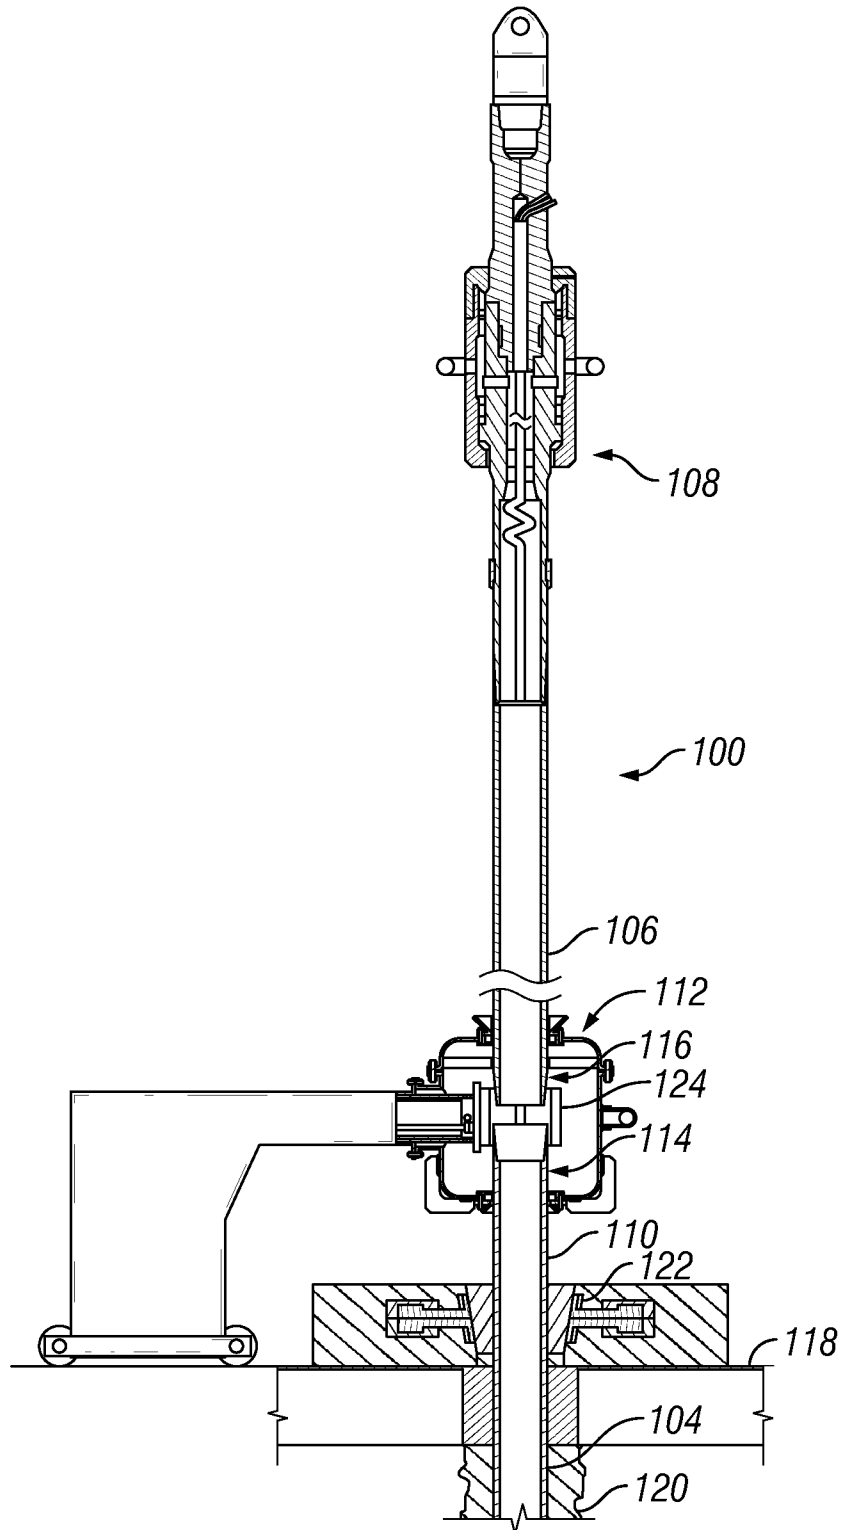


FIG. 1

2/4

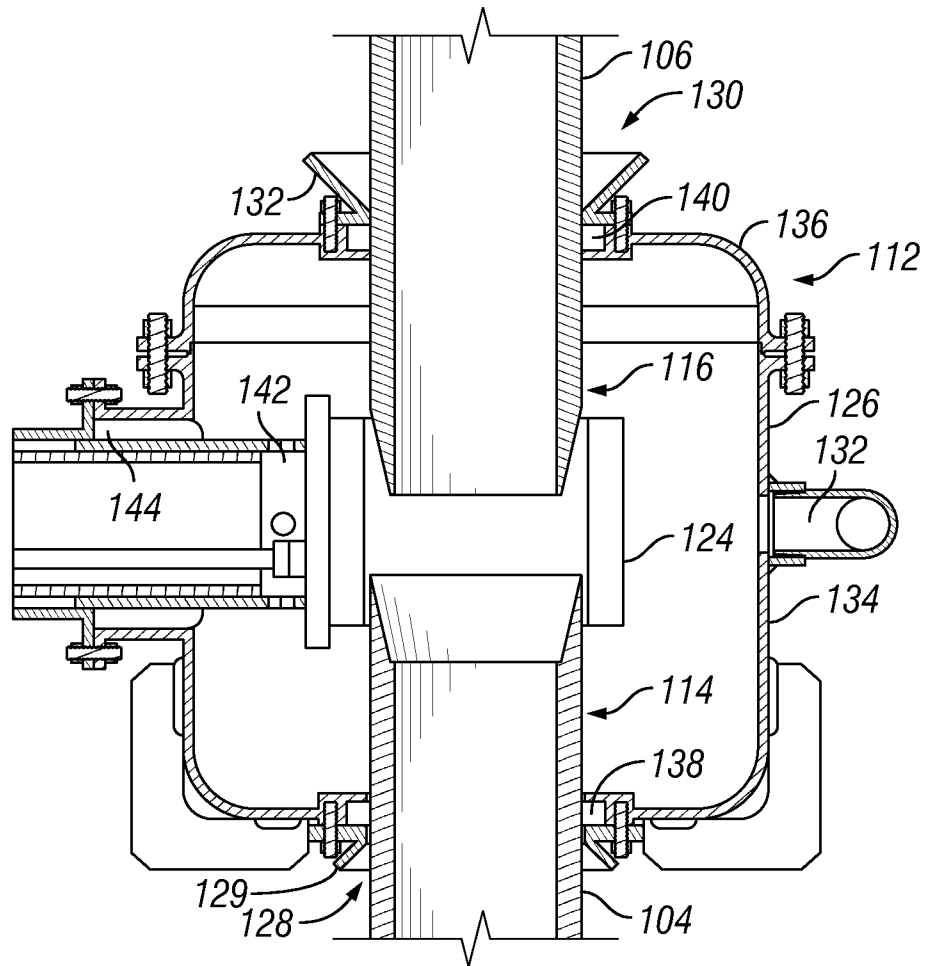


FIG. 2

3/4

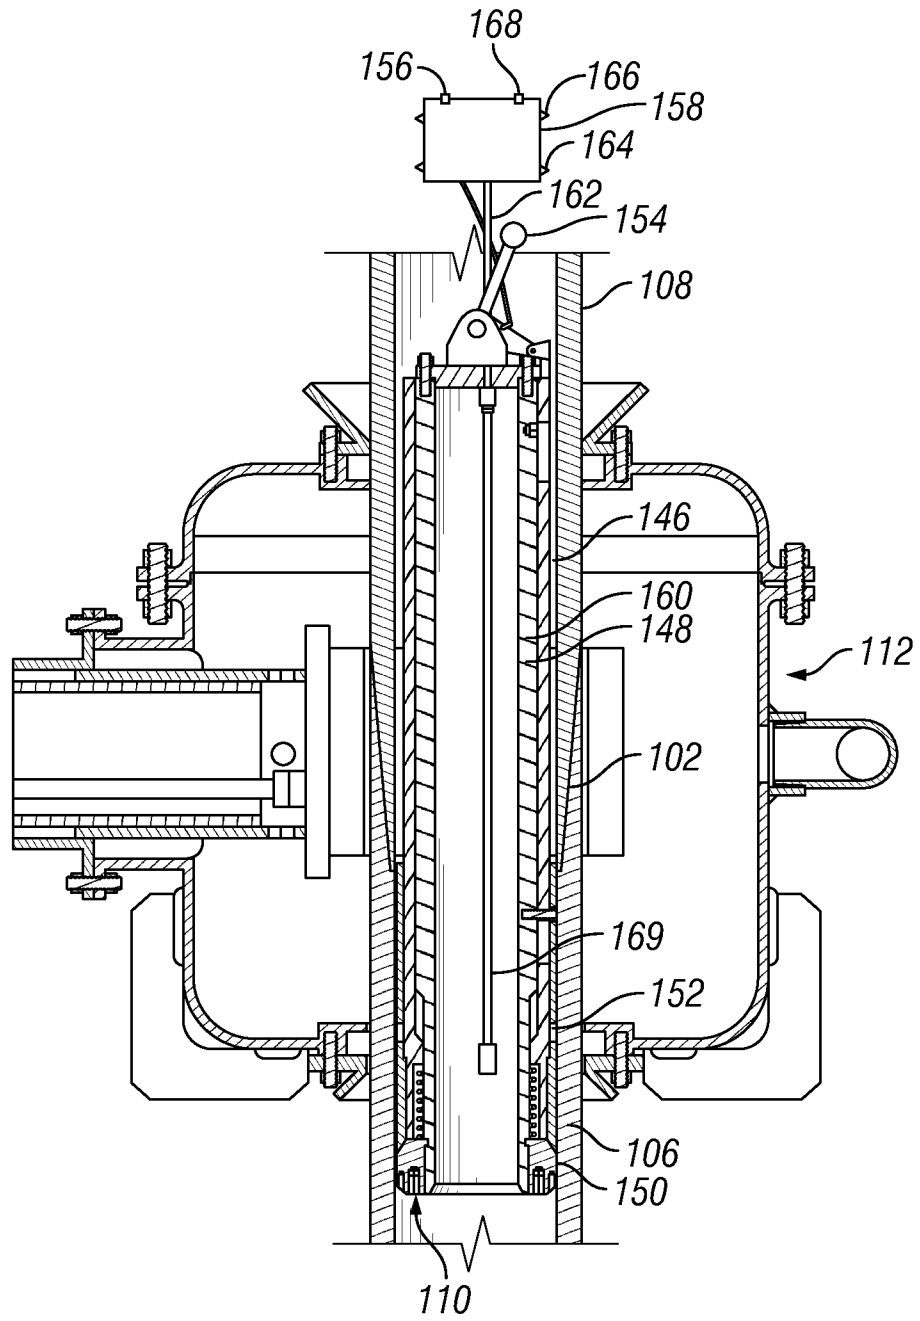


FIG. 3

4/4

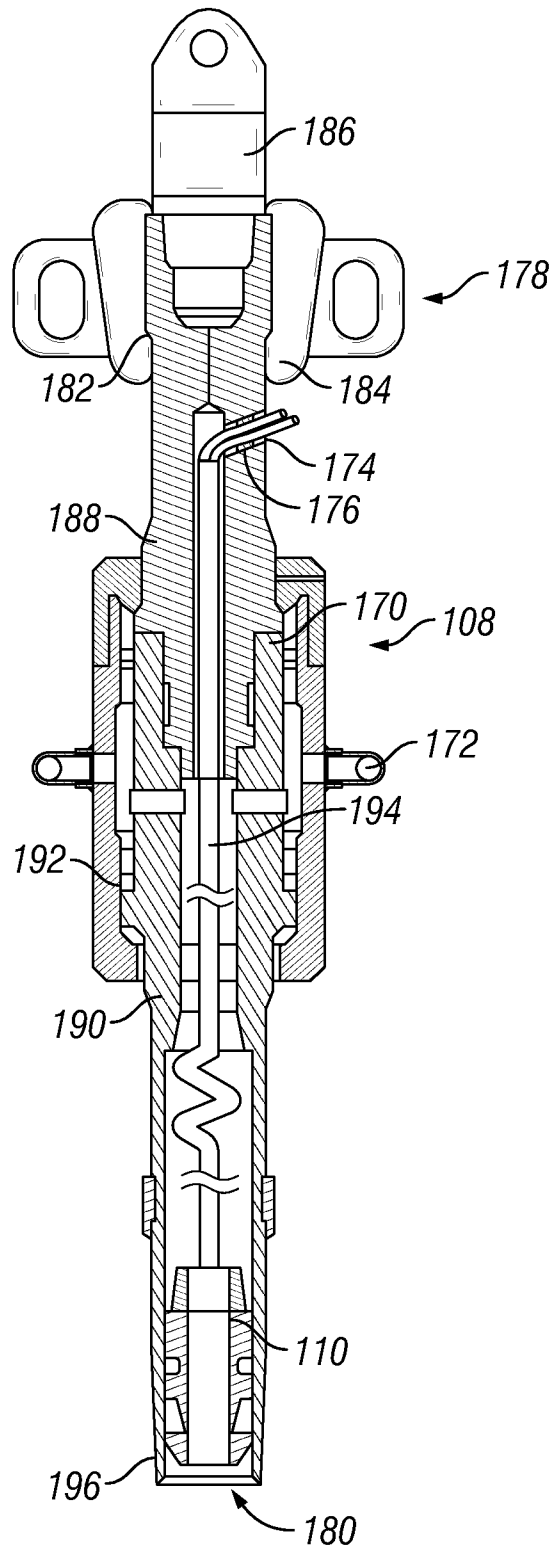


FIG. 4

A. CLASSIFICATION OF SUBJECT MATTER**E21B 19/16(2006.01)i, B23K 1/00(2006.01)i, E21B 33/03(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 19/16; E21B 3/04; B25B 13/50; E21B 19/00; E21B 31/20; E21B 33/16; B23K 1/00; E21B 33/03

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: running tool, purging passage, umbilical, seal, flow, tubular, elevator, and bearing

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6309002 B1 (BOULIGNY, VERNON J.) 30 October 2001 See column 7, line 4 - column 8, line 5 and figures 3-4.	1-18
A	US 2006-0032638 A1 (GIROUX et al.) 16 February 2006 See paragraphs [0035]-[0036] and figures 1-2.	1-18
A	US 2011-0139435 A1 (LATIOLAIS, JR. et al.) 16 June 2011 See paragraphs [0020]-[0029] and figures 1-2.	1-18
A	US 2010-0212915 A1 (HEIDECHE et al.) 26 August 2010 See paragraphs [0079]-[0101] and figures 28-48B.	1-18
A	US 7028586 B2 (ROBICHAUX, DICKY) 18 April 2006 See column 7, line 47 - column 9, line 13 and figures 1-9b.	1-18

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 March 2016 (17.03.2016)

Date of mailing of the international search report

18 March 2016 (18.03.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KIM, Jin Ho

Telephone No. +82-42-481-8699



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/067057

Patent document cited in search report	Publication date	Patent family member(s)	Publication date		
US 6309002 B1	30/10/2001	AU 2001-34965 A1	20/08/2001		
		CA 2399786 A1	16/08/2001		
		CA 2399786 C	26/06/2012		
		EP 1255910 A1	13/11/2002		
		EP 2312115 A2	20/04/2011		
		EP 2312115 A3	17/08/2011		
		EP 2312115 B1	10/10/2012		
		US 6431626 B1	13/08/2002		
		WO 00-61909 A1	19/10/2000		
		WO 00-61909 A9	14/02/2002		
		WO 01-59253 A1	16/08/2001		
		US 2006-0032638 A1	16/02/2006	AU 1999-54332 A1	14/03/2000
				AU 2001-48585 A1	30/10/2001
AU 2002-253377 B2	17/04/2008				
AU 2003-264601 A1	23/12/2004				
AU 2003-264601 B2	24/09/2009				
AU 2006-325824 A1	21/06/2007				
AU 2006-325824 B2	20/05/2010				
AU 2006-332617 A1	12/07/2007				
AU 2006-332617 B2	06/05/2010				
CA 2302231 A1	11/03/1999				
CA 2302231 C	21/11/2006				
CA 2340994 A1	02/03/2000				
CA 2340994 C	16/04/2013				
CA 2404752 A1	25/10/2001				
CA 2404752 C	15/09/2009				
CA 2446687 A1	21/11/2002				
CA 2446687 C	19/10/2010				
CA 2451263 A1	27/05/2004				
CA 2451263 C	05/01/2010				
CA 2512570 A1	20/01/2006				
CA 2512570 C	19/04/2011				
CA 2514136 A1	30/01/2006				
CA 2514136 C	13/09/2011				
CA 2517990 A1	16/09/2004				
CA 2517990 C	18/05/2010				
CA 2517993 A1	16/09/2004				
CA 2517993 C	22/02/2011				
CA 2533134 A1	04/08/2005				
CA 2533134 C	08/06/2010				
CA 2573670 A1	30/07/2007				
CA 2573670 C	22/03/2011				
CA 2605256 A1	02/03/2000				
CA 2605256 C	11/12/2012				
CA 2631573 A1	12/07/2007				
CA 2631573 C	14/09/2010				
CA 2641618 A1	25/10/2001				
CA 2641618 C	21/08/2012				

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/067057

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CA 2710362 A1	21/11/2002
		CA 2714327 A1	16/09/2004
		CA 2714327 C	24/12/2013
		CA 2726769 A1	30/07/2007
		CA 2726769 C	01/10/2013
		CA 2756624 A1	25/10/2001
		CA 2756624 C	19/08/2014
		CA 2768010 A1	21/06/2007
		CA 2799485 A1	02/03/2000
		CA 2799485 C	07/10/2014
		CA 2850900 A1	25/10/2001
		CA 2859724 A1	21/11/2002
		CN 101336332 A	31/12/2008
		CN 101336332 B	26/12/2012
		CN 101365860 A	11/02/2009
		CN 101365860 B	28/11/2012
		CN 102937007 A	20/02/2013
		CN 102943637 A	27/02/2013
		CN 102943637 B	04/02/2015
		CN 103015921 A	03/04/2013
		CN 103015921 B	06/05/2015
		EP 1012439 A1	28/06/2000
		EP 1012439 B1	19/02/2003
		EP 1108111 A1	20/06/2001
		EP 1108111 B1	24/03/2004
		EP 1274919 A1	15/01/2003
		EP 1274919 B1	15/02/2006
		EP 1387924 A1	11/02/2004
		EP 1387924 B1	20/12/2006
		EP 1387924 B3	29/08/2012
		EP 1426550 A1	09/06/2004
		EP 1426550 B1	19/03/2008
		EP 1619349 A2	25/01/2006
		EP 1619349 A3	08/03/2006
		EP 1619349 B1	23/04/2008
		EP 1659258 A2	24/05/2006
		EP 1659258 A3	05/07/2006
		EP 1659258 B1	20/08/2008
		EP 1774133 A1	18/04/2007
		EP 1774133 B1	07/05/2008
		EP 1793079 A2	06/06/2007
		EP 1793079 A3	29/08/2007
		EP 1793079 B1	14/07/2010
		EP 1813768 A1	01/08/2007
		EP 1813768 B1	10/12/2008
		EP 1957747 A2	20/08/2008
		EP 1957747 B1	10/10/2012
		EP 1963612 A2	03/09/2008
		EP 1963612 B1	14/04/2010
		EP 1970526 A2	17/09/2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/067057

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 1970526 A3	28/01/2009
		EP 1970526 B1	16/05/2012
		EP 2189618 A2	26/05/2010
		EP 2189618 A3	07/05/2014
		EP 2284355 A2	16/02/2011
		EP 2284355 A3	07/05/2014
		EP 2284356 A2	16/02/2011
		EP 2284356 A3	07/05/2014
		EP 2284357 A2	16/02/2011
		EP 2284357 A3	07/05/2014
		EP 2322755 A2	18/05/2011
		EP 2322755 A3	07/05/2014
		EP 2322756 A2	18/05/2011
		EP 2322756 A3	07/05/2014
		GB 0515813 D0	07/09/2005
		GB 2340859 A	01/03/2000
		GB 2414757 A	07/12/2005
		GB 2415723 A	04/01/2006
		GB 2416791 A	08/02/2006
		GB 2416791 B	25/11/2009
		GB 2418695 A	05/04/2006
		GB 2428059 A	17/01/2007
		US 2002-0170720 A1	21/11/2002
		US 2003-0111233 A1	19/06/2003
		US 2003-0164276 A1	04/09/2003
		US 2003-0173073 A1	18/09/2003
		US 2004-0003490 A1	08/01/2004
		US 2004-0035587 A1	26/02/2004
		US 2004-0069500 A1	15/04/2004
		US 2004-0144547 A1	29/07/2004
		US 2004-0149451 A1	05/08/2004
		US 2004-0173358 A1	09/09/2004
		US 2004-0216924 A1	04/11/2004
		US 2004-0251050 A1	16/12/2004
		US 2005-0000691 A1	06/01/2005
		US 2005-0161227 A1	28/07/2005
		US 2006-0000600 A1	05/01/2006
		US 2006-0124316 A1	15/06/2006
		US 2006-0169461 A1	03/08/2006
		US 2007-0084598 A1	19/04/2007
		US 2007-0107912 A1	17/05/2007
		US 2007-0131416 A1	14/06/2007
		US 2007-0137868 A1	21/06/2007
		US 2007-0169930 A1	26/07/2007
		US 2007-0193751 A1	23/08/2007
		US 2008-0023192 A1	31/01/2008
		US 2008-0047749 A1	28/02/2008
		US 2008-0059073 A1	06/03/2008
		US 2008-0083540 A1	10/04/2008
		US 2008-0110637 A1	15/05/2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/067057

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2008-0185140 A1	07/08/2008
		US 2009-0218090 A1	03/09/2009
		US 2009-0293640 A1	03/12/2009
		US 2010-0224376 A1	09/09/2010
		US 2011-0174479 A1	21/07/2011
		US 2011-0174483 A1	21/07/2011
		US 2012-0080181 A1	05/04/2012
		US 2013-0075113 A1	28/03/2013
		US 6527047 B1	04/03/2003
		US 6536520 B1	25/03/2003
		US 6591471 B1	15/07/2003
		US 6688398 B2	10/02/2004
		US 6742596 B2	01/06/2004
		US 6938697 B2	06/09/2005
		US 7021374 B2	04/04/2006
		US 7043814 B2	16/05/2006
		US 7073598 B2	11/07/2006
		US 7140445 B2	28/11/2006
		US 7191840 B2	20/03/2007
		US 7219744 B2	22/05/2007
		US 7249637 B2	31/07/2007
		US 7281587 B2	16/10/2007
		US 7296623 B2	20/11/2007
		US 7325610 B2	05/02/2008
		US 7353880 B2	08/04/2008
		US 7503397 B2	17/03/2009
		US 7509722 B2	31/03/2009
		US 7513300 B2	07/04/2009
		US 7568522 B2	04/08/2009
		US 7594540 B2	29/09/2009
		US 7654325 B2	02/02/2010
		US 7669662 B2	02/03/2010
		US 7712523 B2	11/05/2010
		US 7717184 B2	18/05/2010
		US 7740078 B2	22/06/2010
		US 7793719 B2	14/09/2010
		US 7874352 B2	25/01/2011
		US 7896084 B2	01/03/2011
		US 7918273 B2	05/04/2011
		US 8167038 B2	01/05/2012
		US 8567512 B2	29/10/2013
		WO 00-11309 A1	02/03/2000
		WO 01-79652 A1	25/10/2001
		WO 02-092959 A1	21/11/2002
		WO 99-11902 A1	11/03/1999
US 2011-0139435 A1	16/06/2011	AU 1999-57791 A1	29/08/2000
		BR PI0717876 A2	29/10/2013
		CA 2267778 A1	09/04/1998
		CA 2267778 C	22/11/2005

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/067057

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CA 2667369 A1	15/05/2008
		EP 0929731 A1	28/08/2002
		EP 0995011 A1	26/04/2000
		EP 0995011 B1	06/11/2002
		EP 1243746 A1	25/09/2002
		EP 1243746 B1	03/05/2006
		EP 1256691 A2	13/11/2002
		EP 1256691 A3	27/11/2002
		EP 1256691 B1	05/01/2005
		EP 2087198 A1	12/08/2009
		NO 20092106 A	30/07/2009
		US 2002-0029879 A1	14/03/2002
		US 2002-0066564 A1	06/06/2002
		US 2002-0084069 A1	04/07/2002
		US 2006-0283594 A1	21/12/2006
		US 2008-0099196 A1	01/05/2008
		US 2008-0202751 A1	28/08/2008
		US 2010-0096132 A1	22/04/2010
		US 2011-0114306 A1	19/05/2011
		US 5735348 A	07/04/1998
		US 5918673 A	06/07/1999
		US 6279654 B1	28/08/2001
		US 6595288 B2	22/07/2003
		US 7096948 B2	29/08/2006
		US 7370698 B2	13/05/2008
		US 7635026 B2	22/12/2009
		US 7866390 B2	11/01/2011
		US 7874361 B2	25/01/2011
		US 8082982 B2	27/12/2011
		US 8096357 B2	17/01/2012
		WO 00-47866 A1	17/08/2000
		WO 2008-057690 A1	15/05/2008
		WO 98-14688 A1	09/04/1998
		WO 98-50672 A1	12/11/1998
US 2010-0212915 A1	26/08/2010	AU 2010-217897 A1	29/09/2011
		AU 2010-217897 B2	12/06/2014
		CA 2753573 A1	02/09/2010
		CA 2753573 C	11/08/2015
		EP 2401470 A2	04/01/2012
		US 2015-0060045 A1	05/03/2015
		US 8833470 B2	16/09/2014
		WO 2010-099347 A2	02/09/2010
		WO 2010-099347 A3	21/10/2010
US 7028586 B2	18/04/2006	AU 2001-11608 A1	14/05/2001
		AU 2001-33952 A1	17/09/2001
		CA 2390191 A1	10/05/2001
		CA 2397962 A1	13/09/2001
		DE 60129207 D1	16/08/2007

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/067057

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		DE 60129207 T2	06/03/2008
		EP 1234093 A2	28/08/2002
		EP 1257724 A2	20/11/2002
		EP 1257724 B1	04/07/2007
		GB 0004354 D0	12/04/2000
		NO 20023631 D0	31/07/2002
		NO 332003 B1	21/05/2012
		US 2003-0075023 A1	24/04/2003
		US 6854520 B1	15/02/2005
		WO 01-33034 A1	10/05/2001
		WO 01-66905 A2	13/09/2001
		WO 01-66905 A3	07/02/2002