

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
21 June 2018 (21.06.2018)



(10) International Publication Number
WO 2018/109539 A1

(51) International Patent Classification:

B65D 6/16 (2006.01) *B65D 33/10* (2006.01)
B65D 33/08 (2006.01)

(21) International Application Number:

PCT/IB2017/000037

(22) International Filing Date:

09 January 2017 (09.01.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/379,440 14 December 2016 (14.12.2016) US

(72) Inventor; and

(71) Applicant: **TAN, Ah Moi** [MY/MY]; 21, Jalan Bakti 52,
Taman Mutiara Rini, Skudai Johor, 81300 (MY).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SELF-SUPPORTING PLASTIC BAG AND METHOD FOR MANUFACTURING SAME

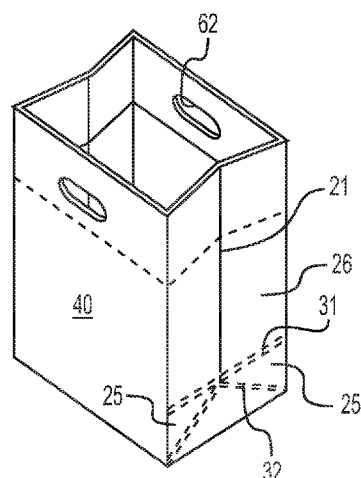


FIG. 1B

(57) Abstract: A plastic bag is provided. The bag may include a rectangular bottom with first, second, third, and fourth edges. It may include a first side extending from a first edge of the bottom, a second side extending from a second edge of the bottom, a third side extending from a third edge of the bottom, and a fourth side extending from a fourth edge of the bottom. The first side may have a first vertical seam and a first flap set. The third side may have a second vertical seam and a second flap set. The bottom, the first side, the second side, the third side, and fourth side are integrally formed from a single sheet of a plastic material. The first vertical seam may extend from a top of the first side to at least the first flap set. The second vertical seam may extend from a top of the third side to at least the second flap set. A method of manufacture thereof is also provided.



WO 2018/109539 A1

Self-Supporting Plastic Bag And Method For Manufacturing Same

TECHNICAL FIELD

[001] This application relates to bags, and methods of manufacture thereof. More specifically, it pertains to plastic bags with a rectangular bottom and that are formed from a single sheet of plastic using side-seams.

BACKGROUND

[002] Existing plastic bags with rectangular bottoms are easier to load with groceries or other items by virtue of the way that they rest on a surface. However, this convenience comes at a price. Such rectangular-bottom plastic bags are often composed of multiple pieces of plastic, require complicated cutting and sealing, and/or are sealed on their bottom surface. Such characteristics may make manufacturing more complicated, more expensive, and less reliable. Further, additional seams cuts may make reduce the load a bag can safely.

SUMMARY

[003] [001]The present disclosure provides a description of plastic bags to address the perceived need described above, and methods of manufacturing the same.

[004] In one embodiment, a plastic bag is provided. The plastic bag may include a rectangular bottom with first, second, third, and fourth edges. It may include a first side extending from a first edge of the bottom, a second side extending from a second edge of the bottom, a third side extending from a third edge of the bottom, and a fourth side extending from a fourth edge of the bottom. The first side may have a first vertical seam and a first flap set. The third side may have a second vertical seam and a second flap set. The bottom, the first side, the second side, the third side, and fourth side are integrally formed from a single sheet of a plastic material. The first vertical seam may extend from a top of the first side to at least the first flap set. The second vertical seam may extend from a top of the third side to at least the second flap set.

[005] The first side may be parallel to and the same size as the third side. The second side may be parallel to and the same size as the fourth side. The first side may connect with and may be perpendicular to both the second side and the fourth side. The bag may

be self-supporting when open. The bag may include a hem at a mouth of the bag. The width of the first side may be shorter than the width of the second side. The second and fourth sides may lack seams. The bottom may lack seams along its second and fourth edges.

[006] The bag may include a pair of handles. The handles may be holes in the plastic sheet and, further, may be holes in the hem. The handles may be strips of plastic attached to the plastic sheet and, further, may be attached to the hem.

[007] In another embodiment, the first vertical seam may extend from the top of the first side to the first edge of the bottom and the second vertical seam may extend from a top of the third side to the third edge of the bottom.

[008] The first flap set may include a first flap extending from the first edge of the bottom. The second flap set may include a second flap extending from the third edge of the bottom. The first vertical seam may bisect the first flap and secure it to the first side. The second vertical seam may bisect the second flap and secure it to the third side.

[009] The bag may further include a first flap seam and a second flap seam. The first flap seam may be parallel to the first edge of the bottom and may further secure the first flap to the first side. The second flap may be parallel to the third edge of the bottom seam and may further secure the second flap to the third side.

[010] There distance between the first flap seam and the first edge of the bottom may be between 0.2 and 2 cm, may be between 2 and 3.5 cm, or may be between 3.5 and 6 cm.

[011] In yet another embodiment, the first flap set may include a first flap and a second flap. The first and second flap may have the same shape.

[012] The first flap may be connected to the first side by a horizontal flap seam and a diagonal flap seam.

[013] The first and second flaps are shaped as right triangles or trapezoids. A diagonal edge of the first flap, a diagonal edge of the second flap, and the first edge of the bottom may a triangular area of the first side. The triangular area of the first side may be seamless.

[014] In yet another embodiment, a method of manufacturing a plastic bag is provided. It includes cutting a rectangular sheet of plastic, folding the rectangular sheet

in half at a fold, forming a first vertical seam on a first side of the folded plastic sheet while providing a first gap along a portion of the first side that is adjacent to the fold, forming a second vertical seam on a second side of the folded plastic sheet while providing a second gap along a portion of the second side that is adjacent to the fold, pushing a portion of the plastic sheet surrounding the first gap into a space at least partially enclosed by the folded rectangular sheet, and pushing a portion of the plastic sheet surrounding the second gap into the space at least partially enclosed by the folded rectangular sheet. It further includes molding and creasing the plastic sheet to form and delineate flaps, a bottom of the bag, and sides of the bag; and securing the flaps to sides of the bag.

[015] In yet another embodiment, another method of manufacturing a plastic bag is provided. The method includes cutting a rectangular sheet of plastic, folding the rectangular sheet such that its cross-section resembles a “W” shape, forming a first vertical seam on an entirety of a first side of the folded plastic bag that includes a folded portion of the rectangular sheet, and forming a second vertical seam on an entirety of a second side of the folded plastic bag that includes the folded portion of the rectangular sheet.

[016] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[017] The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate several embodiments and aspects of the apparatuses and methods described herein and, together with the description, serve to explain the principles of the invention.

[018] Figures 1A to 2C are perspective views of various examples of a self-supporting plastic bag, consistent with disclosed embodiments.

[019] Figures 3A to 3G illustrate steps of a method of manufacturing a self-supporting plastic bag, consistent with disclosed embodiments.

[020] Figures 4A to 4D illustrates steps of an alternative method of manufacturing a self-supporting plastic bag, consistent with disclosed embodiments.

[021] Figure 5 is a flowchart of a method of manufacturing a self-supporting plastic bag, consistent with disclosed embodiments.

[022] Figure 6 is a flowchart of an alternative method of manufacturing a self-supporting plastic bag, consistent with disclosed embodiments.

DETAILED DESCRIPTION

[023] FIGS. 1A- 2C illustrate various versions of bag 100. Each bag may be formed of a single plastic sheet 1. In preferred embodiments, the plastic sheet may comprise or consist of polyethylene, such as HDPE, LLDPE, LDPE or MDPE, but other suitable plastics or flexible materials known in the art may also be used.

[024] Each bag 100 may comprise a mouth 2 at the top, a rectangular bottom 10, two seamed sides 20, and two other sides 40. The two seamed sides 20 may be parallel to one another and extend from two opposite edges of the rectangular bottom 10. The two other sides 40 may be parallel to one another and extend from the remaining two opposite edges of the rectangular bottom 10. The two seamed sides 40 may be perpendicular to the two other sides 40, respectively.

[025] The two seamed sides 20 may be of the same size, with dimensions of bag height 91 by seamed side width 92. Similarly, the two other sides 40 may be of the same size, with dimensions of bag height 91 by other side width 93. As shown, other side width 93 may be greater than seamed side width 92 such that seamed sides 20 are of a smaller size than other sides 40. However, in alternative embodiments, other side width 93 may be shorter than seamed side width 92 or widths 93 and 92 may be the same size.

[026] The terms “parallel,” “perpendicular,” “same size,” “rectangular,” “same shape,” “right triangle,” “right angle,” and the like, as used above and herein, shall be understood to include minor variations as to account for manufacturing tolerances. For example, “parallel” sides need not be strictly parallel in the mathematic sense, but may be deemed sufficiently parallel where bag 100 is roughly a rectangular prism shape, when bag 100 is fully opened and straightened.

[027] Bag 100 may further include a hem 50 at the top along mouth 2, as depicted in Figs. 1B and 1C. Hem 50 may comprise two layers of plastic sheet 1 folded over and seamed together.

[028] Bag 100 may be provided with a pair of handles to improve usability. As shown in Figs. 1B and 2C, bag 100 may comprise cut handles 62. Cut handles 62 may be provided as holes cut, punched, or melted into each of other sides 40 (as shown) or, alternatively, each of seamed sides 20. Cut handles 62 may be provided entirely or partially within hem 50 in some embodiments, as depicted in Fig. 1B. Further, in some embodiments, edges of cut handles 62 may be formed of seams made in plastic sheet 1.

[029] As shown in Figs. 1C and 2B, bag 100 may comprise attached handles 61. Attached handles 61 may be secured to hem 50 in some embodiments, as depicted in Fig. 1C. Attached handles 61 may comprise the same material as plastic sheet 1 and may be formed of the same thickness as plastic sheet 1. For example, attached handles 61 may comprise polyethylene, such as HDPE, LLDPE, LDPE or MDPE; other suitable plastics, or other flexible materials known in the art are contemplated. Here, attached handles 61 may be heat-sealed, respectively, to each of other sides 40 or, alternatively, to each of seamed sides 20. In alternative embodiments, attached handles 61 may be comprised of a rigid or semi-rigid plastic or other suitable material known in the art. In such embodiments, attached handles 61 may be connected to each of other sides 40 (as shown) or each of seamed sides 20, respectively, via a snapping mechanism, a looping mechanism, glue, or another mechanism known in the art.

[030] As shown in the embodiments of Figs. 1A-1C, each seamed side 20 may have a vertical seam 21 that extends from the top of the seamed side 20 to the location of a set of two flaps 25. In such embodiments, each bag 100 may comprise two sets of two flaps 25, thereby comprising four flaps 25. Each flap 25 may have the same shape. Vertical seam 21 may be centrally located in each of seamed sides 20. In some embodiments, for example as shown in Fig. 1A, some of the plastic sheet 1 may extend beyond the vertical seam 21. In other embodiments, for example, as shown in Figs. 1B and 1C, the borders plastic sheet 1 end at the vertical seam 21.

[031] In these embodiments, each flap 25 may comprise two layers of plastic sheet 1; may approximate a right triangle or a trapezoid with a right angle; and may be secured to a seamed side 20 by a horizontal flap seam 31, a diagonal flap seam 32, a differently oriented flap seam, or a combination thereof. Further, each flap 25 may extend from a seamed side 20, for example near the location of diagonal flap seam 32; and may include

a fold at or near to the intersection of the seamed side 20 and an adjacent other side 40. Flaps 25 may be located on the inside of bag 100 and secured to the inner surface of a seamed side 20. However, in alternative embodiments, flaps 25 may be located on the outside of bag 100 and secured to the outer surface of a seamed side 20.

[032] In some embodiments, as shown in Figs 1A-1C, for each seamed side 20, the diagonal edges of the two flaps 25 (which may be the hypotenuse where flap 25 approximates a right triangle), and the corresponding edge of the bottom 10 may define a triangular area of the seamed side 20. Vertical seam 20 may be absent from the triangular area, such that the triangular area may be seamless.

[033] As shown in the alternative embodiments depicted in Figs. 2A-2C, each of seamed sides 20 may have a vertical seam 21 that extends from the top of each seamed side 20 to the adjacent edge of bottom 10, and a set of one flap 25. In such embodiments, each bag 100 may comprise two sets of one triangular flap 25, thereby comprising two flaps 25. Each flap 25 may comprise two layers of plastic sheet 1, and may extend from an adjacent edge of bottom 10. Flap 25 may approximate a triangle or a trapezoid. Vertical seam 21 may be centrally located in each seamed side 20, may bisect flap 25, and may secure flap 25 to the seamed side 20. Specifically, vertical seam 21 may bind the outermost layer flap of 25 to seamed side 20.

[034] In some embodiments, as shown in Figs. 2B and 2C, each seamed side 20 may also have a side support flap seam 30. Side support flap seam 30 may be perpendicular to vertical seam 21; and may bind the innermost layer of flap 25, the outermost layer of flap 25, and seamed side 20 together. Use of side support flap seams 30 may facilitate self-supporting characteristics of bag 100, may improve the load capacity of bag 100, and may facilitate opening bag 100. In some embodiments, side support flap seam 30 may have a length that approximates a horizontally span across flap 25. Consequently, the length of side support flap seam 30 may ultimately define seamed side width 92.

[035] Seam 30 and the adjacent edge of bottom 10 may be separated by a negligible distance such that they are virtually coextensive, may be separated by a distance of 0.2-2 cm, may be separated by a distance of 2-3.5 cm, or may be separated by a distance of 3.5-6 cm. The size of the distance may affect the dimensions of the bag. This is because for bag 100 made from a given plastic sheet 1, the length of side support flap seam 30 may

vary with the distance. For example, the larger the distance is, the shorter the side support flap seam 30, and therefore the shorter seamed side width 92 and the longer other side width 93 may be.

[036] It may further be noted that use of a side support flap seam 30 with an appreciable distance from an edge of bottom 10 may cause the carrying surface of bottom 10 to be curved. This is because on each of the sealed sides 20, the carrying surface of bottom 10 may extend from the side support flap seam 30, which may be disposed above the respective edges of bottom 10. Here, it may be expected that at least the central portion of the carrying surface of bottom 10 may rest upon the ground or the like.

[037] Fig. 5 is flowchart 500, which explains an embodiment of a method of manufacturing bags 100 similar to those depicted in Figs. 1A-1C.

[038] As in step 510, and as illustrated in Fig. 3A, a plastic sheet 1 may be cut from a roll of plastic.

[039] If hem 50 is to be included in bag 100, two hem portions at opposite ends of plastic sheet one are folded over as in step 520 and as illustrated in Fig. 3B. Then, the hem portions are sealed, as in step 530 and as illustrated in Fig. 3C. Seams may preferably be effectuated via hot heat sealing. In alternative embodiments, seams may be created by gluing, crimping, sewing, hot heat sealing, or a combination thereof.

[040] As in step 540, and as illustrated in Fig. 3D, plastic sheet 1 may be folded in half. Where a hem 50 is to be included, the hem components should be aligned with one another.

[041] As in step 550, with the exception of a gap 35, the two edges of folded plastic sheet 1 may be seamed together to form vertical seal 21 on each side of bag 100.

[042] As in step 560 and as illustrated in Fig. 3F, the unsealed portion of the bag surrounding gap 35 may be pushed into the bag and the bag may take shape. This may be accomplished through the use of molds. The sides 20, 40 and bottom 10 may be partially formed and delineated by creases through the use of molds.

[043] As in step 580 and as illustrated in Fig. 3G, the unsealed portion of the bag surrounding gap 35 may be may be molded and creased to form the set of flaps 25 and to further delineated the edges of bottom 10. This may be accomplished through the use of molds. Then, the seams 31, 32 may be added to secure flaps 25 to seamed side 20.

[044] If a pair of handles is to be included in bag 100, as in step 580, cut handles 62 may be cut, punched, or sealed from bag 100. Alternatively, attached handles 61 may be heat sealed or otherwise attached to bag 100. In some embodiments, step 580 may occur earlier in the process, for example, after the plastic sheet is cut in step 510, or after the hem components are sealed in step 530.

[045] Fig. 6 is flowchart 600, which explains an embodiment of a method of manufacturing bags 100 similar to those depicted in Figs. 2A-2C.

[046] Step 510 and option steps 520 and 530 may proceed as described with respect to flow chart 500.

[047] As in step 640, and as illustrated in Fig. 4A, plastic sheet 1 may be folded so that its cross-section resembles a “W” shape. Where a hem 50 is to be included, the hem components should be aligned with one another.

[048] As in step 650, and as illustrated in Fig. 4B, the two edges of folded plastic sheet 1 may be seamed together to form vertical seal 21 on each side of bag 100.

[049] As in step 660 and as illustrated in Fig. 4C, the seamed plastic sheet 1 may be formed into a bag shape. Ultimately, the bottom 10 and flaps 20 may be formed by manipulating the shorter, middle two sections of the folded and seamed “W.” The sides 20, 40, flaps 25, and bottom 10 may be formed and delineated by creases through the use of molds. Step 660, however, may be omitted where unmolded bags may be desired for reduced volume in shipping, packing, or the like.

[050] Optionally, as in step 670 and as illustrated in Fig. 4D, side support flap seams 30 may be added, thereby providing bag 100 with additional structure.

[051] Step 580 may optionally proceed as described with respect to flow chart 500.

[052] Although the foregoing embodiments have been described in detail by way of illustration and example for purposes of clarity of understanding, it will be readily apparent to those of ordinary skill in the art in light of the description herein that certain changes and modifications may be made thereto without departing from the spirit or scope of the appended claims. It is also to be understood that the terminology used herein is for the purpose of describing particular aspects only, and is not intended to be limiting, since the scope of the present invention will be limited only by the appended claims.

[053] It is noted that, as used herein and in the appended claims, the singular forms “a”, “an”, and “the” include plural referents unless the context clearly dictates otherwise. It is further noted that the claims may be drafted to exclude any optional element. As such, this statement is intended to serve as antecedent basis for use of such exclusive terminology as “solely,” “only,” and the like in connection with the recitation of claim elements, or use of a “negative” limitation. As will be apparent to those of ordinary skill in the art upon reading this disclosure, each of the individual aspects described and illustrated herein has discrete components and features which may be readily separated from or combined with the features of any of the other several aspects without departing from the scope or spirit of the disclosure. Any recited method can be carried out in the order of events recited or in any other order that is logically possible. Accordingly, the preceding merely provides illustrative examples. It will be appreciated that those of ordinary skill in the art will be able to devise various arrangements which, although not explicitly described or shown herein, embody the principles of the disclosure and are included within its spirit and scope.

[054] Furthermore, all examples and conditional language recited herein are principally intended to aid the reader in understanding the principles of the invention and the concepts contributed by the inventors to furthering the art, and are to be construed without limitation to such specifically recited examples and conditions. Moreover, all statements herein reciting principles and aspects of the invention, as well as specific examples thereof, are intended to encompass both structural and functional equivalents thereof. Additionally, it is intended that such equivalents include both currently known equivalents and equivalents developed in the future, i.e., any elements developed that perform the same function, regardless of structure. The scope of the present invention, therefore, is not intended to be limited to the exemplary configurations shown and described herein.

[055] In this specification, various preferred embodiments have been described with reference to the accompanying drawings. It will be apparent, however, that various other modifications and changes may be made thereto and additional embodiments may be implemented without departing from the broader scope of the claims that follow. The

specification and drawings are accordingly to be regarded in an illustrative rather than restrictive sense.

WE CLAIM:

1. A plastic bag, the bag comprising:

a rectangular bottom with first, second, third, and fourth edges;
a first side extending from a first edge of the bottom, the first side having a first vertical seam and a first flap set;
a second side extending from a second edge of the bottom;
a third side extending from a third edge of the bottom, the third side having a second vertical seam and a second flap set; and
a fourth side extending from a fourth edge of the bottom;

wherein:

the bottom, the first side, the second side, the third side, and fourth side are integrally formed from a single sheet of a plastic material;
the first vertical seam extends from a top of the first side to at least the first flap set; and
the second vertical seam extends from a top of the third side to at least the second flap set.

2. The bag of claim 1, wherein:

the first side is parallel to and the same size as the third side;
the second side is parallel to and the same size as the fourth side;
the first side connects with and is perpendicular to both the second side and the fourth side.

3. The bag of claim 2, wherein the bag is self-supporting when open.

4. The bag of claim 3, further comprising a hem at a mouth of the bag.

5. The bag of claim 3, wherein a width of the first side is shorter than a width of the second side.

6. The bag of claim 4, wherein:

the second side does not have a seam;
the fourth side does not have a seam;
the bottom does not have a seam along its second edge; and
the bottom does not have a seam along its fourth edge.

7. The bag of claim 2, further comprising a pair of handles.

8. The bag of claim 7, wherein the pair of handles comprise holes in the single plastic sheet.

9. The bag of claim 4, further comprising a pair of handles, wherein the pair of handles comprises holes in the hem.

10. The bag of claim 2, wherein:

the first vertical seam extends from the top of the first side to the first edge of the bottom; and
the second vertical seam extends from a top of the third side to the third edge of the bottom.

11. The bag of claim 10, wherein:

the first flap set comprises a first flap extending from the first edge of the bottom;
the second flap set comprises a second flap extending from the third edge of the bottom;
the first vertical seam bisects the first flap and secures it to the first side; and
the second vertical seam bisects the second flap and secures it to the third side.

12. The bag of claim 11, further comprising a first flap seam and a second flap seam, wherein:

the first flap seam is parallel to the first edge of the bottom and further secures the first flap to the first side; and

the second flap is parallel to the third edge of the bottom seam and further secures the second flap to the third side.

13. The bag of claim 2, wherein:

the first flap set comprises a first flap and a second flap; and
the first and second flaps have the same shape.

14. The bag of claim 13, wherein:

the first flap is connected to the first side by a horizontal flap seam and a diagonal flap seam.

15. The bag of claim 13, wherein:

the first and second flaps are shaped as right triangles;
a diagonal edge of the first flap, a diagonal edge of the second flap, and the first edge of the bottom define a triangular area of the first side; and
the triangular area of the first side is seamless.

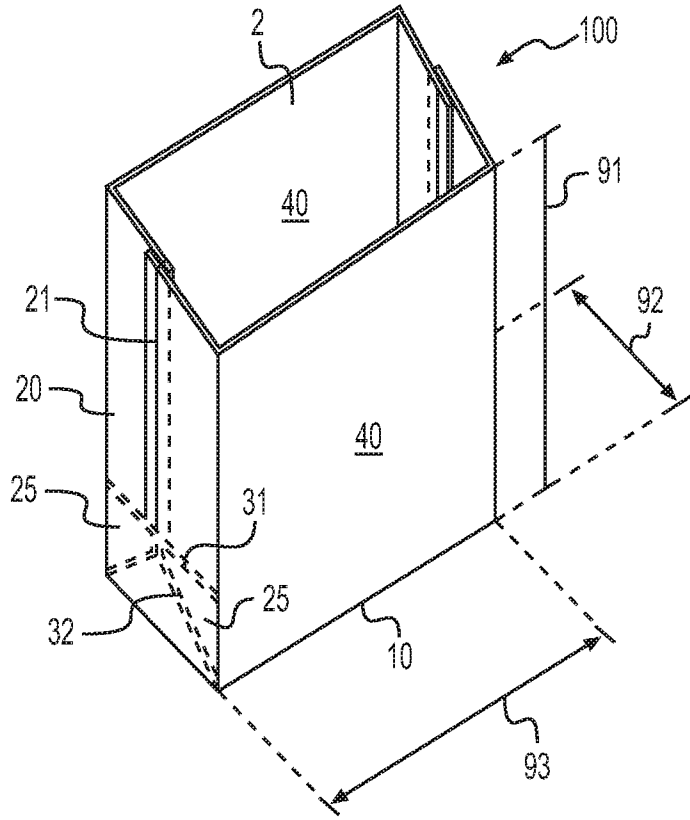


FIG. 1A

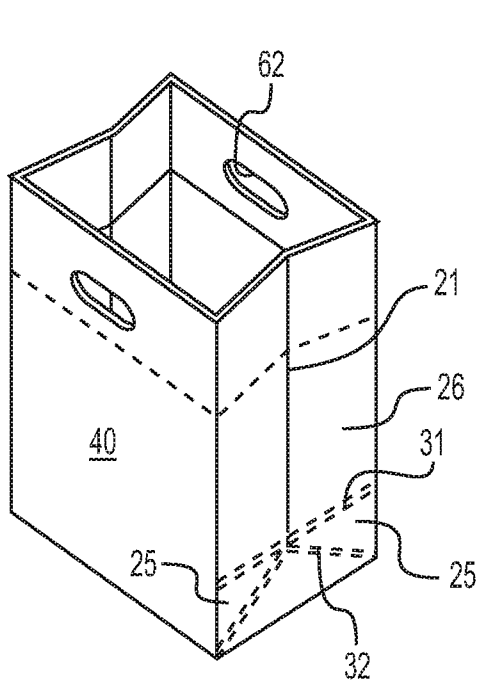


FIG. 1B

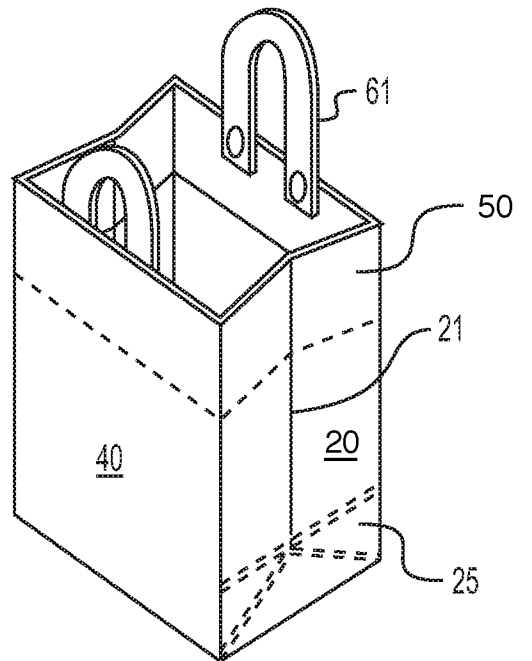


FIG. 1C

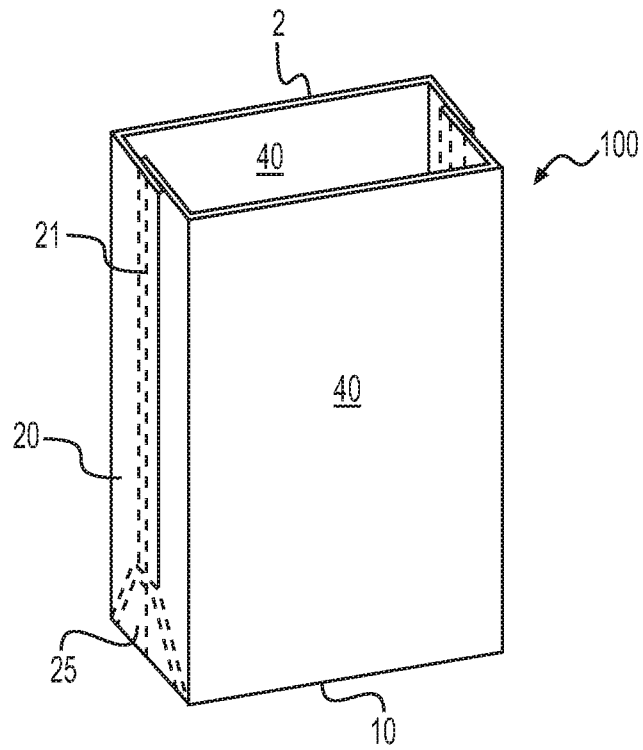


FIG. 2A

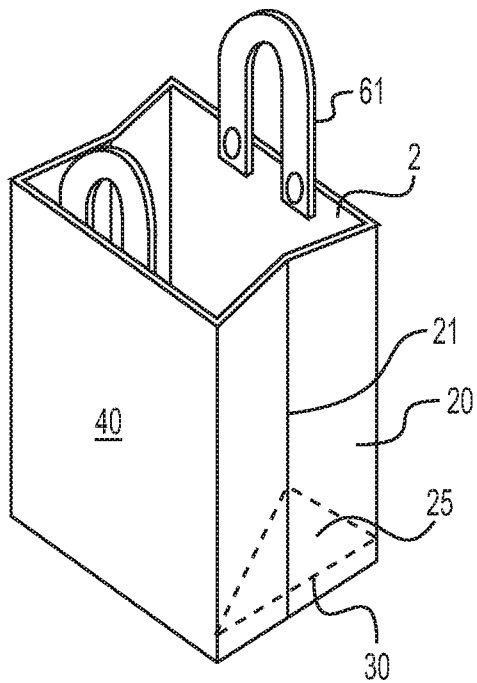


FIG. 2B

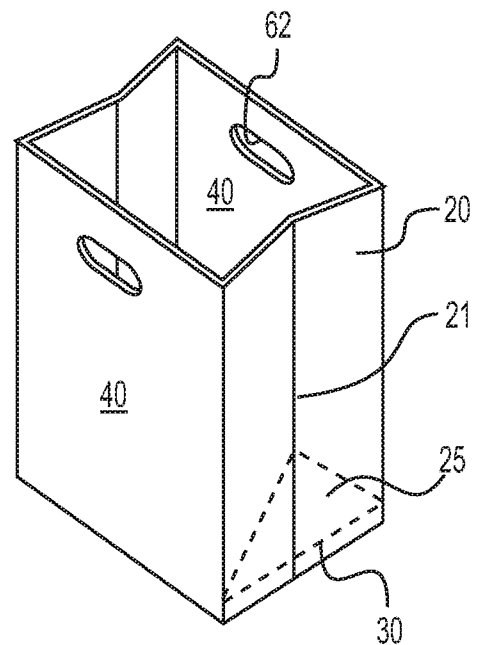


FIG. 2C

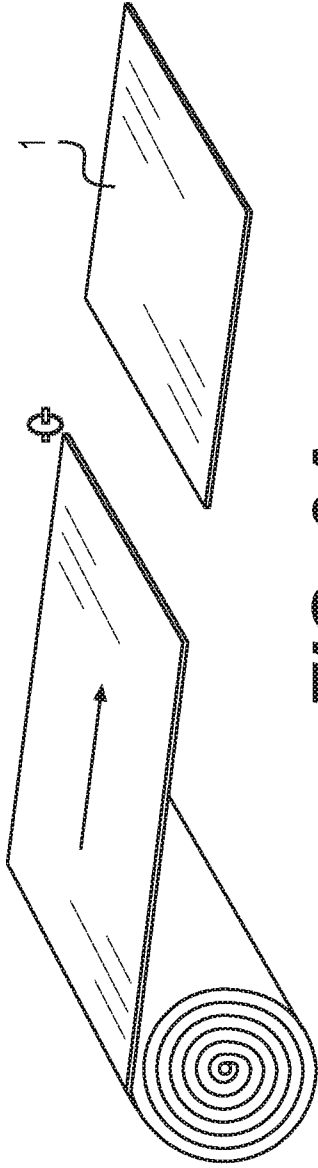


FIG. 3A

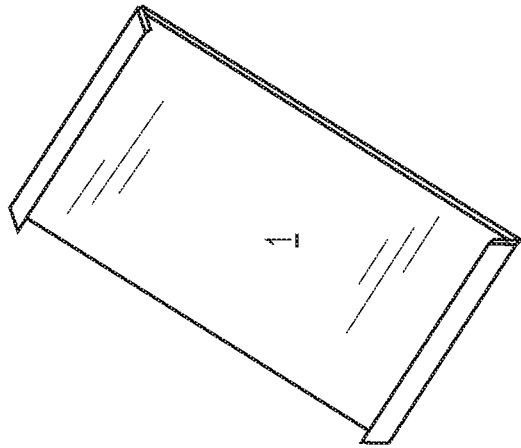


FIG. 3B

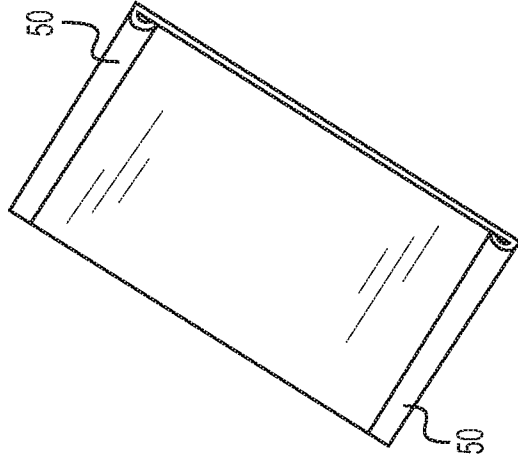


FIG. 3C

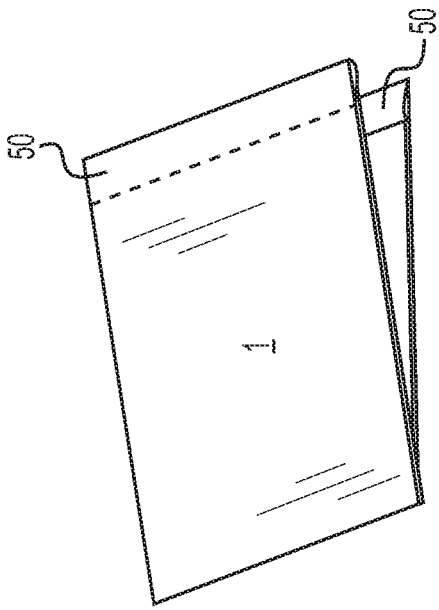


FIG. 3D

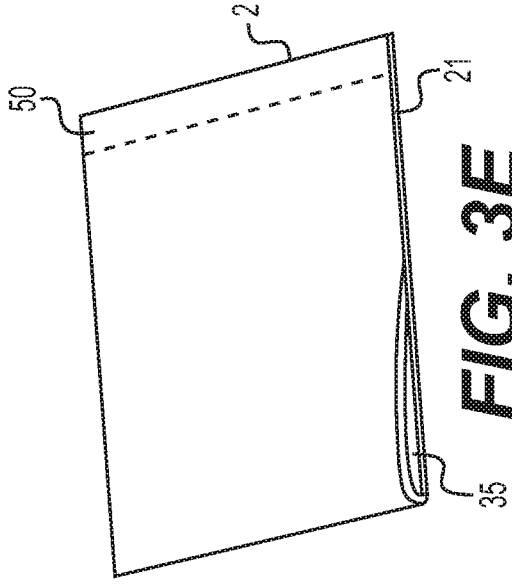


FIG. 3E

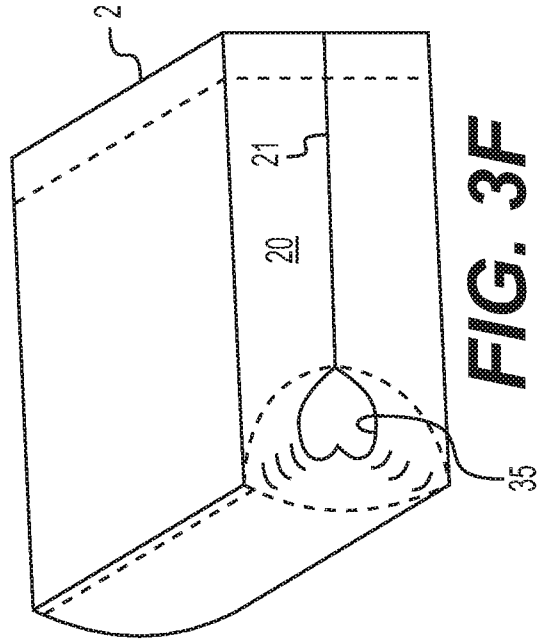


FIG. 3F

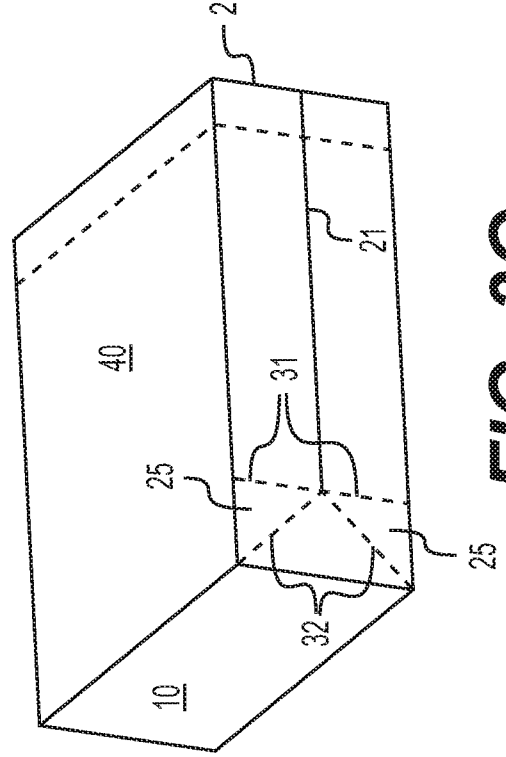


FIG. 3G

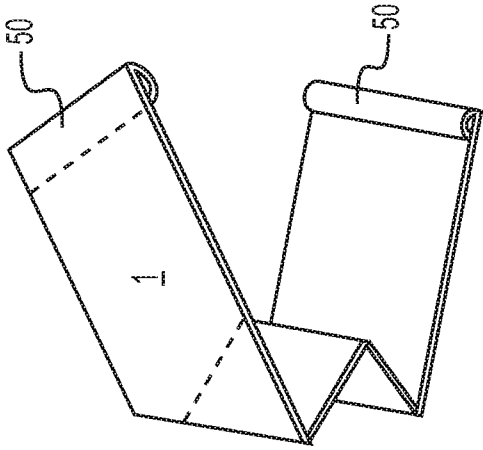


FIG. 4A

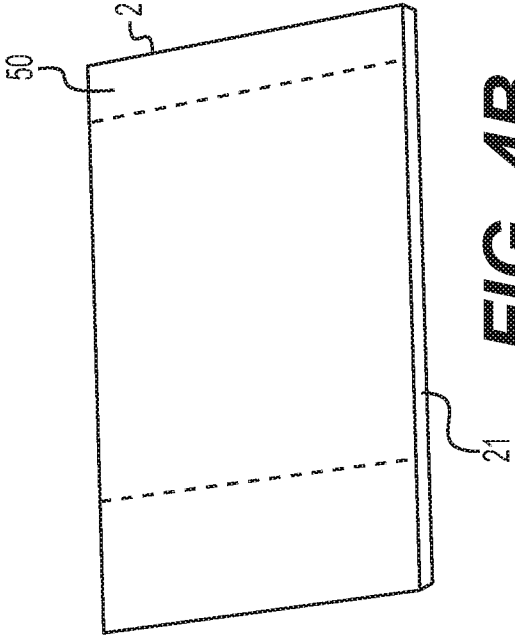


FIG. 4B

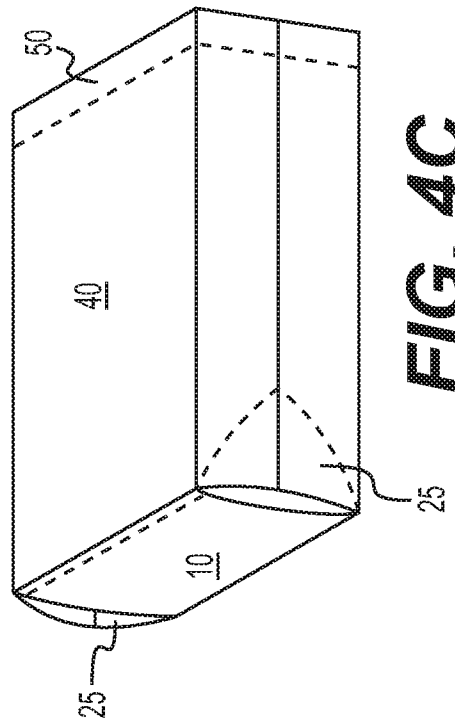


FIG. 4C

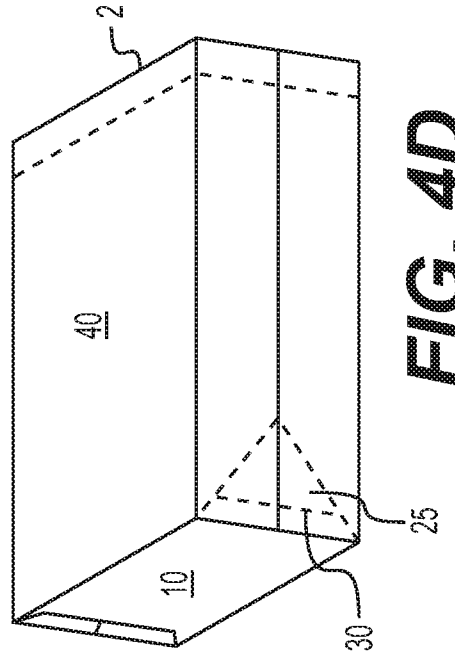


FIG. 4D

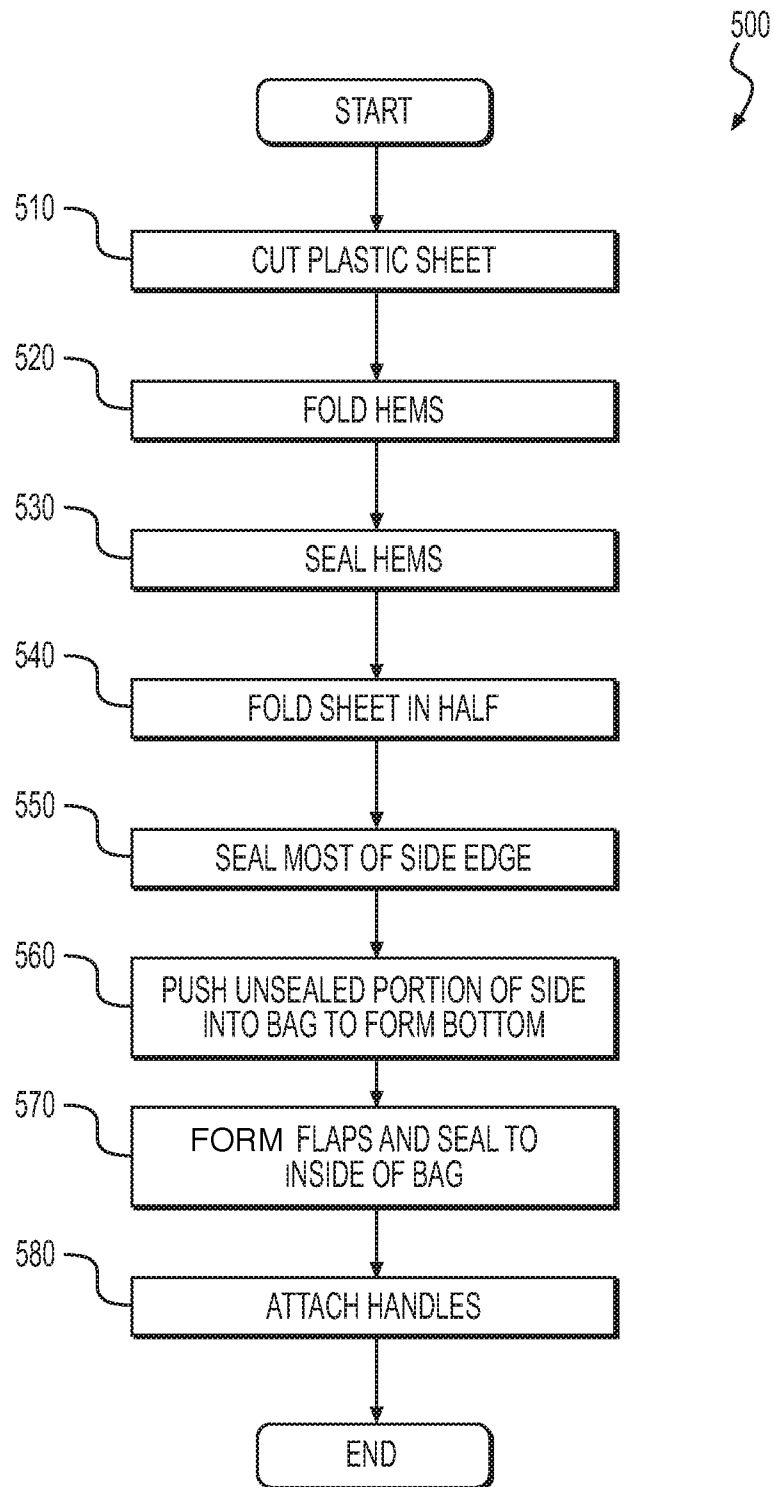


FIG. 5

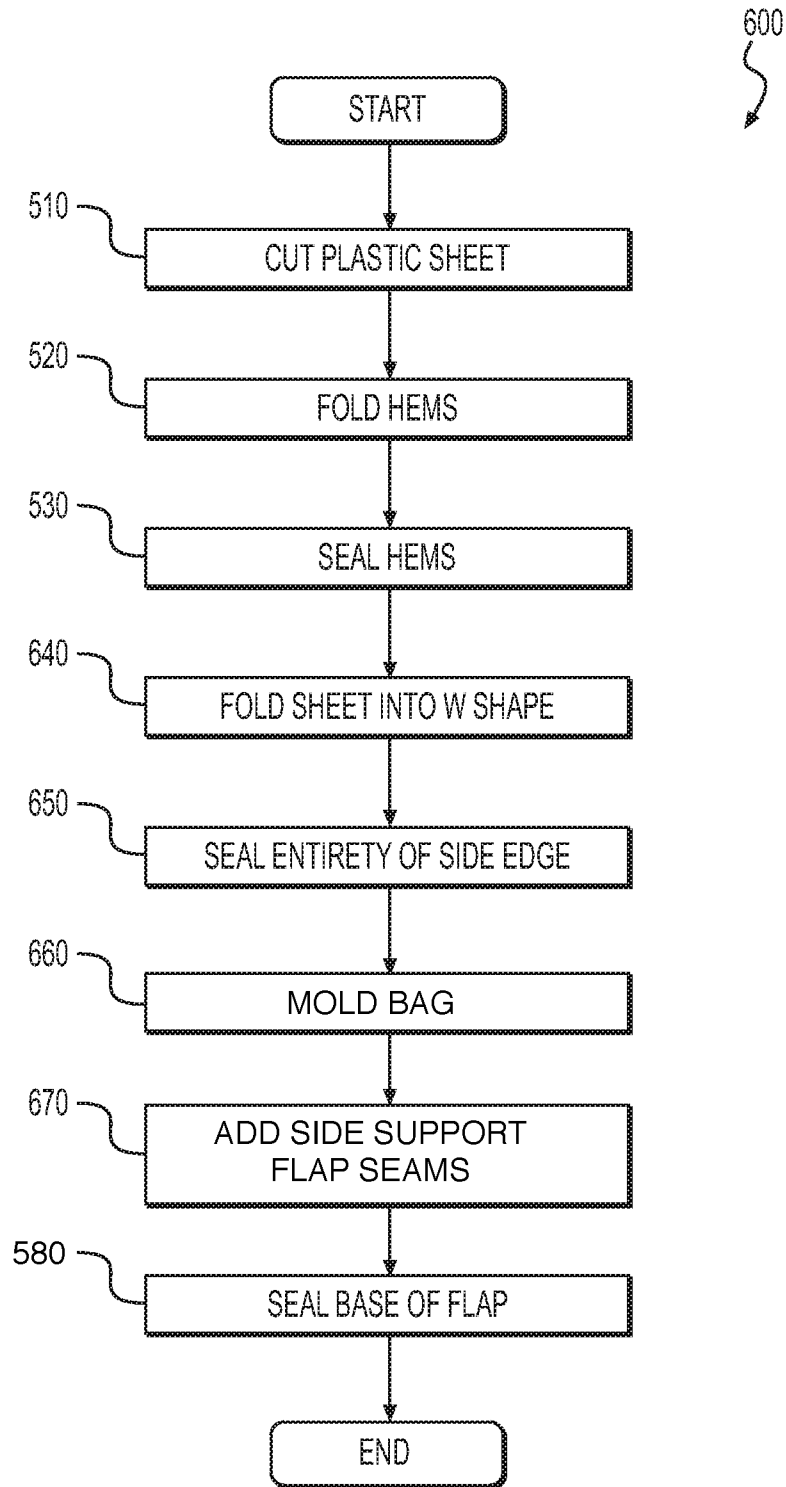


FIG. 6

A. CLASSIFICATION OF SUBJECT MATTER**B65D 6/16(2006.01)i, B65D 33/08(2006.01)i, B65D 33/10(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B65D 6/16; B31B 31/60; B65D 33/10; B31B 1/00; B65D 30/10; B65D 33/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: plastic bag, single sheet of plastic, seam, rectangular bottom, hem, handle

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4041851 A (JENTSCH, HANS G.) 16 August 1977 See column 1, line 46 - column 3, line 9; column 4, line 9 - column 6, line 38; and figures 1-4, 8-13.	1-3,5,10-15
Y		4,6-9
Y	US 5580173 A (SEBASTIAN, JAMES) 03 December 1996 See column 2, line 5 - column 3, line 45; column 5, line 65 - column 8, line 53; claim 10; and figure 2.	4,6-9
A	US 6120183 A (BUCHANAN et al.) 19 September 2000 See column 4, line 48 - column 5, line 12; and figures 17-18.	1-15
A	US 2012-0230611 A1 (EBNER et al.) 13 September 2012 See paragraphs [0033], [0042]; and figure 4.	1-15
A	WO 2004-052729 A2 (CMD CORPORATION et al.) 24 June 2004 See page 6, lines 4-31; and figures 4-5.	1-15

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 August 2017 (28.08.2017)

Date of mailing of the international search report

28 August 2017 (28.08.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

LEE, Se Gyoung

Telephone No. +82-42-481-8740



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IB2017/000037

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4041851 A	16/08/1977	None	
US 5580173 A	03/12/1996	None	
US 6120183 A	19/09/2000	WO 99-08862 A1	25/02/1999
US 2012-0230611 A1	13/09/2012	US 8668387 B2	11/03/2014
WO 2004-052729 A2	24/06/2004	AU 2003-296365 A1	30/06/2004
		CA 2509048 A1	24/06/2004
		CA 2509048 C	21/09/2010
		EP 1590253 A2	02/11/2005
		EP 1590253 A4	17/05/2006
		EP 1590253 B1	05/11/2008
		US 2004-0109616 A1	10/06/2004
		US 2004-0109617 A1	10/06/2004
		US 2006-0078233 A1	13/04/2006
		US 2007-0230833 A1	04/10/2007
		WO 2004-052729 A3	25/11/2004