

(19)



(11)

EP 3 241 503 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

24.06.2020 Bulletin 2020/26

(51) Int Cl.:

A61B 17/072 ^(2006.01)

(21) Application number: **15875127.1**

(86) International application number:

PCT/CN2015/098180

(22) Date of filing: **22.12.2015**

(87) International publication number:

WO 2016/107449 (07.07.2016 Gazette 2016/27)

(54) **STAPLE CARTRIDGE ASSEMBLY AND MEDICAL ANASTOMAT USING SAME**

KLAMMERMAGAZIN UND MEDIZINISCHER ANASTOMAT MIT VERWENDUNG DAVON

ENSEMBLE CARTOUCHE D'AGRAFES ET DISPOSITIF D'ANASTOMOSE MÉDICALE L'UTILISANT

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

• **YE, Yanping**

**Suzhou
Jiangsu 215028 (CN)**

• **GAO, Hui**

**Suzhou
Jiangsu 215028 (CN)**

(30) Priority: **30.12.2014 CN 201410841670**

(43) Date of publication of application:

08.11.2017 Bulletin 2017/45

(74) Representative: **dompatent von Kreisler Selting**

Werner -

**Partnerschaft von Patent- und Rechtsanwälten
mbB**

Deichmannhaus am Dom

Bahnhofsvorplatz 1

50667 Köln (DE)

(73) Proprietor: **Touchstone International Medical
Science Co., Ltd.**

Suzhou, Jiangsu 215028 (CN)

(72) Inventors:

• **CHEN, Wangdong**

**Suzhou
Jiangsu 215028 (CN)**

• **SHU, Tuo**

**Suzhou
Jiangsu 215028 (CN)**

(56) References cited:

WO-A1-2012/040984 CN-A- 101 966 093

CN-A- 103 654 898 CN-A- 104 434 250

CN-A- 104 434 250 CN-U- 204 379 338

CN-U- 204 379 338 US-A1- 2009 114 701

US-A1- 2011 084 113 US-A1- 2013 214 030

EP 3 241 503 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The present invention is related to the technical field of medical instruments, and more particularly, to a staple cartridge assembly and a medical stapler using the staple cartridge assembly.

BACKGROUND

[0002] A medical stapler is a common medical instrument when performing surgeries to physiological tissues such as intestinal tissues. It is a medical device replacing manual suturing. With development of modern technologies and improvement of manufacturing techniques, current medical staplers are reliable in quality, convenient in use and appropriate in tightness and tension of suturing. They have the advantages of quick suturing, simple operation and less side effects and surgical complications. Sometimes, they can cut tumor tissues which could not be removed in past surgeries, so they are praised highly by foreign and domestic surgeons. The difference in performance of such instruments plays a crucially important role in the surgical effects. Documents WO2012040984 and US2011084113 disclose such surgical stapling instruments.

[0003] At present, a cutter push rod of a medical stapler may be formed by multiple thin sheets, each sheet has a thickness of about 0.25mm. As the sheets are very thin and elastic, the cutter push rod formed by such multiple sheets can be deformed under external forces. In practice, during a firing process of a medical stapler and a bending process of a cutter push rod, the multiple sheets are applied with a great external force, such that the multiple sheets can easily deform or detach from one another in their laminating direction, whereby, result in the firing of the medical stapler may not be sufficient.

SUMMARY

[0004] The invention is as defined in the appended claims. The objectives of the present invention are to provide a staple cartridge assembly and a medical stapler using the staple cartridge assembly.

[0005] To realize one of the above objectives, an embodiment of the present invention provides a staple cartridge assembly. The staple cartridge assembly comprises a connector, a cutter push rod and an elastic sheet, the elastic sheet having a first through groove and the cutter push rod being formed by laminating multiple sheets, wherein when the staple cartridge assembly is in an original status or a closed status, part of the cutter push rod is located in the first through groove, and the first through groove restricts detaching of the multiple sheets in a laminating direction of the multiple sheets; in a firing process of the staple cartridge assembly, the cutter push rod moves towards a distal end of the staple

cartridge assembly to press the elastic sheet, such that the elastic sheet deforms and the cutter push rod is gradually detached from the first through groove; after the firing of the staple cartridge assembly is finished, the cutter push rod is detached from the first through groove.

[0006] As an improvement of the embodiment of the present invention, the cutter push rod includes a first end surface formed by laminating the multiple sheets and a second end surface away from the first end surface; when the staple cartridge assembly is in the original status or the closed status, a distance from the highest point of the elastic sheet to the first end surface is greater than that from the highest point to the second end surface; in the firing process of the staple cartridge assembly, the highest point gradually departs from the second end surface and gradually approaches the first end surface; after the firing of the staple cartridge assembly is finished, the elastic sheet is detached from the cutter push rod.

[0007] As another improvement of the embodiment of the present invention, the elastic sheet includes a first end and a second end that are movably connected to the connector; the first end is located at a distal end of the second end; during the firing process of the staple cartridge assembly, the first end moves towards the distal end of the staple cartridge assembly, and the second end moves towards the proximal end thereof.

[0008] As yet another improvement of the embodiment of the present invention, the elastic sheet includes a first end movably connected to the connector and a second end fixedly connected to the connector; the first end is located at a distal end of the second end; during the firing process of the staple cartridge assembly, the first end moves towards the distal end of the staple cartridge assembly.

[0009] As yet another improvement of the embodiment of the present invention, the staple cartridge assembly further includes a limiting member; a second through groove is provided between the first end and the first through groove, and is movably connected to the connector via the limiting member; when the staple cartridge assembly is in the original status or the closed status, the second through groove is stationary relative to the limiting member; during the firing process of the staple cartridge assembly, the limiting member can slide in the second through groove, and the second through groove moves towards the distal end of the staple cartridge assembly relative to the limiting member.

[0010] As yet another improvement of the embodiment of the present invention, the limiting member is a limiting nail fixedly connected to the connector.

[0011] As yet another improvement of the embodiment of the present invention, the cutter push rod includes a cutter push rod main body and a tail end; the tail end is located at the proximal end of the cutter push rod main body; an abutting portion is provided between the proximal end of the first through groove and the second end; when the cutter push rod moves towards the distal end of the staple cartridge assembly, the tail end presses the

abutting portion to deform the elastic sheet.

[0012] As yet another improvement of the embodiment of the present invention, the elastic sheet is located at a midway between the proximal and distal ends of the connector.

[0013] To realize one of the above objectives, an embodiment of the present invention provides a medical stapler including the staple cartridge assembly of any of the above technical solutions.

[0014] As an improvement of the embodiment of the present invention, the medical stapler further includes a firing rod which abuts against the elastic sheet after the firing of the medical stapler is finished.

[0015] Compared with the prior art, the present invention may produce the following advantageous effects. In the present invention, by limiting the multiple sheets using the first through groove in the elastic sheet, the multiple sheets do not detach from one another in their laminating direction; the cutter push rod can smoothly move towards the distal or proximal end of the medical stapler through the deformation of the elastic sheet, and blocking of the cutter push rod by the elastic sheet is avoided.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016]

Fig. 1 is a schematic structural view of a medical stapler according an embodiment of the present invention;

Fig. 2 is a plan view of a stapler cartridge assembly according an embodiment of the present invention;

Fig. 3 is an exploded schematic structural view of a part of a stapler cartridge assembly according an embodiment of the present invention;

Fig. 4 is a schematic structural view of a stapler cartridge assembly in an original status according an embodiment of the present invention;

Fig. 5 is a schematic structural view of an elastic sheet when the stapler cartridge assembly is in an original status according an embodiment of the present invention;

Fig. 6 is a schematic structural view of a firing process of a stapler cartridge assembly according an embodiment of the present invention;

Fig. 7 is a schematic structural view when the firing process of a stapler cartridge assembly is finished according an embodiment of the present invention; and

Fig. 8 is a schematic structural view of an elastic sheet when the firing process of a stapler cartridge

assembly is finished according an embodiment of the present invention.

DETAILED DESCRIPTION

[0017] The followings will describe the present invention in detail with reference to the embodiments shown in the figures.

[0018] The terms expressing the positions and directions used in the present invention use the instrument operator as the reference object. The end close to the operator is the proximal end, and the end far away from the operator is the distal end.

[0019] In the embodiments of the present invention, specific illustrations are made by taking an endoscopic surgical cutting stapler as an example. But it should be noted that other forms of staplers may be alternatively applied.

[0020] As shown in Figs. 1-3, a medical stapler is used for applying multiple staples onto physiological tissues of a human body and cutting the corresponding physiological tissues by a cutter. The medical stapler includes an instrument main body 10, a rotation ring 20 matching with the instrument main body 10, and a firing handle 30 pivotably connected to the instrument main body 10.

[0021] The distal end of the instrument main body 10 is provided with a staple cartridge assembly 40, which includes a staple cartridge 41, an anvil 42, a staple cartridge bracket 43, a connector 44, an I-shaped cutter 45 and a joint 46 arranged at the distal end of the connector 44. By controlling the rotation direction and angle of the joint 46, an area defined by the staple cartridge 41 and the anvil 42 can rotate relative to the connector 44 to adapt to multi-angle cutting and stapling surgeries.

[0022] The staple cartridge bracket 43 defines a support passage in which the staple cartridge 41 is mounted and received. The staple cartridge bracket 43 is used for connecting the staple cartridge 41 to the connector 44.

[0023] In the present embodiment, the staple cartridge 41 and the anvil 42 is rotatably relative to each other. When they rotate to open status, the operated target physiological tissues can be placed between the staple cartridge 41 and the anvil 42. Then, by rotating the staple cartridge 41 and the anvil 42 to a closed status, the target physiological tissues between them are clamped to facilitate the following cutting and stapling operations.

[0024] When the medical stapler/staple cartridge assembly 40 is in an original status, the tail at the proximal end of the anvil 42 is applied with an external force to keep the anvil 42 and the staple cartridge 41 in an open status, and the I-shaped cutter 45 is located at the proximal end of the staple cartridge assembly 40.

[0025] When the medical stapler/staple cartridge assembly 40 is in the closed status, the anvil 42 and the staple cartridge 41 are driven by the I-shaped cutter 45 to be closed. The target physiological tissues can be clamped between the anvil 42 and the staple cartridge 41. The I-shaped cutter 45 moves a certain distance to-

wards the distal end of the medical stapler/staple cartridge assembly 40 relative to the original status. But generally, the I-shaped cutter 45 is still located at the proximal end of the staple cartridge assembly 40.

[0026] When the medical stapler/staple cartridge assembly 40 is in a firing status, the anvil 42 and the staple cartridge 41 are kept to be closed to each other, and the I-shaped cutter 45 moves from the proximal end of the staple cartridge assembly 40 to the distal end thereof, cuts the clamped physiological tissues, and stops moving at the distal end of the staple cartridge assembly 40 when being limited.

[0027] As shown in Fig. 3, the staple cartridge bracket 43 includes a first abutting surface 432 which is away from the anvil 42 and cooperates with one end 451 of the I-shaped cutter 45, and the anvil 42 includes a second abutting surface which is at the back of the anvil surface and cooperates with the other end 452 of the I-shaped cutter 45.

[0028] The staple cartridge 41, the anvil 42 and the staple cartridge bracket 43 are provided with cutter receiving grooves 411, 421, 431 respectively to cooperate with the I-shaped cutter 45. The cutter receiving grooves 411, 421, 431 extend from the proximal ends of the staple cartridge 41, the anvil 42 and the staple cartridge bracket 43 to the distal ends thereof respectively. When the anvil 42 and the staple cartridge 41 are closed to each other, the cutter receiving grooves 411, 421, 431 cooperate with one another to form a passage along which the I-shaped cutter 45 can move from the proximal end of the staple cartridge assembly 40 to the distal end thereof or from the distal end thereof to the proximal end thereof.

[0029] The staple cartridge assembly 40 further includes a cutter push rod 47 connected to the proximal end of the I-shaped cutter 45. The cutter push rod 47 can drive the I-shaped cutter 45 to move from the proximal ends of the cutter receiving grooves 411, 421, 431 to the distal ends thereof or from the distal ends thereof to the proximal ends thereof. In this process, the cutter receiving grooves 411, 421, 431 provide a movement path and guide the I-shaped cutter 45 and the cutter push rod 47. When the area defined by the anvil 42 and the staple cartridge 41 rotates by a certain degree relative to the connector 44, the cutter push rod 47 bends for a certain degree accordingly, so that the I-shaped cutter 45 can smoothly move towards the distal end of the medical stapler.

[0030] As shown in Fig. 4-8, the staple cartridge assembly 40 further includes an elastic sheet 50 having a first through groove 55. As shown in Fig. 3, the cutter push rod 47 is made of multiple sheets. As shown in Fig. 4-5, when the staple cartridge assembly 40 is in the original status or the closed status, a part of the cutter push rod 47 is located in the first through groove 55, which limits the detaching of the multiple sheets in a laminating direction of the multiple sheets. As shown in Fig. 6, in the firing process of the staple cartridge assembly 40, the cutter push rod 47 moves towards the distal end of the

staple cartridge assembly 40 to press the elastic sheet 50. Then the elastic sheet 50 deforms and the cutter push rod 47 is gradually detached from the first through groove 55. As shown in Fig. 7, after the firing process of the staple cartridge assembly 40 is finished, the I-shaped cutter 45 stops at the distal end of the staple cartridge assembly 40 after being limited, and the cutter push rod 47 is completely detached from the first through groove 55.

[0031] In the present embodiment, the width of the first through groove 55 in the laminating direction of the multiple sheets is equal to or slightly greater than the thickness of the laminated multiple sheets, so that the first through groove 55 can better limit the multiple sheets forming the cutter push rod 47 from detaching from one another in the laminating direction of the multiple sheets.

[0032] In the present embodiment, as shown in Fig. 4-5, the elastic sheet 50 includes a first end 51 and a second end 52 connected to the connector 44 respectively; the first end 51 is located at a distal end of the second end 52; at least one of the first and second ends 51, 52 is movably connected to the connector 44. In the present embodiment, for example, the first end 51 is movably connected to the connector 44, and the second end 52 is fixedly connected to the connector 44. During the firing process of the staple cartridge assembly 40, the first end 51 moves towards the distal end of the staple cartridge assembly 40, but this case is not restrictive. In one example, the second end 52 is movably connected to the connector 44, and the first end 51 is fixedly connected to the connector 44. During the firing process of the staple cartridge assembly 40, the second end 52 moves towards the proximal end of the staple cartridge assembly 40. In another example, both the first and second ends 51, 52 are movably connected to the connector 44. During the firing process of the staple cartridge assembly 40, the first end 51 moves towards the distal end of the staple cartridge assembly 40, and the second end 52 moves towards the proximal end thereof.

[0033] In the present embodiment, as shown in Fig. 4-5, the first end 51 is movably connected to the connector 44. A second through groove 56 is provided between the first end 51 and the first through groove 55, and is movably connected to the connector 44 via a limiting member 53. The limiting member 53 is fixedly connected to the connector 44. When the staple cartridge assembly 40 is in the original status or the closed status or has finished its firing process, the second through groove 56 is stationary relative to the limiting member 53. During the firing process of the staple cartridge assembly 40, the limiting member 53 can slide in the second through groove 56, and the second through groove 56 moves towards the distal end of the staple cartridge assembly 40 relative to the limiting member 53. The limiting member 53 may be a limiting nail 53. The maximum diameter of a cap of the limiting member 53 is greater than a width of the second through groove 56 in the laminating direction of the multiple sheets to prevent the second through

groove 56 from being detached from the limiting member 53.

[0034] In the present embodiment, the second end 52 is fixedly connected to the connector 44. The cutter push rod 47 includes a cutter push rod main body 473 and a tail end 474. The tail end 474 is located at the proximal end of the cutter push rod main body 473. The tail end 474 protrudes from the cutter push rod main body 473 in a direction along which the tail end 474 faces the second end 52. An abutting portion 57 is provided between the proximal end of the first through groove 55 and the second end 52. When the tail end 474 and the abutting portion 57 interfere with each other, the tail end 474 presses the elastic sheet 50 to deform the same.

[0035] In the present embodiment, the first and second through grooves 55, 56 cross the elastic sheet 50 in the thickness direction of the elastic sheet 50. The abutting portion 57 does not cross the elastic sheet 50, and is substantially a portion of the elastic sheet 50.

[0036] In the present embodiment, the proximal end of the cutter push rod 47 is connected with a firing rod 70 via a transmission block 60. The firing rod 70 controls the cutter push rod 47 to move towards the distal or proximal end of the staple cartridge assembly 40.

[0037] In the present embodiment, the work procedures of the staple cartridge assembly 40 are as below.

[0038] In the present embodiment, for example, the staple cartridge assembly 40 is horizontally placed, and the staple cartridge 41 is located below the anvil 42. Other positional terms refer to the above descriptions. In addition, in the present embodiment, for example, the elastic sheet 50 is arranged below the connector 44. The area below the connector 44 is an area adjacent to the staple cartridge 41, but this case is not restrictive. In other embodiments, the elastic sheet 50 may be arranged in other regions. The cutter push rod 47 includes a first end surface 471 formed by laminating the multiple sheets and a second end surface 472 away from the first end surface 471.

[0039] As shown in Figs. 4-5, when the staple cartridge assembly 40 is in the original status or the closed status, a distance from the highest point 54 of the elastic sheet 50 to the first end surface 471 is greater than that from the highest point 54 to the second end surface 472. Preferably, the highest point 54 is higher than the second end surface 472. The tail end 474 of the cutter push rod 47 is away from the abutting portion 57 of the elastic sheet 50. The second through groove 56 is stationary relative to the limiting member 53. A part of the cutter push rod 47 is located in the first through groove 55, and the first through groove 55 restricts detaching of the multiple sheets from one another in a laminating direction of the multiple sheets.

[0040] As shown in Fig. 6, in the firing process of the staple cartridge assembly 40, the highest point 54 gradually departs from the second end surface 472 and gradually approaches the first end surface 471. When the cutter push rod 47 moves towards the distal end of the

staple cartridge assembly 40, the tail end 474 of the cutter push rod 47 gradually approaches and presses the abutting portion 57 to deform the elastic sheet 50. The second through groove 56 moves towards the distal end of the staple cartridge assembly 40 relative to the limiting member 53. At this point, a part of the cutter push rod 47 is still located in the first through groove 55, and the first through groove 55 restricts detaching of the multiple sheets from one another in a laminating direction of the multiple sheets. When the highest point 54 gradually descends to a position near the first end surface 471, the tail end 474 of the cutter push rod 47 gradually detaches from the abutting portion 57, and the firing rod 70 gradually abuts against the elastic sheet 50. At this point, the cutter push rod 47, the transmission block 60 and the firing rod 70 can move above the elastic sheet 50, and continue to press the elastic sheet 50 until the cutter push rod 47 reaches the furthest end of the staple cartridge assembly 40.

[0041] As shown in Figs. 7-8, when the staple cartridge assembly 40 finishes the firing process, the elastic sheet 50 detaches from the cutter push rod 47. The tail end 474 of the cutter push rod 47 is away from the abutting portion 57 of the elastic sheet 50. The second through groove 56 is stationary relative to the limiting member 53. The elastic sheet 50 is located below the cutter push rod 47, and the transmission block 60 and the firing rod 70, so that when the cutter push rod 47 approaches the proximal end of the staple cartridge assembly 40, the cutter push rod 47, the transmission block 60 and the firing rod 70 can move above the elastic sheet 50. As shown in Fig. 4, the elastic sheet 50 is located at a midway between the proximal and distal ends of the connector 44. The midway is a position where when the cutter push rod 47 bends for an angle, the multiple sheets can most easily detach from one another.

[0042] In the present embodiment, when the area defined by the anvil 42 and the staple cartridge 41 rotates by a certain degree relative to the connector 44, the cutter push rod 47 bends for a certain degree accordingly. The distal end of the cutter push rod 47 is clamped between the first and second cutter receiving grooves 411, 421, and the proximal end thereof is clamped in the first through groove 55. When the cutter push rod 47 pushes the I-shaped cutter 45 to forward, due to limiting of the proximal end of the cutter push rod 47 by the first through groove 55, the multiple sheets forming the cutter push rod 47 do not detach from one another, so that the cutter push rod 47 can stably push the I-shaped cutter 45 to forward.

[0043] To sum up, in the present invention, by limiting the multiple sheets using the first through groove 55 in the elastic sheet 50, the multiple sheets do not detach from one another in their laminating direction; the cutter push rod 47 can smoothly move towards the distal or proximal ends of the staple cartridge assembly 40 through deformation of the elastic sheet 50, and blocking of the cutter push rod 47 by the elastic sheet 50 is avoided.

ed.

[0044] It should be understood that although the description is described according to the above embodiments, each embodiment may not only include one independent technical solution. The presentation manner of the description is only for the sake of clarity. Those skilled in the art should take the description as an integral part. The technical solutions of the respective embodiments may be combined properly to form other embodiments understandable by those skilled in the art.

[0045] The embodiments aspects and examples which do not fall within the scope of the claims are provided for illustrative purpose only and do not form part of the present invention. The invention is defined in the claims as follows.

Claims

1. A staple cartridge assembly (40) comprising a connector (44), an I-shaped cutter (45), a cutter push rod (47) connected to the proximal end of the I-shaped cutter (45) wherein the cutter push rod (47) is adapted to drive the I-shaped cutter (45), and the staple cartridge assembly (40) further comprises an elastic sheet (50) wherein the elastic sheet (50) is having a first through groove (55) and wherein the cutter push rod (47) being formed by laminating multiple sheets, wherein when the staple cartridge assembly is in an original status or a closed status, the I-shaped cutter (45) is located at the proximal end of the staple cartridge assembly and a part of the cutter push rod (47) is located in the first through groove, and the first through groove restricts detaching of the multiple sheets in a laminating direction of the multiple sheets; further in a firing process of the staple cartridge assembly the I-shaped cutter (45) moves from the proximal end of the staple cartridge assembly (40) to the distal end and the cutter push rod (47) moves towards a distal end of the staple cartridge assembly (40) to press the elastic sheet, such that the elastic sheet (50) deforms and the cutter push rod (47) is gradually detached from the first through groove; and after the firing of the staple cartridge assembly is finished the I-shaped cutter (45) is located at the distal end of the staple cartridge assembly (40) and the cutter push rod (47) is detached from the first through groove.
2. The staple cartridge assembly (40) of claim 1, wherein the cutter push rod (47) includes a first end (51) surface formed by laminating the multiple sheets and a second end (52) surface away from the first end (51) surface; when the staple cartridge assembly is in the original status or the closed status, a distance from the highest point of the elastic sheet (50) to the first end (51) surface is greater than that from the

highest point to the second end (52) surface; when the I-shaped cutter (45) moves from the proximal end of the staple cartridge assembly (40) to the distal end, the highest point gradually departs from the second end (52) surface and gradually approaches the first end (51) surface; when the I-shaped cutter (45) is located at the distal end of the staple cartridge assembly, the elastic sheet (50) is detached from the cutter push rod (47).

3. The staple cartridge assembly (40) of claim 1, wherein the elastic sheet (50) includes a first end (51) and a second end (52) that are movably connected to the connector (44); the first end (51) is located at a distal end of the second end (52); when the I-shaped cutter (45) moves from the proximal end of the staple cartridge assembly (40) to the distal end, the first end (51) moves towards the distal end of the staple cartridge assembly, and the second end (52) moves towards the proximal end thereof.
4. The staple cartridge assembly (40) of claim 1, wherein the elastic sheet (50) includes a first end (51) movably connected to the connector (44) and a second end (52) fixedly connected to the connector (44); the first end (51) is located at a distal end of the second end (52); during the firing process of the staple cartridge assembly, the first end (51) moves towards the distal end of the staple cartridge assembly.
5. The staple cartridge assembly (40) of claim 4, wherein the staple cartridge assembly (40) further includes a limiting member; a second through groove is provided between the first end (51) and the first through groove, and is movably connected to the connector (44) via the limiting member; when the staple cartridge assembly (40) is in the original status or the closed status, the second through groove is stationary relative to the limiting member; when the I-shaped cutter (45) moves from the proximal end of the staple cartridge assembly (40) to the distal end, the limiting member can slide in the second through groove, and the second through groove moves towards the distal end of the staple cartridge assembly (40) relative to the limiting member.
6. The staple cartridge assembly (40) of claim 5, wherein the limiting member is a limiting nail fixedly connected to the connector (44).
7. The staple cartridge assembly (40) of claim 4, wherein the cutter push rod (47) includes a cutter push rod (47) main body and a tail end; the tail end is located at the proximal end of the cutter push rod (47) main body; an abutting portion is provided between the proximal end of the first through groove and the second end (52); when the cutter push rod (47) moves towards the distal end of the staple cartridge assembly

bly, the tail end presses the abutting portion to deform the elastic sheet.

8. The staple cartridge assembly (40) of claim 1, wherein the elastic sheet (50) is located at a midway between the proximal and distal ends of the connector (44).
9. A medical stapler including the staple cartridge assembly (40) of any of claims 1-8.
10. The medical stapler of claim 9, further comprising a firing rod which abuts against the elastic sheet (50) when the I-shaped cutter (45) is located at the distal end of the staple cartridge assembly.

Patentansprüche

1. Klammermagazinanordnung (40) mit einem Verbinder (44), einer I-förmigen Schneideinrichtung (45), einer Schneideinrichtungsschubstange (47), die mit dem proximalen Ende der I-förmigen Schneideinrichtung (45) verbunden ist, wobei die Schneideinrichtungsschubstange (47) eingerichtet ist, die I-förmige Schneideinrichtung (45) anzutreiben, und wobei die Klammermagazinanordnung (40) ferner eine elastische Bahn (50) aufweist, wobei die elastische Bahn (50) eine erste Durchgangsnut (55) aufweist, und wobei die Schneideinrichtungsschubstange (47) durch Laminieren mehrerer Bahnen gebildet ist, wobei, wenn sich die Klammermagazinanordnung (40) im Originalzustand oder in einem geschlossenen Zustand befindet, die I-förmige Schneideinrichtung (45) sich an dem proximalen Ende der Klammermagazinanordnung (40) befindet, und ein Teil der Schneideinrichtungsschubstange (47) in der ersten Durchgangsnut angeordnet ist, und die erste Durchgangsnut das Lösen der mehreren Bahnen in einer Laminierungsrichtung der mehreren Bahnen verhindert; wobei ferner die I-förmige Schneideinrichtung (45) sich in einem Auslösevorgang der Klammermagazinanordnung (40) sich von dem proximalen Ende der Klammermagazinanordnung (40) zu dem distalen Ende bewegt, und die Schneideinrichtungsschubstange (47) sich in Richtung eines distalen Endes der Klammermagazinanordnung (40) bewegt, um derart gegen die elastische Bahn zu drücken, dass die elastische Bahn (50) sich verformt und die Schneideinrichtungsschubstange (47) allmählich aus der Durchgangsnut gelöst wird; und wobei sich die I-förmige Schneideinrichtung (45) nach dem Ende des Auslösens der Klammermagazinanordnung am distalen Ende der Klammermagazinanordnung (40) befindet und die Schneideinrichtungsschubstange (47) aus der ersten Durchgangsnut gelöst ist.

2. Klammermagazinanordnung (40) nach Anspruch 1, bei welcher die Schneideinrichtungsschubstange (47) eine erste Endfläche (51), die durch Laminieren der mehreren Bahnen gebildet ist, und eine zweite Endfläche (52) aufweist, die der ersten Endfläche (51) entgegengesetzt ist; wobei, wenn die Klammermagazinanordnung (40) sich im Originalzustand oder in einem geschlossenen Zustand befindet, die Entfernung von dem höchsten Punkt der elastischen Bahn (50) zu der ersten Endfläche (51) größer ist als diejenige von dem höchsten Punkt zur zweiten Endfläche (52); wobei, wenn die I-förmige Schneideinrichtung (45) sich von einem proximalen Ende der Klammermagazinanordnung (40) zu dem distalen Ende bewegt, der höchste Punkt sich allmählich von der zweiten Endfläche (52) entfernt und sich der ersten Endfläche (51) nähert; wobei, wenn die I-förmige Schneideinrichtung (45) sich am distalen Ende der Klammermagazinanordnung befindet, die elastische Bahn (50) von der Schneideinrichtungsschubstange (47) gelöst ist.
3. Klammermagazinanordnung (40) nach Anspruch 1, bei welcher die elastische Bahn (50) ein erstes Ende (51) und ein zweites Ende (52) aufweist, die bewegbar mit dem Verbinder (44) verbunden sind; wobei das erste Ende (51) sich an einem distalen Ende des zweiten Endes (52) befindet; wobei, wenn die I-förmige Schneideinrichtung (45) sich von dem proximalen Ende der Klammermagazinanordnung (40) zu dem distalen Ende bewegt, das erste Ende (51) sich in Richtung des distalen Endes der Klammermagazinanordnung bewegt, und das zweite Ende (52) sich in Richtung des proximalen Endes derselben bewegt.
4. Klammermagazinanordnung (40) nach Anspruch 1, bei welcher die elastische Bahn (50) ein erstes Ende (51), das bewegbar mit dem Verbinder (44) verbunden ist, und ein zweites Ende (52) aufweist, das fest mit dem Verbinder (44) verbunden ist; wobei das erste Ende (51) sich an einem distalen Ende des zweiten Endes (52) befindet; wobei das erste Ende (51) sich während des Auslösevorgangs der Klammermagazinanordnung in Richtung des distalen Endes der Klammermagazinanordnung bewegt.
5. Klammermagazinanordnung (40) nach Anspruch 4, bei welcher die Klammermagazinanordnung (40) ferner ein Begrenzungsselement aufweist; wobei eine zweite Durchgangsnut zwischen dem ersten Ende (51) und der ersten Durchgangsnut vorgesehen ist, und über das Begrenzungsselement bewegbar mit dem Verbinder (44) verbunden ist; wobei, wenn die Klammermagazinanordnung (40) sich im Originalzustand oder in einem geschlossenen Zustand befindet, die zweite Durchgangsnut in Bezug auf das Begrenzungsselement stationär ist; wobei, wenn die

I-förmige Schneideinrichtung (45) sich von dem proximalen Ende der Klammermagazinanordnung (40) zu dem distalen Ende bewegt, das Begrenzungselement in der zweiten Durchgangsnut gleiten kann, und die zweite Durchgangsnut sich in Bezug auf das Begrenzungselement in Richtung des distalen Endes der Klammermagazinanordnung (40) bewegt.

6. Klammermagazinanordnung (40) nach Anspruch 5, bei welcher das Begrenzungselement ein Begrenzungsnagel ist, der fest mit dem Verbinder (44) verbunden ist. 5
7. Klammermagazinanordnung (40) nach Anspruch 4, bei welcher die Schneideinrichtungsschubstange (47) einen Hauptkörper der Schneideinrichtungsschubstange (47) und ein hinteres Ende aufweist; wobei das hintere Ende sich an dem proximalen Ende des Hauptkörpers der Schneideinrichtungsschubstange (47) befindet; wobei ein Anlagebereich zwischen dem proximalen Ende der ersten Durchgangsnut und dem zweiten Ende (52) vorgesehen ist; wobei, wenn die Schneideinrichtungsschubstange (47) sich in Richtung des distalen Endes der Klammermagazinanordnung bewegt, das hintere Ende gegen den Anlagebereich drückt, um die elastische Bahn zu verformen. 10
8. Klammermagazinanordnung (40) nach Anspruch 1, bei welcher die elastische Bahn (50) sich in der Mitte zwischen dem proximalen und dem distalen Ende des Verbinders (44) befindet. 15
9. Medizinische Klammervorrichtung mit der Klammermagazinanordnung (40) nach einem der Ansprüche 1 - 8. 20
10. Medizinische Klammervorrichtung nach Anspruch 9, ferner mit einer Auslösestange, welche an der elastischen Bahn (50) anliegt, wenn die I-förmige Schneideinrichtung (45) sich an dem distalen Ende der Klammermagazinanordnung befindet. 25

Revendications

1. Ensemble de cartouche d'agrafes (40) comprenant un connecteur (44), un cutter en "I" (45), une tige de poussée de cutter (47) connectée à l'extrémité proximale du cutter en "I" (45), dans lequel la tige de poussée de cutter (47) est adaptée pour entraîner le cutter en "I" (45), et l'ensemble de cartouche d'agrafes (40) comprend par ailleurs une feuille élastique (50), dans lequel la feuille élastique (50) présente une première rainure traversante (55) et dans lequel la tige de poussée de cutter (47) est formée par stratification de multiples feuilles, dans lequel, lorsque l'ensemble de cartouche d'agrafes se trouve dans un 50

état original ou dans un état fermé, le cutter en "I" (45) est situé à l'extrémité proximale de l'ensemble de cartouche d'agrafes et une partie de la tige de poussée de cutter (47) est située dans la première rainure traversante, et la première rainure traversante limite le détachement des multiples feuilles dans une direction de stratification des multiples feuilles; par ailleurs, au cours d'un processus de déclenchement de l'ensemble de cartouche d'agrafes, le cutter en "I" (45) se déplace de l'extrémité proximale de l'ensemble de cartouche d'agrafes (40) vers l'extrémité distale et la tige de poussée du cutter (47) se déplace vers une extrémité distale de l'ensemble de cartouche d'agrafes (40) pour appuyer sur la feuille élastique, de sorte que la feuille élastique (50) se déforme et que la tige de poussée de cutter (47) se détache progressivement de la première rainure traversante; et, lorsque le déclenchement de l'ensemble de cartouche d'agrafes est terminé, le cutter en "I" (45) est situé à l'extrémité distale de l'ensemble de cartouche d'agrafes (40) et la tige de poussée de cutter (47) est détachée de la première rainure traversante.

2. Ensemble de cartouche d'agrafes (40) selon la revendication 1, dans lequel la tige de poussée de cutter (47) comporte une première surface d'extrémité (51) formée par stratification des multiples feuilles et une deuxième surface d'extrémité (52) distante de la première surface d'extrémité (51); lorsque l'ensemble de cartouche d'agrafes se trouve à l'état original ou à l'état fermé, une distance entre le point le plus élevé de la feuille élastique (50) et la première surface d'extrémité (51) est supérieure à celle entre le point le plus élevé et la deuxième surface d'extrémité (52); lorsque le cutter en "I" (45) se déplace de l'extrémité proximale de l'ensemble de cartouche d'agrafes (40) vers l'extrémité distale, le point le plus élevé s'écarte progressivement de la deuxième surface (52) et se rapproche progressivement de la première surface (51); lorsque le cutter en "I" (45) est situé à l'extrémité distale de l'ensemble de cartouche d'agrafes, la feuille élastique (50) est détachée de la tige de poussée de cutter (47). 30

3. Ensemble de cartouche d'agrafes (40) selon la revendication 1, dans lequel la feuille élastique (50) comporte une première extrémité (51) et une deuxième extrémité (52) qui sont connectées de manière déplaçable au connecteur (44); la première extrémité (51) est située à une extrémité distale de la deuxième extrémité (52); lorsque le cutter en "I" (45) se déplace de l'extrémité proximale de l'ensemble de cartouche d'agrafes (40) vers l'extrémité distale, la première extrémité (51) se déplace vers l'extrémité distale de l'ensemble de cartouche d'agrafes et la deuxième extrémité (52) se déplace vers l'extrémité proximale de ce dernier. 45

4. Ensemble de cartouche d'agrafes (40) selon la revendication 1, dans lequel la feuille élastique (50) comporte une première extrémité (51) connectée de manière déplaçable au connecteur (44) et une deuxième extrémité (52) connectée de manière fixe au connecteur (44); la première extrémité (51) est située à une extrémité distale de la deuxième extrémité (52); au cours du processus de déclenchement de l'ensemble de cartouche d'agrafes, la première extrémité (51) se déplace vers l'extrémité distale de l'ensemble de cartouche d'agrafes. 5 10
5. Ensemble de cartouche d'agrafes (40) selon la revendication 4, dans lequel l'ensemble de cartouche d'agrafes (40) comporte par ailleurs un élément de limitation; une deuxième rainure traversante est prévue entre la première extrémité (51) et la première rainure traversante, et est connectée de manière déplaçable au connecteur (44) par l'intermédiaire de l'élément de limitation; lorsque l'ensemble de cartouche d'agrafes (40) se trouve à l'état original ou à l'état fermé, la deuxième rainure traversante est stationnaire par rapport à l'élément de limitation; lorsque le cutter en "I" (45) se déplace de l'extrémité proximale de l'ensemble de cartouche d'agrafes (40) vers l'extrémité distale, l'élément de limitation peut coulisser dans la deuxième rainure traversante, et la deuxième rainure traversante se déplace vers l'extrémité distale de l'ensemble de cartouche d'agrafes (40) par rapport à l'élément de limitation. 15 20 25 30
6. Ensemble de cartouche d'agrafes (40) selon la revendication 5, dans lequel l'élément de limitation est un clou de limitation connecté de manière fixe au connecteur (44). 35
7. Ensemble de cartouche d'agrafes (40) selon la revendication 4, dans lequel la tige de poussée de cutter (47) comporte un corps principal de tige de poussée de cutter (47) et une extrémité arrière; l'extrémité arrière est située à l'extrémité proximale du corps principal de tige de poussée de cutter (47); une partie de butée est prévue entre l'extrémité proximale de la première rainure traversante et la deuxième extrémité (52); lorsque la tige de poussée du cutter (47) se déplace vers l'extrémité distale de l'ensemble de cartouche d'agrafes, l'extrémité arrière appuie sur la partie de butée pour déformer la feuille élastique. 40 45
8. Ensemble de cartouche d'agrafes (40) selon la revendication 1, dans lequel la feuille élastique (50) est située à mi-chemin entre les extrémités proximale et distale du connecteur (44). 50
9. Agrafeuse médicale comportant l'ensemble de cartouche d'agrafes (40) selon l'une quelconque des revendications 1 à 8. 55
10. Agrafeuse médicale selon la revendication 9, comprenant par ailleurs une tige de déclenchement qui vient en butée contre la feuille élastique (50) lorsque le cutter en "I" (45) est situé à l'extrémité distale de l'ensemble de cartouche d'agrafes.

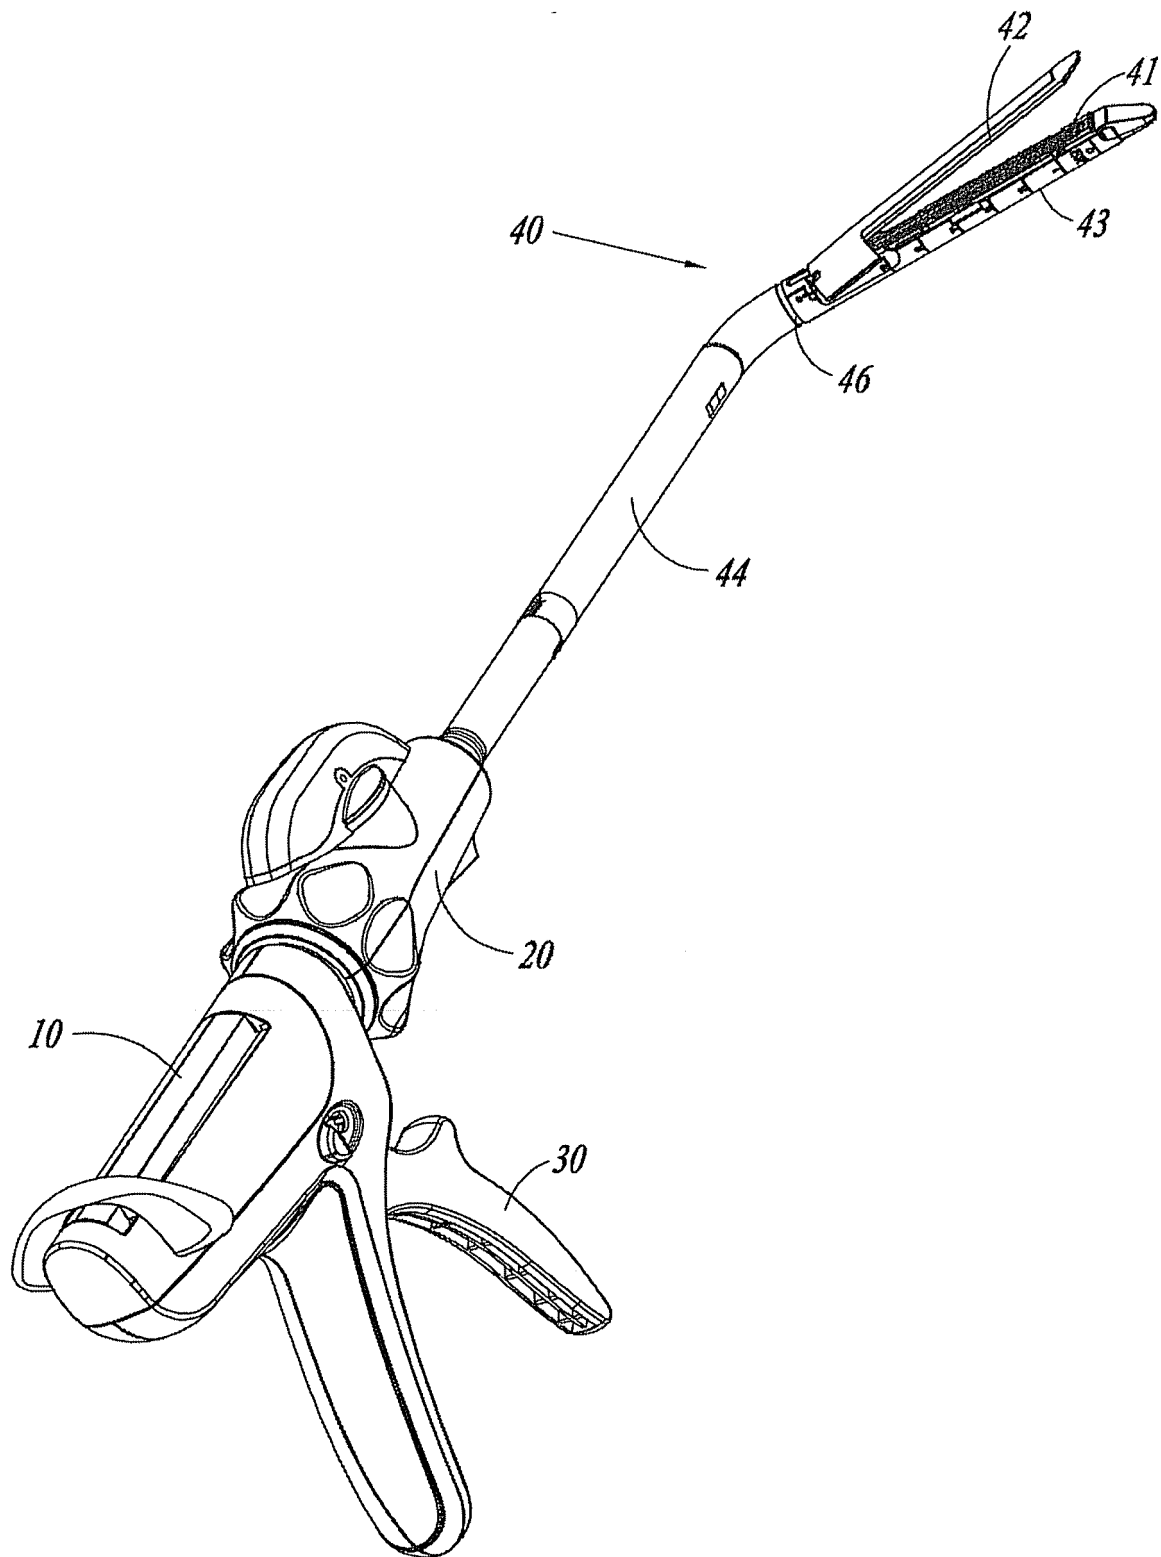


Fig.1

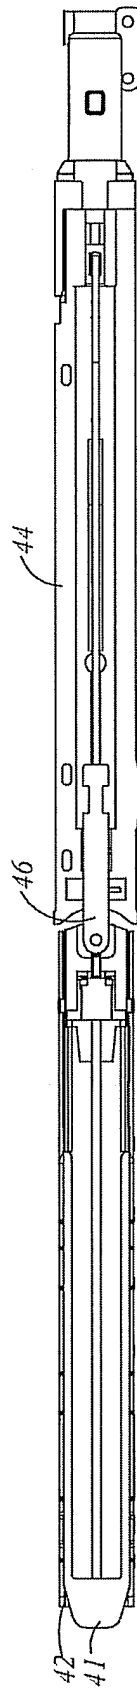


Fig.2

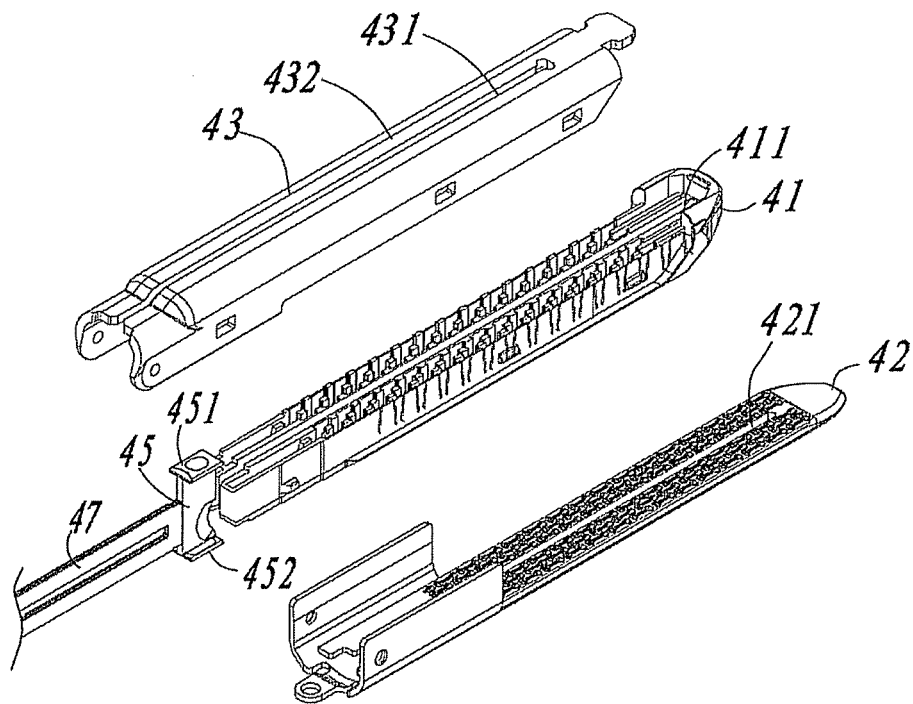


Fig.3

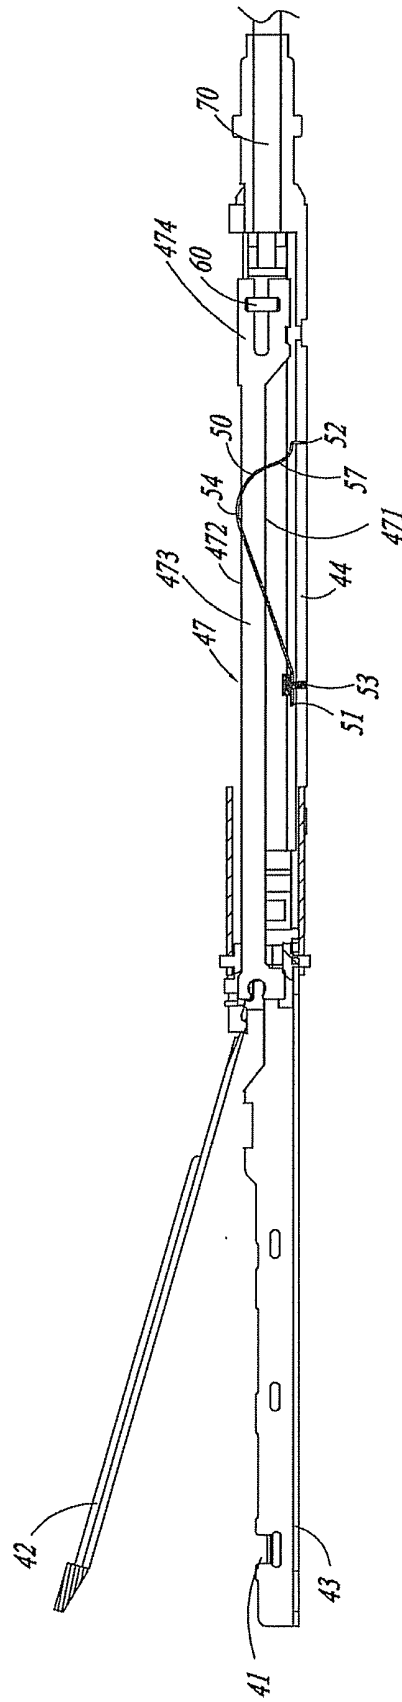


Fig.4

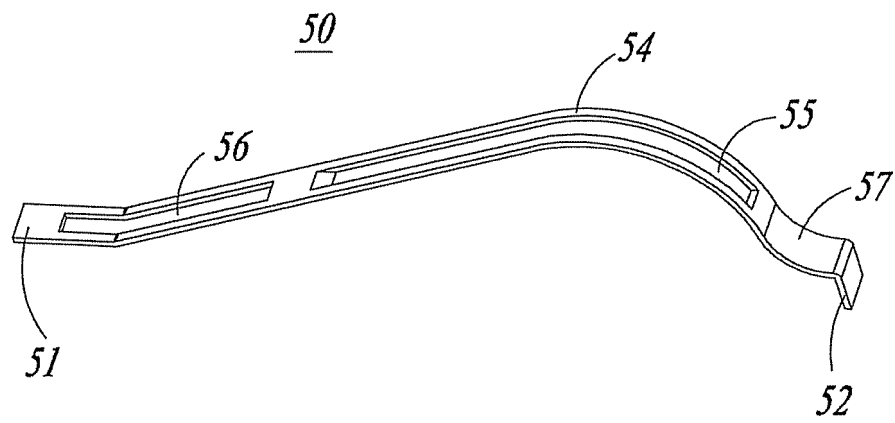


Fig.5

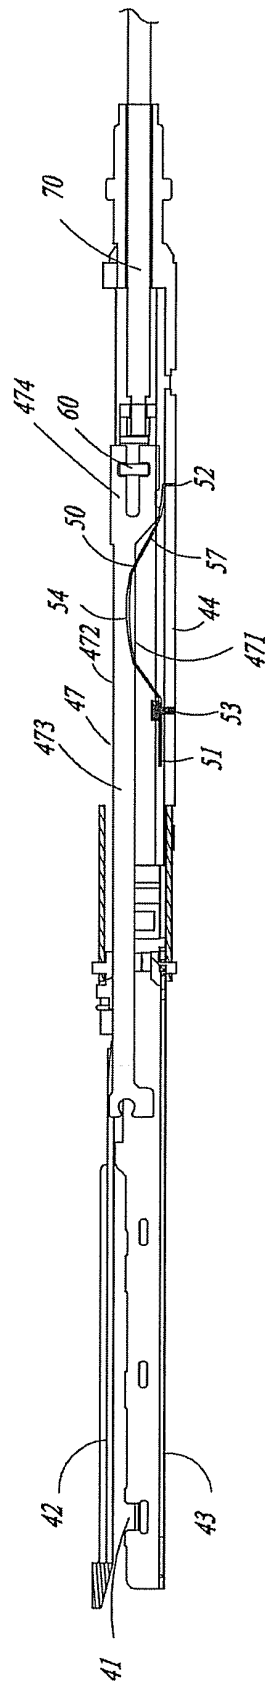


Fig.6

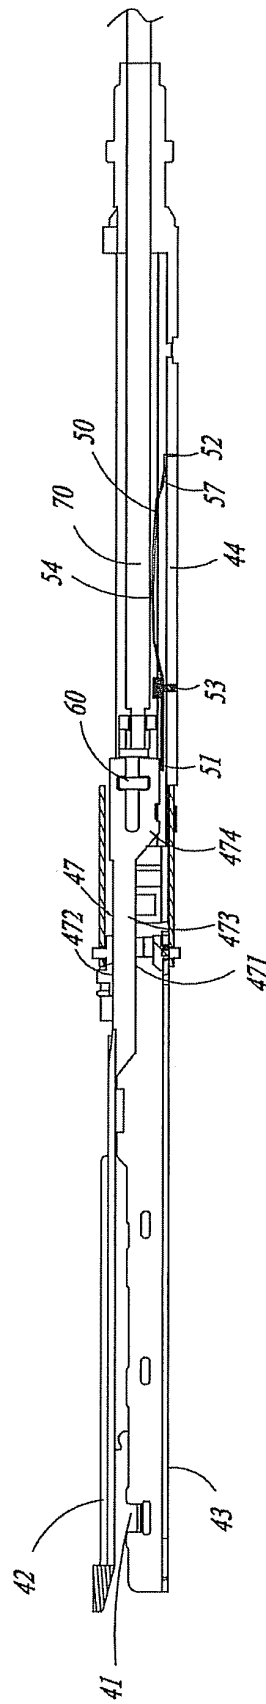


Fig. 7

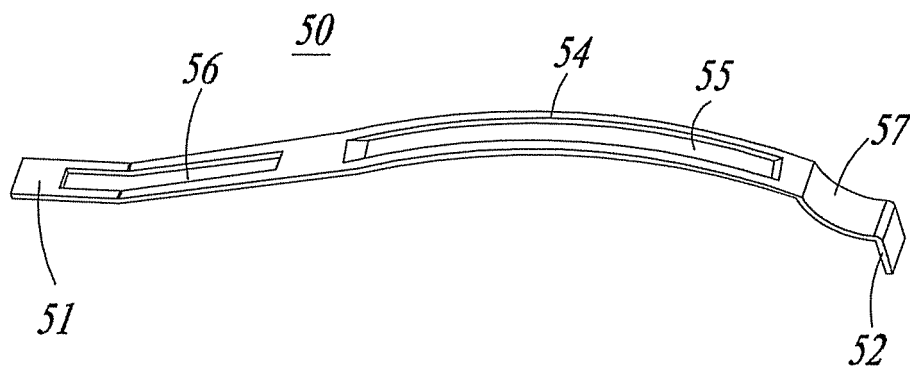


Fig.8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2012040984 A [0002]
- US 2011084113 A [0002]