

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 June 2010 (03.06.2010)

(10) International Publication Number
WO 2010/062591 A1

(51) International Patent Classification:
D04H 1/42 (2006.01) F01N 3/28 (2006.01)

saine [FR/FR]; Boulevard de L'Oise, F-95006 Cergy Pontoise Cedex (FR). **MERRY, Richard P.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(21) International Application Number:
PCT/US2009/062193

(74) Agents: **KNECHT, Harold C., III** et al.; 3M Center Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(22) International Filing Date:
27 October 2009 (27.10.2009)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:
English

(26) Publication Language:
English

(30) Priority Data:
61/110,700 3 November 2008 (03.11.2008) US

(71) Applicant (for all designated States except US): **3M INNOVATIVE PROPERTIES COMPANY [US/US]**; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DE ROVERE, Anne, N.** [FR/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **LALOUCH, Lahous-**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: MOUNTING MAT AND POLLUTION CONTROL DEVICE WITH THE SAME

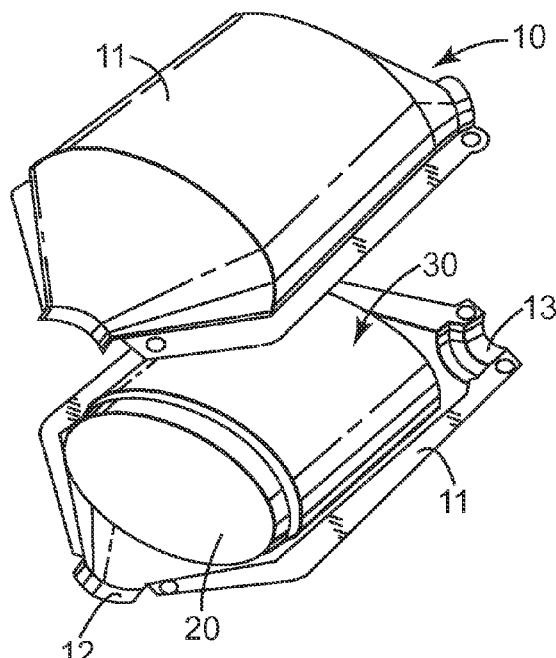


Fig. 1

(57) Abstract: Non-woven mat including basalt and amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and/or heat-treated silica fibers. Embodiments of the non-woven mat surprisingly have a Resiliency Value after three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.1 times greater than the Resiliency Value of a comparable non-woven mat consisting of any individual type of fibers of the non-woven mat. The non-woven mats are useful, for example, in pollution control devices and other thermal insulation applications.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

MOUNTING MAT AND POLLUTION CONTROL DEVICE WITH THE SAME**Background**

[0001] Pollution control devices such as catalytic converters for gasoline engines have been known for over 30 years. In the last few years, more stringent regulations for diesel vehicles have resulted in a rapid increase of other pollution control devices including diesel oxidation catalysts (DOC's), diesel particulate filters (DPF's), and selective catalytic reduction devices (SCR's). The pollution control devices typically comprise a metal housing or casing with a pollution control element securely mounted within the casing by a resilient and flexible mounting mat. Catalytic converters, including diesel oxidation converters, contain a catalyst, which is typically coated on a monolithic structure. The monolithic structures are typically ceramic, although metal monoliths are also known. The catalyst in a gasoline engine oxidizes carbon monoxide and hydrocarbons and reduces the oxides of nitrogen to control atmospheric pollution. A diesel oxidation catalyst oxidizes the soluble organic fraction of soot particles as well as any carbon monoxide present.

[0002] Diesel particulate filters or traps are typically wall-flow filters, which have honeycombed, monolithic structures that are typically made from porous crystalline ceramic materials. Alternate cells of the honeycombed structure are typically plugged such that exhaust gas enters in one cell and is forced through the porous wall to an adjacent cell where it can exit the structure. In this way, the small soot particles that are present in diesel exhaust are collected. From time to time, the temperature of the exhaust gas is increased above the incineration temperature of the soot particles so that they are burned. This process is called "regeneration."

[0003] Selective catalytic reducers are similar in structure and in function (i.e., reduce NOx) to catalytic converters. A gaseous or liquid reductant (generally ammonia or urea) is added to the exhaust gas before reaching the selective catalytic reducer monolith. The mixed gases cause a reaction between the NOx emissions and the ammonia or urea. The reaction converts the NOx emissions into pure nitrogen and oxygen.

[0004] The monoliths, and in particular the ceramic pollution control monoliths, used in pollution control devices are fragile, and susceptible to vibration or shock damage and

breakage. They have a coefficient of thermal expansion generally an order of magnitude less than the metal housing that contains them. This means that as the pollution control device is heated the gap between the inside periphery wall of the housing and the outer wall of the monolith increases. Even though the metallic housing undergoes a smaller 5 temperature change due to the insulating effect of the mat, the higher coefficient of thermal expansion of the metallic housing causes the housing to expand to a larger peripheral size faster than the expansion of the ceramic monolith. Such thermal cycling occurs hundreds of times during the life and use of the pollution control device.

[0005] To avoid damage to the ceramic monoliths from road shock and vibration, to 10 compensate for the thermal expansion difference, and to prevent exhaust gases from passing between the monolith and metal housing (thereby bypassing the catalyst), mounting mats are disposed between the ceramic monolith and metal housing. These mats exert sufficient pressure to hold the monolith in place over the desired temperature range but not so much pressure as to damage the ceramic monolith.

15 [0006] Known mats include intumescent sheet materials comprised of ceramic fibers, intumescent materials and organic and/or inorganic binders. In recent years, non-intumescent mats, especially those comprised of polycrystalline ceramic fibers and binder, have been used. Polycrystalline fibers are much more expensive than (melt-formed) amorphous refractory ceramic fibers (i.e., a fiber that is melt formed and has not been post

20 processed by heat treating to either anneal or crystallize the fiber, so as to be substantially crystalline free, meaning that no crystallinity is detected by powder x-ray diffraction) and, therefore, mats using these fibers are used where deemed absolutely necessary such as with ultra thin-wall monoliths or for pollution control devices that are exposed to water during use (due to filter cleaning, water condensation, rain water from vertical stacks, 25 etc.). Water can have a deleterious effect on certain intumescent mounting materials.

Non-intumescent mats comprising only amorphous refractory ceramic fibers generally lack the necessary holding force to function as a mounting mat. Performance of amorphous refractory ceramic fibers can be improved, but it typically requires expensive shot removal and heat treatment to high temperature to at least partially crystallize the 30 fibers. Mats comprising magnesium aluminum silicate glass fibers have also been tried, but generally lack sufficient temperature capability.

Summary

[0007] In one aspect, the present disclosure describes a non-woven mat comprised of a blend comprised of at least 25 (in some embodiments, at least 30, 35, 40, 45, 50, 55, 60,

5 65, 70, 75, 80, 85, or even 90) percent by weight basalt fibers and at least 10 (in some embodiments, at least 15, 20, 25, 30, 35, or even 40) percent by weight of fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof, based on the total weight of the mat, wherein the non-woven mat is collectively comprised of at least 80 (in some embodiments at least 85, 90, 95, 96, 97, 98, 99, or even 100) by weight of the basalt fibers and the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof, based on the total weight of the mat. In some embodiments, wherein the mat as-made prior to heating above 500°C contains not greater than 5 (in some embodiments, not greater than 4, 3, 2, 1, 0.75, 0.5,

10 15 0.25, 0.1, or even zero) percent by weight organic material (e.g., binder), based on the total weight of the mat.

[0008] In some embodiments, the blend collectively comprises at least 80 (in some embodiments, at least 85, 90, 95, 96, 97, 98, 99, or even 100) percent by weight of the basalt fibers and the fibers selected from the group consisting of amorphous refractory

20 ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof. In some embodiments, the blend collectively comprises at least 80 (in some embodiments, at least 85, 90, 95, 96, 97, 98, 99, or even 100) percent by weight of the basalt fibers and the amorphous refractory ceramic fibers. In some embodiments, the blend collectively comprises at least 80 (in some embodiments, at least 85, 90, 95, 96, 97, 98, 99, or even 100) percent by weight of the basalt fibers and the bio-soluble ceramic fibers. In some 25 30 embodiments, the blend collectively comprises at least 80 (in some embodiments, at least 85, 90, 95, 96, 97, 98, 99, or even 100) percent by weight of the basalt fibers and the heat-treated silica fibers.

[0009] Surprisingly, for some embodiments of non-woven mats described herein, the basalt fibers and the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide the non-woven mat with a Resiliency Value after

three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test (as determined according to the description provided below) at least 1.1 (in some embodiments, at least 1.2, 1.25, 1.3, 1.4, 1.5, 1.6, 1.7, 1.75, or even at least 1.8) times greater than the Resiliency Value of a comparable non-woven mat consisting of any

5 individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the blend of fibers.

[0010] Typically, the basalt fibers used to make non-woven mats described herein are shot free or contain a very low amount of shot (in some embodiments less than 1% by weight, based on total weight of the fibers).

10 [0011] Non-woven mats described herein are useful, for example, in pollution control devices and thermal insulation applications. An exemplary pollution control device comprises a pollution control element (e.g., catalytic converter, a diesel particulate filter, or a selective catalytic reduction element) mounted in a casing with a non-woven mat described herein.

15

Brief Description of the Drawings

[0012] FIG. 1 is a perspective view of an exemplary pollution control device described here.

20 [0013] FIG. 2 is a longitudinal cross section of an exemplary exhaust pipe described here.

Detailed Description

[0014] Referring to FIG. 1, pollution control device 10 comprises metallic casing 11 with generally frusto-conical inlet and outlet ends 12 and 13, respectively. Disposed within casing 11 is pollution control element 20 surrounded by mounting mat according to the present disclosure 30. Mounting mat serves to tightly but resiliently support and hold monolithic element 20 within casing 11 and seals the gap between the pollution control element casing 11, preventing or reducing (preferably minimizing) exhaust gases from bypassing pollution control element 20.

[0015] Referring now to FIG 2, exhaust pipe 19 comprises a double wall having first outer metal wall 22, second and inner metal wall 20. Mat according to the present disclosure 24 is disposed in the gap between outer wall 22 and inner wall 20 and provides thermal insulation. The double wall of exhaust pipe 19 surrounds interior space 26 through which exhaust gas flows through when exhaust pipe 19 is in use in an exhaust system of a motor vehicle.

[0016] Basalt fibers are made from the mineral basalt. Basalt is a hard, dense volcanic rock that can be found in most countries. The basalt is crushed, washed, melted, and fed into platinum-rhodium extrusion bushings to form continuous filaments. Because the fibers are derived from a mineral, the composition of the fibers can vary but generally has a composition, by weight, of about 45 to about 55 percent SiO₂, about 2 to about 6 percent alkalis, about 0.5 to about 2 percent TiO₂, about 5 to about 14 percent FeO, about 5 to about 12 percent MgO, at least about 14 percent by weight Al₂O₃, and often nearly about 10 percent CaO. Typically, the basalt fibers have diameters of at least 5 micrometers (in some embodiments, in a range from 5 to 22 micrometers (preferably, 9 to 13 micrometers)). The fibers are typically shot free, or contain a very low amount of shot (typically less than 1% by weight). The continuous fibers can be cut to predetermined lengths. Typically a length of about 0.5 to about 15 cm is suitable for mounting mat described herein. Suitable chopped basalt fibers are commercially available, for example, from Sudaglass Fiber Technology, Houston, TX, and Kamenny Vek, Dubna, Russia. Basalt fibers are typically continuous. Typically, the continuous fibers are generally individualized. To provide individualized fibers, a tow or yarn of fibers can be chopped, for example, using a glass roving cutter (commercially available, for example, under the

trade designation “MODEL 90 GLASS ROVING CUTTER” from Finn & Fram, Inc., Pacoma, CA), to the desired length (typically in the range from about 0.5 cm to 15 cm).

[0017] Exemplary aluminosilicate amorphous refractory ceramic fibers include blown or spun amorphous refractory ceramic fibers (commercially available, for example, from

5 Thermal Ceramics, Augusta, GA, under the trade designation “KAOWOOL” and “CERAFIBER” and from Unifrax Corporation, Niagara Falls, NY, under the trade designation “FIBERFRAX”).

[0018] Exemplary biosoluble inorganic fibers include those comprised of oxides of silicon, magnesium, and calcium. These types of fibers are typically referred to as calcium

10 magnesium silicate fibers. The calcium magnesium silicate fibers usually contain less than about 10 weight percent Al_2O_3 . In some embodiments, the fibers include about 45 to about 90 weight percent SiO_2 , up to about 45 weight percent CaO , up to about 35 weight percent MgO , and less than about 10 weight percent Al_2O_3 . For example, the fibers can contain about 55 to about 75 weight percent SiO_2 , about 25 to about 45 weight percent

15 CaO , about 1 to about 10 weight percent MgO , and less than about 5 weight percent Al_2O_3 .

[0019] In another exemplary embodiment, the biosoluble inorganic fibers include oxides of silica and magnesium. These types of fibers are typically referred to as magnesium silicate fibers. The magnesium silicate fibers usually contain from about 60 to about 90

20 weight percent SiO_2 , up to about 35 weight percent MgO (typically, from about 15 to about 30 weight percent MgO), and less than about 5 weight percent Al_2O_3 . For example, the fibers can contain about 70 to about 80 weight percent SiO_2 , about 18 to about 27 weight percent MgO , and less than about 4 weight percent of other trace elements.

[0020] Biosoluble inorganic fibers can be made by a variety of methods, including sol

25 gel formation, crystal growing processes, and melt forming techniques (e.g., spinning or blowing). Suitable biosoluble inorganic oxides fibers are described, for example, in U.S. Pat. Nos. 5,332,699 (Olds et al.), 5,585,312 (Ten Eyck et al.), 5,714,421 (Olds et al.), and 5,874,375 (Zoitas et al.); and in European Patent Application No. 02078103.5, filed July 31, 2002.

30 [0021] Biosoluble fibers are commercially available, for example, from Unifrax Corporation, Niagara Falls, NY, under the trade designations “ISOFRAX” and

“INSULFRAX,” under the trade designations “SUPERMAG 1200” from Nutec Fiberatec, Monterrey, Mexico, and Thermal Ceramics, Augusta, GA, under the trade designation “SUPERWOOL.” “SUPERWOOL 607” biosoluble fibers, for example, contain 60 to 70 weight percent SiO₂, 25 to 35 weight percent CaO, 4 to 7 weight percent MgO, and a trace amount of Al₂O₃. “SUPERWOOL 607 MAX” biosoluble fibers, for example, which can be used at a slightly higher temperature, contain 60 to 70 weight percent SiO₂, 16 to 22 weight percent CaO, 12 to 19 weight percent MgO, and a trace amount of Al₂O₃.

[0022] Suitable biosoluble inorganic fibers for use in making the non-woven mats described herein can have a wide range of average diameters and average lengths. For example, biosoluble inorganic fibers are commercially available that have an average fiber diameter in the range of about 0.05 micrometer to about 15 micrometers. In some embodiments, the biosoluble inorganic fibers have average fiber diameters in the range of about 0.1 micrometer to about 5 micrometers.

[0023] The biosoluble inorganic fibers typically have an average fiber length in the range of about 0.1 cm to about 3 cm.

[0024] As used herein, the term “heat-treated silica fibers” refers to fibers comprising at least 80 (in some embodiments at least 85, 90, 92, 93, 94, 95, 96, 97, 98, 99, 99.5, 99.9, or even 100) percent by weight SiO₂, which have been exposed to a heat treatment temperature of at least 400°C for a heat treatment period of at least 5 minutes. Other oxides which may be present in the silica fibers include those known in the art for such fibers, including Al₂O₃, MgO, B₂O₃, CaO, and TiO₂). In some exemplary embodiments, the heat-treated silica fibers comprise about 92 to about 95 percent by weight silica and 8 to about 5 percent by weight alumina, based on a total weight of the fibers. In some embodiments, the heat-treated silica fibers may be heat-treated by exposing the fibers to a heat treatment temperature of at least 400°C, 500°C, 600°C, 700°C, 800°C, 900°C, 1000°C, or even higher) for a heat treatment period of at least about 5 minutes, 10 minutes, 15 minutes, 20 minutes, 25 minutes, 30 minutes, 35 minutes, 40 minutes, 45 minutes, 50 minutes, 55 minutes, 60 minutes, or longer. In some exemplary embodiments, heat-treated silica fibers were heat-treated by (i) heating the fibers from room temperature to a maximum heat treatment temperature from about 600°C to about 1100°C, (ii) maintaining the maximum heat treatment temperature for a heat treatment period of about

5 to about 60 minutes (more typically about 60 minutes), and (iii) allowing the fibers to cool to room temperature. In some exemplary embodiments, heat-treated silica fibers used in the present invention are heat-treated by (i) heating the fibers from room temperature to a maximum heat treatment temperature of at least about 850°C (in some embodiments,

5 from about 850°C to about 1050°C), (ii) maintaining the maximum heat treatment temperature for a heat treatment period of at least about 60 minutes (typically about 60 minutes), and (iii) allowing the fibers to cool to room temperature.

[0025] Various methods can be used to form heat-treated silica fibers (see, e.g., U.S. Pat. Nos. 2,624,658 (Parker et al.), 2,718,461 (Parker et al.), 6,468,932 (Richter et al.),

10 3,498,774 (Saffadi et al.), and 4,038,214 (Sotoji et al.), the disclosure of which is incorporated herein by reference.

[0026] Exemplary heat-treated high silica content fibers are commercially available from Hitco Carbon Composites, Inc., Gardena, CA, under the trade designation “REFRASIL,” and belChem Fiber Materials GmbH, Freiberg, Germany, under the trade 15 designation “BELCOTEX”. For example, the “REFRASIL F100” fiber contains about 96 to about 99 percent by weight SiO₂, while the “BELCOTEX” fiber contains about 94.5 percent by weight SiO₂.

[0027] Suitable heat-treated silica fibers can have a wide range of average diameters and average lengths. Heat-treated silica fibers are commercially available that have an average 20 fiber diameter in the range of about 0.05 micrometer to about 15 micrometers (in some embodiments about 5 micrometers to about 10 micrometers).

[0028] The heat-treated silica fibers typically have an average fiber length in the range of about 0.1 cm to about 3 cm. Generally, the length of the heat-treated silica fibers is not critical as any selected fiber(s) can be broken down into smaller lengths during the 25 manufacturing process, if desired.

[0029] Typically, the heat-treated silica fibers are continuous, and generally individualized as discussed above for the basalt fibers.

[0030] Optionally, some embodiments of non-woven mats described herein further comprise other fibers, including magnesium aluminum silicate glass fibers. Exemplary 30 magnesium aluminum silicate glass fibers for making mounting mats described herein

include E-glass fibers, S-glass fibers, S-2 glass fibers, R-glass fibers, and mixture thereof. Magnesium aluminum silicate glass fibers used in the non-woven mounting mat typically have an average diameter of at least 5 micrometers (In some embodiments, at least 7 micrometers; in some embodiments in a range from 7 micrometers to 14 micrometers) and

5 a length in a range from 0.5 cm to 15 cm (in some embodiments, in a range from 1 cm to 12 cm). Magnesium aluminum silicate glass fibers are typically continuous, and are generally individualized as discussed above for the basalt fibers. Typically, the magnesium aluminum silicate glass fibers are shot free, or contain a very low amount of shot (typically less than 1% by weight, based on total weight of magnesium aluminum silicate glass fibers). Additionally, the magnesium aluminum silicate glass fibers are 10 typically reasonably uniform in diameter (i.e., the amount of magnesium aluminum silicate glass fibers having a diameter of plus/minus 3 micrometers on the average is at least 70% by weight (in some embodiments, at least 80%, or even at least 90% by weight) of the total weight of the magnesium aluminum silicate glass fibers.

15 [0031] The magnesium aluminum silicate glass fibers comprise, by weight (on a theoretical oxide basis), in a range from 10 to 30 percent Al_2O_3 , in a range from 52 to 70 percent SiO_2 , and in a range from 1 to 12 percent MgO . Optionally, the magnesium aluminosilicate glass fibers further comprise additional oxides (e.g., Na_2O , K_2O , B_2O_3 , and/or CaO). Particular examples of magnesium aluminum silicate glass fibers include E-glass fibers, which typically comprise, by weight, about 55% SiO_2 , 11% Al_2O_3 , 18% CaO , 6% B_2O_3 , 5% MgO , and 5% other oxides; S and S-2 glass fibers which, typically comprise about 65% SiO_2 , 25% Al_2O_3 , and 10% MgO ; and R-glass fibers, which typically comprise about 60% SiO_2 , 25% Al_2O_3 , 9% CaO , and 6% MgO . E-glass, S-glass and S-2 glass are 20 commercially available, for example, from Advanced Glassfiber Yarns, LLC, Aiken, SC. R-glass is commercially available, for example, from Saint Gobain Vetrotex, Chambéry, France.

[0032] Optionally, mounting mats described herein may further comprise intumescence material (e.g. vermiculite), although typically, it is preferable that the non-woven mat is non-intumescence (i.e., free of intumescence material (e.g., free of vermiculite)).

30 [0033] Non-woven mats described herein can be made, for example, using wet (typically wet-laid) or dry (typically dry-laid) process known in the art, although those as-

made mounting mats (i.e., before any heating above 500°C) comprising not greater than 5 (in some embodiments, not greater than 4, 3, 2, 1, 0.75, 0.5, 0.25, 0.1, or even zero) percent by weight organic material (e.g., binder), based on the total weight of the mat, are made via dry processing methods. Optionally, non-woven mats described herein can be

5 heat-treated.

[0034] Some embodiments of non-woven mats described herein further comprise binder. The binders can be organic, inorganic, or combinations thereof. For non-woven mats comprising organic binders, during operating temperatures commonly encountered during use of pollution devices, the organic binders decompose, burn-off or otherwise eliminated.

10 Thus, the organic constituents are typically transient or fugitive rather than permanent components of the non-woven mats.

[0035] Polymeric and other organic binders are particularly useful when a non-woven mat is made using a wet-laid or modified papermaking process; however, a non-woven mat made using a dry-laid process may also benefit from the incorporation of such 15 binders. One or more organic binders may be incorporated into the body of a non-woven mat and/or used as a coating for the mat.

[0036] Suitable polymeric binders can be thermoplastic or thermoset, and can be provided as a solid in various forms, or as a liquid comprising a 100 percent solids composition, a solution, dispersion, a latex, an emulsion, combinations of these, and the like. In some embodiments, the polymeric binder is an elastomer. Suitable polymers 20 include natural rubber, copolymers of two or more copolymerizable species including styrene and butadiene, copolymers of two or more copolymerizable species including butadiene and acrylonitrile, (meth)acrylate polymers and copolymers, polyurethanes, silicones, polyesters, polyamides, cellulosic polymers, other elastomer polymers, or combinations of these.

[0037] For non-woven mats including binder, exemplary amounts of binder (e.g., organic binder) include about 0.1 to about 15 percent by weight (in some embodiments, about 0.5 to about 12, or about 1 to about 10 percent by weight), on a dry weight basis.

[0038] In some embodiments, the polymer binders are acrylic- and/or methacrylate-containing latex compositions. Such latex compositions tend to burn cleanly without 30 producing undesirable amounts of toxic or corrosive by-products. Examples of suitable

acrylic emulsions include, but are not limited to, those commercially available under the trade designations "RHOPLEX HA-8" (a 44.5% by weight solids aqueous emulsion of acrylic copolymers) from Rohm and Haas, Philadelphia, PA, and under the trade designation "AIRFLEX 600BP" (a 55% solids ethylene vinyl acetate copolymer) from Air Products, Allentown, PA.

[0039] Polymeric fibers may also be used as a binder component in the compositions to improve the handling, flexibility, the resiliency, or a combination thereof, especially when the non-woven mat is made by a dry-laid process. The polymeric fibers tend to enhance processing and improve the strength of the non-woven mat. As with the polymeric binder, polymeric fibers tend to burn out (i.e., to decompose or be eliminated) after one or more heating cycles if the compositions are used in a pollution control device.

[0040] Exemplary polymeric fibers include thermoplastic fibers (e.g., polyolefin (e.g., polyethylene and polypropylene) fibers, polystyrene fibers, polyether fibers, polyester (e.g., polyethylene terephthalate (PET) and polybutalene terephthalate (PBT)) fibers, vinyl polymer (e.g., polyvinyl chloride and polyvinylidene fluoride) fibers, polyamides (e.g., polycaprolactame, polyurethanes, and nylon) fibers, and polyaramide fibers. Particularly useful fibers for thermal bonding in non-woven mats described herein include so-called bicomponent fibers which typically comprise polymers of different composition or with different physical properties. Typically, these fibers are core/sheath fibers where, for example, the polymeric component of the core provides structure and the sheath is melttable or thermoplastic enabling bonding of the fibers. For example, in one embodiment, the bicomponent fiber may be a core/sheath polyester/polyolefin fiber. Bicomponent fibers that can be used include those commercially available under the trade designation "TREVIRA 255" from Trevira GmbH, Bobingen, Germany, and "FIBERVISIONS CREATE WL" from FiberVisions, Varde, Denmark. Typically, if present, the amount of polymeric fiber is up to about 5 (in some embodiments, in a range from 1 to 5) weight percent polymeric fibers on a dry weight basis. The polymeric fibers may be staple fibers or fibrillated fibers. In one embodiment, the polymeric fibers are staple fibers in the range of about 0.5 denier to about 5 denier.

[0041] Suitable polymeric binders may be used alone or may be combined with additional components. Additional components may include, monomers, plasticizers, fillers, tackifiers, surfactants, or other modifiers.

[0042] Suitable inorganic binder materials may include, colloidal particles; inorganic micaceous binders as disclosed, for example, in PCT Publication No. WO03/031368, 5 published April 17, 2003, the subject matter of which is hereby incorporated by reference in its entirety; and products commercially available from R.T. Vanderbilt Company, Inc., Norwalk, CT, under the trade designation "DIXIE CLAY". When present in non-woven mats described herein, the micaceous binder as described in WO03/031368 is typically 10 present in an amount of less than about 5 percent by weight (in some embodiments, less than about 2, or less than 1 percent by weight), based on a total dry weight of the non-woven mat. Most embodiments of the non-woven mats described herein are free of micaceous binder material.

[0043] Embodiments of mounting mats described herein can be made, for example, by 15 feeding chopped, individualized fibers (e.g., about 2.5 cm to about 5 cm in length) into a lickerin roll equipped with pins such as that available from Laroche, Cours la ville, France and/or a conventional web-forming machine (commercially available, for example, under the trade designation "RANDO WEBBER" from Rando Machine Corp., Macedon, NY; "DAN WEB" from ScanWeb Co., Denmark), wherein the fibers are drawn onto a wire 20 screen or mesh belt (e.g., a metal or nylon belt). If a "DAN WEB"-type web-forming machine is used, the fibers are preferably individualized using a hammer mill and then a blower. To facilitate ease of handling of the mat, the mat can be formed on or placed on a scrim.

[0044] Embodiments of mounting mats described herein can be also made, for example, 25 using conventional wet-forming or textile carding. For wet forming processes, the fiber length is often from about 0.5 cm to about 6 cm.

[0045] In some embodiments, particularly with wet forming processes, binder is used to facilitate formation of the mat. In some embodiments, nonwoven mats described herein comprise not greater than 10 (in some embodiments not greater than 4, 3, 2, 1, 0.75, 0.5, 30 0.25, or even not greater than 0.1) percent by weight binder, based on the total weight of the mat, while others contain no binder.

[0046] Optionally, some embodiments of mounting mat described herein are needle-punched (i.e., where there is physical entanglement of fibers provided by multiple full or partial (in some embodiments, full) penetration of the mat, for example, by barbed needles). The nonwoven mat can be needle punched using a conventional needle

5 punching apparatus (e.g., a needle puncher commercially available, for example, under the trade designation "DILO" from Dilo, Germany, with barbed needles (commercially available, for example, from Foster Needle Company, Inc., of Manitowoc, WI or Groz-Beckert Group, Germany)) to provide a needle-punched, nonwoven mat. Needle punching, which provides entanglement of the fibers, typically involves compressing the
10 mat and then punching and drawing barbed needles through the mat. The efficacy of the physical entanglement of the fibers during needle punching is generally improved when the polymeric and/or bicomponent organic fibers previously mentioned are included in the mat construction. The improved entanglement can further increase tensile strength and improve handling of the nonwoven mat. The optimum number of needle punches per area
15 of mat will vary depending on the particular application. Typically, the nonwoven mat is needle punched to provide about 5 to about 60 needle punches/cm² (in some embodiments, about 10 to about 20 needle punches/cm²).

[0047] Optionally, some embodiments of mounting mat described herein are stitchbonded using conventional techniques (see e.g., U.S. Pat. No. 4,181,514 (Lefkowitz et al.), the disclosure of which is incorporated herein by reference for its teaching of
20 stitchbonding nonwoven mats). Typically, the mat is stitchbonded with organic thread. A thin layer of an organic or inorganic sheet material can be placed on either or both sides of the mat during stitchbonding to prevent or minimize the threads from cutting through the mat. If it is desirable for the stitching thread to not decompose in use, an inorganic thread,
25 (e.g., ceramic or metal (such as stainless steel) can be used. The spacing of the stitches is usually about 3 mm to about 30 mm so that the fibers are uniformly compressed throughout the entire area of the mat.

[0048] In some embodiments, mounting mats described herein have an as-made (i.e., before any heating above 50°C) bulk density in a range from 0.05 g/cm³ to 0.3 g/cm³ (in
30 some embodiments, in a range from 0.1 g/cm³ to 0.25 g/cm³). In another aspect, when the mounted, the mat typically has a mount density in a range from 0.2 g/cm³ to 0.6 g/cm³ (in

other embodiments, in a range from 0.3 g/cm³ to 0.5 g/cm³ (i.e., the mat will be compressed when mounted)).

[0049] In some embodiments, the non-woven mat has a thickness in the range from 3 mm to 50 mm. In some embodiments, the non-woven mat has a tensile strength of at least 5 10 kPa, as determined as described in the Examples.

[0050] The metallic casing can be made from materials known in the art for such use, including stainless steel.

[0051] The nonwoven mat can be used as a thermal insulation material to insulate various components of an exhaust system including, for example, an exhaust pipe, the 10 inlet or outlet end cone of a pollution control device or exhaust manifold of an internal combustion engine. Non-woven mats described herein are useful, for example, in pollution control devices. Pollution control device typically comprises pollution control element (e.g., catalytic converter, a diesel particulate filter or a selective catalytic reduction element) mounted in a casing with a non-woven mat described herein. In one 15 exemplary embodiment, an exhaust system comprising a double walled exhaust component (e.g., an exhaust pipe, an end cone end cap, or other portion of a pollution control device, and/or an exhaust manifold) and the nonwoven mat described herein. The nonwoven mat can be mounted in the gap between the first outer wall and second inner wall of the double wall component. Exemplary mount densities are in a range from about 20 0.1 g/cm² to 0.6 g/cm².

[0052] Exemplary pollution control elements that can be mounted with mounting mat described herein include gasoline pollution control elements as well as diesel pollution control elements. The pollution control element may be a catalytic converter or a particulate filter or trap. Catalytic converters contain a catalyst, which is typically coated 25 on a monolithic structure mounted within a metallic housing. The catalyst is typically adapted to be operative and effective at the requisite temperature. For example, for use with a gasoline engine the catalytic converter should typically be effective at a temperature in a range from 400°C to 950°C, whereas for a diesel engine lower temperatures (typically not more than 350°C) are common. The monolithic structures are typically ceramic, 30 although metal monoliths are also sometimes used. The catalyst oxidizes carbon monoxide and hydrocarbons and reduces the oxides of nitrogen in exhaust gases to control

atmospheric pollution. While in a gasoline engine all three of these pollutants can be reacted simultaneously in a so-called "three way converter", most diesel engines are equipped with only a diesel oxidation catalytic converter. Catalytic converters for reducing the oxides of nitrogen, which are only in limited use today for diesel engines,

5 generally consist of a separate catalytic converter. Examples of pollution control elements for use with a gasoline engine include those made of cordierite that are commercially available from Corning Inc., Corning, NY or NGK Insulators, LTD., Nagoya, Japan, or metal monoliths commercially available from Emitec, Lohmar, Germany.

[0053] Suitable selective catalytic reduction elements are available, for example, from

10 Corning, Inc., Corning, NY.

[0054] Diesel particulate filters or traps are typically wall flow filters, which have honeycombed, monolithic structures typically made from porous crystalline ceramic materials. Alternate cells of the honeycombed structure are typically plugged such that exhaust gas enters in one cell and is forced through the porous wall to an adjacent cell

15 where it can exit the structure. In this way, the small soot particles that are present in diesel exhaust gas are collected. Suitable diesel particulate filters made of cordierite are commercially available from Corning Inc. and NGK Insulators, Inc. Diesel particulate filters made of silicon carbide are commercially available from Ibiden Co. Ltd., Japan, and are described in, for example, JP 2002047070A, published February 12, 2002.

20

[0055] -Exemplary Embodiments

1. A non-woven mat comprised of a blend comprised of at least 25 percent by weight basalt fibers and at least 10 percent by weight fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof, based on the total weight of the mat, and wherein the non-woven mat is collectively comprised of at least 80 percent by weight of said basalt fibers and said fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof, based on the total weight of the mat.

20 2. The non-woven mat according to embodiment 1 collectively comprising at least 85 percent by weight of said basalt fibers and said fibers selected from the group

consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof.

3. The non-woven mat according to embodiment 1 collectively comprising at least 90 percent by weight of said basalt fibers and said fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof.

4. The non-woven mat according to embodiment 1 collectively comprising at least 95 percent by weight of said basalt fibers and said fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof.

5. The non-woven mat according to embodiment 1 collectively comprising at least 99 percent by weight of said basalt fibers and said fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof.

15 6. The non-woven mat according to embodiment 1 collectively comprising at least 100 percent by weight of said basalt fibers and said fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof.

7. The non-woven mat according to embodiment 1 collectively comprising at least 80 percent by weight of said basalt fibers and said amorphous refractory ceramic fibers.

8. The non-woven mat according to embodiment 1 collectively comprising at least 85 percent by weight of said basalt fibers and said amorphous refractory ceramic fibers.

25 9. The non-woven mat according to embodiment 1 collectively comprising at least 90 percent by weight of said basalt fibers and said amorphous refractory ceramic fibers.

10. The non-woven mat according to embodiment 1 collectively comprising at least 95 percent by weight of said basalt fibers and said amorphous refractory ceramic fibers.

11. The non-woven mat according to embodiment 1 collectively comprising at least 99 percent by weight of said basalt fibers and said amorphous refractory ceramic fibers.

12. The non-woven mat according to embodiment 1 collectively comprising at 5 least 100 percent by weight of said basalt fibers and said amorphous refractory ceramic fibers.

13. The non-woven mat according to embodiment 1 collectively comprising at least 80 percent by weight of said basalt fibers and said bio-soluble ceramic fibers.

14. The non-woven mat according to embodiment 1 collectively comprising at 10 least 85 percent by weight of said basalt fibers and bio-soluble ceramic fibers.

15. The non-woven mat according to embodiment 1 collectively comprising at least 90 percent by weight of said basalt fibers and bio-soluble ceramic fibers.

16. The non-woven mat according to embodiment 1 collectively comprising at least 95 percent by weight of said basalt fibers and bio-soluble ceramic fibers.

17. The non-woven mat according to embodiment 1 collectively comprising at 15 least 99 percent by weight of said basalt fibers and bio-soluble ceramic fibers.

18. The non-woven mat according to embodiment 1 collectively comprising at least 100 percent by weight of said basalt fibers and bio-soluble ceramic fibers.

19. The non-woven mat according to embodiment 1 collectively comprising at 20 least 80 percent by weight of said basalt fibers and said heat-treated silica fibers.

20. The non-woven mat according to embodiment 1 collectively comprising at least 85 percent by weight of said basalt fibers and said heat-treated silica fibers.

21. The non-woven mat according to embodiment 1 collectively comprising at least 90 percent by weight of said basalt fibers and said heat-treated silica fibers.

22. The non-woven mat according to embodiment 1 collectively comprising at 25 least 95 percent by weight of said basalt fibers and said heat-treated silica fibers.

23. The non-woven mat according to embodiment 1 collectively comprising at least 99 percent by weight of said basalt fibers and said heat-treated silica fibers.

24. The non-woven mat according to embodiment 1 collectively comprising at 30 least 100 percent by weight of said basalt fibers and said heat-treated silica fibers.

25. The non-woven mat according to any preceding embodiment, wherein the basalt fibers and the fibers selected from the group consisting of amorphous refractory

ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.1 times greater than the Resiliency Value of a comparable non-woven mat consisting of 5 any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the non-woven mat comprised of the blend of fibers.

26. The non-woven mat according to any preceding embodiment, wherein the basalt fibers and the fibers selected from the group consisting of amorphous refractory 10 ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.2 times greater than the Resiliency Value of a comparable non-woven mat consisting of 15 any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the blend of fibers.

27. The non-woven mat according to any preceding embodiment, wherein the basalt fibers and the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after 20 three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.25 times greater than the Resiliency Value of a comparable non-woven mat consisting of any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic 15 fibers, and heat-treated silica fibers, present in the blend of fibers.

28. The non-woven mat according to any preceding embodiment, wherein the basalt fibers and the fibers selected from the group consisting of amorphous refractory 25 ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.3 times greater than the Resiliency Value of a comparable non-woven mat consisting of 30 any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the blend of fibers.

29. The non-woven mat according to any preceding embodiment, wherein the basalt fibers and the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after 5 three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.4 times greater than the Resiliency Value of a comparable non-woven mat consisting of any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the blend of fibers.

30. The non-woven mat according to any preceding embodiment, wherein the 10 basalt fibers and the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.5 times greater than the Resiliency Value of a comparable non-woven mat consisting of 15 any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the blend of fibers.

31. The non-woven mat according to any preceding embodiment, wherein the 20 basalt fibers and the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.6 times greater than the Resiliency Value of a comparable non-woven mat consisting of any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the blend of fibers.

25 32. The non-woven mat according to any preceding embodiment, wherein the basalt fibers and the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 30 1.7 times greater than the Resiliency Value of a comparable non-woven mat consisting of any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the blend of fibers.

33. The non-woven mat according to any preceding embodiment, wherein the basalt fibers and the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after 5 three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.75 times greater than the Resiliency Value of a comparable non-woven mat consisting of any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the blend of fibers.

34. The non-woven mat according to any preceding embodiment, wherein the 10 basalt fibers and the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.8 times greater than the Resiliency Value of a comparable non-woven mat consisting of 15 any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the blend of fibers.

35. The non-woven mat according to any preceding embodiment, wherein the blend of fibers comprises at least one of the amorphous refractory fiber or the bio-soluble fibers.

20 36. The non-woven mat according to any preceding embodiment, wherein the mat comprises at least 30 percent by weight of the basalt fibers based on the total weight of the mat.

25 37. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 35 percent by weight of the basalt fibers based on the total weight of the mat.

38. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 40 percent by weight of the basalt fibers based on the total weight of the mat.

39. The non-woven mat according to any of embodiments 1 to 35, wherein the 30 mat comprises at least 45 percent by weight of the basalt fibers based on the total weight of the mat.

40. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 50 percent by weight of the basalt fibers based on the total weight of the mat.

41. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 55 percent by weight of the basalt fibers based on the total weight of the mat.

42. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 60 percent by weight of the basalt fibers based on the total weight of the mat.

43. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 65 percent by weight of the basalt fibers based on the total weight of the mat.

44. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 70 percent by weight of the basalt fibers based on the total weight of the mat.

45. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 75 percent by weight of the basalt fibers based on the total weight of the mat.

46. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 80 percent by weight of the basalt fibers based on the total weight of the mat.

47. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 85 percent by weight of the basalt fibers based on the total weight of the mat.

48. The non-woven mat according to any of embodiments 1 to 35, wherein the mat comprises at least 90 percent by weight of the basalt fibers based on the total weight of the mat.

49. The non-woven mat according to any preceding embodiment, wherein the mat comprises at least 15 percent by weight of the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof based on the total weight of the mat.

50. The non-woven mat according to any of embodiments 1 to 48, wherein the mat comprises at least 20 percent by weight of the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof based on the total weight of the mat.

5 51. The non-woven mat according to any of embodiments 1 to 48, wherein the mat comprises at least 25 percent by weight of the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof based on the total weight of the mat.

10 52. The non-woven mat according to any of embodiments 1 to 48, wherein the mat comprises at least 30 percent by weight of the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof based on the total weight of the mat.

15 53. The non-woven mat according to any of embodiments 1 to 48, wherein the mat comprises at least 35 percent by weight of the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof based on the total weight of the mat.

20 54. The non-woven mat according to any of embodiments 1 to 48, wherein the mat comprises at least 40 percent by weight of the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof based on the total weight of the mat.

55. The non-woven mat according to any preceding embodiment, wherein the non-woven mat is needled-punched.

56. The non-woven mat according to any preceding embodiment, wherein the non-woven mat is made via a wet-laid process.

25 57. The non-woven mat according to any of embodiments 1 to 55, wherein the non-woven mat is made via a dry-laid process.

58. The non-woven mat according to embodiment 57, wherein the non-woven mat as-made prior to heating above 500°C contains not greater than 5 percent by weight organic material, based on the total weight of the mat.

30 59. The non-woven mat according to embodiment 57, wherein the non-woven mat as-made prior to heating above 500°C contains not greater than 4 percent by weight organic material, based on the total weight of the mat.

60. The non-woven mat according to embodiment 57, wherein the non-woven mat as-made prior to heating above 500°C contains not greater than 3 percent by weight organic material, based on the total weight of the mat.

5 61. The non-woven mat according to embodiment 57, wherein the non-woven mat as-made prior to heating above 500°C contains not greater than 2 percent by weight organic material, based on the total weight of the mat.

62. The non-woven mat according to embodiment 57, wherein the non-woven mat as-made prior to heating above 500°C contains not greater than 1 percent by weight organic material, based on the total weight of the mat.

10 63. The non-woven mat according to embodiment 57, wherein the non-woven mat as-made prior to heating above 500°C contains not greater than 0.75 percent by weight organic material, based on the total weight of the mat.

15 64. The non-woven mat according to embodiment 57, wherein the non-woven mat as-made prior to heating above 500°C contains not greater than 0.5 percent by weight organic material, based on the total weight of the mat.

65. The non-woven mat according to embodiment 57, wherein the non-woven mat as-made prior to heating above 500°C contains not greater than 0.25 percent by weight organic material, based on the total weight of the mat.

20 66. The non-woven mat according to embodiment 57, wherein the non-woven mat as-made prior to heating above 500°C contains not greater than 0.1 percent by weight organic material, based on the total weight of the mat.

67. The non-woven mat according to embodiment 57, wherein the non-woven mat as-made prior to heating above 500°C contains zero percent by weight organic material, based on the total weight of the mat.

25 68. The non-woven mat according to any preceding embodiment, wherein the non-woven mat has an as-made bulk density in a range from 0.05 g/ cm³ to 0.3 g/ cm³.

69. The non-woven mat according to any preceding embodiment, wherein the amorphous refractory ceramic is an aluminosilicate.

70. The non-woven mat according to any preceding embodiment, wherein the 30 bio-soluble ceramic is at least one of magnesium silicate or calcium magnesium silicate.

71. The non-woven mat according to any preceding embodiment, wherein the non-woven mat has a thickness in the range from 3 mm to 50 mm.

72. The non-woven mat according to any preceding embodiment, wherein the non-woven mat has a tensile strength of at least 10 kPa.

73. The non-woven mat according to any preceding embodiment, wherein the basalt fibers have diameters of at least 5 micrometers.

5 74. The non-woven mat according to any preceding embodiment, wherein the basalt fibers are shot-free.

75. The non-woven mat according to any preceding embodiment, wherein the non-woven mat comprises not greater than 5 percent by weight organic material, based on the total weight of the mat.

10 76. The non-woven mat according to embodiment 75, further comprising binder.

77. The non-woven mat according to any preceding embodiment, wherein the non-woven mat is non-intumescent.

15 78. The non-woven mat according to any preceding embodiment, wherein the non-woven mat is free of vermiculite.

79. A pollution control device comprising a pollution control element mounted in a casing with the mat according to any preceding embodiment.

20 80. The pollution control device according to embodiment 79, wherein the pollution element is one of a catalytic converter, a diesel particulate filter or a selective catalytic reduction element.

81. An exhaust system comprising a double walled exhaust component and the mat according to any of embodiments 1 to 78, wherein the mat is positioned in a gap between the walls of the double wall exhaust component.

25 82. The exhaust system according to embodiment 81, wherein the double walled exhaust component is an exhaust pipe.

83. The exhaust system according to embodiment 81, wherein the double walled exhaust component is an end cone of a pollution control device.

84. The exhaust system according to embodiment 81, wherein the double walled exhaust component is an exhaust manifold.

Test Methods-Real Condition Fixture Test (RCFT)

[0056] This test is used to measure the pressure exerted by the sheet material under conditions representative of actual conditions found in a pollution control element such as 5 a catalytic converter in actual use.

[0057] A sheet sample material having dimensions of 44.45 mm by 44.45 mm is placed between two 50.8 mm by 50.8 mm heated, metal platens having independent heating controls. Each platen is heated incrementally from room temperature (about 25°C) to a different temperature profile to simulate the temperatures of the metal housing and the 10 monolith in a pollution control device. During heating, the gap between the platens is increased by a value calculated from the temperatures and thermal expansion coefficients of a typical catalytic converter housing and monolith. After heating to the maximum temperature of 700°C for the platen representing the monolith side and 400°C for the platen representing the metal housing side (also referred to herein as 700°C/400°C), the 15 platens are cooled incrementally from room temperature (about 25°C) while the gap is decreased by a value calculated from the temperatures and thermal expansion coefficients. This thermal cycling is conducted three times.

[0058] The materials are initially compressed to either a starting pressure value (e.g., 200 kilopascals (kPa)) or a selected mount density to simulate conditions of the mounting 20 material in a pollution control device. The force exerted by the mounting material is measured using a Sintech ID computer controlled load frame with an Extensometer (obtained from MTS Systems Corp., Research Triangle Park, NC). The pressure exerted by the mat during the heating and cooling cycle is plotted against the temperature profile. The sample and platens are cooled to room temperature, and the cycle is usually repeated 25 two more times to produce a graph having 3 plots of pressure vs. temperature. A minimum value of at least 50 kPa for each of the three cycles is typically considered desirable for a mounting mat. Lower values may still be suitable depending on the particular application.

30 -Thermal Mechanical Analyzer (TMA)

[0059] For purposes of this disclosure, this test is used to evaluate the shrinkage of non-intumescent, non-woven mats described here at certain elevated temperatures. In this test, the thickness of the non-woven mat is continuously measured and recorded under a constant pressure, as it is isothermally heated to 700°C or 750 °C and then cooled down to 5 room temperature. This test, however, is not intended to simulate a real converter environment.

[0060] Each sample (11 mm diameter circle) is placed in a conventional furnace and heated uniformly at a rate of 15°C per minute. A 7 mm quartz rod rested on top of the mat; the rod supported a 1350 gram weight, resulting in a constant pressure of 345 kPa (50 10 psi) on the mat. As the mat shrank, the quartz rod is moved downward. This displacement is measured and recorded as a function of mat temperature. Since quartz has a very low coefficient of thermal expansion, it is presumed the rod does not affect the measured shrinkage.

15 -Tensile Test

[0061] The tensile test is used to evaluate certain handability characteristics of the non-woven mats as they may relate to the process of making and using the mat. It is desirable that the non-woven mat not tear or break when handled, wrapped around the monolith, or canned. After the mat is mounted inside the converter assembly, tensile strength is no 20 longer an issue.

[0062] Each sample is cut in a strip 1 inch (2.5 cm) wide and 7 inch (17.8 cm) long in the down-web direction. A conventional caliper is used to measure the thickness of the sample over a 2.5 inch (6.25 cm) diameter area under a pressure of 0.715 psi (4.9 kPa). Samples are tested on a tensile tester (obtained under the trade designation “QC1000 25 MATERIALS TESTER” from Thwing & Albert, West Berlin, NJ) with an initial gap of 5 inch (12.7 cm), and a crosshead speed of 1 inch/min. (2.5 cm/min.).

[0063] Foreseeable modifications and alterations of this invention will be apparent to those skilled in the art without departing from the scope and spirit of this invention. This

invention should not be restricted to the embodiments that are set forth in this application for illustrative purposes.

What is claimed is:

1. A non-woven mat comprised of a blend comprised of at least 25 percent by weight basalt fibers and at least 10 percent by weight fibers selected from the group

5 consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof, based on the total weight of the mat, and wherein the non-woven mat is collectively comprised of at least 80 percent by weight of said basalt fibers and said fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof, based on

10 the total weight of the mat.

2. The non-woven mat according to claim 1 collectively comprising at least 80 percent by weight of said basalt fibers and said amorphous refractory ceramic fibers.

15 3. The non-woven mat according to either claim 1 or 2, wherein the basalt fibers and the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof present in the blend collectively provide non-woven mat with a Resiliency Value after three thermal cycles from 25°C to 700°C/400°C of the Real Condition Fixture Test at least 1.1 times

20 greater than the Resiliency Value of a comparable non-woven mat consisting of any individual basalt fibers, amorphous refractory ceramic fibers, bio-soluble ceramic fibers, and heat-treated silica fibers, present in the non-woven mat comprised of the blend of fibers.

25 4. The non-woven mat according to any preceding claim, wherein the mat comprises at least 15 percent by weight of the fibers selected from the group consisting of amorphous refractory ceramic fibers, bio-soluble ceramic fibers, heat-treated silica fibers, and mixtures thereof based on the total weight of the mat.

30 5. The non-woven mat according to claim 4, wherein the non-woven mat as-made prior to heating above 500°C contains not greater than 5 percent by weight organic material, based on the total weight of the mat.

6. A pollution control device comprising a pollution control element mounted in a casing with the mat according to any preceding claim.

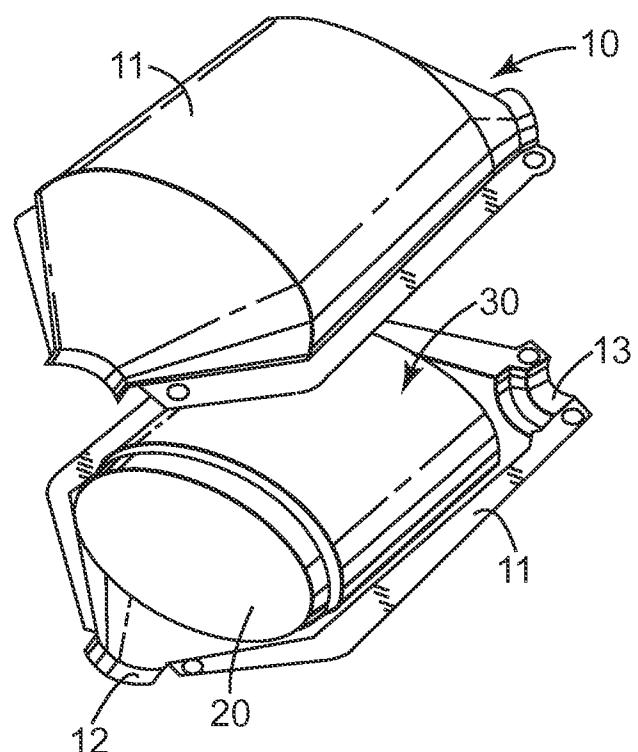
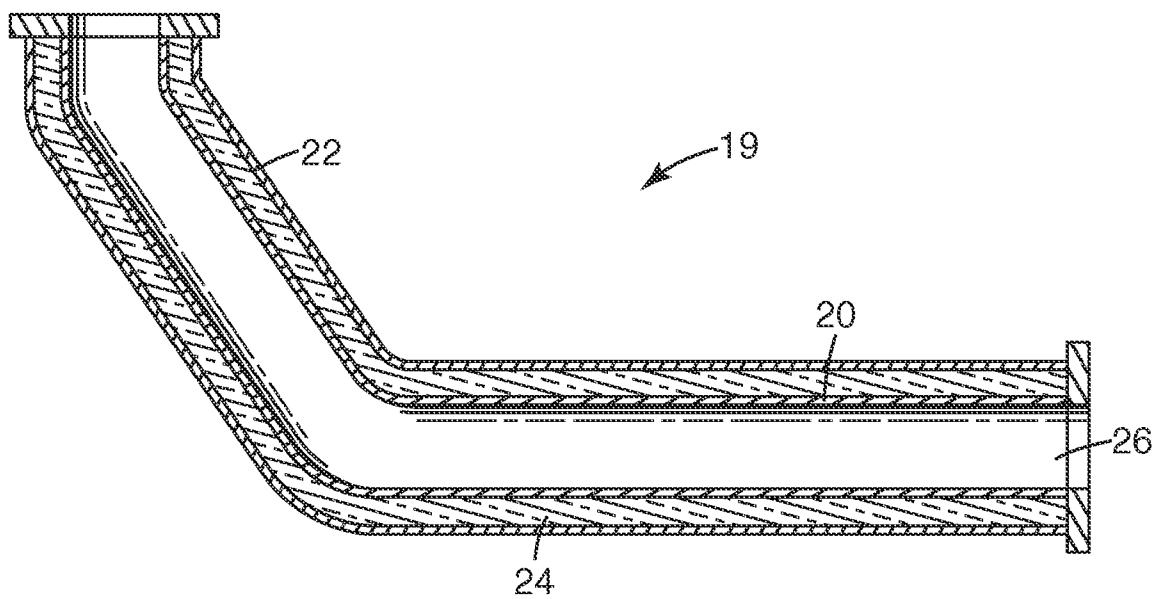
5 7. An exhaust system comprising a double walled exhaust component and the mat according to any of claims 1 to 6, wherein the mat is positioned in a gap between the walls of the double wall exhaust component.

10 8. The exhaust system according to claim 7, wherein the double walled exhaust component is an exhaust pipe.

9. The exhaust system according to claim 7, wherein the double walled exhaust component is an end cone of a pollution control device.

15 10. The exhaust system according to claim 7, wherein the double walled exhaust component is an exhaust manifold.

1/1

*Fig. 1**Fig. 2*

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/062193

A. CLASSIFICATION OF SUBJECT MATTER
INV. D04H1/42 F01N3/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
D04H F01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2008 045239 A (JAPAN VILENE CO LTD) 28 February 2008 (2008-02-28) abstract -----	1,6-10
Y	US 5 464 952 A (SHAH HITEN T [US] ET AL) 7 November 1995 (1995-11-07) column 3; claim 5 -----	1,6-10
A	FR 2 436 757 A1 (CORNING GLASS WORKS [US]) 18 April 1980 (1980-04-18) page 2, lines 1-12 -----	1-10
A	EP 0 643 204 A2 (NGK INSULATORS LTD [JP]) 15 March 1995 (1995-03-15) page 7, lines 29- 48 -----	1-10
A	EP 1 696 110 A1 (IBIDEN CO LTD [JP]) 30 August 2006 (2006-08-30) paragraphs [0012], [0013]; claims 1,2 -----	1-10

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

19 March 2010

30/03/2010

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Lanniel, Geneviève

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No PCT/US2009/062193

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
JP 2008045239	A	28-02-2008	NONE		
US 5464952	A	07-11-1995	NONE		
FR 2436757	A1	18-04-1980	CA	1121391 A1	06-04-1982
			DE	2938421 A1	03-04-1980
			GB	2031870 A	30-04-1980
			JP	1478473 C	27-01-1989
			JP	55047241 A	03-04-1980
			JP	63020781 B	30-04-1988
			US	4199336 A	22-04-1980
EP 0643204	A2	15-03-1995	CA	2131247 A1	04-03-1995
			DE	69414792 D1	07-01-1999
			DE	69414792 T2	20-05-1999
			US	5866079 A	02-02-1999
EP 1696110	A1	30-08-2006	CN	1811141 A	02-08-2006
			DE	602006000431 T2	15-01-2009
			JP	2006207393 A	10-08-2006
			KR	20060086282 A	31-07-2006
			TW	290189 B	21-11-2007
			US	2006166584 A1	27-07-2006