

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 200 164 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
05.07.2006 Bulletin 2006/27

(21) Application number: **00936069.4**

(22) Date of filing: **18.05.2000**

(51) Int Cl.:
A63H 3/46 (2006.01)

(86) International application number:
PCT/US2000/013735

(87) International publication number:
WO 2001/008776 (08.02.2001 Gazette 2001/06)

(54) **DOLL HAVING REALISTIC TWISTING MIDRIFF**

PUPPE MIT REALISTISCH DREHBARER TAILLE

POUPÉE DONT LA TAILLE PIVOTE DE FAÇON RÉALISTE

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(30) Priority: **02.08.1999 US 364889**

(43) Date of publication of application:
02.05.2002 Bulletin 2002/18

(73) Proprietor: **MATTEL, INC.**
El Segundo, CA 90245-5012 (US)

(72) Inventors:
• **ABBO, Jussuf**
Whittier, CA 90601 (US)

• **GODDARD, Peter**
Oakhurst, CA 93644 (US)
• **TORRES, Ronald**
Rosemead, CA 91770 (US)

(74) Representative: **Müller, Gerald Christian et al**
Albert-Rosshaupter-Strasse 65
81369 München (DE)

(56) References cited:
WO-A-99/08764 DE-C- 928 751
US-A- 2 129 421 US-A- 2 174 932
US-A- 3 265 257 US-A- 3 557 471
US-A- 3 837 008 US-A- 4 968 282
US-A- 6 110 002

EP 1 200 164 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the Invention

[0001] This invention relates generally to fashion dolls and particularly to those fabricated to have movable and articulated body parts.

Background of the Invention

[0002] Fashion dolls are a well known and a very popular type of doll toy product. While the fabrication of fashion dolls has varied some what through the years, generally all are fabricated of relatively rigid molded plastic components which include a torso or main body having a neck supporting a head together with articulated arms and legs all of which usually formed of a relatively rigid molded plastic. In most fashion dolls, arms and legs move to facilitate dressing the doll in various interchangeable clothing garments. In addition, most fashion dolls are sufficiently articulated to be capable of being posed in various positions such as sitting, standing or lying prone. A variety of cooperating accessories are also used with fashion dolls which have included such devices as cars, houses, work areas such as offices and campers or the like.

[0003] One of the more interesting aspects of fashion dolls is the play pattern which utilizes a variety of stylish and often very fashionable garments which the dolls may wear. Much of the appeal of fashion dolls involves the use of such garments. Notsurprisingly, practitioners in the toy arts providing fashion dolls often strive to make available garments which are in tune with the latest styles and fashions or which fit a particular selected theme. One style or fashion which periodically rises in the fashion world involves a bare midriff look or style. The utilization of such bare midriff styles present substantial difficulty for manufactures of fashion dolls in that the torso which is exposed in a typical fashion doll includes various unnatural visible joint structures or structural elements for example, US Patent 3,942,284 issued to Kublan sets forth a DOLL WITH SEVEN SPHERICAL TORSO JOINTS AND FIVE APPENDAGES HELD BY THREE-SECURED ELASTIC MEMBERS having a doll utilizing a torso formed of an upper torso and lower torso joined by a ball joint together with a pair of arms and a pair of legs pivotally joined to the upper and lower torso portions. A single elastic member extends from the lower torso through the upper torso and into the doll head while second and third elastic members are stretched between the arm pair and the leg pair.

[0004] US Patent 4,968,282 issued to Robson et al. sets forth a POSEABLE DOLL constructed of sub units connected to one another by ball and socket joints. A skin which encloses the sub units is secured to the sub units by insertion of appendages into sockets in the sub units and by means of a fastener which snaps into a groove pinning the skin to the doll.

[0005] US Patent 3,699,710 issued to Glass et al. sets forth a DOLL JOINT having a doll body defining upper and lower torso components movably related to each other and characterized by the connection of the torso components so as to permit rotational movement therebetween.

[0006] US Patent 3,425,155 issued to Ryan et al. sets forth a DOLL CONSTRUCTION FOR NATURAL MOVEMENTS AND POSITIONS having an upper and lower torso joined by a rotational attachment. The upper and lower torso portions of the doll as well as the head to neck attachment of the doll is rotatable with respect to a plane of rotation which is angled by an acute angle relative to the height of the doll body.

[0007] US Patent 4,135,327 issued to Sapkus et al. sets forth a DOLL CONSTRUCTION WITH PIVOTABLE TORSO MEMBERS having upper and lower hollow torso members supportable in an upright position along the longitudinal center line of the doll. The doll torso portions are adapted to be pivoted with respect to each other about an axis angled at approximately thirty degrees from the longitudinal axis of the doll.

[0008] US Patent 4,662,857 issued to Quinn et al. sets forth an ARTICULATED SOFT DOLL CONSTRUCTION ASSEMBLY in which a soft skin covers a soft head and a soft torso of a doll. The torso has a first skin covering a fiber filler material formed with an opening in which a neck connecting member is received. A second soft skin cover is used to cover a soft head filled with a fiber material. A neck plug is received through an opening in the head and the second soft skin cover.

[0009] US Patent 4,723,932 issued to Kelley et al. sets forth a TOY DOLL HAVING ARTICULATED ARMS AND A TILTABLE UPPER TORSO in which upper and lower torso portions are joined at a ball and socket joint. The upper torso is coupled to the lower torso by a rotatable shaft which allows tilting thereof.

[0010] US Patent 4,954,118 issued to Refabert sets forth FLEXIBLE BODIED DOLLS having a plurality of rigid or semi-rigid members embedded within the body. The rigid or semi-rigid members form a supporting skeleton for the doll and facilitate posing by bending the doll and its supporting members.

[0011] US Patent 4,995,846 issued to Mariol sets forth a TOY FIGURE WITH PIVOTAL LOWER TORSO having a lower torso and legs defining an angled plane together with an upper torso, arms and head defining a correspondingly angled plane and a rotatable coupling therebetween. The angled plane about which the upper and lower portions of the toy figure are rotatable causes the angle between body portions to change as the figure is rotated.

[0012] US Patent 3,124,901 issued to Beebe sets forth a BALL JOINT BETWEEN DOLL HEAD AND BODY which facilitates a snap-in attachment and pivotal support of a doll head upon the neck and shoulders of a doll body.

[0013] US Patent 5,752,869 issued to Huff sets forth a TOY CONSTRUCTION SET suitable for modeling an

animal, bird, insect, dinosaur humanoid figure. A skeleton having a plurality of snap-fitted ball and socket members which may be interchanged facilitates the adaptation to various types of figures.

[0014] The German patent DE 928 751 discloses a device for changing the body height of a doll as well as for flexing the upper part of the doll in all directions. An elastic ring made of a flexible material is placed in the hip region between the end plates of the upper and lower parts of the body.

[0015] While the foregoing described prior art devices have improved the art and in some instances enjoyed commercial success, there remains nonetheless a continuing need in the art for ever more improved, interesting and realistic fashion dolls.

Summary of the Invention

[0016] Accordingly, it is a general object of the present invention to provide an improved fashion doll. It is a more particular object of the present invention to provide an improved fashion doll which presents a realistic appearing twistable torso suitable for use with "bare midriff" fashions or the like.

[0017] In accordance with the present invention there is provided a doll according to claim 1.

Brief Description of the Drawings

[0018] The features of the present invention, which are believed to be novel, are set forth with particularity in the appended claims. The invention, together with further objects and advantages thereof, may best be understood by reference to the following description taken in conjunction with the accompanying drawings, in the several figures of which like reference numerals identify like elements and in which:

Figure 1 sets forth a front perspective view of a fashion doll body constructed in accordance with the present invention;

Figure 2 sets forth a partial front view of the present invention doll having the supporting skeletal members shown in invisible dash-line;

Figure 3 sets forth a section view of the present invention doll taken along section lines 3-3 in Figure 2;

Figure 4 sets forth a perspective assembly view of the present invention doll;

Figure 5 sets forth a section view of the present invention doll taken along section lines 5-5 in Figure 2.

Description of the Preferred Embodiment

[0019] Figure 1 sets forth a front perspective view of a

5 doll constructed in accordance with the present invention and generally referenced by numeral 10. Doll 10 includes a doll body 11 having an upper portion 12, a midriff 20, and a lower body 17. Upper body 12 is formed of a front portion 23 and a rear portion 24 and supports a pair of arms 15 and 16 in the manner set forth below in greater detail. Similarly, lower body 17 is formed of a front portion 21 and a rear portion 22 and supports a pair of legs 18 and 19 in the manner set forth below in greater detail. 10 Midriff 20 is joined to upper body 12 along a seam 26 and is joined to lower body 17 along a seam 25. Upper body 12 further defines an upwardly extending neck 13 having a head connector 46. For purposes of illustration, the lower portion of a typical doll head 14 is shown in dash-line representation. It will be understood that head 14 is connectable to head connector 46 in accordance with conventional fabrication techniques (not shown).

[0020] In accordance with the present invention, upper body 12 and arms 15 and 16 are preferably fabricated of a relatively rigid molded plastic material or the like. 20 Front portion 23 and rear portion 22 are joined utilizing conventional fabrication techniques such as sonic welding, thermal welding or adhesive attachment or other equivalent attachments. In further accordance with the present invention, lower body 17 together with legs 18 and 19 are also preferably fabricated of a relatively rigid material such as molded plastic. In further accordance with the present invention, midriff 20 is fabricated of a soft resilient flexible material such as rubber or the like and is supported by an upper body armature and a lower body armature joined by a ball and socket structure in the manner set forth below in greater detail. Suffice it to note here, that the underlying skeleton coupled between upper body portion 12 and lower body portion 17 which passes through and which supports soft flexible midriff 20 utilizes 30 a ball and socket coupling within midriff 20 to permit upper body 12 and lower body 17 to be twisted about a vertical axes relative to each other. In accordance with an important aspect of the present invention, midriff 20 is generally contoured and textured to closely resemble human skin in both color and flexing characteristics. Accordingly, the twisting motion between upper body 12 and lower body 17 is accommodated by the flexibility of midriff 20. In further accordance with an important aspect of the present invention, the unique structure of midriff 20 and the supporting armatures therein maintains a realistic natural midriff appearance for body 11 despite its capability to twist or flex. Thus, in common to prior art devices which accomplish such twisting or flexing capability at the expense of unrealistic and visible joint structures, the present invention doll is uniquely configured and constructed to allow the doll to wear a variety of so-called "bare midriff" fashion garments.

[0021] Figure 2 sets forth a front view of doll 10, showing the underlying structure and supporting armatures thereof in dash-line or invisible representation.

[0022] As described above, doll 10 includes an upper body 12 and a lower body 17 coupled by a resilient midriff

20. As is also described above, upper body 12 supports a neck 13 having a head connector 46 supported therein. A pair of arms 15 and 16 having arm bearings 41 and 45 respectively and ball ends 43 and 44 are pivotally secured to upper body 12. Upper body 12 defines a lower edge 48 which meets midriff 20 to form a seam 26. Similarly, lower body 17 defines an upper edge 56 which meets midriff 20 to form a seam 25.

[0023] Lower body 17 supports a lower body armature 70 secured therein by cooperating posts 27 and 28 in the manner seen in Figure 3. Lower body armature 70 includes a pair of outwardly extending hip supports 76 and 77 which in turn support a pair of spring clips 80 and 84. Spring clips 80 and 84 are received within a pair of split balls 81 and 85. Lower body armature 70 further includes a horizontally disposed plate 71 and an upwardly extending ball support 72. A ball 73 is supported upon ball support 72.

[0024] Doll 10 further includes a pair of leg armatures 90 and 92 upon which legs 18 and 19 are formed. In accordance with conventional fabrication techniques, leg armatures 90 and 92 are molded into legs 18 and 19. Thus, a rigid structure for legs 18 and 19 may be obtained while utilizing a somewhat softer more realistic material for legs 18 and 19. Leg armature 90 defines a hip socket 91 receiving split ball 81 and spring clip 80. Similarly, leg armature 92 defines a hip socket 95 which receives split ball 85 and spring clip 84. The resulting assembly of legs 18 and 19 and lower body armature 70 provides pivotal attachment of legs 18 and 19.

[0025] In further accordance with the present invention, body 11 includes an upper body armature 30 having a pair of forwardly extending supports 36 and 37. Upper body armature 30 further includes a rearwardly extending flange 35 (seen in Figure 4) which is supported within grooves 50 and 51 or rear portion 24 (also seen in Figure 4). Suffice it to note here, that upper body armature 30 is secured within upper body 12 in a rigid attachment. Upper body armature 30 further includes a downwardly extending housing supporting a generally horizontal plate 34. Plate 34 in turn supports a downwardly extending socket support 33 having a socket 32 joined thereto. In accordance with the structure set forth below in Figures 3, 4 and 5 in greater detail, ball 73 is pivotally supported within socket 32.

[0026] In the preferred fabrication of the present invention, midriff 20 is molded upon upper body armature 30 after socket 32 receives ball 73. Toward this end, plates 34 and 71 are structured to grip the material of midriff 20 as midriff 20 is molded thereon. Once midriff 20 is molded upon the combination of upper body armature 30 and lower body armature 70, the attachment between upper body 12 and lower body 17 is complete and the realistic midriff appearance and twisting and flexing action thereof is provided.

[0027] Figure 3 sets forth a section view of doll taken along section lines 3-3 in Figure 2. As described above, doll 10 includes a body 11 formed of an upper body 12

and a lower body 17 joined by a flexible midriff 20. As is also described above, upper body 12 is formed of a front portion 23 and a rear portion 24 joined by adhesive attachment. Upper body 12 defines a neck 13 supporting a head connector 46 which is used in accordance with conventional fabrication techniques to secure a conventional doll head (not shown). Front portion 23 of upper body 12 defines a lower edge 48 while rear portion 24 thereof defines a lower edge 47. An arm bearing 41 rotatably supports arm 15 (seen in Figure 2).

[0028] Lower body 17 is formed of a front portion 21 and a rear portion 22 joined by conventional attachment such as adhesive attachment or the like. Front portion 21 defines a pair of rearwardly extending bosses 100 and 101 while rear portion 22 defines a pair of forwardly extending posts 27 and 28. Posts 27 and 28 are received within bosses 100 and 101 and secured by conventional means such as adhesive attachment or the like.

[0029] In accordance with the present invention, an upper body armature 30 includes a flange 35 received within a pair of grooves 50 and 51 (groove 50 seen in Figure 4) both of which are formed in rear portion 24. Upper body armature 30 further includes a downwardly extending housing 31 having a plate 34 extending therefrom. A socket support 33 extends downwardly beyond plate 34 and supports a socket 32. Socket 32 includes a pair of limit tabs 105 and 106.

[0030] A lower body armature 70 defines a pair of apertures 78 and 79 which receive bosses 100 and 101 together with posts 27 and 28 to securely attach lower body armature 70 within lower body 17. Conventional attachment such as adhesive attachment or the like is used to secure lower body armature 70. Lower body armature 70 further includes an upwardly extending ball support 72 and a laterally extending plate 71. Ball support 72 is joined to a ball 73 which is received within socket 32 of upper body armature 30. Ball 73 defines a front opening 74 and a rear opening 75. As is better seen in Figure 5, front opening 74 receives limit tab 106 while rear opening 75 receives limit tab 105. The operation of limit tabs 105 and 106 within openings 75 and 74 is described below in connection with Figure 5 in greater detail. Suffice it to note here, that the cooperative effect thereof, provides an angular limit on the twisting or pivoting range of motion between ball 73 and socket 32. This limits the twisting of midriff 20 a realistic degree of motion to maintain realism.

[0031] As described above, front portion 21 of lower body 17 defines an upper edge 57 while rear portion 22 thereof defines an upper edge 56. Correspondingly, a lip 55 receives edges 56 and 57 to provide a smooth seam 25 between midriff 20 and lower body 17. A similar smooth seam 26 is formed between midriff 20 and upper body portion 12 at edges 47 and 48.

[0032] Thus, the pivotal attachment between upper body 12 and lower body 17 provided by ball 73 of lower body armature 70 and socket 32 of upper body armature 30 together with the smooth flexible and realistically con-

toured molded on structure of midriff 20 combines to provide a novel doll fabrication which is suitable for wearing garments having a bare midriff or exposed midriff area. The degree of pivotal twisting of upper body 12 with respect to lower body 17 or vice versa is limited by the structure is limited by the structure of ball 73 and socket 32 to maintain a realistic range of motion and to avoid damage to the present invention doll. The attachment of ball 73 within socket 32 also provides additional strength which resists forces tending to stretch body 11 in a manner pulling upper body 12 and lower body 17 apart. The strength provided by upper body armature 30 and lower body armature 70 in resisting this force allows midriff 20 to be formed of a highly realistic feeling resilient material closely simulating the touch and feel of the human body. But for the provision of armatures 30 and 70, midriff 20 would of necessity need to be fabricated of a substantially stronger and therefore less realistic material.

[0033] Figure 4 sets forth a perspective assembly view of the present invention doll. As described above, doll 10 includes a front portion 23 and a rear portion 24 which are joined to form upper body 12 (seen in Figure 1). Rear portion 24 defines socket portions 60 and 62 while front portion 23 defines docket portions 61 and 63. In addition, rear portion 24 defines grooves 50 and 51 and bottom edge 47. Front portion 23 defines a bottom edge 48. When front portion 23 is joined to rear portion 24, socket portions 60 and 61 form a shoulder socket as due socket portions 62 and 63. A pair of arms 15 and 16 having ball ends 42 and 43 together with arm bearings 41 and 44 are received within the shoulder sockets thus formed.

[0034] In accordance with the present invention, an upper body armature 30 having a housing 31 supporting a rearwardly extending flange 35 and forwardly extending supports 36 and 37 is captivated between front portion 23 and rear portion 24. This captivation results from the insertion of flange 35 within grooves 50 and 51 prior to the assembly of front portion 23 to rear portion 24. Upper body armature 30 further includes a plate 34 supporting a downwardly extending socket support 33 which in turn supports a downwardly open socket 32.

[0035] Front portion 21 and rear portion 22 combine to form lower body 17 (seen in Figure 1). A lower body armature 70 defines apertures 78 and 79 together with outwardly extending hip supports 76 and 77. Hip supports 76 and 77 further support spring clips 80 and 81 respectively. A pair of split balls 81 and 85 having slots 82 and 86 together with apertures 83 and 87 formed therein are configured to receive spring clips 80 and 84. A pair of legs 18 and 19 having supporting armatures 90 and 92 (armature 92 seen in Figure 2) define respective hip sockets 91 and 95. Front portion 21 and rear portion 22 of lower body 17 are joined using conventional attachment such as adhesive attachment or the like, to captivate lower body armature 70 upon posts 27 and 28 passing through apertures 78 and 79 respectively. Once lower body aperture 70 is secured within front portion 21 and rear portion 22, legs 18 and 19 are assembled by initially

inserting split balls 81 and 85 into hip sockets 91 and 95 respectively. Thereafter, spring clips 80 and 84 are forced through apertures 83 and 87 respectively and are resiliently locked therein to secure legs 18 and 19 to lower body armature 70.

[0036] Lower body armature 70 further includes a plate 71 having an upwardly extending ball support 72 which in turn supports a ball 73. Ball 73 defines a front opening 74 and a rear opening 85.

[0037] The assembly of doll 10 proceeds by joining lower body aperture 70 to upper body aperture 30 as ball 73 is forced into socket 32 to provide the assembly shown in Figure 2. Once upper body aperture 30 is assembled to lower body aperture 70, midriff 20 is formed upon doll 10 to provide the completed doll shown in Figure 1. In the preferred fabrication of the present invention, midriff 20 is formed of a flexible resilient soft material such as rubber or the like and is molded directly upon the remainder of doll 10 to form lips 46 and 55 against edges 47 and 48 of front portion 23 and rear portion 24 and against edges 56 and 57 of rear portion 22 and front portion 21. Thus, while midriff 20 is shown pre-formed for purposes of illustration in Figure 4, it will be understood that in the preferred fabrication of the present invention shown in Figure 2, midriff 20 is molded upon upper body armature 30 and lower body armature 70.

[0038] The resulting structure assembled in the manner shown in Figure 4, provides the above described resilient midriff having a realistic appearance together with the twisting action and high strength attachment provided by the ball and socket joint of ball 73 within socket 32.

[0039] Figure 5 sets forth a section view of doll 10 taken along section lines 5-5 in Figure 2. Figure 5 is provided to more clearly shown the limitation of pivotal movement between ball 73 and socket 32 which in turn limits the twisting or pivotal motion obtainable between upper body 12 and lower body 17. Accordingly, a ball 73 defining a front opening 74 and a rear opening 75 is received within a socket 32 in accordance with the ball and socket joint formed between upper body armature 30 and lower body armature 70 shown in Figure 2. Socket 32 defines a limit tab 105 extending into opening 75 and a limit tab 106 extending into opening 74. Midriff 20 is shown molded upon socket 32 and ball 73 in the manner shown in Figure 2.

[0040] In operation, twisting movement between upper body 12 and lower body 17 (seen in Figure 2) is accommodating by the flexing of midriff 20 together with the rotation of ball 73 within socket 32. The rotation motion of ball 73 in either direction however, is limited by the extension of tabs 105 and 106. In this manner, the twisting movement or rotation of upper body 12 with respect to lower body 17 is limited to a realistic angular twist or pivoting motion.

[0041] It will be apparent to those skilled in the art that while the illustrative embodiment set forth in Figures 1 through 5 utilizes a ball and socket joint between upper body armature 30 and lower body armature 70 in which

upper body armature 30 supports a socket and lower body armature 70 supports a ball, the reverse relationship of the ball and socket joint may be utilized without departing from the spirit and scope of the present invention. Thus, for example, it is equally within the present invention to provide a ball such as ball 73 supported upon support 33 of upper body armature 30 and a socket such as socket 32 supported upon support 72 of lower body armature 70. The resulting structure is a simple reversal of the ball and socket elements with the identical performance and capabilities thus it is believed clearly within the scope of the present invention to utilize a reversed ball and socket combination between armatures 30 and 70.

[0042] While particular embodiments of the invention have been shown and described, it will be obvious to those skilled in the art that changes and modifications may be made without departing from the invention in its broader aspects. Therefore, the aim in the appended claims is to cover all such changes and modifications as fall within the scope of the invention.

Claims

1. A doll (10) comprising:

- an upper body (12) having an upper body armature (30);
- a lower body (17) having a lower body armature (70);
- a ball (73) and socket (32) forming a ball and socket joint joining said upper body armature (30) to said lower body armature (70) and supporting said upper body (12) and said lower body (17) to form a space therebetween; and
- a soft resilient midriff (20) spanning said space;

characterized by

- said soft resilient midriff (20) encapsulating said ball and socket joint;
- said ball (73) including an open portion (74,75),
- said socket (32) including a limit tab (105,106) extending into said open portion (74,75) and
- said limit tab (105,106) and said open portion (74,75) cooperating to limit the range of pivotal motion between said ball (73) and said socket (32).

2. A doll (10) set forth in claim 1 wherein

- said upper body (12) has a neck (13), a lower edge (48) and a pair of arms (15,16);
- said upper body armature (30) is joined to said upper body (12) and has a downwardly extending first support (33);
- said lower body (17) has a pair of legs (18,19)

and an upper edge (56);

- said lower body armature (70) is joined to said lower body (17) and has an upwardly extending second support (72);
- said ball (73) and said socket (32) are joined to said first and second supports (33,72) to form said ball and socket joint between said upper body armature (30) and said lower body armature (70),
- said first and second supports (33,72) supporting said upper and lower bodies (12,17) such that said space is formed between said lower edge (48) and said upper edge (56); and
- said midriff (20) extends between said upper edge (56) and said lower edge (48) to span said space.

3. The doll (10) set forth in claim 1 or claim 2 wherein said midriff (20) is molded upon said first and second supports (33,72) and said ball and socket joint.

4. The doll (10) set forth in one of the preceding claims wherein said ball (73) is supported upon said lower body armature (70) and wherein said socket (32) is supported upon said upper body armature (30).

5. The doll (10) set forth in claim 2, 3 or 4 wherein said upper body armature (30) includes a first extending plate (34) formed on said downwardly extending first support (33).

6. The doll (10) set forth in claim 5 wherein said lower body armature (70) includes a second extending plate (71) formed on said second upwardly extending support (73).

7. The doll (10) set forth in one of claims 2 through 6 wherein said socket (32) is formed on said first support (33) and wherein said ball (73) is formed on said second support (72).

Patentansprüche

1. Puppe (10), umfassend:

- einen Oberkörper (12) mit einer Oberkörperarmatur (30);
- einen Unterkörper (17) mit einer Unterkörperarmatur (70);
- eine Kugel (73) und eine Pfanne (32), die ein Kugelgelenk bilden, das die Oberkörperarmatur (30) mit der Unterkörperarmatur (70) verbindet sowie den Oberkörper (12) und den Unterkörper (17) derart trägt, dass zwischen ihnen ein Raum entsteht; und
- eine weiche nachgiebige Taille (20), die den

Raum überspannt;

gebildet ist.

dadurch gekennzeichnet, dass

- die weiche nachgiebige Taille (20) das Kugelgelenk einkapselt; 5
- die Kugel (73) einen offenen Bereich (74, 75) aufweist;
- die Pfanne (32) eine Begrenzungsnase (105, 106) aufweist, die sich in den offenen Bereich (74, 75) hinein erstreckt; und 10
- die Begrenzungsnase (105, 106) und der offene Bereich (74, 75) derart zusammenwirken, dass sie den Bereich der Schwenkbewegung zwischen der Kugel (73) und der Pfanne (32) begrenzen. 15

2. Puppe (10) nach Anspruch 1, wobei

- der Oberkörper (12) einen Hals (13), eine Unterkante (48) und ein Paar Arme (15,16) aufweist; 20
- die Oberkörperarmatur (30) mit dem Oberkörper (12) verbunden ist und eine sich nach unten erstreckende erste Stütze (33) aufweist; 25
- der Unterkörper (17) ein Paar Beine (18,19) und eine Oberkante (56) aufweist;
- die Unterkörperarmatur (70) mit dem Unterkörper (17) verbunden ist und eine sich nach oben erstreckende zweite Stütze (72) aufweist; 30
- die Kugel (73) und die Pfanne (32) mit der ersten und der zweiten Stütze (33,72) verbunden sind, um das Kugelgelenk zwischen der Oberkörperarmatur (30) und der Unterkörperarmatur (70) zu bilden; 35
- die erste und die zweite Stütze (33,72) den Ober- und den Unterkörper (12,17) derart tragen, dass der Raum zwischen der Unterkante (48) und der Oberkante (56) gebildet wird; und 40
- sich die Taille (20) zwischen der Oberkante (56) und der Unterkante (48) erstreckt, um den Raum zu überspannen.

3. Puppe (10) nach Anspruch 1 oder Anspruch 2, wobei die Taille (20) an der ersten und der zweiten Stütze (33,72) sowie an dem Kugelgelenk geformt ist. 45

4. Puppe (10) nach einem der vorangehenden Ansprüche, wobei die Kugel (73) von der Unterkörperarmatur (70) getragen wird und wobei die Pfanne (32) von der Oberkörperarmatur (30) getragen wird. 50

5. Puppe (10) nach Anspruch 2, 3 oder 4, wobei die Oberkörperarmatur (30) eine erste sich erstreckende Platte (34) aufweist, die an der sich nach unten erstreckenden ersten Stütze (33) aus- 55

6. Puppe (10) nach Anspruch 5, wobei die Unterkörperarmatur (70) eine zweite sich erstreckende Platte (71) aufweist, die an der zweiten sich nach oben erstreckenden Stütze (73) ausgebildet ist.

7. Puppe (10) nach einem der Ansprüche 2-6, wobei die Pfanne (32) an der ersten Stütze (33) ausgebildet ist und wobei die Kugel (73) an der zweiten Stütze (72) ausgebildet ist.

Revendications

1. Une poupée (10) comprenant :

- un corps supérieur (12) présentant une armature de corps supérieur (30) ;
- un corps inférieur (17) présentant une armature de corps inférieur (70) ;
- une bille (73) et une douille (32) formant une liaison rotule joignant ladite armature de corps supérieur (30) à ladite armature de corps inférieur (70) et supportant ledit corps supérieur (12) et ledit corps inférieur (17) de façon à former un espace les séparant ; et
- une basque molle et élastique (20) enjambant dans ledit espace ;

caractérisé par :

- ladite basque molle et élastique (20) encapsulant ladite liaison rotule ;
- ladite bille (73) incluant une portion ouverte (74, 75),
- ladite douille (32) incluant une butée (105, 106) s'étendant dans ladite portion ouverte (74, 75) et
- ladite butée (105, 106) et ladite portion ouverte (74, 75) coopérant pour limiter l'amplitude du mouvement pivotant entre ladite bille (73) et ladite douille (32).

2. La poupée (10) selon la revendication 1, dans laquelle :

- ledit corps supérieur (12) présente un cou (13), un bord inférieur (48) et une paire de bras (15, 16) ;
- ladite armature de corps supérieur (30) est reliée audit corps supérieur (12) et présente un premier support s'étendant vers le bas (33) ;
- ledit corps inférieur (17) a une paire de jambes (18, 19) et un bord supérieur (56) ;
- ladite armature de corps inférieur (70) est reliée audit corps inférieur (17) et présente un second support s'étendant vers le bas (72) ;

- ladite bille (73) et ladite douille (32) sont reliées auxdits premier et second supports (33, 72) pour former ladite liaison rotule entre ladite armature de corps supérieur (30) et ladite armature de corps inférieur (70) ; 5
- lesdits premier et second supports (33, 72) supportant lesdits corps supérieur et inférieur (12, 17) de sorte que ledit espace est formé entre ledit bord inférieur (48) et ledit bord supérieur (56) ; et 10
- ladite basque (20) s'étend entre ledit bord supérieur (56) et ledit bord inférieur (48) pour enjambrer ledit espace.

- 3. La poupée (10) selon la revendication 1 ou 2, 15
dans laquelle ladite basque (20) est moulée en englobant les premier et second supports (33, 72) et ladite liaison rotule.

- 4. La poupée (10) selon l'une quelconque des revendications précédentes, 20
dans laquelle ladite bille (73) est supportée par ladite armature de corps inférieur (70) et dans laquelle ladite douille (32) est supportée par ladite armature de corps supérieur (30). 25

- 5. La poupée (10) selon l'une des revendications 2, 3 ou 4 30
dans laquelle ladite armature de corps supérieur (30) comprend une première plaque en saillie (34) formée sur ledit premier support s'étendant vers le bas (33). 30

- 6. La poupée (10) selon la revendication 5 35
dans laquelle ladite armature de corps inférieur (70) comprend une seconde plaque en saillie (70) formée sur ledit second support s'étendant vers le bas (73). 35

- 7. La poupée (10) selon l'une quelconque des revendications 2 à 6 40
dans laquelle ladite douille (32) est formée sur ledit premier support (33) et dans laquelle ladite bille (73) est formée sur ledit second support (72). 40

45

50

55

FIG. 1

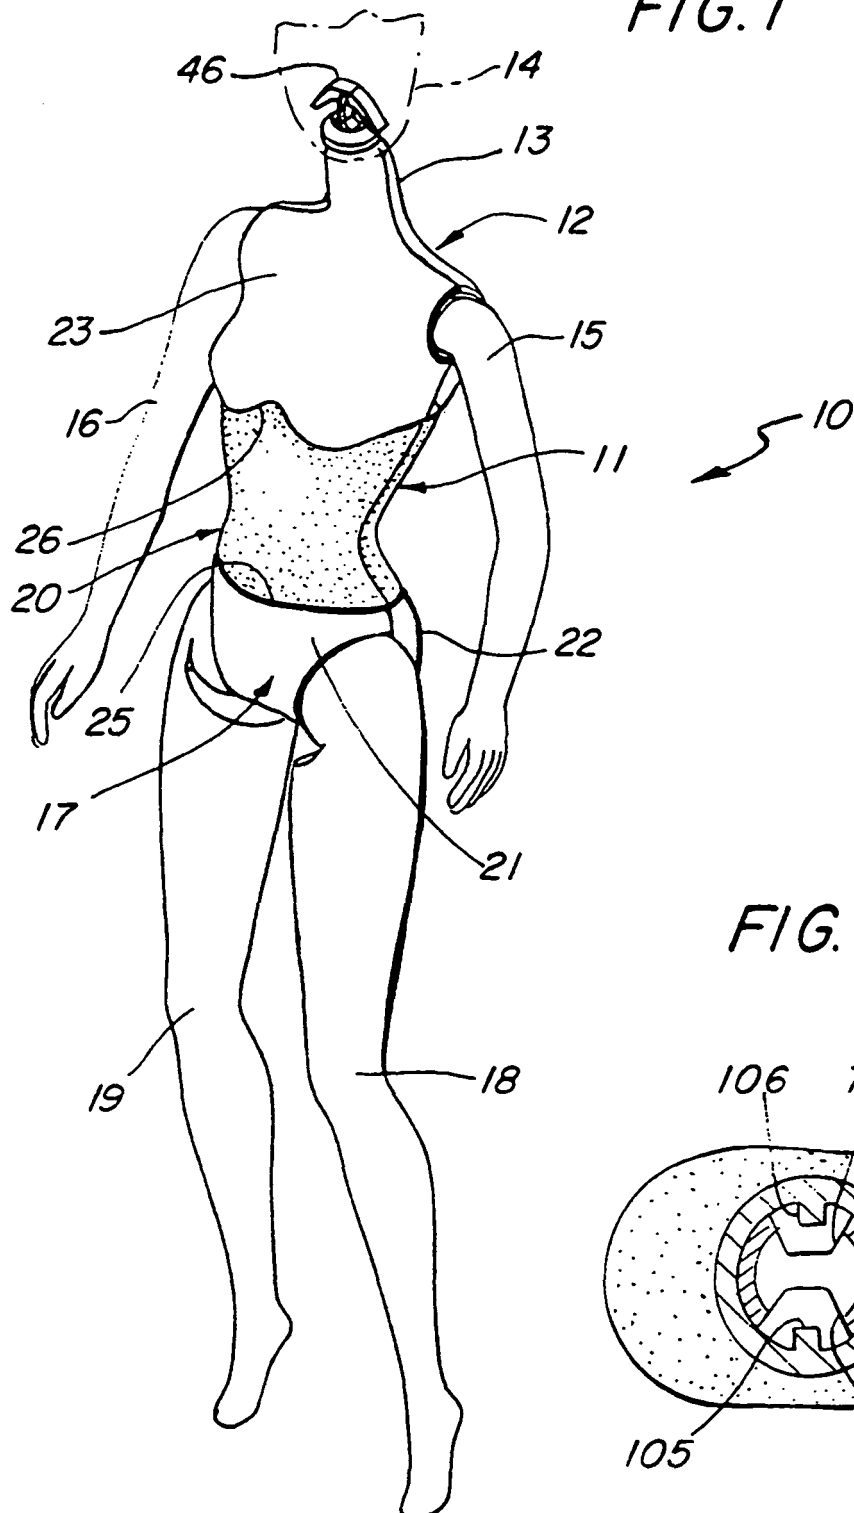


FIG. 5

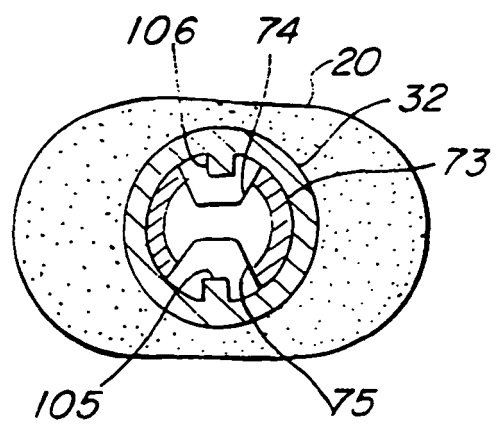


FIG. 2

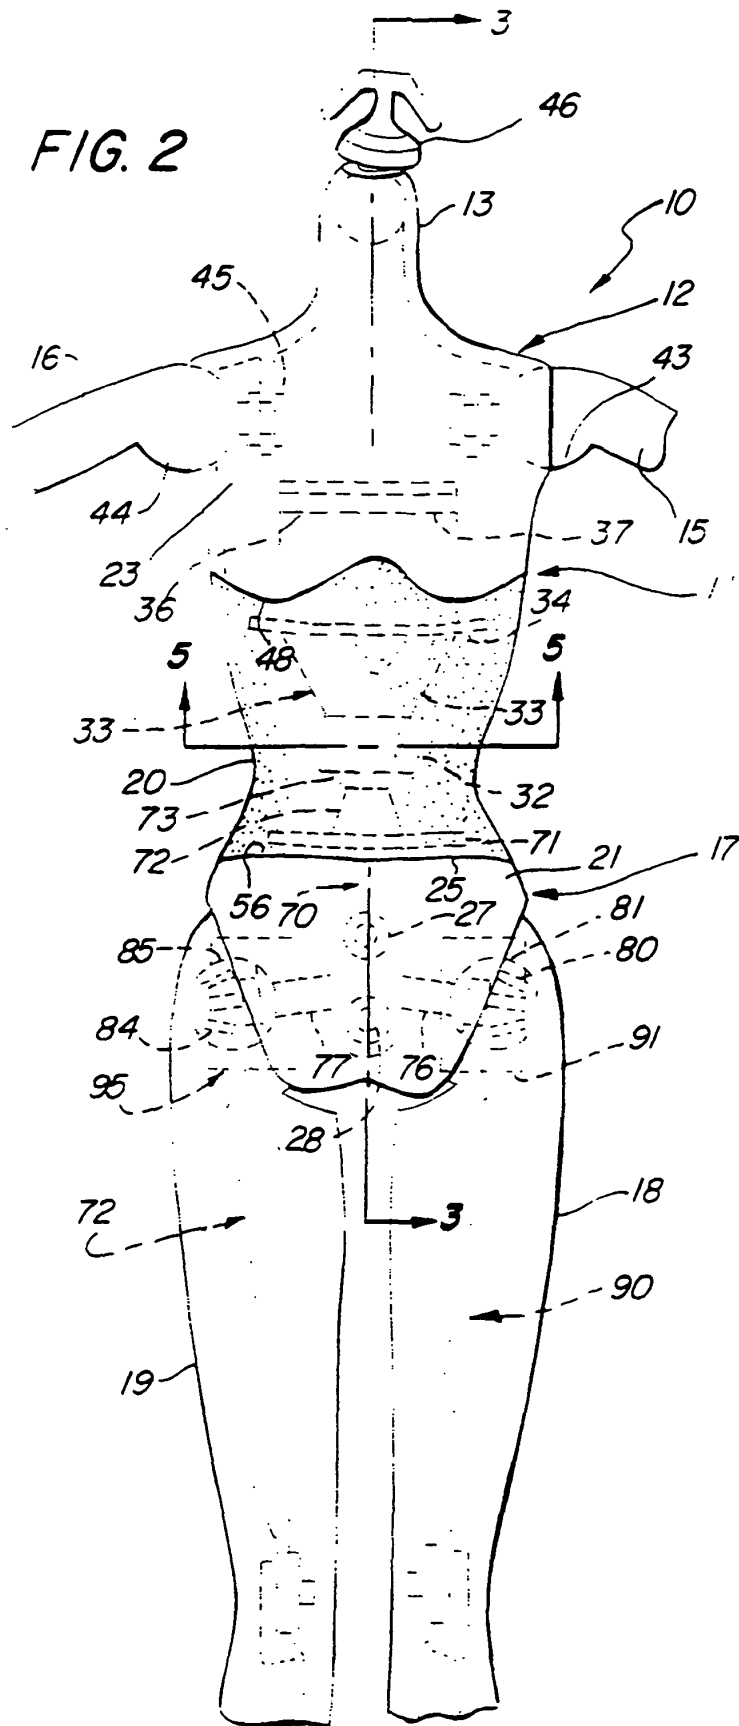


FIG. 3

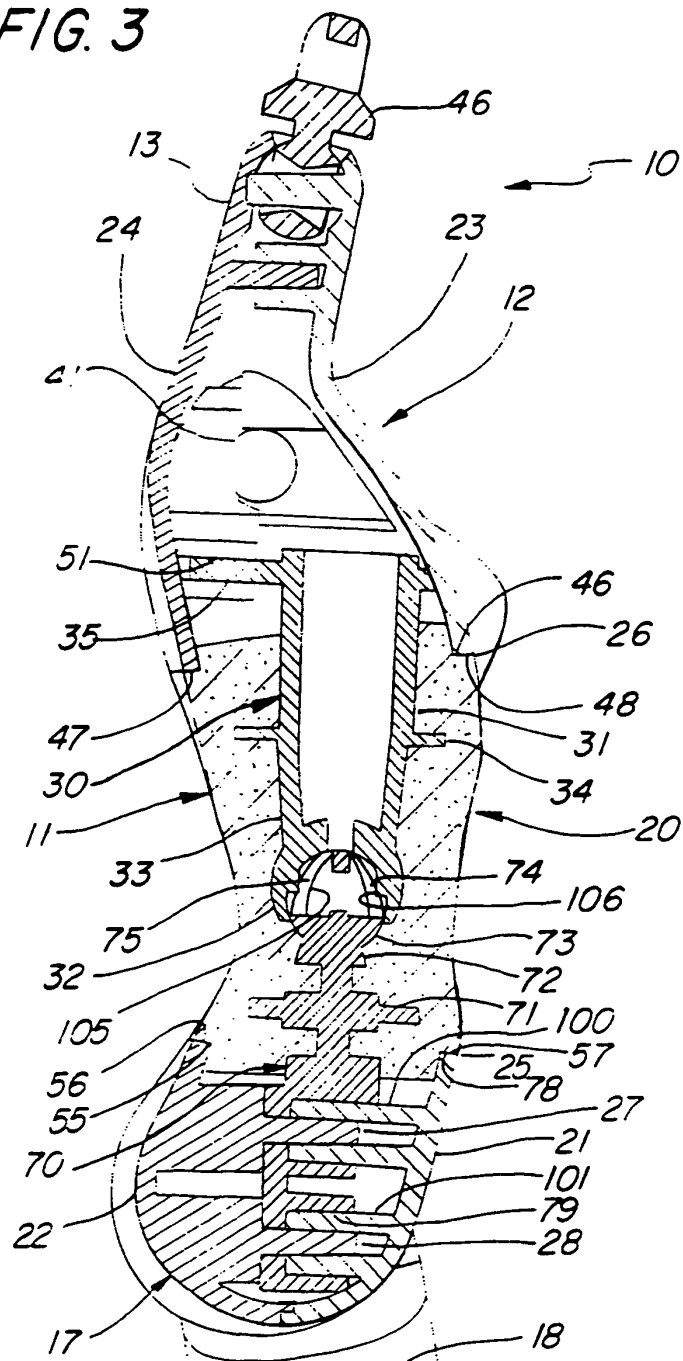


FIG. 4

