



(51) International Patent Classification:

H04N 19/119 (2014.01) H04N 19/103 (2014.01)
H04N 19/70 (2014.01) H04N 19/167 (2014.01)

(21) International Application Number:

PCT/US2016/038322

(22) International Filing Date:

20 June 2016 (20.06.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/182,852 22 June 2015 (22.06.2015) US
14/918,771 21 October 2015 (21.10.2015) US

(71) Applicant: CISCO TECHNOLOGY, INC. [US/US]; 170
West Tasman Drive, San Jose, CA 95134-1706 (US).

(72) Inventors: FULDSETH, Arild; Lysaer Brygge 3, 1366
Lysaker (NO). BJONTEGAARD, Gisle; Haukeliveien 12,
1415 Oppegard (NO).

(74) Agents: DEBOY, Mark et al.; 9801 Washingtonian Blvd.,
Suite 750, Gaithersburg, MD 20878 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: BLOCK-BASED VIDEO CODING USING A MIXTURE OF SQUARE AND RECTANGULAR BLOCKS

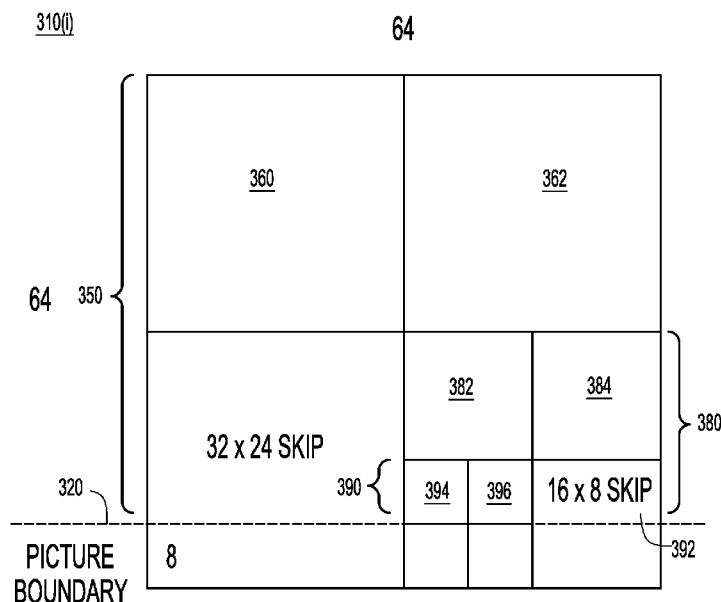


FIG.3D

(57) Abstract: A video decoding method is provided. The method includes receiving an encoded bit stream representative of a video signal, the encoded bit stream including information indicating partitioning of a frame of the video signal into blocks such that at least one rectangular block of any size occurs at any position of the frame. Information is obtained from the encoded bit stream, the information signaling at least one video coding parameter for the at least one rectangular block. The encoded bit stream of the video signal is decoded in accordance with the information for the at least one rectangular block. An analogous video encoding method is also provided.

BLOCK-BASED VIDEO CODING USING A MIXTURE OF SQUARE AND RECTANGULAR BLOCKS

CROSS REFERENCE TO RELATED APPLICATION

[001] This application claims priority to U.S. Provisional Patent Application No. 62/182,852, filed June 22, 2015, the entirety of which is incorporated herein by reference.

TECHNICAL FIELD

[002] The present disclosure relates to video encoding and decoding technology.

BACKGROUND

[003] Video encoding and decoding is used to transmit and receive video content over communication networks. There are continuous efforts being made in this technology to improve the quality of the video given the bandwidth of the communication channel over which the video streams are sent.

BRIEF DESCRIPTION OF THE DRAWINGS

[004] FIG. 1 is a block diagram of a video encoder according to an example embodiment.

[005] FIG. 2 is a block diagram of a video decoder according to an example embodiment.

[006] FIG. 3A illustrates partitioning of a video frame into blocks, according to an example embodiment.

[007] FIG. 3B illustrates hierarchical block partitioning of a video frame, according to an example embodiment.

[008] FIGS. 3C and 3D illustrate examples of rectangular block partitioning at a frame boundary, according to an example embodiment.

[009] FIG. 4 is a flow chart of a video encoding method according to an example embodiment.

[010] FIG. 5 is a flow chart of a video decoding method according to an example embodiment.

[011] FIG. 6 is a block diagram of a computing device configured to perform the encoding and decoding techniques presented herein, according to an example embodiment.

DESCRIPTION OF EXAMPLE EMBODIMENTS

Overview

[012] In accordance with one embodiment, a video decoding method is provided. The method includes receiving an encoded bit stream representative of a video signal, the encoded bit stream including information indicating partitioning of a frame of the video signal into blocks such that at least one rectangular block of any size occurs at any position of the frame. Information is obtained from the encoded bit stream, the information signaling at least one video coding parameter for the at least one rectangular block. The encoded bit stream of the video signal is decoded in accordance with the information for the at least one rectangular block.

[013] In accordance with another embodiment, a video encoding method is provided. The method includes obtaining a frame of a video signal to be encoded for transmission. The frame is partitioned into blocks such that at least one rectangular block of any size occurs at any position of the frame. Information is included in an encoded bit stream information signaling at least one video coding parameter for the at least one rectangular block.

Detailed Description

[014] Referring first to FIG. 1, a block diagram of a video encoder is shown at reference numeral 100. The video encoder 100 includes a subtractor 105, a transform unit 110, a quantizer unit 120, an entropy coding unit 130, an inverse transform unit 140, an adder 150, one or more loop filters 160, a reconstructed frame memory 170, a motion estimation unit 180, an inter-frame prediction unit 190, an intra-frame prediction unit 195 and a switch 197.

[015] A current frame (input video) as well as a prediction frame are input to a subtractor 105. The subtractor 105 is provided with input from either the inter-frame prediction unit 190 or intra-frame prediction unit 195, the selection of which is controlled by switch 197. Intra-prediction processing is selected for finding similarities within the current image frame, and is thus referred to as "intra" prediction. Motion compensation has a temporal component and thus involves analysis between successive frames that is referred to as "inter" prediction. The motion estimation unit 180 supplies a motion estimation output as input to the inter-frame prediction unit 190. The motion estimation unit 180 receives as input the input video and an output of the reconstructed frame memory 170.

[016] The subtractor 105 subtracts the output of the switch 197 from the pixels of the current frame, prior to being subjected to a two dimensional transform process by the

transform unit 110 to produce transform coefficients. The transform coefficients are then subjected to quantization by quantizer unit 120 and then supplied to entropy coding unit 130. Entropy coding unit 130 applies entropy encoding in order to remove redundancies without losing information, and is referred to as a lossless encoding process. Subsequently, the encoded data is arranged in network packets via a packetizer (not shown), prior to be transmitted in an output bit stream.

[017] The output of the quantizer unit 120 is also applied to the inverse transform unit 140 and used for assisting in prediction processing. The adder 150 adds the output of the inverse transform unit 140 and an output of the switch 197 (either the output of the inter-frame prediction unit 190 or the intra-frame prediction unit 195). The output of the adder 150 is supplied to the input of the intra-frame prediction unit 195 and to one or more loop filters 160 which suppress some of the sharpness in the edges to improve clarity and better support prediction processing. The output of the loop filters 160 is applied to a reconstructed frame memory 170 that holds the processed image pixel data in memory for use in subsequent motion processing by motion estimation block 180.

[018] Turning to FIG. 2, a block diagram of a video decoder is shown at reference numeral 200. The video decoder 200 includes an entropy decoding unit 210, an inverse transform unit 220, an adder 230, an intra-frame prediction unit 240, an inter-frame prediction unit 250, a switch 260, one or more loop filters 270 and a reconstructed frame memory 280. The entropy decoding unit 210 performs entropy decoding on the received input bitstream to produce quantized transform coefficients which are applied to the inverse transform unit 220. The inverse transform unit 220 applies two-dimensional inverse transformation on the quantized transform coefficients to output a quantized version of the difference samples. The output of the inverse transform unit 220 is applied to the adder 230. The adder 230 adds to the output of the inverse transform unit 220 an output of either the intra-frame prediction unit 240 or inter-frame prediction unit 250. The loop filters 270 operate similar to that of the loop filters 160 in the video encoder 100 of FIG. 1. An output video image is taken at the output of the loop filters 270.

[019] The video encoder 100 of FIG. 1 and the video decoder of FIG. 2 may be implemented by digital logic gates in an integrated circuit (e.g., by an application specific integrated circuit) or by two or more separate logic devices. Alternatively, the video encoder 100 and video decoder 200 may be implemented by software executed by one or more processors, as described further in connection with FIG. 6, below.

[020] Each of the functional blocks in FIGs. 1 and 2 are executed for each coding block, prediction block, or transform block.

[021] FIGs. 3A-3D illustrate block partitioning techniques according to example embodiments. First, FIG. 3A illustrates a frame 300 of a video signal to be encoded for transmission to a destination. Each frame 300 is divided into $N \times N$ blocks 310(1)-310(K) of a predetermined size, such as 64×64 . The blocks 310(1)-310(K) are processed in raster-scan order.

[022] Turning to FIG. 3B, an $N \times N$ block, shown generically at reference numeral 310(i), can be divided into sub-blocks using a hierarchical quad-tree structure. The smallest sub-block size is 8×8 . The sub-blocks may be referred to as coding units (CUs). The four sub-blocks of larger blocks may be signaled in the following order: upleft, downleft, upright, and downright.

[023] The following modes may be signaled at the sub-block level:

Intra-prediction

Skip/copy (skip index, no residual information)

Merge (skip index, residual information)

Inter-prediction (motion information, residual information)

Bi-prediction (2x motion information, 2x residual information)

[024] At frame boundaries some square blocks might not be complete. For example, for 1920×1080 resolutions, the bottom row would consist of rectangular blocks of size 64×56 .

[025] Current approaches, such as the H.265 standard, solve this by describing an implicit split, i.e., for any square block that falls outside the block boundary, a split is inferred. For the bottom part of a 1920×1080 frame, this implies that the following splits are inferred at the decoder side without signaling:

Split the 64×56 block into two 32×32 blocks and two 32×24 blocks.

Split each of the 32×24 blocks into two 16×16 blocks and two 16×8 blocks

Split each of the 16×8 blocks into two 8×8 blocks.

[026] A new scheme is presented herein. For each rectangular block, information (e.g., one bit) is sent to signal selection between: a rectangular skip/copy sub-block and a further split. For the bottom part of a 1920×1080 frame, this implies the following:

1. For each 64x56 block, one bit is transmitted to signal a 64x56 skip/copy block or a split into two 32x32 sub-blocks and two 32x24 sub-blocks.
2. For each 32x24 sub-block, one bit is transmitted to signal a 32x24 skip/copy sub-block or a split into two 16x16 sub-blocks and two 16x8 sub-blocks.
3. For each 16x8 sub-block, one bit is transmitted to signal a 16x8 skip/copy sub-block or a split into two 8x8 sub-blocks.

[027] The block and sub-block dimensions given above are only examples. It is not required that the rectangular block be 64x56, nor is it required that the smaller rectangular sub-blocks be 32x24 and 16x8. Moreover, the split indicator information may taken on a value that indicates that the rectangular block is coded using a mode that belongs to a subset of the modes allowed for a square block.

[028] A first example of block partitioning at the bottom row of a 1920x1080 frame is shown in FIG. 3C. In this example, a 64x64 block 310(i) is adjacent a picture/frame boundary 320. Because the block 310(i) is adjacent to the picture/frame boundary 32, it is partitioned into rectangular 64x56 sub-block 330. In this example, the 64x56 sub-block 330 is a skip sub-block. One bit would be transmitted to signal that sub-block 330 is a skip sub-block.

[029] A second example is shown in FIG. 3D. In this example, a 64x64 block 310(i) is adjacent to the picture/frame boundary 320. It is therefore partitioned into a rectangular 64x56 block. The 64x56 block 350 is split into two 32x24 sub-blocks 360 and 362 and two 32x24 sub-blocks 370 and 380. One bit would be transmitted to signal the split of sub-block 350 into two 32x32 sub-blocks 360 and 362 and two 32x24 sub-blocks 370 and 380. Sub-block 380 is further split into two 16x16 sub-blocks 382 and 384, and two 16x8 sub-blocks 390 and 392. Again, one bit would be transmitted to signal the split of sub-block 380 into two 16x16 sub-blocks 382 and 384, and two 16x8 sub-blocks 390 and 392. Sub-block 390 is further split into two 8x8 sub-blocks 394 and 396. One bit would be transmitted to signal the split of sub-block 390 into two 8x8 sub-blocks 394 and 396.

[030] The frame partitioning techniques described above in connection with FIGs. 3A-3D may be generalized such that rectangular blocks of any size are allowed at any position of a frame, and where at least one video coding parameter (of any type) may be signaled for a rectangular block. Examples of video coding parameters includes (without limitation): split indication, mode, a motion vector, a reference frame index, a coded block pattern, and

transform coefficients. The mode may include skip, copy, merge, inter-prediction, bi-prediction, or intra-prediction.

[031] Reference is now made to the flow chart of FIG. 4 for a description of a video encoding method 400, according to an example embodiment. At 410, a frame of a video signal to be encoded for transmission is obtained. At 420, the frame is partitioned into blocks such that at least one rectangular block of any size occurs at any position of the frame. At 430, included in an encoded bit stream is information signaling at least one video coding parameter for the at least one rectangular block.

[032] Turning to FIG. 5, a flow chart is now described for a video decoding method 500, according to an example embodiment. At 510, an encoded bit stream representative of a video signal is received. The encoded bit stream includes information indicating partitioning of a frame of the video signal into blocks such that at least one rectangular block of any size occurs at any position of the frame. At 520, information is obtained from the encoded bit stream that signals at least one video coding parameter for the at least rectangular block. At 530, the encoded bit stream of the video signal is decoded in accordance with the information for the at least one rectangular block.

[033] As described above, the at least one video coding parameter includes (without limitation): split indication, mode, a motion vector, a reference frame index, a coded block pattern, and transform coefficients. The mode may include skip, copy, merge, inter-prediction, bi-prediction, or intra-prediction. The rectangular block referred to in connection with the encoding and decoding processes of FIGs. 4 and 5 may be adjacent to a boundary of the frame.

[034] The information signaling the at least one video coding parameter is sent at the block level, because the parameter is associated with each rectangular block and different rectangular blocks can have different parameter values. The information signaling at least one video coding parameter for the at least one rectangular block may include a split indicator. When the split indicator is a first value (e.g., “true”), this may indicate that the rectangular block is further split into at least two smaller sub-blocks. At least one of the two smaller sub-blocks may be rectangular or square, all the sub-blocks may be square or all the sub-blocks may be rectangular. When the split indicator is a second value (e.g., “false”), this may indicate that the rectangular block is coded using a mode that belongs to a subset of the modes allowed for a square block. In another example, when the split indicator is “false,”

this may indicate that the mode of the rectangular block is either a skip or a copy. The information signaling the at least one video coding parameter may signal that the at least one rectangular block is hierarchically split into sub-blocks.

[035] FIG. 6 illustrates a computer system 1201 upon which an embodiment of the present invention may be implemented. The computer system 1201 may be programmed to implement a computer based device, such as a video conferencing endpoint or any device includes a video encoder or decoder for processing real time video images. The computer system 1201 includes a bus 1202 or other communication mechanism for communicating information, and a processor 1203 coupled with the bus 1202 for processing the information. While the figure shows a signal block 1203 for a processor, it should be understood that the processors 1203 represent a plurality of processing cores, each of which can perform separate processing. The computer system 1201 also includes a main memory 1204, such as a random access memory (RAM) or other dynamic storage device (e.g., dynamic RAM (DRAM), static RAM (SRAM), and synchronous DRAM (SD RAM)), coupled to the bus 1202 for storing information and instructions to be executed by processor 1203. In addition, the main memory 1204 may be used for storing temporary variables or other intermediate information during the execution of instructions by the processor 1203.

[036] The computer system 1201 further includes a read only memory (ROM) 1205 or other static storage device (e.g., programmable ROM (PROM), erasable PROM (EPROM), and electrically erasable PROM (EEPROM)) coupled to the bus 1202 for storing static information and instructions for the processor 1203.

[037] The computer system 1201 also includes a disk controller 1206 coupled to the bus 1202 to control one or more storage devices for storing information and instructions, such as a magnetic hard disk 1207, and a removable media drive 1208 (e.g., floppy disk drive, read-only compact disc drive, read/write compact disc drive, compact disc jukebox, tape drive, and removable magneto-optical drive). The storage devices may be added to the computer system 1201 using an appropriate device interface (e.g., small computer system interface (SCSI), integrated device electronics (IDE), enhanced-IDE (E-IDE), direct memory access (DMA), or ultra-DMA).

[038] The computer system 1201 may also include special purpose logic devices (e.g., application specific integrated circuits (ASICs)) or configurable logic devices (e.g., simple programmable logic devices (SPLDs), complex programmable logic devices (CPLDs), and

field programmable gate arrays (FPGAs)), that, in addition to microprocessors and digital signal processors may individually, or collectively, are types of processing circuitry. The processing circuitry may be located in one device or distributed across multiple devices.

[039] The computer system 1201 may also include a display controller 1209 coupled to the bus 1202 to control a display 1210, such as a cathode ray tube (CRT), for displaying information to a computer user. The computer system 1201 includes input devices, such as a keyboard 1211 and a pointing device 1212, for interacting with a computer user and providing information to the processor 1203. The pointing device 1212, for example, may be a mouse, a trackball, or a pointing stick for communicating direction information and command selections to the processor 1203 and for controlling cursor movement on the display 1210. In addition, a printer may provide printed listings of data stored and/or generated by the computer system 1201.

[040] The computer system 1201 performs a portion or all of the processing steps of the invention in response to the processor 1203 executing one or more sequences of one or more instructions contained in a memory, such as the main memory 1204. Such instructions may be read into the main memory 1204 from another computer readable medium, such as a hard disk 1207 or a removable media drive 1208. One or more processors in a multi-processing arrangement may also be employed to execute the sequences of instructions contained in main memory 1204. In alternative embodiments, hard-wired circuitry may be used in place of or in combination with software instructions. Thus, embodiments are not limited to any specific combination of hardware circuitry and software.

[041] As stated above, the computer system 1201 includes at least one computer readable medium or memory for holding instructions programmed according to the embodiments presented, for containing data structures, tables, records, or other data described herein. Examples of computer readable media are compact discs, hard disks, floppy disks, tape, magneto-optical disks, PROMs (EPROM, EEPROM, flash EPROM), DRAM, SRAM, SD RAM, or any other magnetic medium, compact discs (e.g., CD-ROM), or any other optical medium, punch cards, paper tape, or other physical medium with patterns of holes, or any other medium from which a computer can read.

[042] Stored on any one or on a combination of non-transitory computer readable storage media, embodiments presented herein include software for controlling the computer system 1201, for driving a device or devices for implementing the invention, and for enabling

the computer system 1201 to interact with a human user (e.g., print production personnel). Such software may include, but is not limited to, device drivers, operating systems, development tools, and applications software. Such computer readable storage media further includes a computer program product for performing all or a portion (if processing is distributed) of the processing presented herein.

[043] The computer code devices may be any interpretable or executable code mechanism, including but not limited to scripts, interpretable programs, dynamic link libraries (DLLs), Java classes, and complete executable programs. Moreover, parts of the processing may be distributed for better performance, reliability, and/or cost.

[044] The computer system 1201 also includes a communication interface 1213 coupled to the bus 1202. The communication interface 1213 provides a two-way data communication coupling to a network link 1214 that is connected to, for example, a local area network (LAN) 1215, or to another communications network 1216 such as the Internet. For example, the communication interface 1213 may be a wired or wireless network interface card to attach to any packet switched (wired or wireless) LAN. As another example, the communication interface 1213 may be an asymmetrical digital subscriber line (ADSL) card, an integrated services digital network (ISDN) card or a modem to provide a data communication connection to a corresponding type of communications line. Wireless links may also be implemented. In any such implementation, the communication interface 1213 sends and receives electrical, electromagnetic or optical signals that carry digital data streams representing various types of information.

[045] The network link 1214 typically provides data communication through one or more networks to other data devices. For example, the network link 1214 may provide a connection to another computer through a local area network 1215 (e.g., a LAN) or through equipment operated by a service provider, which provides communication services through a communications network 1216. The local network 1214 and the communications network 1216 use, for example, electrical, electromagnetic, or optical signals that carry digital data streams, and the associated physical layer (e.g., CAT 5 cable, coaxial cable, optical fiber, etc.). The signals through the various networks and the signals on the network link 1214 and through the communication interface 1213, which carry the digital data to and from the computer system 1201 maybe implemented in baseband signals, or carrier wave based signals. The baseband signals convey the digital data as unmodulated electrical pulses that are descriptive of a stream of digital data bits, where the term "bits" is to be construed broadly to

mean symbol, where each symbol conveys at least one or more information bits. The digital data may also be used to modulate a carrier wave, such as with amplitude, phase and/or frequency shift keyed signals that are propagated over a conductive media, or transmitted as electromagnetic waves through a propagation medium. Thus, the digital data may be sent as unmodulated baseband data through a "wired" communication channel and/or sent within a predetermined frequency band, different than baseband, by modulating a carrier wave. The computer system 1201 can transmit and receive data, including program code, through the network(s) 1215 and 1216, the network link 1214 and the communication interface 1213. Moreover, the network link 1214 may provide a connection through a LAN 1215 to a mobile device 1217 such as a personal digital assistant (PDA) laptop computer, or cellular telephone.

[046] In summary, in one form, a method is provided comprising: receiving an encoded bit stream representative of a video signal, the encoded bit stream including information indicating partitioning of a frame of the video signal into blocks such that at least one rectangular block of any size occurs at any position of the frame; obtaining from the encoded bit stream information signaling at least one video coding parameter for the at least one rectangular block; and decoding the encoded bit stream of the video signal in accordance with the information for the at least one rectangular block.

[047] In another form, an apparatus is provided comprising: a communication interface configured to receive an encoded bit stream representative of a video signal, the encoded bit stream including information indicating partitioning of a frame of the video signal into blocks such that at least one rectangular block of any size occurs at any position of the frame; at least one processor configured to: obtain from the encoded bit stream information signaling at least one video coding parameter for the at least one rectangular block; and decode the encoded bit stream of the video signal in accordance with the information for the at least one rectangular block.

[048] In still another form, a method is provided comprising: obtaining a frame of a video signal to be encoded for transmission; partitioning the frame into blocks such that at least one rectangular block of any size occurs at any position of the frame; and including in an encoded bit stream information signaling at least one video coding parameter for the at least one rectangular block.

[049] In yet another form, one or more non-transitory computer readable storage media are provided that are encoded with instructions which, when executed by one or more

processors, are operable to perform operations including: receiving an encoded bit stream representative of a video signal, the encoded bit stream including information indicating partitioning of a frame of the video signal into blocks such that at least one rectangular block of any size occurs at any position of the frame; obtaining from the encoded bit stream information signaling at least one video coding parameter for the at least one rectangular block; and decoding the encoded bit stream of the video signal in accordance with the information for the at least one rectangular block.

[050] As described above, the at least one video coding parameter may include: split indication, mode, a motion vector, a reference frame index, a coded block pattern, and transform coefficients. The mode may include skip, copy, merge, inter-prediction, bi-prediction, or intra-prediction. The rectangular block may be adjacent to a boundary of the frame. The at least one of the two smaller sub-blocks may be rectangular, or at least one of the two smaller sub-blocks may be square. Moreover, the information may signal the at least one rectangular block is hierarchically split into sub-blocks.

[051] When the information includes a split indicator, the split indicator may be a first value that indicates that the rectangular block is further split into at least two smaller sub-blocks. When the split indicator is a second value, this indicates that the rectangular block is coded using a mode that belongs to a subset of the modes allowed for a square block. Or, when the split indicator is a second value, this may indicate that the mode of the rectangular block is either a split or a copy.

[052] The above description is intended by way of example only. Although the techniques are illustrated and described herein as embodied in one or more specific examples, it is nevertheless not intended to be limited to the details shown, since various modifications and structural changes may be made within the scope and range of equivalents of the claims.

What is claimed is:

1. A method comprising:
receiving an encoded bit stream representative of a video signal, the encoded bit stream including information indicating partitioning of a frame of the video signal into blocks such that at least one rectangular block of any size occurs at any position of the frame;
obtaining from the encoded bit stream information signaling at least one video coding parameter for the at least one rectangular block; and
decoding the encoded bit stream of the video signal in accordance with the information for the at least one rectangular block.
2. The method of claim 1, wherein the at least one video coding parameter includes: a split indicator, mode, a motion vector, a reference frame index, a coded block pattern, and transform coefficients.
3. The method of claim 2, wherein the mode includes skip, copy, merge, inter-prediction, bi-prediction, or intra-prediction.
4. The method of claim 1, wherein the rectangular block is adjacent to a boundary of the frame.
5. The method of claim 1, wherein the information includes a split indicator, wherein the split indicator being a first value indicates that the rectangular block is further split into at least two smaller sub-blocks.
6. The method of claim 5, wherein the split indicator being a second value indicates that the rectangular block is coded using a mode that belongs to a subset of the modes allowed for a square block.
7. The method of claim 5, wherein the split indicator being a second value indicates that the mode of the rectangular block is either a skip or a copy.

8. The method of claim 5, wherein at least one of the two smaller sub-blocks is rectangular.
9. The method of claim 5, wherein at least one of the two smaller sub-blocks is square.
10. The method of claim 1, wherein the information signals that the at least one rectangular block is hierarchically split into sub-blocks.
11. An apparatus comprising:
 - a communication interface configured to receive an encoded bit stream representative of a video signal, the encoded bit stream including information indicating partitioning of a frame of the video signal into blocks such that at least one rectangular block of any size occurs at any position of the frame;
 - at least one processor configured to:
 - obtain from the encoded bit stream information signaling at least one video coding parameter for the at least one rectangular block; and
 - decode the encoded bit stream of the video signal in accordance with the information for the at least one rectangular block.
12. The apparatus of claim 11, wherein the at least one video coding parameter includes: split indication, mode, a motion vector, a reference frame index, a coded block pattern, and transform coefficients.
13. The apparatus of claim 12, wherein the mode includes skip, copy, merge, inter-prediction, bi-prediction, or intra-prediction.
14. The apparatus of claim 11, wherein the rectangular block is adjacent to a boundary of the frame.
15. The apparatus of claim 11, wherein the information includes a split indicator, wherein the split indicator being a first value indicates that the rectangular block is further split into at least two smaller sub-blocks.

16. The apparatus of claim 15, wherein the split indicator being a second value indicates that the rectangular block is coded using a mode that belongs to a subset of the modes allowed for a square block.
17. The apparatus of claim 15, wherein the split indicator being a second value indicates that the mode of the rectangular block is either a skip or a copy.
18. A method comprising:
 - obtaining a frame of a video signal to be encoded for transmission;
 - partitioning the frame into blocks such that at least one rectangular block of any size occurs at any position of the frame; and
 - including in an encoded bit stream information signaling at least one video coding parameter for the at least one rectangular block.
19. The method of claim 18, wherein the at least one video coding parameter includes: split indication, mode, a motion vector, a reference frame index, a coded block pattern, and transform coefficients.
20. The method of claim 19, wherein the mode includes skip, copy, merge, inter-prediction, bi-prediction, or intra-prediction.
21. The method of claim 18, wherein the rectangular block is adjacent to a boundary of the frame.
22. The method of claim 18, wherein the information includes a split indicator, wherein the split indicator being a first value indicates that the rectangular block is further split into at least two smaller blocks.
23. The method of claim 22, wherein the split indicator being a second value indicates that the rectangular block is coded using a mode that belongs to a subset of the modes allowed for a square block.
24. The method of claim 22, wherein the split indicator being a second value indicates that the mode of the rectangular block is either a skip or a copy.

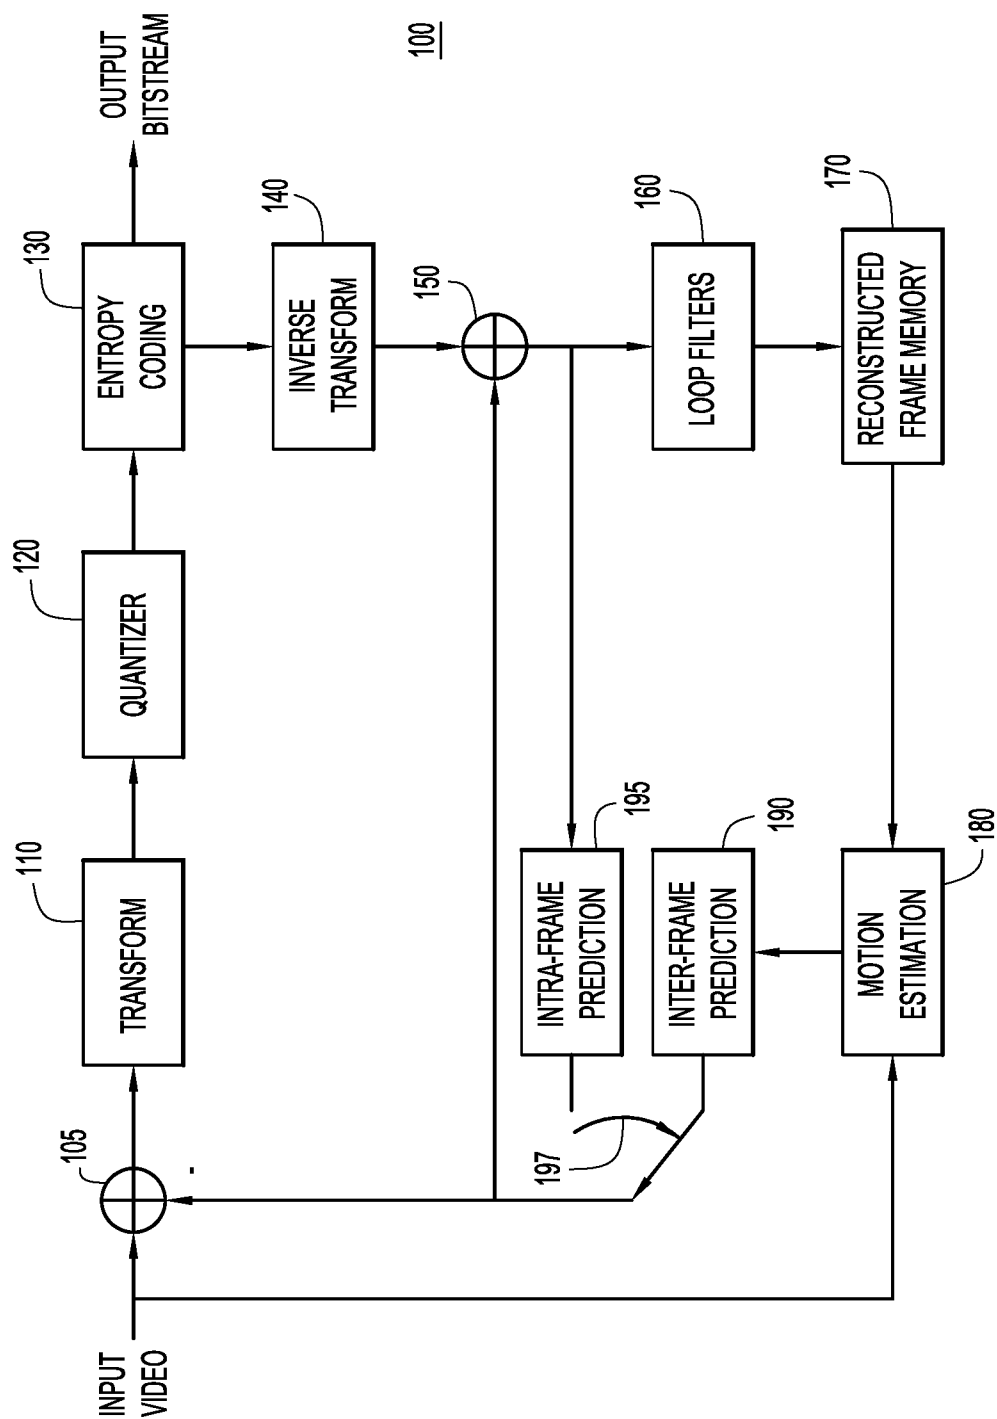


FIG.1

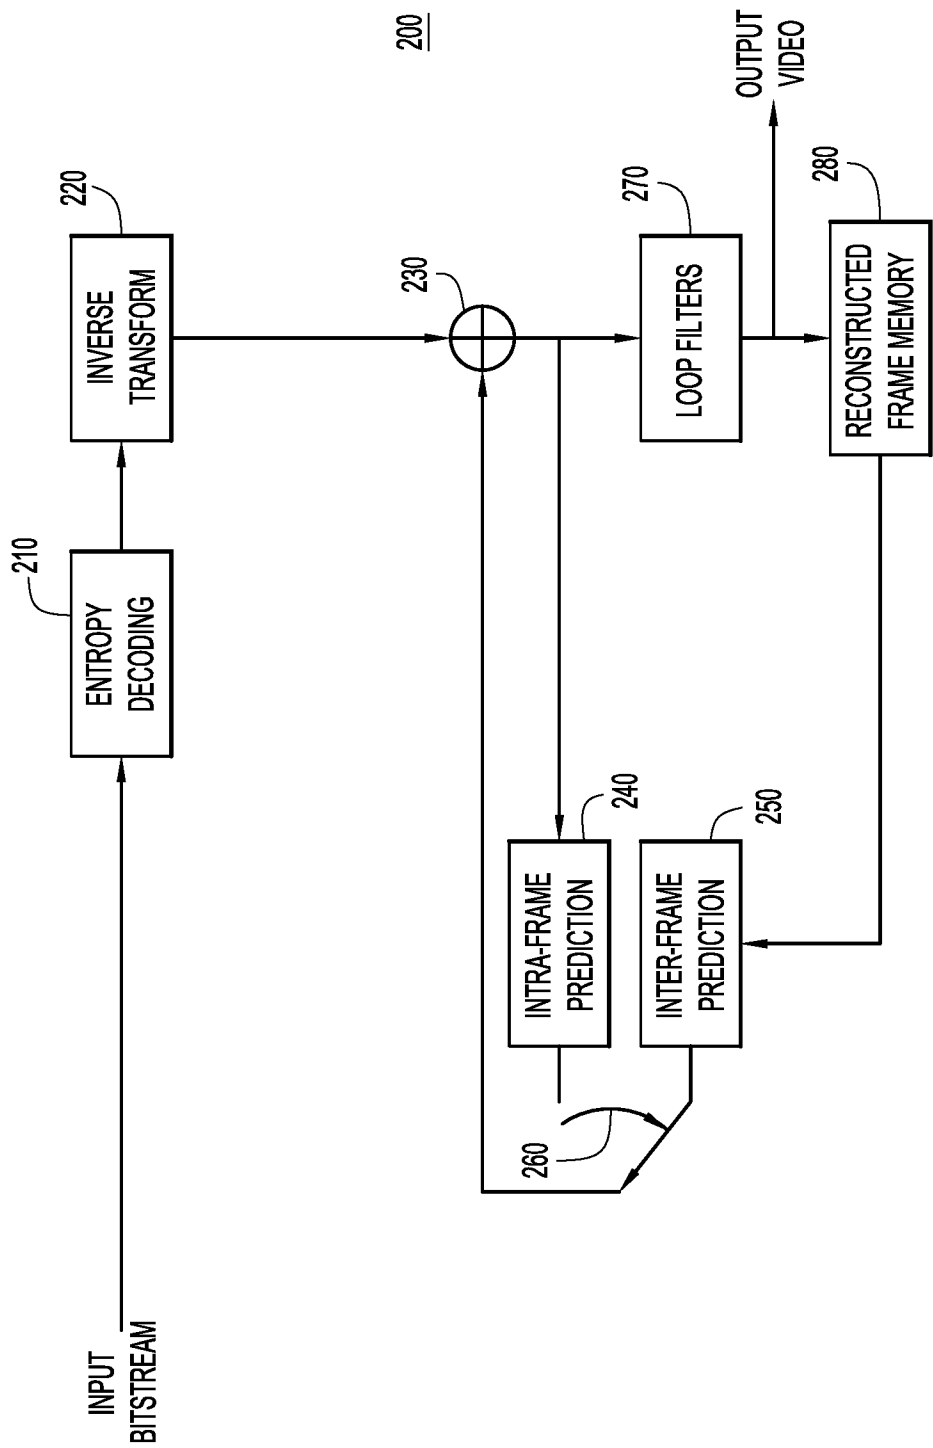


FIG.2

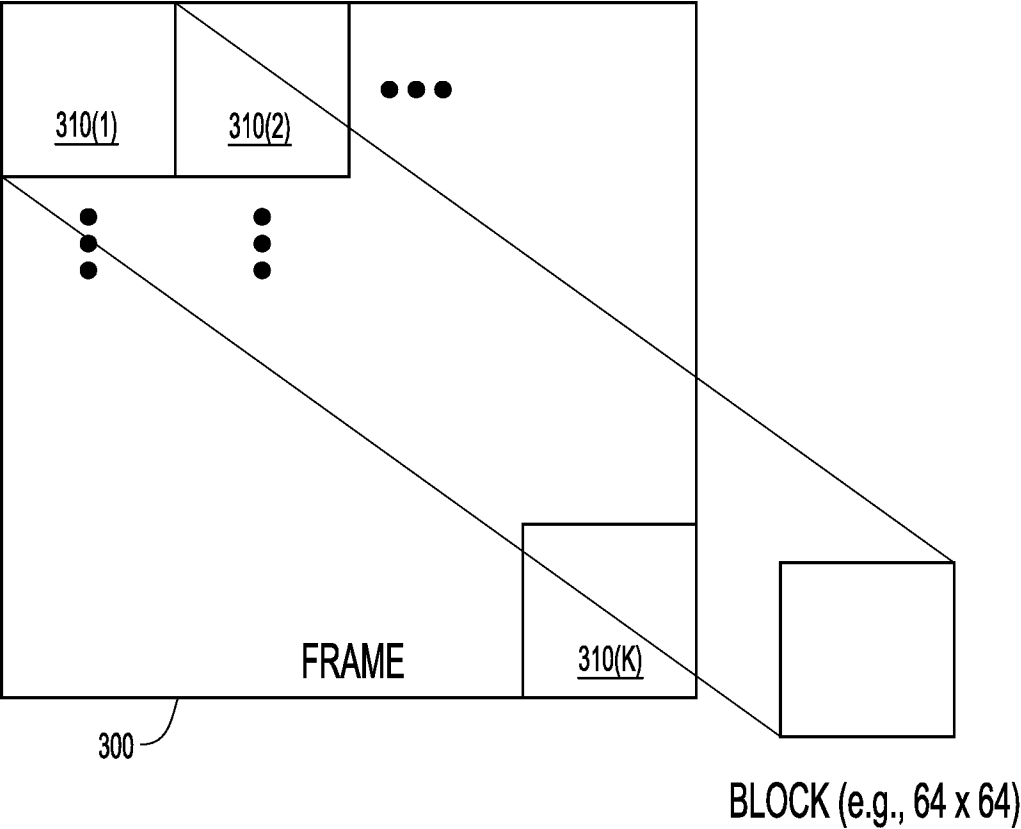


FIG.3A

310(i)

5/9

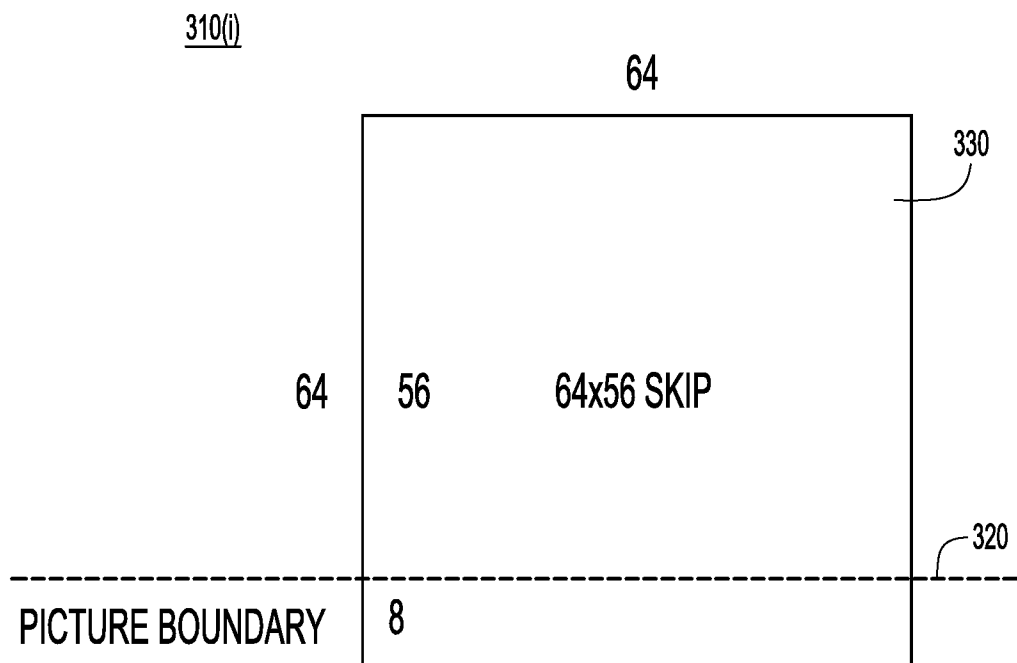


FIG.3C

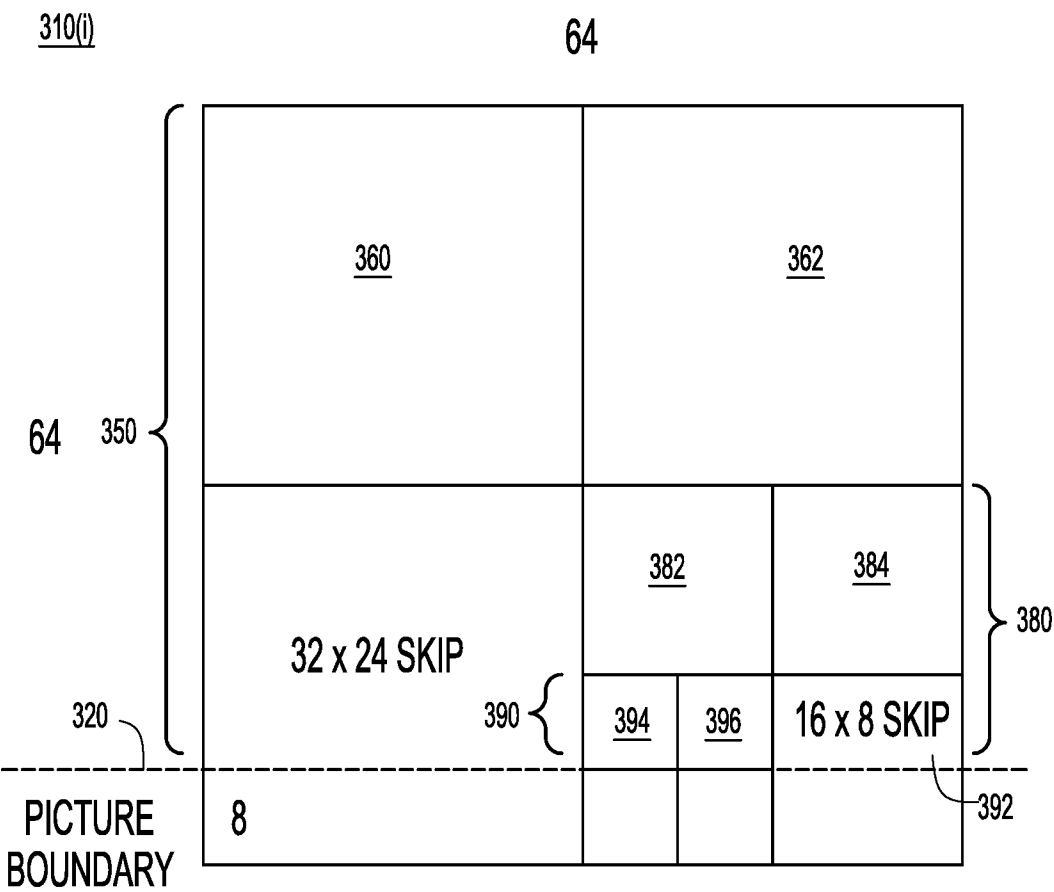


FIG.3D

7/9

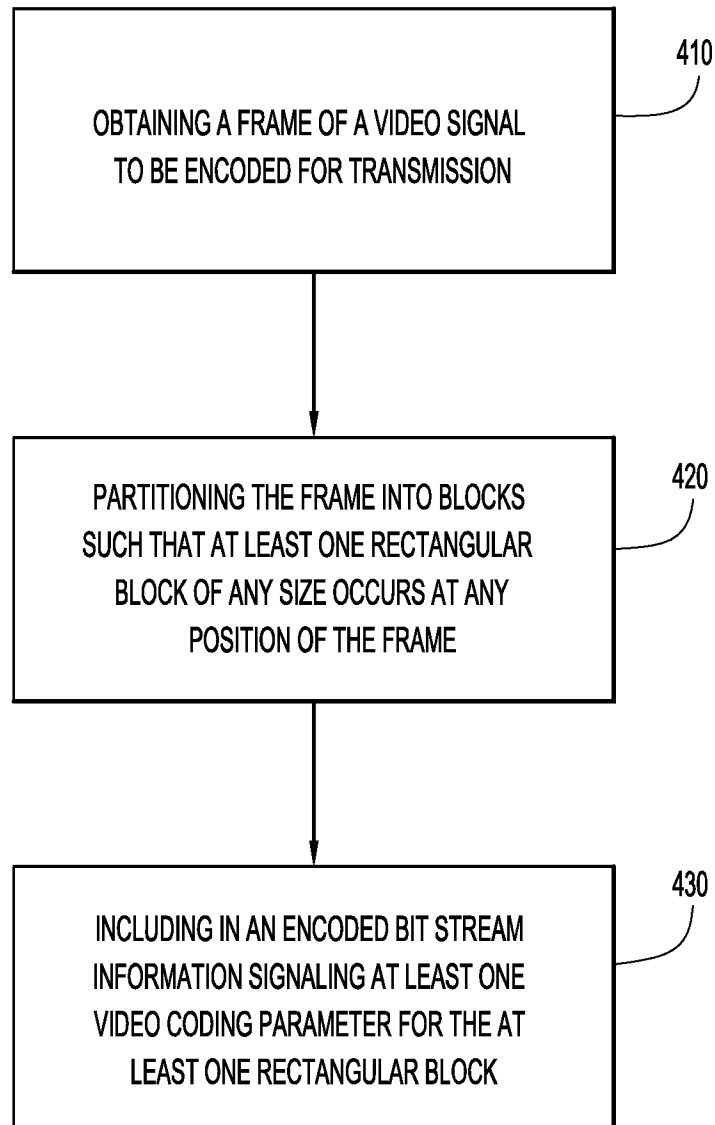
400

FIG.4

8/9

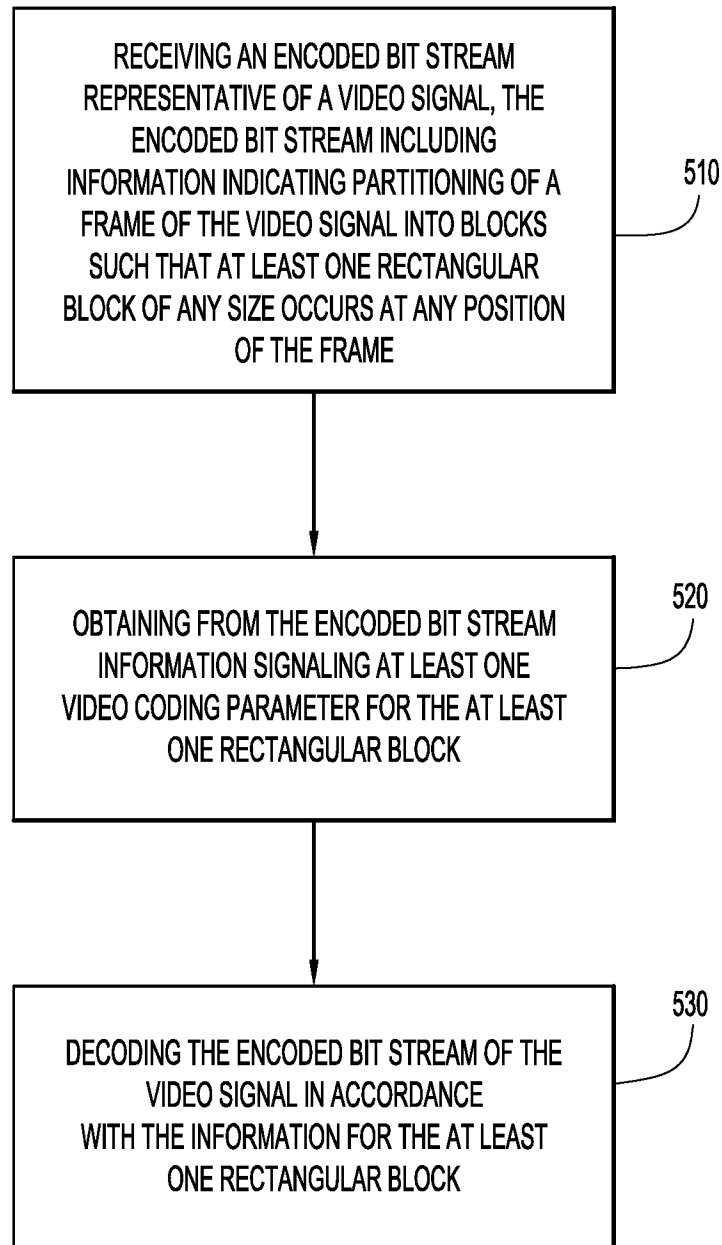
500

FIG.5

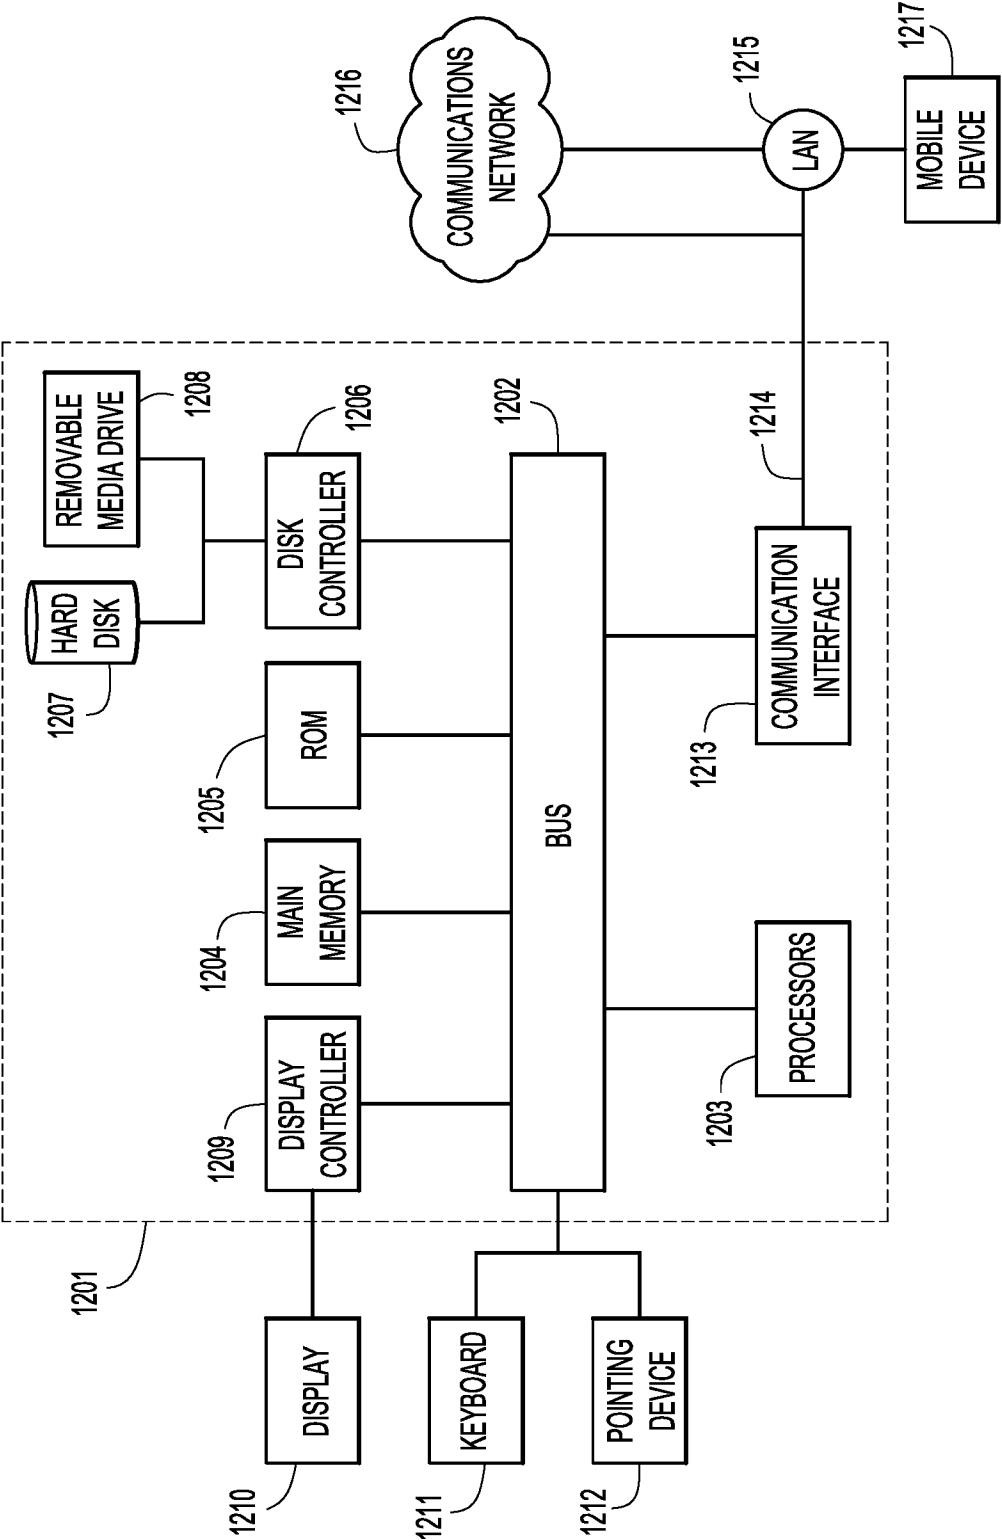


FIG.6

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/038322

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04N19/119 H04N19/70 H04N19/103 H04N19/167
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	YANG F ET AL: "CTB splitting on frame boundary for arbitrary resolution video", 3. JCT-VC MEETING; 94. MPEG MEETING; 7-10-2010 - 15-10-2010; GUANGZHOU; (JOINT COLLABORATIVE TEAM ON VIDEO CODING OF ISO/IEC JTC1/SC29/WG11 AND ITU-T SG.16); URL: HTTP://WFTP3.ITU.INT/AV-ARCH/JCTVC-SITE/, , no. JCTVC-C025, 1 October 2010 (2010-10-01), XP030007732, ISSN: 0000-0045	1-6, 8-16, 18-23
A	the whole document	7,17,24
X	EP 2 739 057 A1 (SAMSUNG ELECTRONICS CO LTD [KR]) 4 June 2014 (2014-06-04) paragraphs [0030], [0031]; figures 10-12 ----- -/-	1-6, 8-16, 18-23



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

3 August 2016

Date of mailing of the international search report

11/08/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Oelbaum, Tobias

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2016/038322

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	KIM J ET AL: "Enlarging MB size for high fidelity video coding beyond HD", 36. VCEG MEETING; 8-10-2008 - 10-10-2008; SAN DIEGO, US; (VIDEO CODINGEXPERTS GROUP OF ITU-T SG.16),, no. VCEG-AJ21, 5 October 2008 (2008-10-05) , XP030003643, ISSN: 0000-0086 paragraphs [02.1], [02.2]; figure 3; table 2 -----	1-24
X	GARY J. SULLIVAN ET AL: "Overview of the High Efficiency Video Coding (HEVC) Standard", IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS FOR VIDEO TECHNOLOGY., vol. 22, no. 12, 1 December 2012 (2012-12-01), pages 1649-1668, XP055284729, US ISSN: 1051-8215, DOI: 10.1109/TCSVT.2012.2221191 paragraph [000J]; figures 3,4,6 -----	1-6, 8-16, 18-23
X	LIM (SK TELECOM) J ET AL: "Video coding technology proposal by SK telecom, Sejong University and Sungkyunkwan University", 1. JCT-VC MEETING; 15-4-2010 - 23-4-2010; DRESDEN; (JOINTCOLLABORATIVE TEAM ON VIDEO CODING OF ISO/IEC JTC1/SC29/WG11 AND ITU-TSG.16); URL: HTTP://WFTP3.ITU.INT/AV-ARCH/JCTVC-SITE/,, no. JCTVC-A113, 13 April 2010 (2010-04-13) , XP030007551, ISSN: 0000-0049 paragraph [02.2]; figures 1-2, 2-3 -----	1-6, 8-16, 18-23
X	JCT-VC: "Test Model under Consideration (TMuC)", 1. JCT-VC MEETING; 15-4-2010 - 23-4-2010; DRESDEN; (JOINTCOLLABORATIVE TEAM ON VIDEO CODING OF ISO/IEC JTC1/SC29/WG11 AND ITU-TSG.16); URL: HTTP://WFTP3.ITU.INT/AV-ARCH/JCTVC-SITE/,, no. JCTVC-A205, 18 July 2010 (2010-07-18), XP030007586, ISSN: 0000-0049 paragraphs [4.1.9], [4.1.10]; figures 3-1, 3-5 -----	1-6, 8-16, 18-23

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/038322

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2739057	A1	04-06-2014	
		AU 2010313997 A1	17-05-2012
		BR 112012009766 A2	17-05-2016
		CA 2778534 A1	05-05-2011
		CA 2818572 A1	05-05-2011
		CA 2818587 A1	05-05-2011
		CA 2888395 A1	05-05-2011
		CA 2888396 A1	05-05-2011
		CN 102640492 A	15-08-2012
		CN 103220521 A	24-07-2013
		CN 103220526 A	24-07-2013
		CN 104581160 A	29-04-2015
		CN 104581164 A	29-04-2015
		CN 104602010 A	06-05-2015
		CN 104796709 A	22-07-2015
		CN 104796710 A	22-07-2015
		EP 2471262 A2	04-07-2012
		EP 2629524 A1	21-08-2013
		EP 2629525 A1	21-08-2013
		EP 2739057 A1	04-06-2014
		EP 2741508 A1	11-06-2014
		EP 2741509 A1	11-06-2014
		EP 2755394 A1	16-07-2014
		EP 3059708 A1	24-08-2016
		JP 5639687 B2	10-12-2014
		JP 5687310 B2	18-03-2015
		JP 5711248 B2	30-04-2015
		JP 5727114 B1	03-06-2015
		JP 5727115 B1	03-06-2015
		JP 5913677 B2	27-04-2016
		JP 2013214990 A	17-10-2013
		JP 2013214991 A	17-10-2013
		JP 2013509788 A	14-03-2013
		JP 2015111894 A	18-06-2015
		JP 2015111895 A	18-06-2015
		JP 2015144486 A	06-08-2015
		KR 20110047697 A	09-05-2011
		RU 2013114238 A	27-03-2014
		RU 2013114276 A	27-02-2014
		RU 2013119372 A	27-10-2014
		RU 2013119397 A	27-10-2014
		RU 2013119400 A	27-10-2014
		RU 2013152955 A	10-06-2015
		US 2011103701 A1	05-05-2011
		US 2012114261 A1	10-05-2012
		US 2012243799 A1	27-09-2012
		US 2013083861 A1	04-04-2013
		US 2014064367 A1	06-03-2014
		US 2014064629 A1	06-03-2014
		US 2014072238 A1	13-03-2014
		US 2014294084 A1	02-10-2014
		WO 2011053050 A2	05-05-2011
		ZA 201304978 B	25-09-2013
		ZA 201304979 B	25-09-2013
		ZA 201500338 B	29-04-2015
		ZA 201500339 B	29-04-2015