


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : C23C 14/34, 14/58, G11B 5/704, 5/66, 5/62, B05D 5/12</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/09460</p> <p>(43) International Publication Date: 13 March 1997 (13.03.97)</p>
<p>(21) International Application Number: PCT/US96/14249</p> <p>(22) International Filing Date: 26 August 1996 (26.08.96)</p> <p>(30) Priority Data: 08/524,725 6 September 1995 (06.09.95) US</p> <p>(71) Applicant: AKASHIC MEMORIES CORPORATION [US/US]; 305 West Tasman Drive, San Jose, CA 95134 (US).</p> <p>(72) Inventor: WEISS, Joel, R.; 44840 Vista del Sol, Fremont, CA 94539 (US).</p> <p>(74) Agents: BARRISH, Mark, D. et al.; Townsend and Townsend and Crew L.L.P., Two Embarcadero Center, 8th floor, San Francisco, CA 94111-3834 (US).</p>		<p>(81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: DISCRETE TRACK MEDIA PRODUCED BY UNDERLAYER LASER ABLATION</p>		

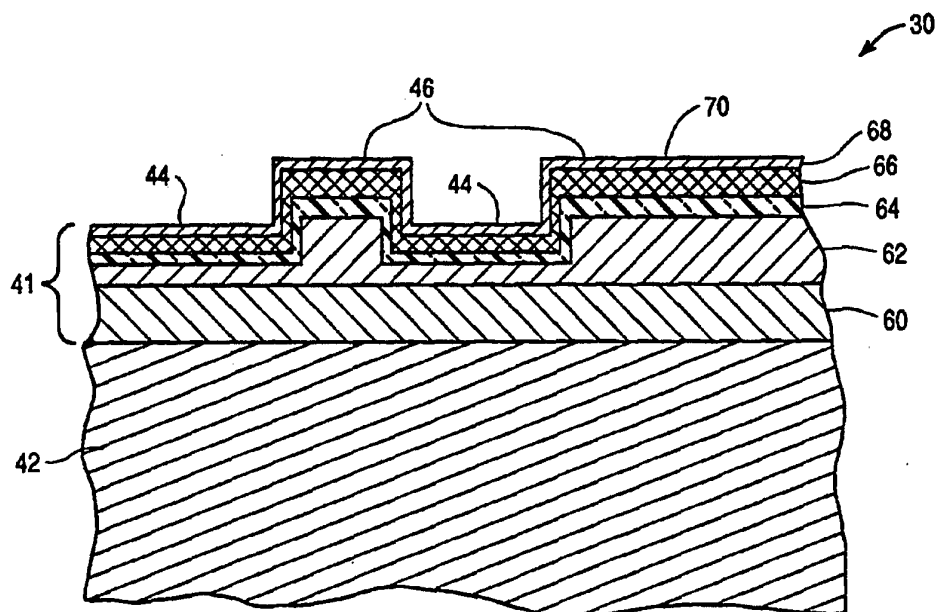

(57) Abstract

The invention provides discrete track magnetic recording media (30) and methods for their fabrication. A discrete track servo pattern (40) is imposed on an underlayer (62), over which a magnetic recording layer (66) is deposited. The pattern is preferably imposed by selective laser ablation of the underlayer (62). Ideally the underlayer (62) comprises sputtered carbon, which has been found to improve the signal-to-noise ratio of the subsequent magnetic layer (66). Optionally, a contact start/stop zone (32) having a relatively rough surface texture is imposed, also by selective laser ablation of the underlayer (62).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Larvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MZ	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

DISCRETE TRACK MEDIA PRODUCED BY UNDERLAYER LASER ABLATION

BACKGROUND OF THE INVENTION

5

1. Field of the Invention

The present invention relates generally to magnetic recording media, and more particularly to magnetic recording disks having discrete servo tracks formed by laser ablation of a carbon underlayer.

10

Thin film magnetic recording disks generally comprise a disk substrate having a magnetic layer and a number of underlayers and overlayers deposited thereon. The nature and composition of each layer is selected to provide desired magnetic recording characteristics, as generally recognized in the industry. An exemplary present day thin film disk is illustrated in Fig. 1 and comprises a non-magnetic disk substrate 10, typically composed of an aluminum alloy. An amorphous nickel phosphorous (Ni-P) underlayer 12 is formed over each surface of the disk substrate 10, typically by plating and is subsequently polished and sometimes texturized prior to deposition of the additional films. The Ni-P layer is hard, and imparts rigidity to the aluminum substrate. Alternatively, glass and other non-metallic materials are now used to form highly rigid disk substrates. A second underlayer in the form of a chromium ground layer 14 is formed over the Ni-P layer 12, typically by sputtering, and a magnetic layer 16 is formed over the ground layer 14. The magnetic layer 16 comprises a thin film of ferromagnetic material, such as a magnetic oxide or magnetic metal alloy. Usually, a protective layer 18, such as a carbon film, is formed over the magnetic layer 16 and a lubricating layer 20 is formed over the protective layer.

15

20

25

30

35

The presence of the Ni-P underlayer 12, together with the chromium ground layer 14, has been found to improve

the recording characteristics of the magnetic layer 16. In particular, the chromium ground layer formed over a Ni-P layer provides enhanced coercivity and reduced noise characteristics. Such improvements are sometimes further enhanced when the Ni-P underlayer is treated by mechanical texturing to create a roughened surface prior to formation of the chromium ground layer. The texturing may be circumferential or crosswise, with the preferred geometry depending on the particular composition of the cobalt-containing magnetic layer.

The outer carbon protective layer 18 serves a very different purpose. This protective layer has been found to greatly extend the life of magnetic recording media by reducing disk wear. Carbon has been shown to provide a high degree of wear protection when a thin lubrication layer 20 is subsequently applied.

Such magnetic recording disk constructions have been very successful and allow for high recording densities. As with all successes, however, it is presently desired to provide magnetic recording disks having even higher recording densities. One method for increasing the areal density on rigid magnetic disks involves patterning the surface of a thin film disk to form discrete data tracks. Such "discrete track media" typically include surface geometry data which are utilized by the hard disk drive servo mechanism, allowing specific recording tracks to be identified, and providing feedback to improve the accuracy of read/write head tracking.

Such discrete track media, however, suffer from their own disadvantages. The surface patterns of discrete track media have generally been imposed using standard lithographic techniques to remove material from the magnetic recording layer or by creating recessed zones or valleys in the substrate prior to deposition of the magnetic material. In the former case, the magnetic recording material is etched or ion milled through a resist mask to leave a system of valleys which are void of magnetic material. In the latter case, the magnetic film, subsequently applied, is spaced far enough away from the recording head that the flux from the

head does not sufficiently "write" the magnetic medium. Servo track information can be conveyed by the difference in magnetic flux at the boundary between the elevated patterns and the valleys. However, the boundary signals have at most 50% of the amplitude of conventionally recorded data. Additionally, fabrication of production quantities of discrete track media has remained problematic, due in part to the expense of the required lithographic processes.

It has recently been proposed to produce discrete track magnetic recording media through the use of a pre-embossed rigid former magnetic disk. The surface pattern would be directly imprinted on a substrate using a stamping process. Thin film magnetic recording layers could then be sputtered over the patterned surface of the substrate, producing discrete track media having a continuous magnetic layer extending over both the elevated regions and the recessed zones or valleys. Unfortunately, the stamping process inherently requires elevated temperatures and pressures, and is susceptible to warping. Additionally, the intricate pattern must be first precisely imprinted on the stamping plate, as the stamping process will reproduce any flaws or contaminants present on the stamping plates. Development of discrete track media using such a stamping process is particularly problematic, as each test pattern requires production of an expensive stamping tool.

For these reasons, it would be desirable to provide an improved method for producing a discrete track servo pattern for discrete track media. It would be particularly desirable if such a method provided the accuracy and reproducibility of lithography, but did not involve multiple process steps or the complex, dedicated tooling required for stamping. It would be best if such a method enhanced the improvements to the magnetic recording characteristics available using the conventional underlayers, magnetic recording layers, and overlayers of high density magnetic recording media.

2. Description of the Background Art

The production of discrete track media and other magnetic recording media having patterned surfaces were described by S.E. Lambert et al. in *Beyond Discrete Tracks: Other Aspects of Patterned Media*, JOURNAL OF APPLIED PHYSICS, Vol. 69, 8:4724-26, April 15, 1991. Each of the patterned media described were produced by sputter etching or ion milling a magnetic recording layer through a resist mask. The resist mask was written with an electron beam, as is known in the lithographic arts.

The production of discrete track media through the use of a pre-embossed rigid magnetic disk was described by D. Dericotte, et al., in *Advancements in the Development of Plastic Hard Disks With Pre-embossed Servo Patterns*, CORPORATE RESEARCH LABORATORIES, SONY CORPORATION. The disk is produced using an injection molding process between two stamping plates. The plates containing the media surface pattern are produced using lithographical techniques.

Recording media having a selectively laser-textured surface and methods for their production are described in U.S. Patent Nos. 5,062,021, and 5,108,781, respectively. A laser system for texturing a substrate, Ni-P layer, or a magnetic recording layer is also disclosed.

SUMMARY OF THE INVENTION

In a first aspect, magnetic recording media according to the principles of the present convention comprise a rigid substrate having a substantially flat surface, and an underlayer having a discrete servo track pattern disposed over the flat surface of the substrate. A magnetic recording layer is disposed over the underlayer, and thereby reflects the discrete track pattern of the underlayer. Therefore, the discrete track pattern can be imposed without resorting to lithographically reproducing the pattern and etching the magnetic recording layer on each disk.

Preferably, the discrete servo track pattern is imposed on the underlayer at least in part by selective laser ablation. Thus, the pattern is imposed directly on the

underlayer, avoiding the danger of producing a large number of defective disks from a single defective or contaminated plate. Additionally, expensive specialized tools are not required for each pattern, as alternative patterns may be imposed simply by varying the laser ablation pattern, making the magnetic recording media of the present invention particularly well suited for specialized short production runs, for example, in fabricating disks for pattern development testing.

A particularly advantageous material for use as an underlayer in the present recording media comprises carbon, ideally being sputtered from a sputtering source composed of at least 99.9% pure carbon. Such a carbon underlayer has been found to provide an improved signal-to-noise ratio for subsequent magnetic recording layers.

Generally, the discrete track pattern comprises recessed zones and raised zones. Typically, the raised zones are used for data storage. Servo track information may optionally be conveyed as discrete raised portions within a generally recessed servo data zone, or may alternatively be magnetically stored within the recessed zone. Preferably, the underlayer comprises carbon with a thickness in the range between 0 Å and 400 Å within the recessed zones, ideally being between 50 Å and 400 Å to optimize the magnetic recording characteristics of the servo data. The use of such a carbon underlayer is particularly advantageous when disposed over a non-metallic substrate.

In another aspect, the present invention provides magnetic recording media comprising a substrate and a carbon underlayer disposed over the substrate. The underlayer includes a surface with a discrete servo track pattern, which pattern is imposed at least in part by selective laser ablation of the underlayer. A magnetic recording layer is disposed over the surface of the underlayer. Generally, a layer comprising chromium or an alloy with chromium is disposed over the underlayer and below the magnetic layer to improve the magnetic recording characteristics. Similarly, a protective outer layer will often be disposed over the magnetic layer to improve durability. The protective layer

may be formed by a method similar to that used for the underlayer, typically by sputter deposition. This eliminates the need for additional thin film deposition equipment or techniques.

5 A method for fabricating a magnetic recording media according to the principles of the present convention comprises depositing an underlayer over a substrate surface, and selectively laser ablating the underlayer. A magnetic recording layer is deposited over the underlayer surface.
10 Generally, the ablating step comprises producing a surface with a discrete servo track pattern, preferably by selective ablation of a carbon underlayer. Advantageously, the laser type may be specified based at least in part on the absorption spectra of the underlayer material.

15 Optionally, the ablating step comprises texturing the underlayer surface to improve recording head glide characteristics, ideally by texturing a contact start/stop zone with a surface roughness greater than a data zone. The methods of the present invention may thereby make use of the
20 flexibility of laser ablation to optimize the surfaced topology of magnetic recording media. Specifically, magnetic recording media surface roughness is dictated by the conflicting constraints of data storage, which generally benefits from low surface roughness, and durability, which
25 requires a relatively high surface roughness to minimize stiction and provide an adequate air bearing during head takeoff and landing. Laser ablation provides a highly controlled texturing process, and thereby facilitates the formation of a separate data zone and contact start/stop zone
30 over different portions of the magnetic recording surface to resolve these conflicting surface texture limitations.

BRIEF DESCRIPTION OF THE DRAWINGS

35 Fig. 1 is a cross-sectional view of an exemplary prior art magnetic recording disk, as described in the background section hereinabove.

 Fig. 2 schematically illustrates a magnetic recording disk having discrete servo tracks and a contact

start/stop zone according to the principles of the present invention.

Fig. 3 is a perspective view showing a servo data zone within the discrete servo track pattern of the magnetic recording disk Fig. 2.

Fig. 4 is a cross-sectional view showing the layer structure of the discrete servo track pattern of Fig. 3.

Fig. 5 schematically illustrates the texture of the contact start/stop zone and data zones of the magnetic recording disk of Fig. 2.

DETAILED DESCRIPTION OF THE SPECIFIC EMBODIMENTS

Referring now to Fig. 2, magnetic recording media according to the present invention will usually be in the form of a magnetic recording disk 30 having a contact start/stop zone 32 and a data zone 34. These zones are distinguished by the surface texture, as more fully described herein below.

A discrete servo track pattern 40 has been imposed over the surface of data zone 34. Discrete servo track pattern 40 includes a number of data track zones 38 which are separated by a plurality of servo tracking zones 36. The data storage function of disk 30 is typically confined to data track zones 38, while servo tracking zones 36 provide information to the disk drive which allows a read/write head to maintain alignment on the individual, tightly-spaced discrete data tracks.

Although a relatively low number of servo tracking zones are illustrated, it should be understood that discrete track media patterns may include several hundred servo zones to improve head tracking during each rotation. Additionally, the servo tracking zones need not be straight radial zones as shown, but may instead comprise arcs, intermittent zones, or even irregularly-spaced zones separating individual data tracks.

Referring now to Fig. 3, an enlarged portion of discrete servo track pattern 40 is shown imposed on the recording media layer structure 41, which in turn is disposed on a discrete track media substrate 42. The elements of

pattern 40 are generally defined by a difference in height between recessed zones 44 and raised zones 46. Pattern 40 includes discrete track zones 38 separated by servo tracking zone 36.

5 The individual data tracks 48 comprise raised zones on which the data are magnetically stored. Such discrete data tracks offer a number of advantages over contiguous surface media, including a reduction in signal-to-noise ratio, specifically achieved by lowering edge noise between the
10 physically separated tracks. In addition, discrete track patterns allow the inclusion of servo tracking zones having servo tracking data which is permanently coordinated with the individual data tracks.

 Servo tracking zone 36 generally includes track ID
15 bars 50 and tracking position bars 52. ID bars 50 provide the identification for each of the discrete tracks 48 of the discrete track pattern 40. Optionally, ID bars 50 comprise raised zones of a specific number and location for each data track 48, so that the track ID data is permanently imposed
20 with the pattern. Where track ID is imposed with the pattern, a much larger number of discrete track bars are required than are shown in Fig. 3. Alternatively, track identification information may be magnetically recorded, either on a limited number of discrete raised track bars as shown, or,
25 alternatively, entirely within the recessed zone 44. Where track identification is magnetically recorded, a limited number of ID bars 50 are required, as seen in Fig. 3. ID bars may be eliminated entirely by storing the data magnetically within recessed zone 44.

30 Tracking bars 52 provide the disk drive with feedback of the accuracy with which the read/write head is tracking an individual discrete track 48. Typically, tracking bars 52 extend approximately to the middle of the path defined by each track 48. Tracking bars 52 are staggered, so that
35 each discrete track includes at least one tracking bar extending from the middle of the track path toward the disk axis, and one tracking bar which extends from the middle of the track path radially outward. By balancing the signal

strength of the inward and outward staggered tracking bars, the read/write head can be accurately positioned within the center of the discrete track path. Typically, multiple staggered tracking bars are included in each servo data zone to improve tracking accuracy.

As described above, the tracking bars need not be physically raised zones, but may instead comprise permanently and accurately magnetically recorded areas within recessed zone 44. The use of ID bars and tracking bars was more fully described by S.E. Lambert, in *Beyond Discrete Tracks: Other Aspects of Patterned Media*, JOURNAL OF APPLIED PHYSICS, 69:4724-26, April 15, 1991, the full disclosure of which is herein incorporated by reference.

Referring now to Fig. 4, the structure of disk 30 generally comprises substrate 42 and structural layers 41. In turn, structural layers 41 typically comprise an Ni-P layer 60 disposed over substrate 42, a carbon underlayer 62, a chromium ground layer 64, a magnetic recording layer 66, a protective carbon outer layer 68, and a lubricating layer 70.

The presence of Ni-P layer 60 is optional, depending, in part, on the material used for substrate 42. Where a conventional aluminum substrate is selected, a reinforcing Ni-P layer provides the advantages described above regarding Fig. 1. Where a glass or other non-metallic substrate is used, the Ni-P layer may be eliminated. Irregardless, the outer surface of substrate 42 or Ni-P layer 60 may optionally be textured using conventional techniques, as described hereinabove. Although the outer surface may include the increased surface roughness of texturing, the pattern has not yet been imposed. Thus, the outer surface remains "substantially planar" as that term is used herein. Alternatively, some portion of the pattern may be imposed on this intermediate surface. For example, recessed radial servo tracking zones might be stamped into a non-metallic substrate, while the discrete tracks are imposed on the underlayer using the method of the present invention.

Carbon underlayer 62 is generally sputtered without electrical biasing, although the substrate is preferably

heated. After sputtering, the underlayer typically has a substantially planar outer surface. It is this carbon underlayer surface which receives the discrete track pattern.

To impose the pattern on the underlayer surface, a
5 laser selectively ablates the underlayer material. The laser is computer controlled by a system similar to that used to create raised "bumps" in the polished Ni-P surface for "laser zone texture" or to direct an electron beam as in electron beam lithography. Laser zone texturing systems suitable to
10 modify for production of the recording media of the present invention are described in U.S. Patent Nos. 5,062,021 and 5,108,781, and in published European Patent Application No. 94308034.1, the full disclosures of which are herein incorporated by reference. Advantageously, the pattern is
15 written directly to the underlayer material, eliminating the need for developing, etching, and the other intermediate lithographic process steps. Optionally, the laser is further directed over the surface of raised zones 46 or recessed zones 44 (see Fig. 3) to provide an optimized texture, as
20 described hereinbelow.

The choice of the laser type is preferably determined by the absorption spectra of the underlayer. For example, if the carbon underlayer film energy absorption at 10.6 μm (infrared wavelengths) is acceptable, then a CO_2 laser
25 would be a suitable choice. However, if the energy absorption is significantly better within the ultraviolet range, an ultraviolet laser should be selected. Similarly, this energy absorption spectra may promote the use of alternative layer materials. For example, in copending U.S. Patent Application
30 Serial No. 08/435,440 (Attorney Docket No. 14089-17), the full disclosure of which is herein incorporated by reference, it was proposed that a silicon underlayer would offer signal-to-noise improvements similar to that provided by a carbon underlayer. Hence, if the absorption spectra of
35 silicon offered significant advantages over that of carbon for available laser wavelengths, the fabrication advantages of silicon laser ablation would then promote the use of a silicon

underlayer to optimize the speed of selective underlayer material removal during imposition of the pattern.

Ground layer 64 is typically sputtered over the pattern surface of carbon underlayer 62. Magnetic recording layer 66, typically comprising a cobalt alloy, is then sputtered over the surface of ground layer 64. It should be noted that the magnetic layer extends continuously from raised zones 46 to recessed zones 44. In contrast, discrete track media formed by etching the magnetic layer typically do not have any magnetic material remaining in the recessed zones. As described in *Advancements in the Development of Plastic Hard Disks With Pre-embossed Servo Patterns*, CORPORATE RESEARCH LABORATORIES, SONY CORPORATION, by D. Dericotte, et al., such discontinuous discrete track media provide a roughly half-strength signal at the interface between recessed zones and raised zones after a simple DC erasing procedure. Discrete track media having continuous magnetic layers require a two-step erasing process, but provide a full strength signal at the interface between raised and recessed zones.

Protective carbon layer 68 is again sputtered, similar to the process used in deposition of carbon underlayer 62. A thin lubricating layer 70 is then applied over the surface of protective carbon layer 68, as is typically of magnetic recording media. The thickness and composition of ground layer 64, magnetic layer 66, protective carbon layer 68, and lubricating layer 70 are generally typical of high density magnetic recording media.

Referring now to Fig. 5, a profiler scan 80 of the surface topology of disk 30 illustrates the difference in surface roughness of data zone 34 versus contact start/stop zone 32. Surface topology is generally measured by surface roughness (Ra), which is the arithmetic average of the absolute height and depth of peaks and valleys in such a profiler scan. Recording densities generally benefit from the low glide heights associated with smooth recording surfaces having a low surface roughness where the head lands on the disk surface. In contrast, reliability of magnetic recording

systems generally benefit from increased surface roughness. Physical separation of disk 30 into contact start/stop zone 32 and data zone 34 avoids compromising on the topological characteristics throughout the head interaction surface, and allows independent optimization of a landing texture 82 and a data texture 84.

The underlayer laser ablation of the present invention provides a flexible method for imposing independent textures on zone textured disks. Optionally, both landing texture 82 and data texture 84 are imposed using selective laser ablation as described hereinabove. Data texture 84 is optionally applied both on raised zones 46 of the discrete track pattern, and on recessed zones 44 to improve magnetic recording of zone tracking data (see Fig. 3). Note that the data zone texture 84 refers only to the surface topology of the substantially horizontal recessed zones and raised zones, rather than to the gross changes in height associated with the discrete track pattern.

Optionally, selective laser ablation is used to impose only one of landing texture 82 and data texture 84, preferably the former. Generally, it is preferable to first impose landing texture 82, followed by texturing of the data zone 84. The data zone texturing process promotes the polishing out of a trailing end 85 of the relatively rough landing texture, thereby providing a smooth transition texture 86 to ensure durability. Alternatively, the flexibility of selective laser ablation should allow the imposition of a landing texture 82 over contact start/stop zone 32 after the data texture has been imposed. The precise definition provided by computer controlled laser ablation appears to allow the direct imposition of a transition zone 88 with a surface roughness which varies smoothly between contact start/stop zone 32 and data zone 34. Thus, the data texture is optionally applied prior to imposing the discrete track pattern, even on a layer disposed below carbon underlayer 62.

Although the exemplary embodiment has been described in some details by way of illustration and example, for purposes of clarity and understanding, certain modifications

will be obvious to those who skill in the art. For example, the discrete servo track pattern may be imposed in part using laser ablation of a carbon underlayer, and in part using known lithographic or stamping processes, within the scope of the present invention. Therefore, the scope of the invention is limited solely by the appended claims.

WHAT IS CLAIMED IS:

1 1. Magnetic recording media comprising:
2 a rigid substrate having a substantially flat
3 surface;
4 an underlayer having a discrete servo track pattern
5 disposed over the flat surface of the substrate; and
6 a magnetic recording layer disposed over the
7 underlayer.

1 2. Magnetic recording media as claimed in claim 1,
2 wherein the pattern is imposed at least in part by selective
3 laser ablation of the underlayer.

1 3. Magnetic recording media as claimed in claim 1,
2 wherein the underlayer comprises carbon.

1 4. Magnetic recording media as claimed in claim 3,
2 wherein the carbon underlayer is sputter deposited from a
3 sputtering source composed of at least 99.9% carbon.

1 5. Magnetic recording media as claimed in claim 3,
2 wherein the pattern comprises recessed zones and raised zones,
3 and wherein the carbon underlayer thickness at the recessed
4 zones is in the range between 0 Å and 400 Å.

1 6. Magnetic recording media as claimed in claim 3,
2 wherein the substrate comprises a non-metallic material.

1 7. Magnetic recording media as claimed in claim 1,
2 wherein the substrate comprises an aluminum disk, and further
3 comprising an Ni-P layer disposed over the substrate and below
4 the underlayer.

1 8. Magnetic recording media as claimed in claim 1,
2 further comprising a head interface surface including a data
3 zone and a contact start stop zone, wherein the discrete track
4 pattern is disposed within the data zone, and wherein the
5 contact start stop zone has a rough surface texture relative
6 to the data zone.

1 9. Magnetic recording media as claimed in claim 8,
2 wherein the contact start stop zone texture is imposed at
3 least in part by selective laser ablation of the underlayer.

1 10. Magnetic recording media comprising:
2 a substrate;
3 a carbon underlayer disposed over the substrate, the
4 underlayer having a surface with a discrete track servo
5 pattern, wherein the pattern is imposed at least in part by
6 selective laser ablation of the underlayer; and
7 a magnetic recording layer disposed over the surface
8 of the underlayer.

1 11. Magnetic recording media as claimed in claim
2 10, wherein the pattern comprises recessed zones and raised
3 zones, and wherein the carbon underlayer thickness at the
4 recessed zones is in the range between 0 Å and 400 Å.

1 12. Magnetic recording media as claimed in
2 claim 10, further comprising a layer including chromium
3 disposed over the underlayer and below the magnetic layer.

1 13. Magnetic recording media as claimed in
2 claim 12, further comprising a protective outer carbon layer
3 disposed over the magnetic layer.

1 14. Magnetic recording media as claimed in
2 claim 13, wherein the underlayer and protective layer are
3 sputtered.

1 15. A method for fabricating magnetic recording
2 media comprising:
3 depositing an underlayer over a substrate surface;
4 selectively laser ablating the underlayer;
5 depositing a magnetic recording layer over the
6 underlayer.

1 16. A method as claimed in claim 15, wherein the
2 ablating step comprises producing a surface with a discrete
3 servo track pattern.

1 17. A method as claimed in claim 15, wherein the
2 underlayer depositing step comprises sputtering carbon.

1 18. A method as claimed in claim 17, wherein the
2 carbon underlayer depositing step comprises sputtering a
3 sputtering source of at least 99.9% pure carbon.

1 19. A method as claimed in claim 17, further
2 comprising selecting a laser type based on the absorption
3 spectra of carbon.

1 20. A method as claimed in claim 17, wherein the
2 ablating step comprises producing a surface with a discrete
3 servo track pattern including recessed zones and raised zones,
4 wherein the carbon underlayer thickness at the recessed zones
5 is in the range between 0 Å and 400 Å.

1 21. A method as claimed in claim 15, wherein the
2 ablating step comprises texturing the underlayer surface to
3 improve recording head glide characteristics.

1 22. A method as claimed in claim 15, wherein the
2 ablating step comprises texturing a contact start stop zone
3 with a surface roughness greater than a data zone.

- 1 23. A magnetic recording media having a discrete
- 2 servo track pattern developed using the method claimed in
- 3 claim 15.

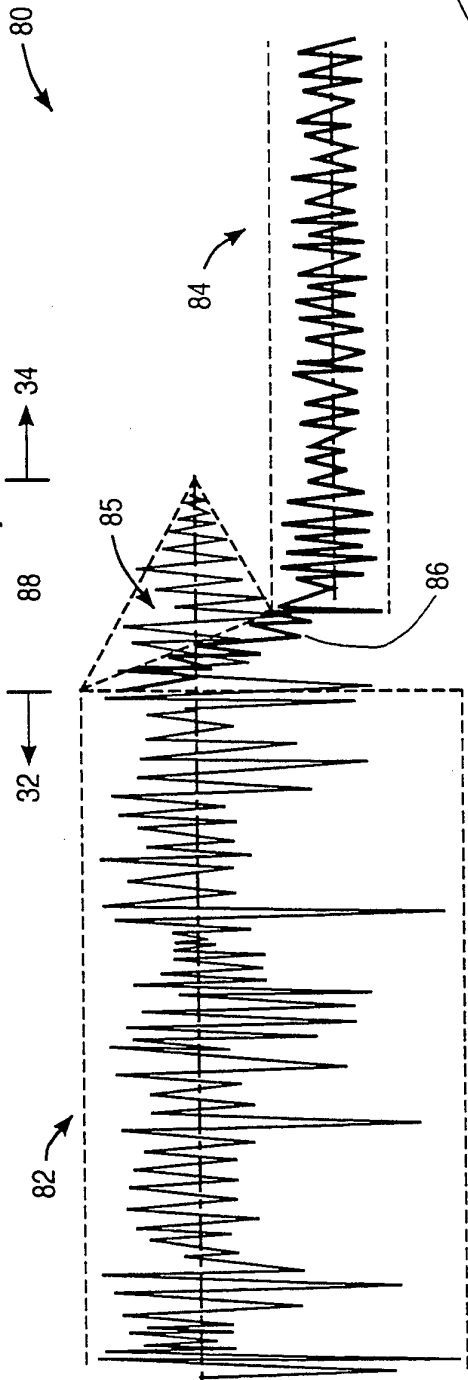


FIG. 5

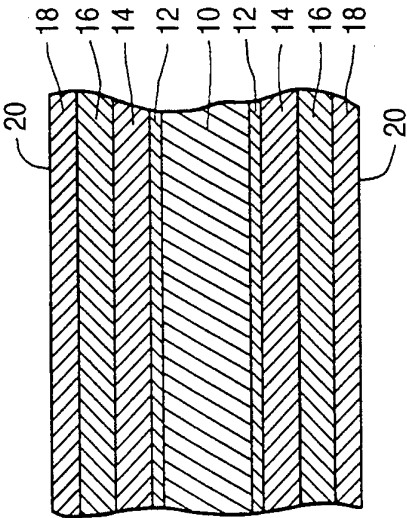


FIG. 1 (PRIOR ART)

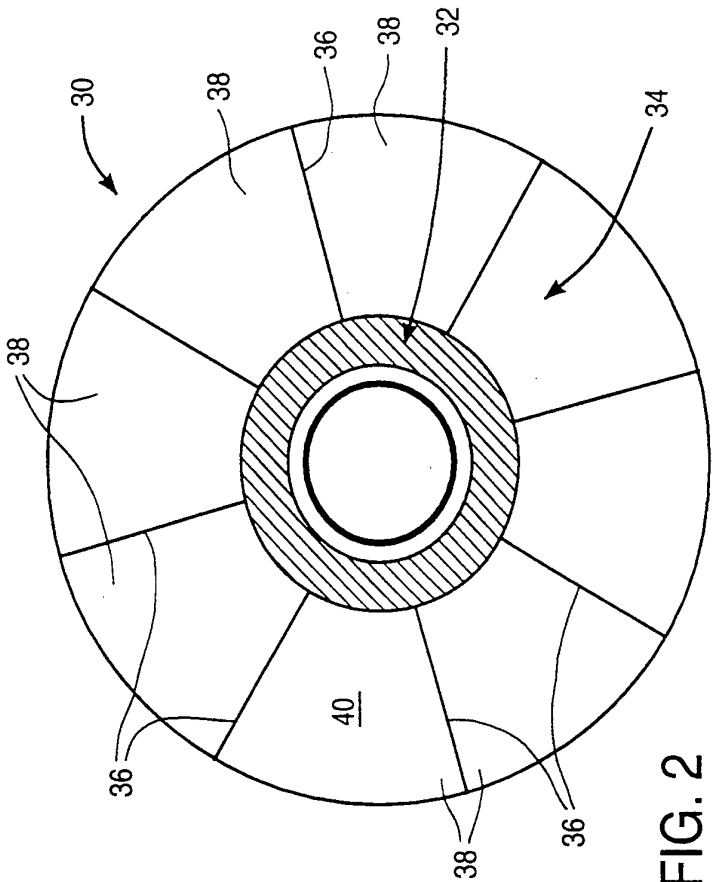


FIG. 2

2 / 2

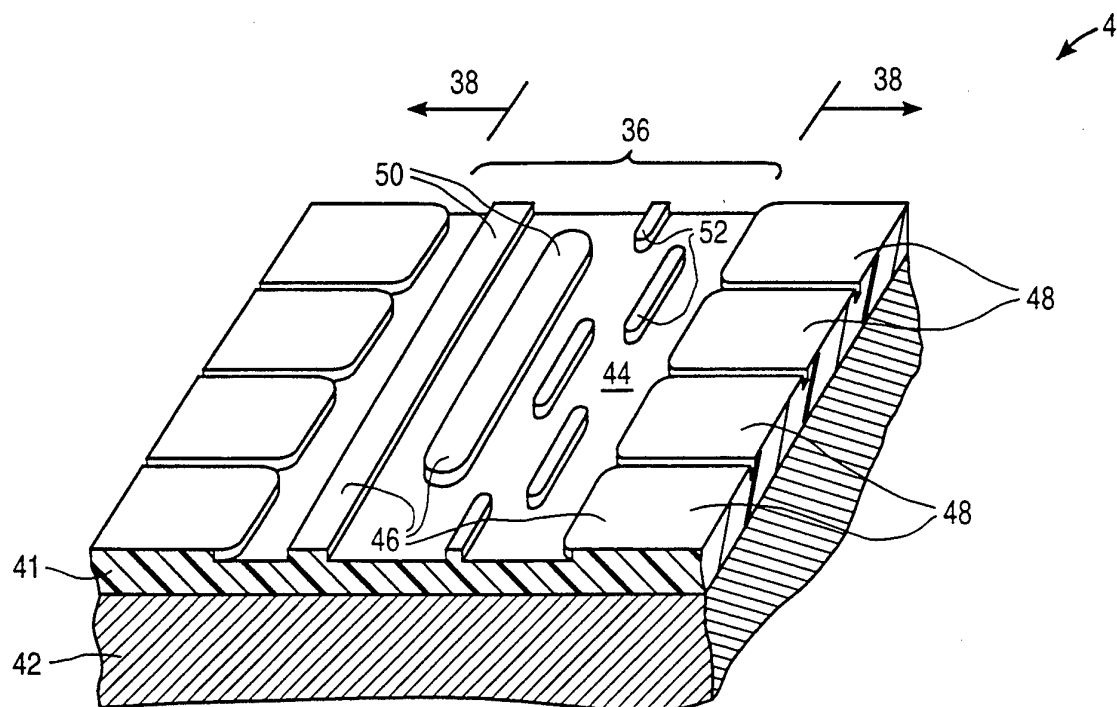


FIG. 3

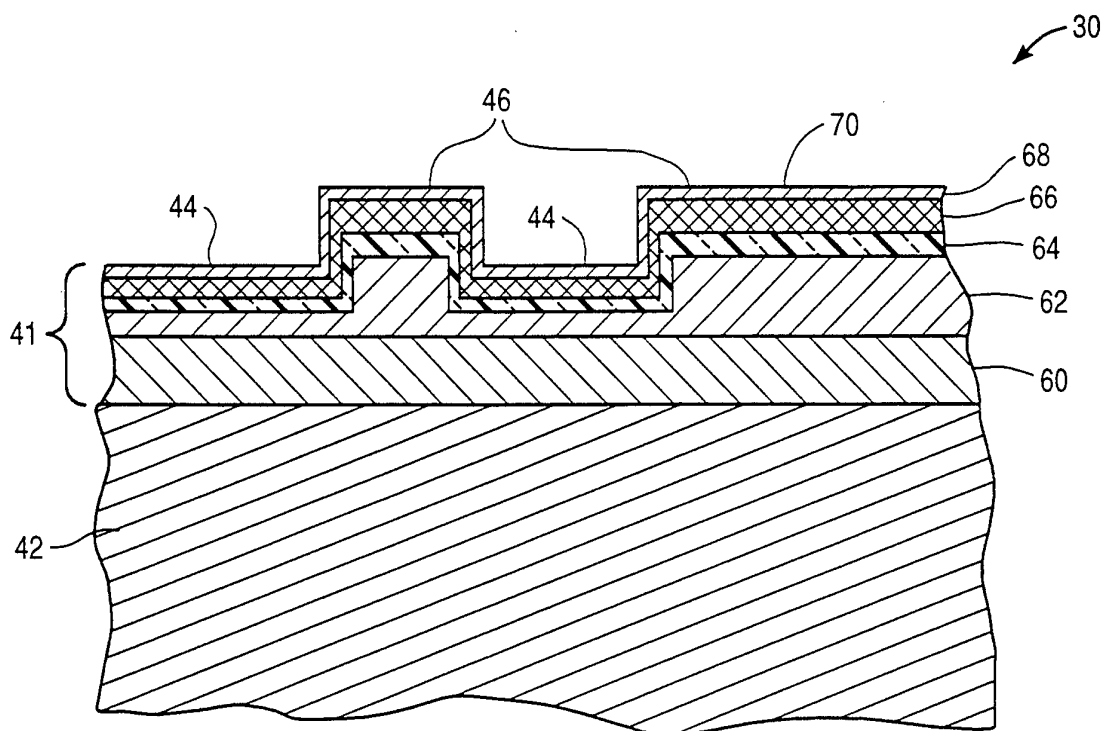


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US96/14249

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : C23C 14/34, 14/58; G11B 5/704, 5/66, 5/62; B05D 5/12

US CL : Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 204/192.2, 192.16; 427/554, 555, 596, 129, 130, 131; 216/65, 95; 428/694T, 694TS, 694TB, 694TC, 694TR, 694BR, 694SG; 360/135

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 652 554 (BAUMGART et al) 10 May 1995, Col. 3 lines 58-65.	19
Y	US 5,344,720 A (BELT et al) 6 September 1994, See Abstract.	1,2,10-14, 16,20,23
Y	JP 4-157619 A (KOBUE) 29 May 1992, See Abstract.	3,4,7,10-14 17,18
X	US 5,108,781 A (RANJAN et al) 28 April 1992, Col. 2 lines 29-34, Col. 3 lines 25-31; Col. 5 lines 32-36, lines 41-46,	15,21,22 -----
Y	lines 50-56, lines 64-68; Col. 6 lines 1-3, lines 54-66.	1,2,8,9,10-14
Y	Lambert et al. "Beyond Discrete Tracks: Other Aspects of Patterned Media", J. Appl. Phys., April 1991, 69(8), pages 4724-4726.	1,2,10-14, 16,20,23

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Z" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

15 NOVEMBER 1996

Date of mailing of the international search report

21 JAN 1997

 Name and mailing address of the ISA/US
 Commissioner of Patents and Trademarks
 Box PCT
 Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

ROBERT BRUCE BRENNEMAN

Telephone No. (703) - 308 - 3324

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/14249

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,893,299 A (HUMBERSTONE et al) 9 January 1990, Col. 2 lines 40-54, lines 62-67; Col. 3 lines 6-19; Col. 8 lines 3-14; Col. 11 lines 27-64.	3,5,6,10-14
Y	US 4,833,020 A (SHIROISHI et al) 23 May 1989, Fig. 1; Col. 8 lines 40-67; See Abstract.	3,4,7,10-14 17,18

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US96/14249

A. CLASSIFICATION OF SUBJECT MATTER:

US CL :

204/192.2, 192.16; 427/554, 555, 596, 129, 130, 131; 216/65, 95; 428/694T, 694TS, 694TB, 694TC, 694TR, 694BR, 694SG; 360/135