

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(10) International Publication Number

WO 2019/025883 A1

(43) International Publication Date
07 February 2019 (07.02.2019)(51) International Patent Classification:
B24D 11/04 (2006.01)

NIE, Qihong; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **RAITHEL, David C.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **SACHS, Kim C. Jr.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(21) International Application Number:
PCT/IB2018/055037

(22) International Filing Date:
09 July 2018 (09.07.2018)

(74) Agent: **HARGETT, Emily V.**, et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(30) Priority Data:
62/539,120 31 July 2017 (31.07.2017) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventors: **ZU, Lijun**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **ANDERSON, Andrew C.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **HAGEN, Sarah L.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **LUND, Jesse D.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: FLOOR PAD WITH VARIABLE ABRASIVE DISTRIBUTION

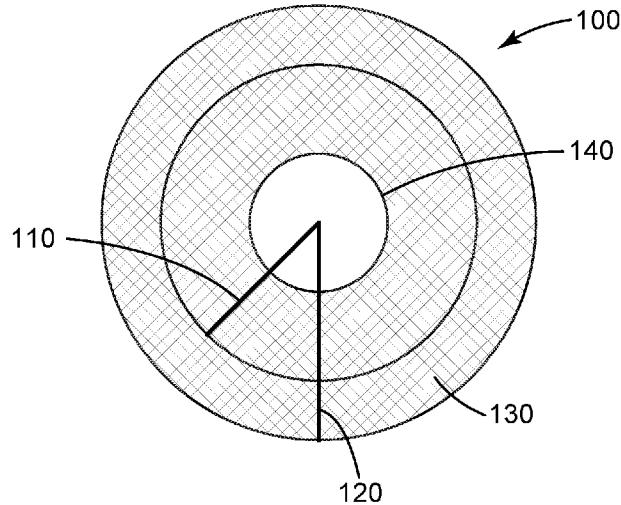


Fig. 1a

(57) Abstract: A surface-treating article, comprising a circular substrate (100) comprising a first major surface, an abrasive disposed on the first major surface, the abrasive having a first concentration at a first radius (110) measured from the center of the substrate, the abrasive having a second concentration not equal to the first concentration at a second radius (120) measured from the center of the substrate, wherein the first radius (110) and the second radius (120) are different lengths.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

FLOOR PAD WITH VARIABLE ABRASIVE DISTRIBUTION

BACKGROUND

Non-woven floor pads have been commercially available for many years. The 5 floor pads have a wide variety of types to provide many functions. Some pads are extremely abrasive and are desirably used for wax stripping and cleaning floor surfaces which are heavily encrusted with soil. Other floor pads are mildly abrasive and sometimes used for daily maintenance and floor polishing. The different abrasive properties of the 10 pads are achieved by appropriate selection of the fibers, resin binders and abrasive materials used in their construction. Stripping and cleaning pads are used on a rotary machine at low rotational speed of 50rpm to 250rpm. Burnishing pads are normally used on a rotary machine at high rotational speed of 1500rpm to 3000rpm.

Among all types of floor pads, uniform distribution of abrasives across the entire 15 surface and/or through the thickness of non-woven web is traditionally desired. One exception is the ACS Cyclone® CYCLONE-D™ diamond pad. Diamonds are only present on an outer circle of this pad. This is done primarily for economic reasons to reduce the use of expensive diamonds by leaving the center uncovered by diamonds. Due to the pad holder in the center of the diamond pad, the about 4" circle in the center of the 20 pad is not actually contacting the floor when the pad is mounted to a cleaning machine.

However, for both uniform abrasives coverage on a floor pad and the outer circle 25 coverage on the surface as described with respect to the ACS Cyclone® CYCLONE-D™ diamond pad, the scratch pattern on the floor generated by abrasives on the floor pad is not uniform, due to velocity difference from center to edge of the pad and translational movement of the floor scrubbing machine. These types of floor pads give a non-uniform appearance on the floor when the floor pad is moving in one direction with self-rotation around a central axis.

It is therefore desirable to develop a new floor pad that allows for superior control of the uniformity of appearance due to abrasion of a floor or other surface.

30

SUMMARY OF THE INVENTION

In some embodiments of the present invention, a surface-treating article is provided. The surface-treating article includes a circular substrate with a first major

surface and an abrasive disposed on the first major surface. The abrasive has a first concentration at a first radius measured from the center of the substrate, and the abrasive having a second concentration not equal to the first concentration at a second radius measured from the center of the substrate, where the first radius and the second radius
5 have different lengths.

In some embodiments, the surface-treating article includes a circular substrate including natural fiber, a polyamide, a polyester, rayon, polyethylene, polypropylene, or a combination thereof, having a first major surface and a single abrasive formulation disposed on the first major surface. The single abrasive formulation has a first concentration at a first radius, and the single abrasive formulation has a second concentration at a second radius that is a different length than the first radius, where the ratio of the first concentration to the second concentration ranges from about 2:1 to about
10 1.1:1.

In some embodiments, the surface-treating article includes a circular substrate including natural fiber, a polyamide, a polyester, rayon, polyethylene, polypropylene, or a combination thereof, having a first major surface and a single abrasive formulation disposed on the first major surface. The single abrasive formulation has a first concentration at a first radius, and a single abrasive formulation has a second concentration at a second radius that is a different length than the first radius, where the ratio of the first concentration to the second concentration ranges from about 1:1.2 to
20 about 1:2.2.

In some embodiments, a surface-treating article for controlling the amount of material removed from a work-surface is provided. The surface-treating article includes a circular substrate having a first major surface and an abrasive disposed on the first major surface. The abrasive has a first concentration at a first radius measured from the center of the substrate, and the abrasive having a second concentration not equal to the first concentration at a second radius measured from the center of the substrate that is a different length than the first radius, where the amount of material removed from a work-surface by the surface-treating article is a function of the difference between the first
25 concentration and the second concentration.

Advantageously, the surface-treating articles described herein are able to achieve more uniform finishes when used on a work-surface due to the radially non-uniform

abrasive grain distribution on the surface-treating articles. In some embodiments, by including multiple abrasive regions, each of which with a gradient distribution of abrasive particles, fine control of the finish on a work surface can be achieved. Advantageously, by placing more abrasives in a more effective working region, a higher removal rate from a 5 work surface can be achieved.

BRIEF DESCRIPTION OF THE FIGURES

In the drawings, which are not necessarily drawn to scale, like numerals describe substantially similar components throughout the several views. Like numerals having 10 different letter suffixes represent different instances of substantially similar components. The drawings illustrate generally, by way of example, but not by way of limitation, in accordance various embodiments of the present invention.

FIG. 1a is a schematic of the surface-treating article showing a region with a first and second abrasive concentration, in accordance with various embodiments.

15 FIG. 1b is a schematic of the surface-treating article showing a region with a first, second, and third abrasive concentration, in accordance with various embodiments.

FIG. 2a is a uniform random grain distribution of 800 grains on a circular pad.

FIG. 2b is a uniform random grain distribution of 800 grains on a circular pad.

FIG. 2c is a uniform random grain distribution of 800 grains on a circular pad.

20 FIG. 2d is a representative modeling result of the scratch pattern of a uniform grain distribution of 800 grains on the circular pad, in accordance with various embodiments.

FIG. 3a is a radially non-uniform random gradient distribution of 800 grains on a circular pad, where the center and edge of the pad have lower concentration of abrasive grains, in accordance with various embodiments.

25 FIG. 3b is a radially non-uniform random gradient distribution of 800 grains on a circular pad, where the center and edge of the pad have lower concentration of abrasive grains, in accordance with various embodiments.

FIG. 3c is a radially non-uniform random gradient distribution of 800 grains on a circular pad, where the center and edge of the pad have lower concentration of abrasive 30 grains, in accordance with various embodiments.

FIG. 3d is the radial distribution of abrasive grains, from the center of the pad (0) to the edge of the pad (r), in accordance with various embodiments. T

FIG. 3e is a representative modeling result of the scratch pattern of a radially non-uniform grain distribution of 800 grains on the circular pad, according to some embodiments.

5 FIG. 4a is a radially non-uniform random gradient distribution of 800 grains on a circular pad, where the center and edge of the pad have higher concentration of the abrasive grains, in accordance with various embodiments.

FIG. 4b is a radially non-uniform random gradient distribution of 800 grains on a circular pad, where the center and edge of the pad have higher concentration of the abrasive grains, in accordance with various embodiments.

10 FIG. 4c is a radially non-uniform random gradient distribution of 800 grains on a circular pad, where the center and edge of the pad have higher concentration of the abrasive grains, in accordance with various embodiments.

FIG. 4d is the radial distribution of abrasive grains, from the center of the pad (0) to the edge of the pad (r), in accordance with various embodiments.

15 FIG. 4e is a representative modeling result of the scratch pattern of a radially non-uniform grain distribution of 800 grains on the circular pad, according to some embodiments.

20 FIG. 5 is a plotted the density of scratches on the floor across the pad for a comparative pad (Sample 1) and two pads according to some embodiments (Samples 2 and 3).

FIG. 6 is a plot of 60° gloss across the test lane on a vinyl composition tile (VCT) tile with signature floor finish after scrubbing with a floor pad having uniform abrasive grain distribution.

25 DETAILED DESCRIPTION OF THE INVENTION

Reference will now be made in detail to certain embodiments of the disclosed subject matter, examples of which are illustrated in part in the accompanying drawings. While the disclosed subject matter will be described in conjunction with the enumerated claims, it will be understood that the exemplified subject matter is not intended to limit the 30 claims to the disclosed subject matter.

Throughout this document, values expressed in a range format should be interpreted in a flexible manner to include not only the numerical values explicitly recited

as the limits of the range, but also to include all the individual numerical values or sub-ranges encompassed within that range as if each numerical value and sub-range is explicitly recited. For example, a range of “about 0.1% to about 5%” or “about 0.1% to 5%” should be interpreted to include not just about 0.1% to about 5%, but also the individual values (e.g., 1%, 2%, 3%, and 4%) and the sub-ranges (e.g., 0.1% to 0.5%, 1.1% to 2.2%, 3.3% to 4.4%) within the indicated range. The statement “about X to Y” has the same meaning as “about X to about Y,” unless indicated otherwise. Likewise, the statement “about X, Y, or about Z” has the same meaning as “about X, about Y, or about Z,” unless indicated otherwise.

In this document, the terms “a,” “an,” or “the” are used to include one or more than one unless the context clearly dictates otherwise. The term “or” is used to refer to a nonexclusive “or” unless otherwise indicated. The statement “at least one of A and B” or “at least one of A or B” has the same meaning as “A, B, or A and B.” In addition, it is to be understood that the phraseology or terminology employed herein, and not otherwise defined, is for the purpose of description only and not of limitation. Any use of section headings is intended to aid reading of the document and is not to be interpreted as limiting; information that is relevant to a section heading may occur within or outside of that particular section.

In the methods described herein, the acts can be carried out in any order without departing from the principles of the invention, except when a temporal or operational sequence is explicitly recited. Furthermore, specified acts can be carried out concurrently unless explicit claim language recites that they be carried out separately. For example, a claimed act of doing X and a claimed act of doing Y can be conducted simultaneously within a single operation, and the resulting process will fall within the literal scope of the claimed process.

The term “about” as used herein can allow for a degree of variability in a value or range, for example, within 10%, within 5%, or within 1% of a stated value or of a stated limit of a range, and includes the exact stated value or range.

The term “substantially” as used herein refers to a majority of, or mostly, as in at least about 50%, 60%, 70%, 80%, 90%, 95%, 96%, 97%, 98%, 99%, 99.5%, 99.9%, 99.99%, or at least about 99.999% or more, or 100%. The term “substantially free of” as used herein can mean having none or having a trivial amount of, such that the amount of

material present does not affect the material properties of the composition including the material, such that the composition is about 0 wt% to about 5 wt% of the material, or about 0 wt% to about 1 wt%, or about 5 wt% or less, or less than, equal to, or greater than about 4.5 wt%, 4, 3.5, 3, 2.5, 2, 1.5, 1, 0.9, 0.8, 0.7, 0.6, 0.5, 0.4, 0.3, 0.2, 0.1, 0.01, or 5 about 0.001 wt% or less. The term “substantially free of” can mean having a trivial amount of, such that a composition is about 0 wt% to about 5 wt% of the material, or about 0 wt% to about 1 wt%, or about 5 wt% or less, or less than, equal to, or greater than about 4.5 wt%, 4, 3.5, 3, 2.5, 2, 1.5, 1, 0.9, 0.8, 0.7, 0.6, 0.5, 0.4, 0.3, 0.2, 0.1, 0.01, or about 0.001 wt% or less, or about 0 wt%.

10 The term “surface” as used herein refers to a boundary or side of an object, wherein the boundary or side can have any perimeter shape and can have any three-dimensional shape, including flat, curved, or angular, wherein the boundary or side can be continuous or discontinuous.

15 As used herein, the term “polymer” refers to a molecule having at least one repeating unit and can include copolymers.

The term “abrasive,” as used herein, refers to abrasive particles suitable for use as an abrasive coating on the surface-treating article described herein, abrasive particles within the interior of the surface-treating article, abrasive particles both on the surface and in the interior of the surface-treating article, or to resins and other polymeric materials on 20 the surface, in the interior, or both on the surface and in the interior of the surface-treating article that have a hardness measured on the Mohs hardness scale that is greater than the hardness of the surface-treating article itself. Exemplary abrasive particles include both naturally occurring and synthetically formed particles, such as fused aluminum oxide based materials such as aluminum oxide, ceramic aluminum oxide (which may include 25 one or more metal oxide modifiers and/or seeding or nucleating agents), heat-treated aluminum oxide, silicon carbide, co-fused alumina-zirconia, diamond, ceria, titanium diboride, cubic boron nitride, boron carbide, garnet, flint, emery, sol-gel derived abrasive particles, novaculite, pumice, rouge, sand, corundum, sandstone, tripoli, powdered feldspar, staurolite, ceramic iron oxide, glass powder, steel particles, and blends thereof. 30 Exemplary resins and polymeric materials suitable for use as an abrasive material in the surface-treating article described herein include melamine resin, polyester resin such as the condensation product of maleic and phthalic anhydrides and propylene glycol,

synthetic polymers such as styrene-butadiene (SBR) copolymers, carboxylated-SBR copolymers, phenol-aldehyde resins, polyesters, polyamides, polyureas, polyvinylidene chloride, polyvinyl chloride, acrylic acid-methylmethacrylate copolymers, acetal copolymers, polyurethanes, and mixtures and cross-linked versions thereof.

5 The term “single abrasive formulation,” as used herein, refers material that can contain a single abrasive as defined herein or a mixture of abrasives. A single abrasive formulation can contain a distribution of abrasive particle sizes and shapes of any one of the abrasive materials described herein. The single abrasive formulation can also include fillers such as talc, calcium carbonate, etc., which can also possess abrasive properties, but 10 can have lower abrasiveness and lower hardness than the abrasive particles described above.

As used herein, the term “free of intentionally included abrasive” refers to a region may have some small amount of adventitiously deposited abrasive due to deposition of abrasive at an adjacent region.

15 As used herein, the term “radius” refers to a length on a circular surface that extends from the center of the surface to another portion of the surface, or to a length that originates at a point on the circular surface that is not the center of the surface and extends to another point on the surface.

As used herein, the term “non-working region” refers to a portion of the surface-20 treating article that does not touch a work-surface, such as a floor, when the surface-treating article is used to, for example, abrade or polish the work-surface.

As used herein, the term “working region” refers to a portion of the surface-treating article that is in contact with a work-surface, such as a floor, when the surface-treating article is used to, for example, abrade or polish the work-surface.

25 Surface-treating article.

In some embodiments, a surface-treating article is provided. The surface-treating article includes a circular substrate with a first major surface and an abrasive disposed on the first major surface. The abrasive has a first concentration at a first radius measured 30 from the center of the substrate, and the abrasive has a second concentration not equal to the first concentration at a second radius measured from the center of the substrate, where

the first radius and the second radius have different lengths. In some embodiments, the surface-treating article has a working region and a non-working region.

A surface-treating article according to some embodiments is shown in FIG. 1a. In FIG. 1a, circular substrate (100) has a first radius (110) and a second radius (120), where 5 the second radius is longer than the first radius. The two radii define an abrasive region (130) that has a first concentration at the edge corresponding to the end point of the first radius and a second concentration at the edge corresponding to the endpoint of the second radius. The concentration gradient in the abrasive region (130) can either increase from the first concentration to the second concentration (i.e. the first concentration is lower than 10 the second concentration), or decrease from the first concentration to the second concentration (i.e. the first concentration is higher than the second concentration). The circular substrate (100) has a central region (140) that does not have any intentionally deposited abrasive. The pattern in FIG. 1a only indicates where abrasive is disposed on the surface-treating article, but does not illustrate a gradient of abrasive at different radii 15 on the circular substrate.

The circular substrate can have any size that is suitable for the abrading, scouring, finishing, sanding, or polishing applications that it is used for. In some embodiments, the substrate can have a diameter of about 1 inch to about 50 inches, or about 4 inches to 20 about 40 inches, or about 5 inches to about 30 inches, or about 6 inches to about 20 inches, or any range or sub-range between these values. In some embodiments, the substrate has a diameter of 1, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 25, 30, 35, 40, 45, or 50 inches, or any 25 range or sub-range between these values. In some embodiments, the substrate has a diameter of about 12 inches to about 27 inches. In some embodiments, the substrate has a diameter of about 4 inches to about 27 inches. The circular substrate can have a thickness ranging from about 0.01 inches to about 1 inches, about 0.1 inches to about 0.9 inches, about 0.2 inches to about 0.8 inches, about 0.3 inches to about 0.7 inches, or about 0.3 30 inches to about 0.6 inches, or any range or sub-range between these values. In some embodiments, the circular substrate has a thickness 0.05, 0.1, 0.15, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, or 1.0 inches, or any range or sub-range between these values. In some embodiments, the substrate has a thickness of about 0.25 inches to about 1 inch. In some embodiments, the substrate has a thickness of about 0.025 inches to about 0.07 inches.

The substrate can include a web open, lofty, three-dimensional nonwoven fibers, including natural and synthetic fibers. In some embodiments, the substrate comprises natural fiber (e.g., vegetable fibers such as hemp, jute, and the like; animal hair fibers, such as hog's hair), a polyamide (e.g., a nylon), a polyester (e.g., polyethylene terephthalate or polyethylene isophthalate), rayon, polyethylene, polypropylene, a synthetic fiber, or a combination thereof. Synthetic fibers include polymers derived from natural sources, such as polylactic acid derived from corn. The substrate can be a non-woven web, including a plurality of fibers, which are adhered to each other at their joints of mutual contact by a binder and/or by being melt-bonded. In other instances, the substrate can be a variety of materials, including paper, woven fabrics, nonwoven fabrics, calendared nonwoven fabrics, polymeric films, stitch-bonded fabrics, open cell foams, closed cell foams, and combinations thereof.

In some embodiments, the abrasive includes abrasive grains. The abrasive grains can be any of the abrasive particle materials described herein, such as aluminum oxide, 15 ceramic aluminum oxide, heat-treated aluminum oxide, silicon carbide, co-fused alumina-zirconia, diamond, ceria, titanium diboride, cubic boron nitride, boron carbide, garnet, flint, emery, sol-gel derived abrasive particles, novaculite, pumice, rouge, sand, corundum, sandstone, tripoli, powdered feldspar, staurolite, ceramic iron oxide, glass powder, steel particles, and blends thereof. In some embodiments, the abrasive is a single abrasive 20 formulation. The abrasive can also include resins. Exemplary resins suitable for use as an abrasive material in or on a major surface of the surface-treating article described herein include melamine resin, polyester resin such as the condensation product of maleic and phthalic anhydrides and propylene glycol, synthetic polymers such as styrene-butadiene (SBR) copolymers, carboxylated-SBR copolymers, phenol-aldehyde resins, polyesters, 25 polyamides, polyureas, polyvinylidene chloride, polyvinyl chloride, acrylic acid-methylmethacrylate copolymers, acetal copolymers, polyurethanes, and mixtures and cross-linked versions thereof.

In some embodiments, the substrate further includes a second major surface. The second major surface, in some embodiments, can be the side of the surface-treating article 30 opposite to the first major surface. The second major surface can have any suitable abrasive described herein disposed on it. In some embodiments, the second major surface has a greater hardness than the substrate as measured on Mohs scale. The second major

surface can have disposed on it any abrasive suitable for use in the first major surface, including melamine resin, polyester resin such as the condensation product of maleic and phthalic anhydrides and propylene glycol, synthetic polymers such as styrene-butadiene (SBR) copolymers, carboxylated-SBR copolymers, phenol-aldehyde resins, polyesters, 5 polyamides, polyureas, polyvinylidene chloride, polyvinyl chloride, acrylic acid-methylmethacrylate copolymers, acetal copolymers, polyurethanes, and mixtures and cross-linked versions thereof. The substrate can also have resin or polymeric materials disposed within the interior of the surface-treating article. The resin or polymeric material can give the surface-treating article additional structural rigidity and provides finishing 10 capability.

The abrasive or single abrasive formulation can be applied to the surface of the substrate in a coating using any suitable coating techniques, such as spray coating or roll coating. In some instances, particularly where the substrate is porous, when the abrasive is disposed on the first major surface or second major surface of the surface-treating article, 15 it may penetrate into the interior of the surface-treating article to a depth less than the thickness of the surface-treating article. In some embodiments, at least some of the abrasive or single abrasive formulation can be present in the interior of or throughout the surface-treating article. The abrasive or single abrasive formulation can be present on the first major surface, the second major surface, the interior of the surface-treating article, or 20 any combination thereof. The coating containing the abrasive or single abrasive formulation can be deposited on the first or second major surface of the surface-treating article so that a radially non-uniform gradient of the abrasive or single abrasive formulation is formed.

The coating can include the abrasive or single abrasive formulation, together with 25 binders, fillers, crosslinkers, or other additives suitable for use in such substrates. Suitable additives can include an organic solvent, a surfactant, an emulsifier, a dispersant, a crosslinking agent, a catalyst, a rheology modifier, a density modifier, a cure modifier, a free radical initiator, a diluent, an antioxidant, a heat stabilizer, a flame retardant, a plasticizer, filler, a polishing aid, an inorganic particle, a pigment, a dye, an adhesion 30 promoter, antistatic additives, or a combination thereof. The coating can be a curable coating composition.

In some embodiments, the first concentration and second concentration of the abrasive are greater than zero. In some embodiments, the first concentration is greater than the second concentration. In some embodiments, the second concentration is greater than the first concentration.

5 The ratio of the first concentration to the second concentration can range from about 10:1 to about 1:10. In some embodiments, the ratio of the first concentration to the second concentration can range from about 9:1 to about 1:9, from about 8:1 to about 1:8, from about 7:1 to about 1:7, from about 6:1 to about 1:6, from about 5:1 to about 1:5, from about 4:1 to about 1:4, from about 3:1 to about 1:3, from about 2:1 to about 1:2, or any 10 range or sub-range between these values. In some embodiments, the ratio of the first concentration to the second concentration can range from about 2:1 to about 1.1:1. In some embodiments, ratio of the first concentration to the second concentration can range from about 1.8:1 to about 1.4:1. In some embodiments, the ratio of the first concentration to the second concentration ranges from about 1:1.2 to about 1:2.2. In some embodiments, 15 the ratio of the first concentration to the second concentration ranges from about 1:1.5 to about 1:2.

In some embodiments, the length of the first radius is less than the length of the second radius. In some embodiments, the second radius extends from the edge of the substrate to the end of the first radius. The first radius or the second radius can be from 20 about 0.5 to about 25 inches, about 2 to about 21, about 3 to about 19, about 4 to about 17, about 5 to about 16, about 6 to about 13, or about 7 to about 11 inches in length. In some embodiments, the first radius is about 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, or about 12 inches in length. In some embodiments, the second radius is about 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, or about 12 inches in length. In some embodiments, the ratio of the first concentration to the 25 second concentration ranges in a gradient distribution.

In some embodiments, a concentration of the abrasive at the first radius to the second radius decreases from the first concentration in a gradient distribution to the second concentration. For example, FIG. 4d depicts a concentration gradient where the first concentration at a radius of 2 inches decreases along a gradient to a lower concentration at 30 a radius of 6 inches.

In some embodiments, a concentration of the abrasive at the first radius to the second radius increases from the first concentration in a gradient distribution to the second

concentration. For example, FIG. 3d depicts a concentration gradient where the first concentration at a radius of 2 inches increases along a gradient to a higher concentration at a radius of 6 inches.

In some embodiments, the first concentration or the second concentration is a maximum abrasive concentration of the first major surface of the surface-treating article. In some embodiments, the first concentration or the second concentration is a minimum abrasive concentration of the first major surface of the surface-treating article. FIGS. 2d and 3d show both maximum and minimum first concentrations and second concentrations. In FIGS. 2d and 3d, the maximum concentration has been normalized to a value of 100.

FIG. 3d shows a first concentration that is a minimum, and a second concentration that is a maximum. In FIG. 3d the minimum concentration is 60% of the maximum concentration. FIG. 4d shows a first concentration that is a maximum, and a second concentration that is a minimum. In FIG. 4d the minimum concentration is 55% of the maximum concentration.

In some embodiments, the first major surface includes a central region substantially free of intentionally included abrasive. The central region of the first major surface is the portion of the surface-treating article that is mounted on or attached to a machine or apparatus adapted to rotate and/or translate the surface-treating article to effect abrading or polishing a work-surface. When the surface-treating article is configured the on the machine or apparatus, the central region can be punched out. For this reason depositing any abrasive on this region is economically wasteful. The area of the central region can be from about 1% to about 15%, about 2% to about 13%, about 3% to about 11%, or about 4% to about 9% of the total area of the surface treating article. In some embodiments, the central region can be 1%, 2%, 3%, 4%, 5%, 6%, 7%, 8%, 9%, 10%, 11%, 12%, 13%, 14%, or 15% of the total surface area of the surface-treating article, or any range or sub-range in between these values.

In some embodiments, the surface-treating article further includes an abrasive having a third concentration at a third radius measured from the center of the substrate. In some embodiments, the first and third concentrations are both greater than the second concentration, and the length of the second radius is between the length of the first radius and the third radius. In some embodiments, the first and third concentrations are both less

than the second concentration, and the length of the second radius is between the length of the first radius and the third radius.

The gradient distribution of the abrasive can have a sinusoidal or parabolic shape, such that the maximum abrasive concentration occurs at the first concentration and the 5 first radius, the minimum concentration occurs at a second concentration and the second radius, and a maximum concentration occurs at a third concentration and the third radius. The gradient distribution of the abrasive can also have a sinusoidal or parabolic shape, such that the minimum abrasive concentration occurs at the first concentration and the first radius, the maximum concentration occurs at a second concentration and the second radius, and the minimum concentration occurs at a third concentration and the third radius. 10

A surface-treating article having a first, second, and third concentration and radius is shown in FIG. 1b. In FIG. 1b, circular substrate (200) has a first radius (210), a second radius (220), and a third radius (230), where the second radius is longer than the first radius, and the third radius is longer than the second radius. The three radii define 15 abrasive regions (250 and 260) that have a first concentration at the edge corresponding to the end point of the first radius, a second concentration at the edge corresponding to the endpoint of the second radius, and a third concentration at the edge corresponding to the endpoint of the third radius. The concentration gradient in the abrasive region (250) can either increase from the first concentration to the second concentration (i.e. the first 20 concentration is lower than the second concentration), or decrease from the first concentration to the second concentration (i.e. the first concentration is higher than the second concentration). Similarly the concentration in the abrasive region (260) can either increase from the second concentration to the third concentration (i.e. the second concentration is lower than the third concentration), or decrease from the second concentration to the third concentration (i.e. the second concentration is higher than the third concentration). The circular substrate (200) has a central region (240) that does not 25 have any intentionally deposited abrasive. The pattern in FIG. 1b only indicates where abrasive is disposed on the surface-treating article, but does not illustrate a gradient of abrasive at different radii on the circular substrate.

30 The number of regions having a particular abrasive concentration is not limited, so that the surface-treating article can have a fourth concentration at a fourth radius, a fifth concentration at a fifth radius, and so forth. In some embodiments, the concentration of

abrasive can also be substantially zero at a particular radius, so that the surface-treating article can include regions of abrasive with a gradient distribution interspersed with regions where no abrasive is intentionally deposited. Regions having no abrasive can still have small adventitious amounts of abrasive at the edge where the abrasive-free region 5 meets a region containing abrasive.

In some embodiments, the surface-treating article includes a circular substrate that can include natural fiber, a polyamide, a polyester, rayon, polyethylene, polypropylene, or a combination thereof and having a first major surface. The first major surface includes a single abrasive formulation having a first concentration at a first radius, and a single 10 abrasive formulation having a second concentration at a second radius that is a different length than the first radius, where the ratio of the first concentration to the second concentration ranges from about 2:1 to about 1.1:1.

In some embodiments, the surface-treating article includes a circular substrate that can include natural fiber, a polyamide, a polyester, rayon, polyethylene, polypropylene, or a combination thereof and having a first major surface. The first major surface includes a 15 single abrasive formulation having a first concentration at a first radius, and a single abrasive formulation having a second concentration at a second radius that is a different length than the first radius, where the ratio of the first concentration to the second concentration ranges from about 1:1.2 to about 1:2.2.

20 In some embodiments, a surface-treating article for controlling the amount of material removed from a work-surface is provided. The surface-treating article includes a circular substrate having a first major surface. The first major surface includes an abrasive having a first concentration at a first radius measured from the center of the substrate, and the abrasive having a second concentration not equal to the first concentration at a second 25 radius measured from the center of the substrate that is a different length than the first radius, where the amount of material removed from a work-surface by the surface-treating article is a function of the difference between the first concentration and the second concentration.

30 In some embodiments, the pattern of material removed from the work-surface by the surface-treating article is a function of the difference between the first concentration and the second concentration. The overall pattern of material removed from the work-surface is produced by a combination of regions of lower first concentration and higher

second concentration or regions of higher first concentration and lower second concentration. As, discussed herein, there is no limitation as to the number of regions on the surface-treating article, and the pattern of material removed from the work-surface will also depend on the number of non-radial abrasive gradient distributions on the entire 5 surface of the surface-treating article.

The work-surface can be any surface that requires controlled removal of material such as wood, stone, metal, ceramic, glass, mineral, cured polymer, or combinations thereof.

The work-surface can include resilient floor, vinyl composition tile (VCT) tile, 10 laminate, hardwood, seamless polymer floor, etc. and surfaces that have been treated with coatings.

Examples

Various embodiments of the present invention can be better understood by 15 reference to the following Examples which are offered by way of illustration. The present invention is not limited to the Examples given herein.

Modeling.

Modeling was used to simulate the situation of a floor pad scrubbing on the floor. 20 A 20 inch circular pad with uniform abrasive grain distribution was calculated first. The pad self-rotational speed of 200rpm and its translational speed of 72 feet per minute were used in the modeling to simulate the actual conditions of a floor pad under the floor scrubbing machine.

Comparative Example 1.

A pad having a uniform abrasive grain distribution was modeled. There were 800 abrasive grains in total and three randomizations of the abrasive grains were generated.

Three random uniform abrasive grain distributions on a circular pad are shown in FIGS. 1a-1c. FIG. 2d shows a representative modeling result. The pad was rotated 30 counter clock-wise at a speed of 200 rpm and a translational speed of 72 feet per minute (to the right). One side of the pad has higher density of scratches, and both center and edge of

the pad have lower density of the pad. A pad with uniform abrasive grain distribution does not provide a uniform scratch pattern on the floor.

Example 2.

A pad having a radially non-uniform abrasive grain distribution was modeled.

5 There were 800 abrasive grains in total and three randomizations of the abrasive grains were generated.

Three random radially non-uniform random gradient distributions on a circular pad are shown in FIGS. 2a-2c. The center and edge of the pad have lower concentration of abrasive grains than the middle portion of the pad.

10 The radial distribution of abrasive grains, from the center of the pad (0) to the edge of the pad (r), is shown in FIG. 3d. The distribution is gradient distribution having a normalized maximum abrasive grain concentration at the portion in the distribution curve marked 100. The abrasive grain concentration decreases on either side of the maximum point in a continuous gradient.

15 A representative modeling result of the scratch pattern of a radially non-uniform grain distribution of 800 grains on a circular pad is shown in FIG. 3e. The pad was rotated counter clock-wise at a speed of 200 rpm and a translational speed of 72 feet per minute (to the right). This embodiment shows a higher density of scratches in the middle (between center and edge of the pad), which is the most effective working area.

20

Example 3.

A pad having a radially non-uniform abrasive grain distribution was modeled. There were 800 abrasive grains in total and three randomizations of the abrasive grains were generated.

25 Three random radially non-uniform random gradient distributions on a circular pad are shown in FIGS. 3a-3c. The center and edge of the pad have higher concentration of the abrasive grains than the middle portion of the pad.

30 The radial distribution of abrasive grains, from the center of the pad (0) to the edge of the pad (r), is shown in FIG. 4d. The distribution is gradient distribution having a normalized maximum abrasive grain concentration at the portions in the distribution curve marked 100. The abrasive grain concentration decreases between the maximum points in a continuous gradient.

A representative modeling result of the scratch pattern of a radially non-uniform grain distribution of 800 grains on the circular pad is shown in FIG. 4e. The pad is rotated counter clock-wise at a speed of 200 rpm and a translational speed of 72 feet per minute (to the right). This embodiment shows a more uniform distribution of scratches, which will 5 allow a more uniform appearance on the floor.

The density of scratches on a floor is shown in FIG. 5. FIG. 5 plots Sample 1 (uniform grain distribution), Sample 2 (radially non-uniform gradient distribution with maximum abrasive concentration in the middle of the pad and minimum abrasive concentration at the center and edge of the pad), and Sample 3 (radially non-uniform 10 gradient distribution with minimum abrasive concentration in the middle of the pad and maximum abrasive concentration at the center and edge of the pad). Standard deviations for Samples 1, 2, and 3 are 14.05, 18.55, and 9.48, respectively. The scratch pattern of Sample 3 is more uniform across the floor with smaller standard deviation, Sample 2 with 15 more abrasive grains in the middle of the pad showed more scratches in the most effective working zone.

Example 4. Sample Preparation.

3M™ Aqua™ 3100 Floor Pad (20 inches) were used as a starting material. Such pads are available from 3M Company, St. Paul, MN, USA. The fibers constituting the pad 20 are held together at their points of mutual contact by a primary polymer resin. The pad is flexible and resilient and contains polyester fibers.

A homogenous polymer resin mixture was prepared, consisting of 292.5 grams of Phenol resin BB077a (available from Arclin USA, LLC, Roswell, Georgia, 300076), 511.2 grams of aluminum oxides 240f (available from Washington Mills, Niagara Falls, NY, 25 14302), and 196.3 grams of water. The resin mixture was evenly sprayed onto one of the surfaces of the 20 inch floor pad by hand using a standard type compressed air spray gun (normally used for spraying paint) with above mixture. The wet (uncured resin) add-on weight thereafter weighed 81 grams.

30 Testing.

The test area was prepared by coating a bare vinyl composition tile (VCT) floor with 4 coats of Signature floor finish (available from Sealed Air, Charlotte, NC, 28273) at

a rate of 2000 sq. ft per gallon and allowed to cure 2 days before testing. Each of Examples was mounted on a Tennant T300 auto scrubber filled with water only. After conditioning the pad by running for 15 linear feet, the sample was used to scrub a test lane at ~72 feet per minute at the high-pressure setting.

5 A series of 60° Gloss measurements were taken using a Rhopoint IQ 20/60 meter. The meter was aligned perpendicular to the test lane and 19 readings were taken at intervals of 1" across the width of the test lane. The meter was also aligned parallel to the test lane and 19 readings were taken at intervals of 1" across the width of the test lane.

FIG. 6 plotted the 60° gloss data across the test lane.

10 The modeling data of the floor pad with uniform abrasive gain distribution (Sample 1 in FIG. 5) matched very well with this experimental data on 60° Gloss. FIG. 6 is a plot of 60° Gloss across the test lane on a vinyl composition tile (VCT) tile with signature floor finish after scrubbing with a floor pad having uniform abrasive grain distribution.

15 The terms and expressions that have been employed are used as terms of description and not of limitation, and there is no intention in the use of such terms and expressions of excluding any equivalents of the features shown and described or portions thereof, but it is recognized that various modifications are possible within the scope of the embodiments of the present invention. Thus, it should be understood that although the 20 present invention has been specifically disclosed by specific embodiments and optional features, modification and variation of the concepts herein disclosed may be resorted to by those of ordinary skill in the art, and that such modifications and variations are considered to be within the scope of embodiments of the present invention.

25 Embodiment 1 provides a surface-treating article, comprising: a circular substrate comprising a first major surface; an abrasive disposed on the first major surface; the abrasive having a first concentration at a first radius measured from the center of the substrate, the abrasive having a second concentration not equal to the first concentration at a second radius measured from the center of the substrate, wherein the first radius and the second radius are different lengths.

30 Embodiment 2 provides the he surface-treating article of embodiment 1, wherein the substrate comprises a web of open, lofty, nonwoven fibers.

Embodiment 3 provides the surface-treating article of embodiments 1-2, wherein the substrate comprises natural fiber, a polyamide, a polyester, rayon, polyethylene, polypropylene, a synthetic fiber, or a combination thereof.

5 Embodiment 4 provides the surface-treating article of embodiments 1-3, wherein the abrasive comprises abrasive grains.

Embodiment 5 provides the surface-treating article of embodiments 1-4, wherein the abrasive is a single abrasive formulation.

Embodiment 6 provides the surface-treating article of embodiments 1-5, wherein the substrate further comprises a second major surface.

10 Embodiment 7 provides the surface-treating article of embodiments 1-6, wherein the second major surface has a greater hardness than the substrate.

Embodiment 8 provides the surface-treating article of embodiments 1-7, wherein the first concentration and second concentration are greater than zero.

15 Embodiment 9 provides the surface-treating article of embodiments 1-8, wherein the length of the first radius is less than the length of the second radius.

Embodiment 10 provides the surface-treating article of embodiments 1-9, wherein the second radius extends from the edge of the substrate to the end of the first radius.

Embodiment 11 provides the surface-treating article of embodiments 1-10, wherein the first concentration is greater than the second concentration.

20 Embodiment 12 provides the surface-treating article of embodiments 1-11, wherein the second concentration is greater than the first concentration.

Embodiment 13 provides the surface-treating article of embodiments 1-12, wherein a concentration of the abrasive at the first radius to the second radius decreases from the first concentration in a gradient distribution to the second concentration.

25 Embodiment 14 provides the surface-treating article of embodiments 1-13, wherein a concentration of the abrasive at the first radius to the second radius increases from the first concentration in a gradient distribution to the second concentration.

Embodiment 15 provides the surface-treating article of embodiments 1-14, wherein the first concentration or the second concentration is a maximum abrasive concentration of 30 the first major surface of the surface-treating article.

Embodiment 16 provides the surface-treating article of embodiments 1-15, wherein the first concentration or the second concentration is a minimum abrasive concentration of the first major surface of the surface-treating article.

5 Embodiment 17 provides the surface-treating article of embodiments 1-16, wherein the first major surface comprises a central region substantially free of intentionally included abrasive.

Embodiment 18 provides the surface-treating article of embodiments 1-17, wherein the ratio of the first concentration to the second concentration ranges from about 10:1 to about 1:10.

10 Embodiment 19 provides the surface-treating article of embodiments 1-18, wherein the ratio of the first concentration to the second concentration ranges in a gradient distribution.

15 Embodiment 20 provides the surface-treating article of embodiments 1-19, wherein the ratio of the first concentration to the second concentration ranges from about 2:1 to about 1.1:1.

Embodiment 21 provides the surface-treating article of embodiments 1-20, wherein the ratio of the first concentration to the second concentration ranges from about 1.8:1 to about 1.4:1.

20 Embodiment 22 provides the surface-treating article of embodiments 1-21, wherein the ratio of the first concentration to the second concentration ranges from about 1:1.2 to about 1:2.2.

Embodiment 23 provides the surface-treating article of embodiments 1-22, wherein the ratio of the first concentration to the second concentration ranges from about 1:1.5 to about 1:2

25 Embodiment 24 provides the surface-treating article of embodiments 1-23, further comprising an abrasive having a third concentration at a third radius measured from the center of the substrate.

30 Embodiment 25 provides the surface-treating article of embodiments 1-24, wherein the first and third concentrations are both greater than the second concentration, and the length of the second radius is between the length of the first radius and the third radius.

Embodiment 26 provides the surface-treating article of embodiments 1-25, wherein the first and third concentrations are both less than the second concentration, and the length of the second radius is between the length of the first radius and the third radius.

Embodiment 27 provides a surface-treating article, comprising: a circular substrate comprising natural fiber, a polyamide, a polyester, rayon, polyethylene, polypropylene, or a combination thereof and having a first major surface; a single abrasive formulation disposed on the first major surface; the single abrasive formulation having a first concentration at a first radius, the single abrasive formulation having a second concentration at a second radius that is a different length than the first radius, wherein a ratio of the first concentration to the second concentration ranges from about 2:1 to about 1.1:1.

Embodiment 28 provides a surface-treating article, comprising: a circular substrate comprising natural fiber, a polyamide, a polyester, rayon, polyethylene, polypropylene, or a combination thereof and having a first major surface; a single abrasive formulation disposed on the first major surface; the single abrasive formulation having a first concentration at a first radius measured from the center of the substrate; the single abrasive formulation having a second concentration at a second radius measured from the center of the substrate that is a different length than the first radius, wherein a ratio of the first concentration to the second concentration is 1:1.2 to about 1:2.2.

Embodiment 29 provides a surface-treating article for controlling the amount of material removed from a work-surface, comprising: a circular substrate comprising a first major surface; an abrasive disposed on the first major surface; the abrasive having a first concentration at a first radius measured from the center of the substrate, the abrasive having a second concentration not equal to the first concentration at a second radius measured from the center of the substrate that is a different length than the first radius; wherein the amount of material removed from a work-surface by the surface-treating article is a function of the difference between the first concentration and the second concentration.

Embodiment 30 provides the surface-treating article of embodiment 29, wherein the pattern of material removed from the work-surface by the surface-treating article is a function of the difference between the first concentration and the second concentration.

Embodiment 31 provides the surface-treating article of embodiments 29-30, wherein the work-surface comprises wood, stone, metal, ceramic, glass, mineral, cured polymer, or combinations thereof.

What is claimed is:

1. A surface-treating article, comprising:
 - a circular substrate comprising a first major surface;
 - 5 an abrasive disposed on the first major surface;
 - the abrasive having a first concentration at a first radius measured from the center of the substrate,
 - the abrasive having a second concentration not equal to the first concentration at a second radius measured from the center of the substrate, wherein the first radius and the second radius are different lengths.
- 10 2. The surface-treating article of claim 1, wherein the substrate comprises a web open, lofty, nonwoven fibers.
- 15 3. The surface-treating article of claim 1, wherein the substrate comprises natural fiber, a polyamide, a polyester, rayon, polyethylene, polypropylene, a synthetic fiber, or a combination thereof.
- 20 4. The surface-treating article of claim 1, wherein the abrasive comprises abrasive grains.
5. The surface-treating article of claim 4, wherein the abrasive is a single abrasive formulation.
- 25 6. The surface-treating article of claim 1, wherein the substrate further comprises a second major surface.
7. The surface-treating article of claim 1, wherein the second major surface has a greater hardness than the substrate.
- 30 8. The surface-treating article of claim 1, wherein the first concentration and second concentration are greater than zero.

9. The surface-treating article of claim 1, wherein the length of the first radius is less than the length of the second radius.
- 5 10. The surface-treating article of claim 1, wherein the second radius extends from the edge of the substrate to the end of the first radius.
11. The surface-treating article of claim 1, wherein the first concentration is greater than the second concentration.
- 10 12. The surface-treating article of claim 1, wherein the second concentration is greater than the first concentration.
- 15 13. The surface-treating article of claim 1, wherein a concentration of the abrasive at the first radius to the second radius decreases from the first concentration in a gradient distribution to the second concentration.
- 20 14. The surface-treating article of claim 1, wherein a concentration of the abrasive at the first radius to the second radius increases from the first concentration in a gradient distribution to the second concentration.
- 25 15. The surface-treating article of claim 1, wherein the first concentration or the second concentration is a maximum abrasive concentration of the first major surface of the surface-treating article.
16. The surface-treating article of claim 1, wherein the first concentration or the second concentration is a minimum abrasive concentration of the first major surface of the surface-treating article.
- 30 17. The surface-treating article of claim 1, wherein the first major surface comprises a central region substantially free of intentionally included abrasive.

18. The surface-treating article of claim 1, wherein the ratio of the first concentration to the second concentration ranges from about 10:1 to about 1:10.
19. The surface-treating article of claim 17, wherein the ratio of the first concentration to the second concentration ranges in a gradient distribution.
20. The surface-treating article of claim 1, wherein the ratio of the first concentration to the second concentration ranges from about 2:1 to about 1.1:1.
- 10 21. The surface-treating article of claim 19, wherein the ratio of the first concentration to the second concentration ranges from about 1.8:1 to about 1.4:1.
- 15 22. The surface-treating article of claim 1, wherein the ratio of the first concentration to the second concentration ranges from about 1:1.2 to about 1:2.2.
23. The surface-treating article of claim 21, wherein the ratio of the first concentration to the second concentration ranges from about 1:1.5 to about 1:2
24. The surface-treating article of claim 1, further comprising an abrasive having a third concentration at a third radius measured from the center of the substrate.
- 20 25. The surface-treating article of claim 24, wherein the first and third concentrations are both greater than the second concentration, and the length of the second radius is between the length of the first radius and the third radius.
- 25 26. The surface-treating article of claim 24, wherein the first and third concentrations are both less than the second concentration, and the length of the second radius is between the length of the first radius and the third radius.
- 30 27. A surface-treating article, comprising:
a circular substrate comprising natural fiber, a polyamide, a polyester, rayon, polyethylene, polypropylene, or a combination thereof and having a first major surface;

a single abrasive formulation disposed on the first major surface;
the single abrasive formulation having a first concentration at a first radius,
the single abrasive formulation having a second concentration at a second
radius that is a different length than the first radius, wherein a ratio of the first
5 concentration to the second concentration ranges from about 2:1 to about 1.1:1.

28. A surface-treating article, comprising:

a circular substrate comprising natural fiber, a polyamide, a polyester, rayon,
polyethylene, polypropylene, or a combination thereof and having a first major surface;

10 a single abrasive formulation disposed on the first major surface;

the single abrasive formulation having a first concentration at a first radius
measured from the center of the substrate;

the single abrasive formulation having a second concentration at a second
radius measured from the center of the substrate that is a different length than the first
15 radius, wherein a ratio of the first concentration to the second concentration is 1:1.2 to
about 1:2.2.

29. A surface-treating article for controlling the amount of material removed from a
work-surface, comprising:

20 a circular substrate comprising a first major surface;

an abrasive disposed on the first major surface;

the abrasive having a first concentration at a first radius measured from the
center of the substrate,

the abrasive having a second concentration not equal to the first
25 concentration at a second radius measured from the center of the substrate that is a
different length than the first radius;

wherein the amount of material removed from a work-surface by the surface-
treating article is a function of the difference between the first concentration and the
second concentration.

30. The surface-treating article of claim 29, wherein the pattern of material removed from the work-surface by the surface-treating article is a function of the difference between the first concentration and the second concentration.

5 31. The surface-treating article of claim 29, wherein the work-surface comprises wood, stone, metal, ceramic, glass, mineral, cured polymer, or combinations thereof.

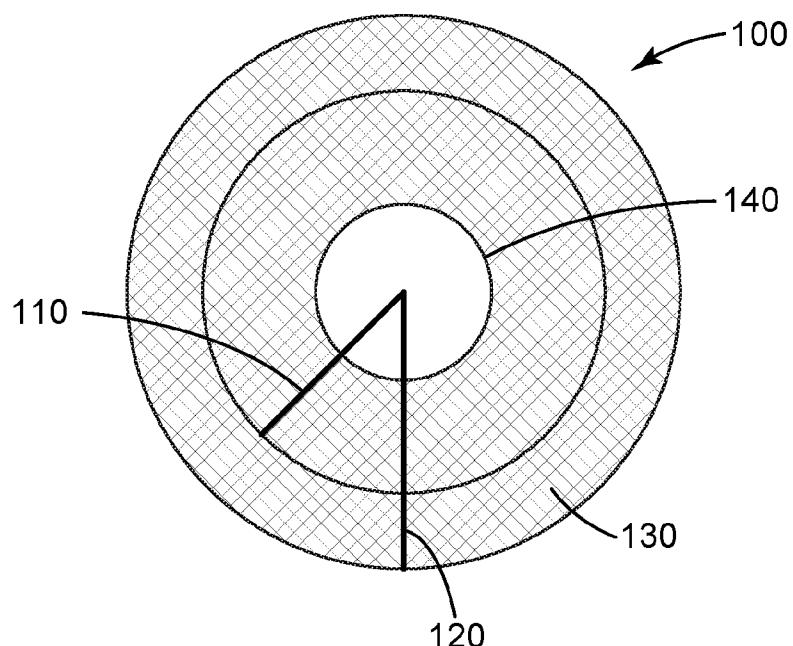


Fig. 1a

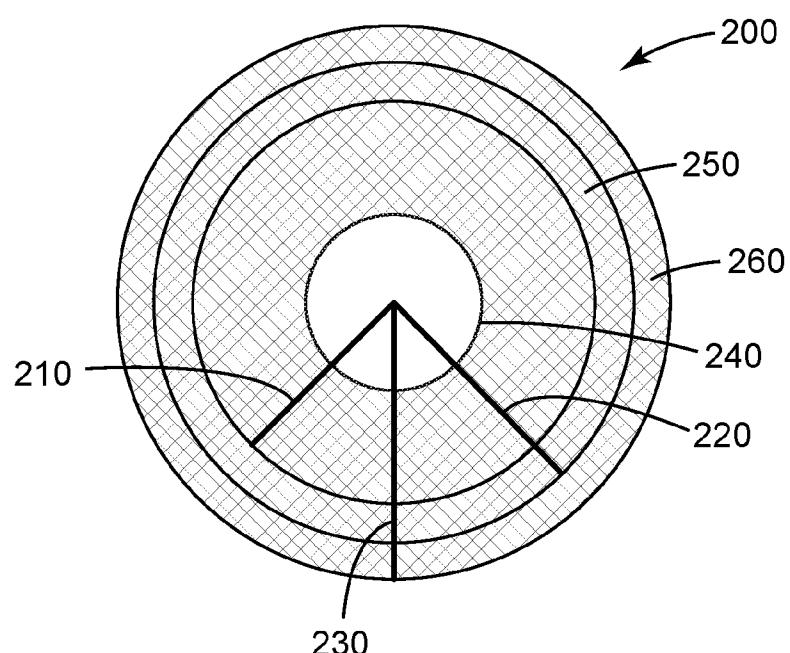


Fig. 1b

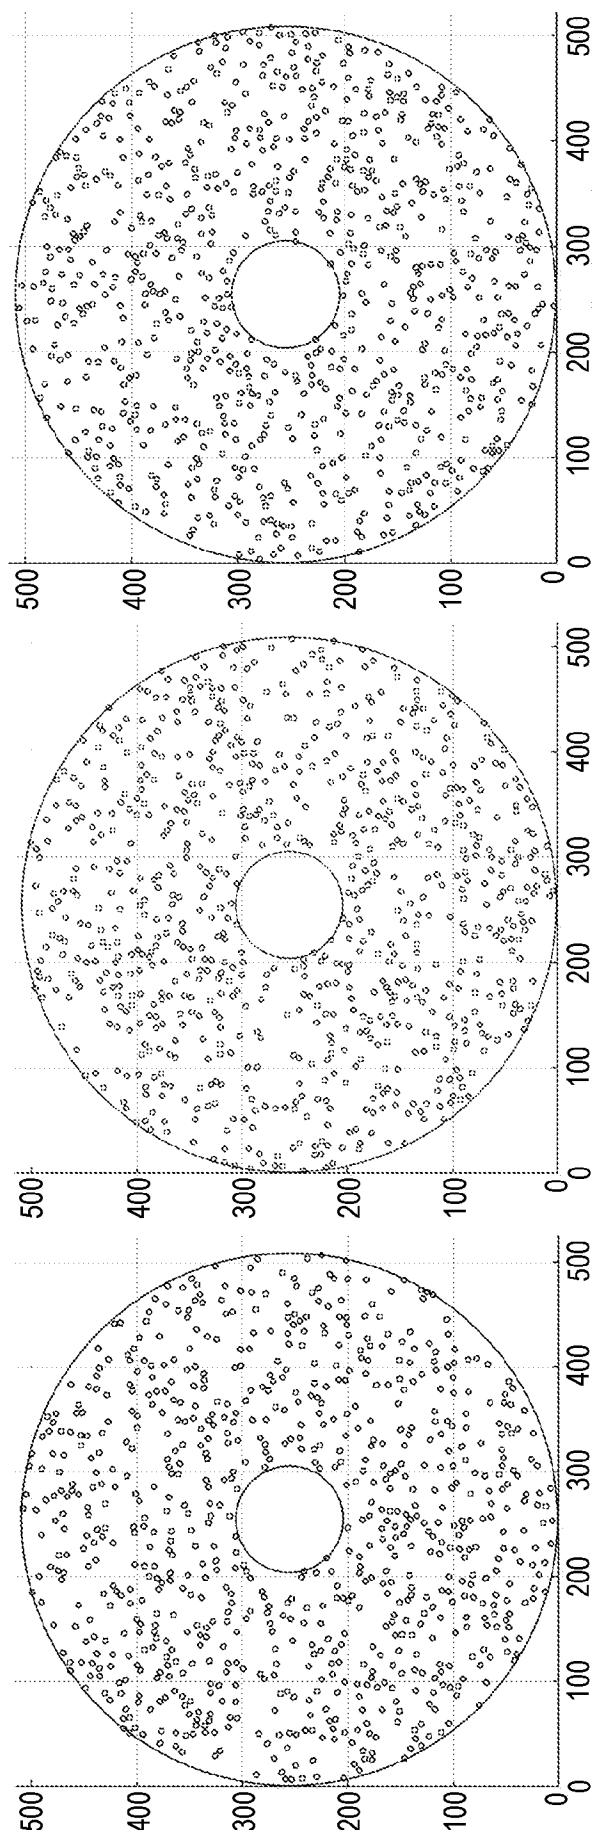


Fig. 2a

Fig. 2b

Fig. 2c

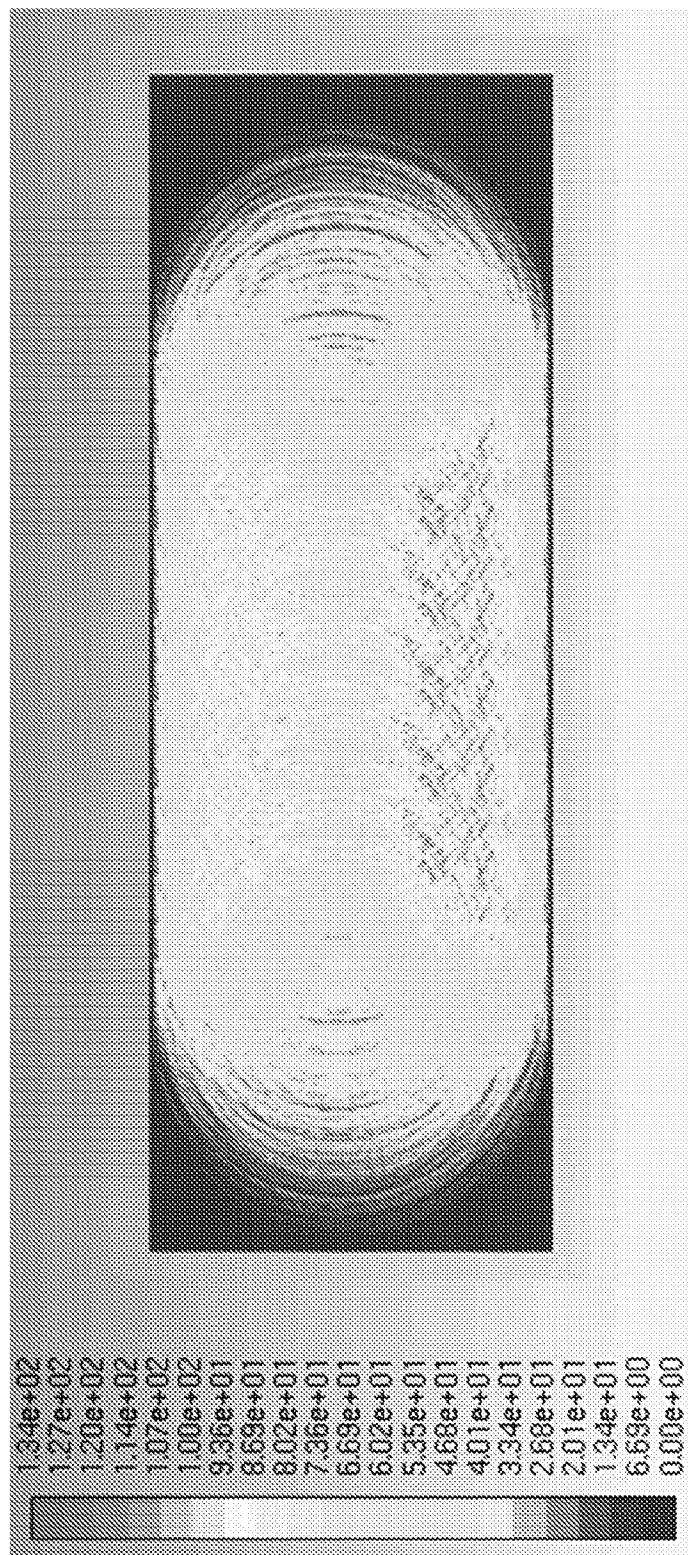


Fig. 2d

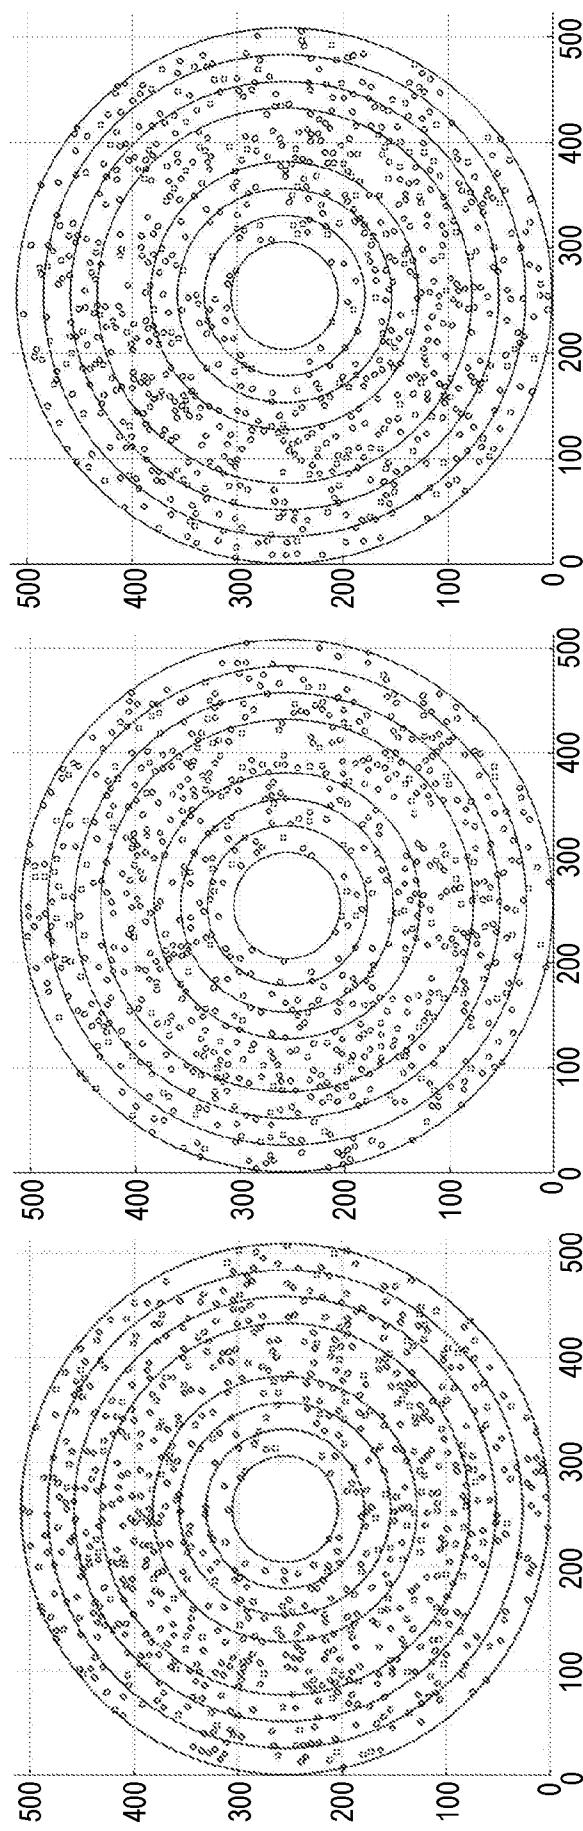


Fig. 3a
Fig. 3b
Fig. 3c

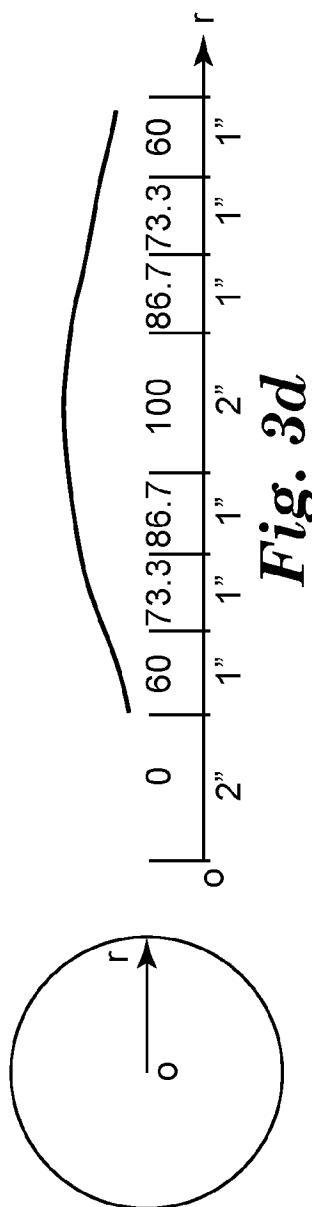


Fig. 3d

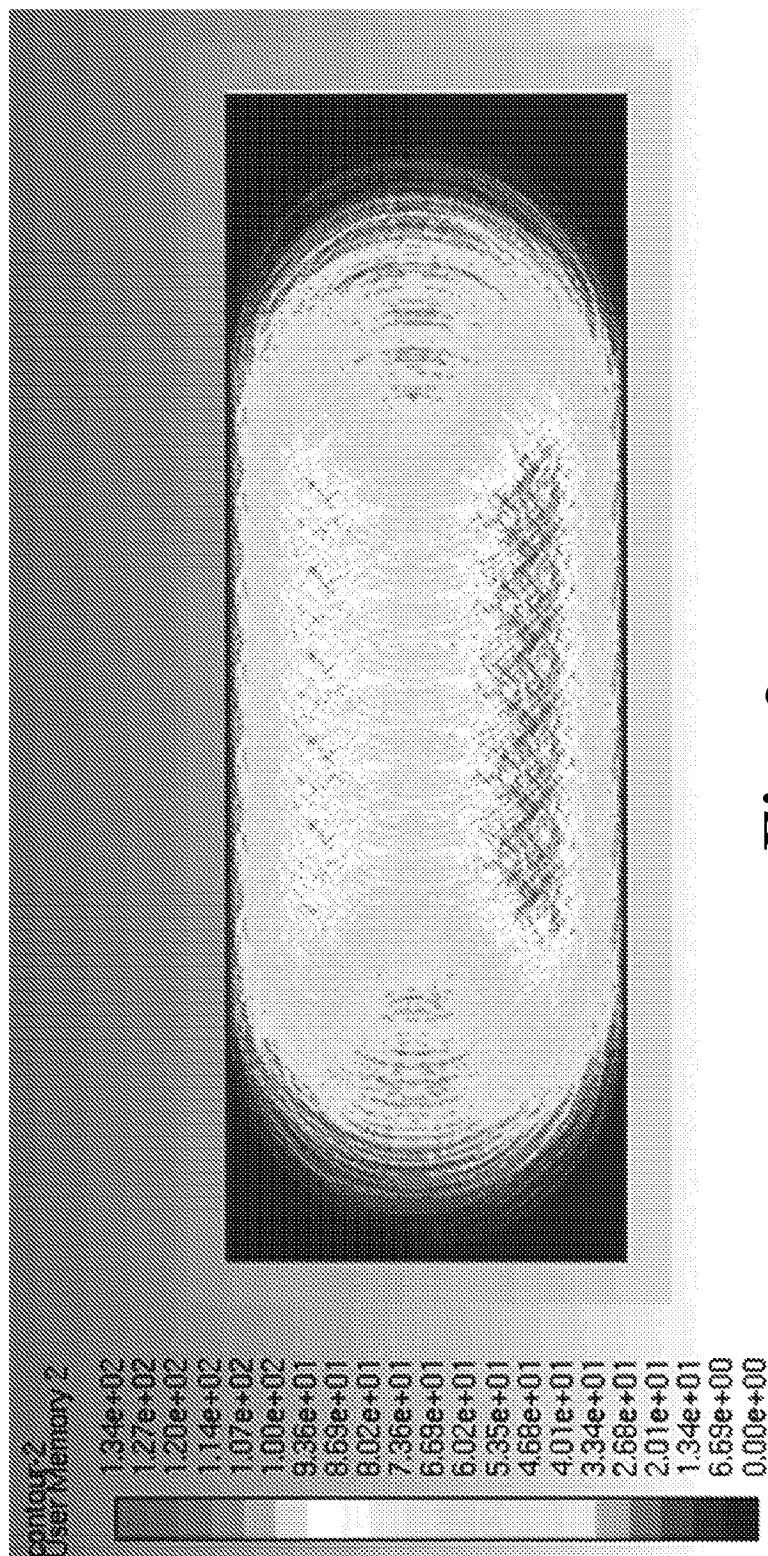


Fig. 3e

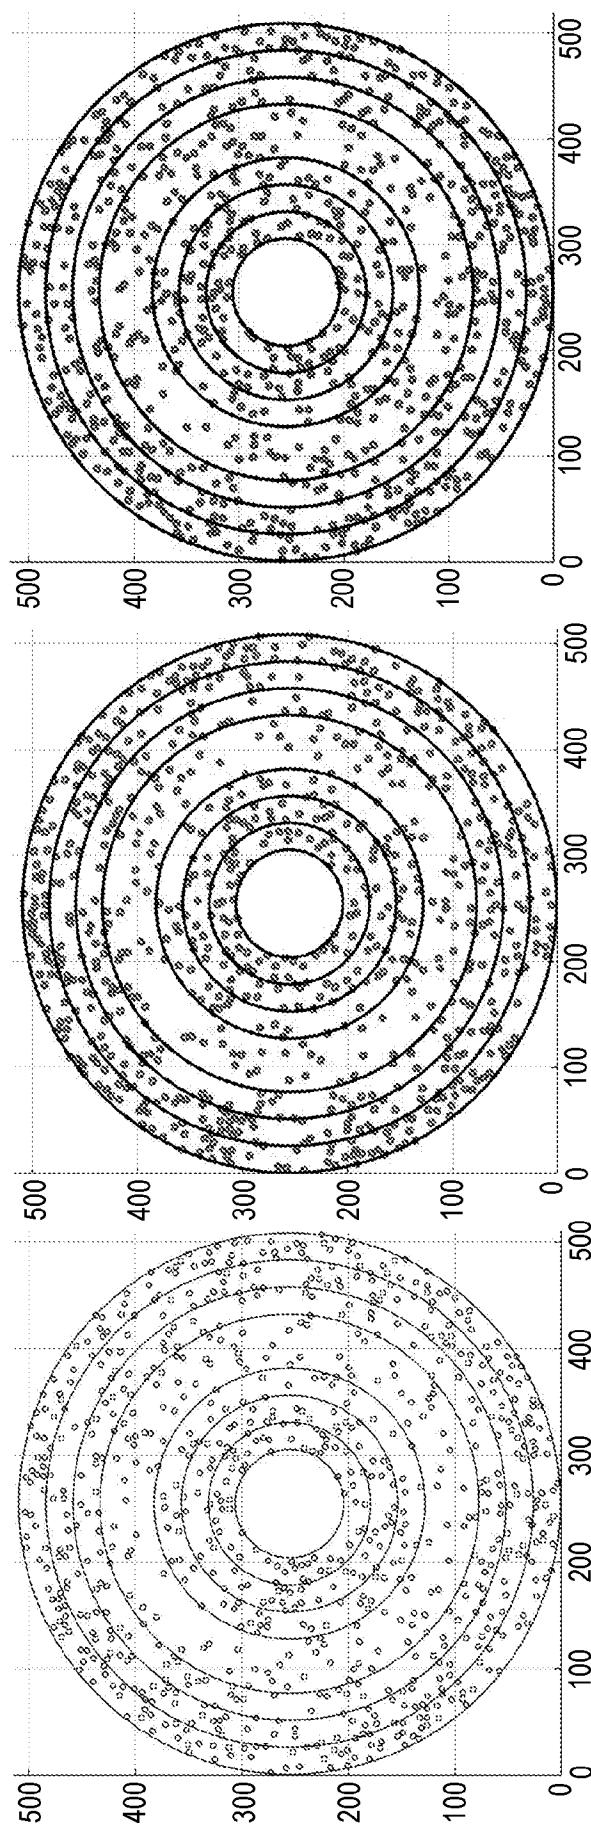


Fig. 4a
Fig. 4b
Fig. 4c

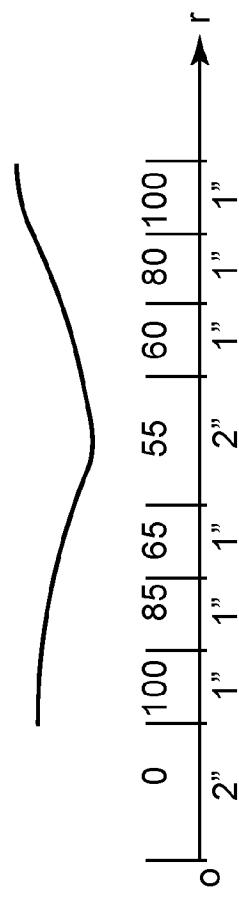


Fig. 4d

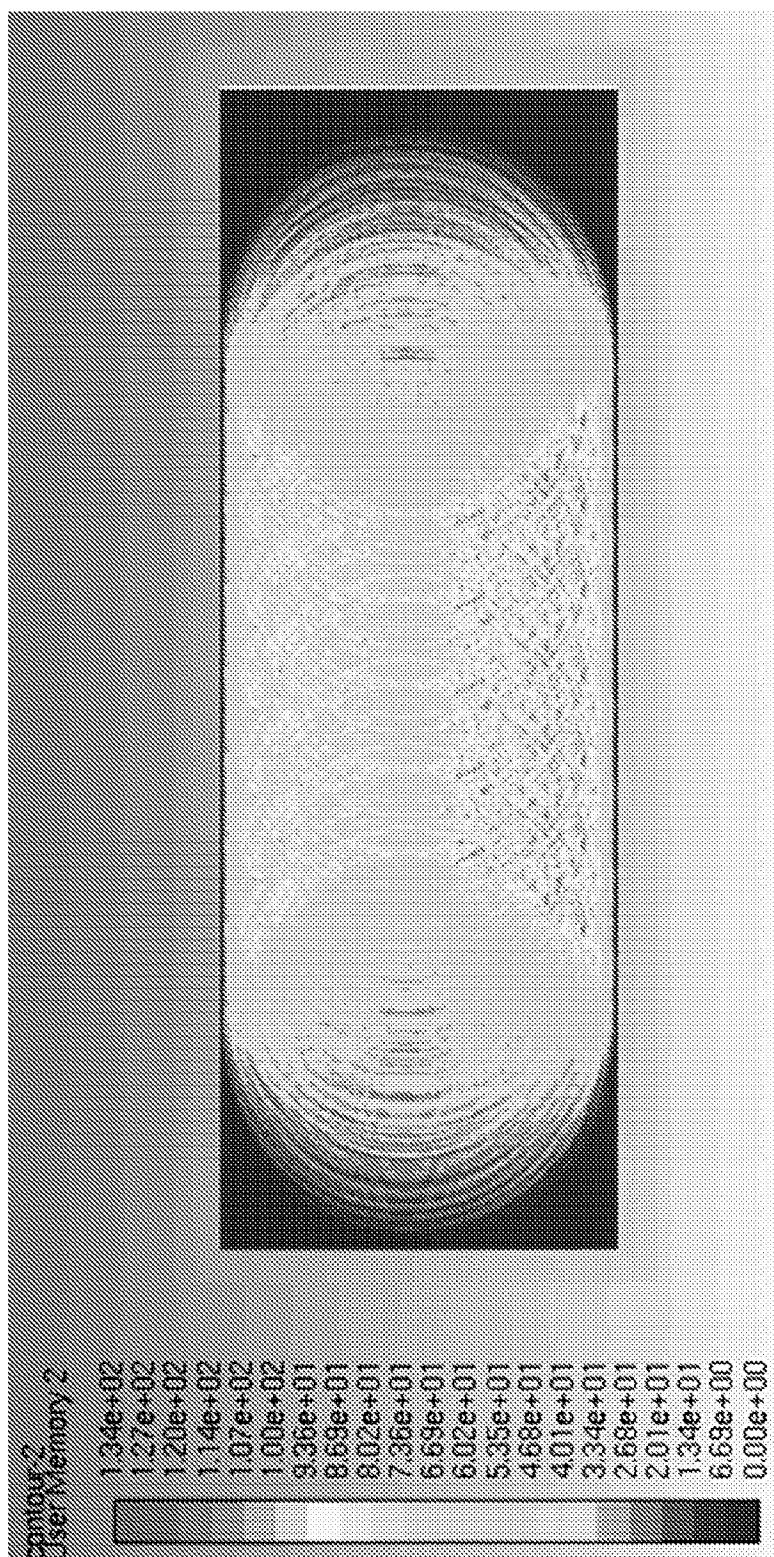


Fig. 4e

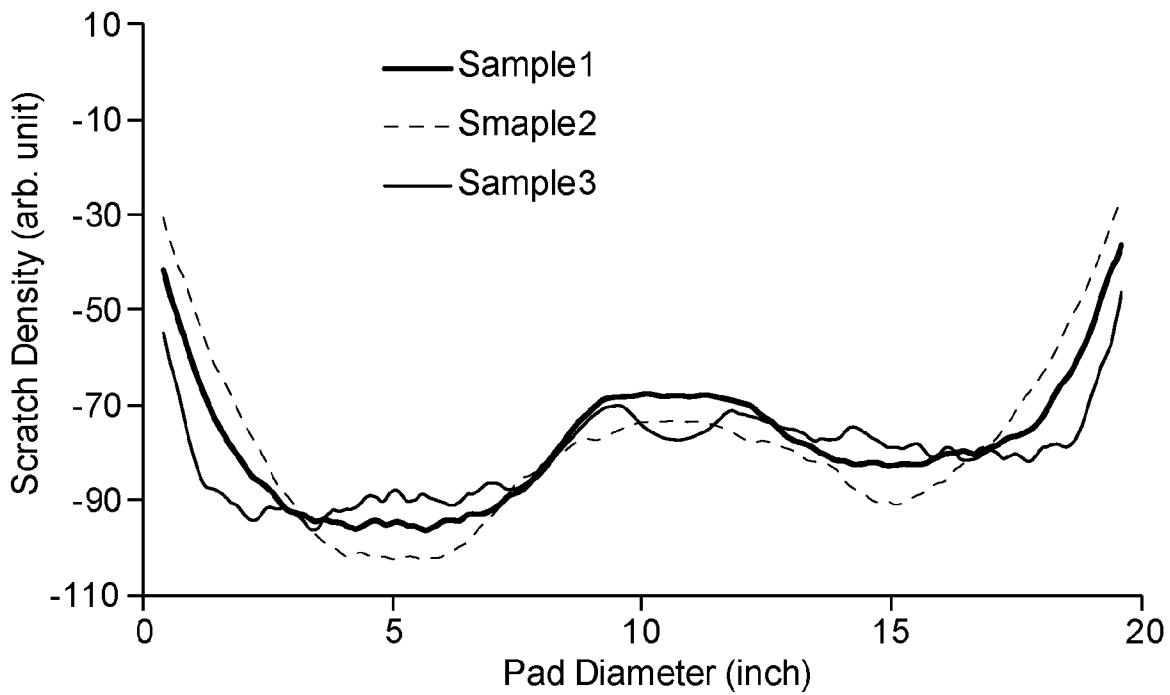


Fig. 5

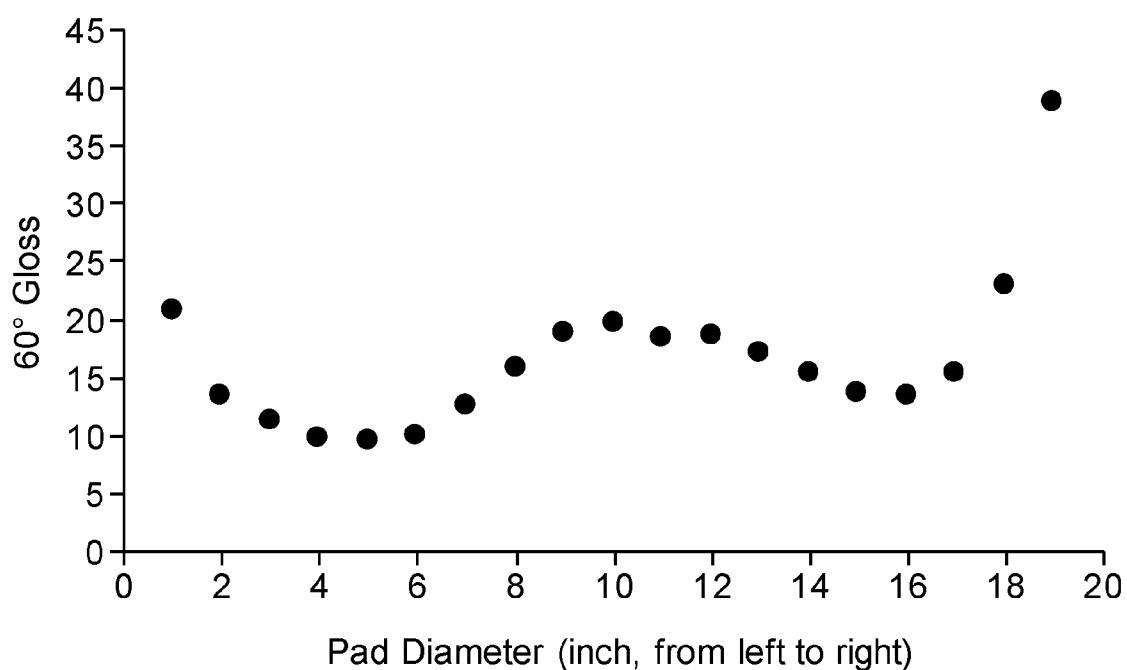


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2018/055037

A. CLASSIFICATION OF SUBJECT MATTER
INV. B24D11/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B24D B24B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 702 714 A1 (HTC SWEDEN AB [SE]) 20 September 2006 (2006-09-20) paragraphs [0023], [0024], [0036], [0055], [0058], [0061]; figures 2a, 2b -----	1-11, 15-17, 29-31
X	US 2005/095959 A1 (SUNG CHIEN-MIN [TW]) 5 May 2005 (2005-05-05) paragraph [0087]; figures 7, 8 -----	1,4-24, 29-31
X	EP 1 595 645 A1 (MIYANAGA KK [JP]) 16 November 2005 (2005-11-16) abstract; figures 4, 6, 8, 11 ----- -/-	1,4-12, 15-17, 24-26, 29-31

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
16 October 2018	26/10/2018
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Endres, Mirja

INTERNATIONAL SEARCH REPORTInternational application No
PCT/IB2018/055037

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2012/157006 A1 (FIORE NICOLA [IT]) 22 November 2012 (2012-11-22) page 16, line 14 - page 17, line 2; figures 17, 18 -----	1-29
1		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2018/055037

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP 1702714	A1 20-09-2006	AT	361815 T	15-06-2007
		AT	516109 T	15-07-2011
		CN	101175602 A	07-05-2008
		CN	101219526 A	16-07-2008
		CN	101219527 A	16-07-2008
		CY	1108028 T1	04-09-2013
		CY	1111862 T1	04-11-2015
		DE	202005021478 U1	17-04-2008
		DE	602005001110 T2	10-01-2008
		DK	1702714 T3	10-09-2007
		DK	1787751 T3	31-10-2011
		EP	1702714 A1	20-09-2006
		EP	1787751 A2	23-05-2007
		ES	2286730 T3	01-12-2007
		ES	2370913 T3	23-12-2011
		PT	1702714 E	26-07-2007
		PT	1787751 E	18-10-2011
		SI	1702714 T1	31-10-2007
		TW	I385052 B	11-02-2013
		UA	88099 C2	10-09-2009
		UA	88803 C2	25-11-2009
		UA	94911 C2	25-06-2011
		ZA	200708741 B	25-03-2009
		ZA	200805901 B	28-04-2010
		ZA	200805902 B	28-04-2010
<hr/>				
US 2005095959	A1 05-05-2005	CN	101068654 A	07-11-2007
		JP	2008515238 A	08-05-2008
		KR	20070063569 A	19-06-2007
		TW	I290506 B	01-12-2007
		US	2005095959 A1	05-05-2005
		US	2007254566 A1	01-11-2007
		WO	2006039457 A1	13-04-2006
<hr/>				
EP 1595645	A1 16-11-2005	AT	441502 T	15-09-2009
		AU	2003289412 A1	14-07-2004
		AU	2007216741 A1	04-10-2007
		AU	2009200815 A1	19-03-2009
		BR	0316766 A	01-11-2005
		CA	2509910 A1	08-07-2004
		CA	2632701 A1	08-07-2004
		CA	2632775 A1	08-07-2004
		EP	1595645 A1	16-11-2005
		EP	1941972 A1	09-07-2008
		JP	4335872 B2	30-09-2009
		JP	2009006478 A	15-01-2009
		JP	W02004056533 A1	20-04-2006
		KR	20050085667 A	29-08-2005
		TW	I238753 B	01-09-2005
		US	2006160481 A1	20-07-2006
		WO	2004056533 A1	08-07-2004
<hr/>				
WO 2012157006	A1 22-11-2012	BR	112013029474 A2	17-01-2017
		CA	2836116 A1	22-11-2012
		CN	103717353 A	09-04-2014
		EP	2709799 A1	26-03-2014
		ES	2546673 T3	25-09-2015
		HK	1194032 A1	19-02-2016

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2018/055037

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 5844455 B2	20-01-2016
		JP 2014513635 A	05-06-2014
		MX 336863 B	04-02-2016
		US 2014154961 A1	05-06-2014
		WO 2012157006 A1	22-11-2012