



(51) International Patent Classification:  
*G06F 15/16* (2006.01)

(21) International Application Number:  
PCT/US2013/069842

(22) International Filing Date:  
13 November 2013 (13.11.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
13/686,040 27 November 2012 (27.11.2012) US

(71) Applicant: **FACEBOOK, INC.** [US/US]; 1601 Willow Road, Menlo Park, CA 94025 (US).

(72) Inventors: **DEETER, Ken, Taro**; c/o of Facebook, Inc., 1601 Willow Road, Menlo Park, CA 94025 (US). **KAO, Wayne**; c/o of Facebook, Inc., 1601 Willow Road, Menlo Park, CA 94025 (US).

(74) Agents: **HULSE, Robert, A.** et al.; Fenwick & West LLP, Silicon Valley Center, 801 California Street, Mountain View, CA 94041 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TRANSMISSION OF NOTIFICATIONS TO MULTIPLE DEVICES ASSOCIATED WITH A USER

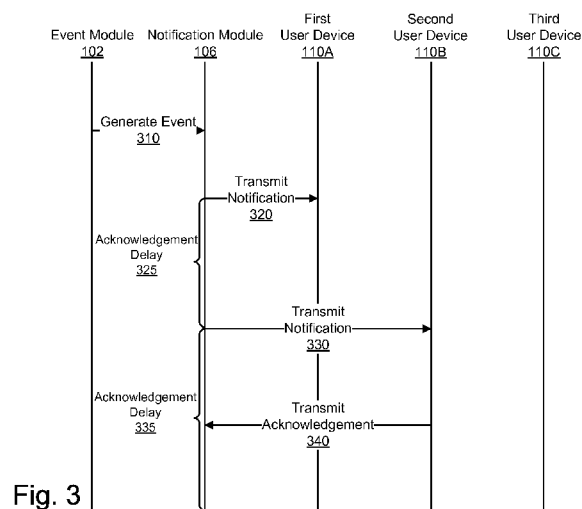


Fig. 3

(57) Abstract: A notification system provides notifications to a user associated with multiple user devices. The notification system selects a user device to receive a notification based on user behavior, such as user interactions with the notification system via the user device or acknowledgments of notifications received from user devices. The notification is sent to the selected user device, and the notification system waits for an acknowledgment from the selected notification system for an acknowledgement delay period. If no acknowledgment is received within the acknowledgment delay period, an additional user device is selected and the notification is sent to the additional user device.

## **TRANSMISSION OF NOTIFICATIONS TO MULTIPLE DEVICES ASSOCIATED WITH A USER**

### **BACKGROUND**

[0001] This invention relates generally to event notifications in online systems, and more particularly to providing notifications to multiple user devices associated with an online system user.

[0002] Many online systems include a notification system to notify users of the online system when events occur. For example, when a user of a social networking system receives a message or is identified in a post, a notification system of the social networking system transmits a notification of the event to the user. Notifications may be sent to multiple devices associated with a user. Hence, when a user accesses the online system using a single user device, the single user device receives the notification. But when users access the online system using multiple user devices, all of the user devices are typically notified of a generated notification at approximately the same time. This results in notifications being sent to user devices that may not be used by the user. Additionally, the user must acknowledge or remove the notification from each user device individually, causing the user to repetitively view notifications for the same event on multiple user devices.

### **SUMMARY**

[0003] A notifications system notifies a user of an event by transmitting notifications of the event to different user devices with a time delay separating transmission of the notification to different user devices. The notification system identifies a plurality of user devices associated with the user that are eligible for receiving notifications. For example, a user device is eligible to receive a notification if a notification has not previously been transmitted to the user device within a threshold time. A user device is selected from the plurality of user devices eligible to receive the notification. For example, the notification system selects a user device based on recent user activity with various user devices and prior responses by the user to notifications transmitted to various user devices. A notification is provided to the selected user device, and the notification system waits an acknowledgement delay period to receive an acknowledgement of the notification from the selected user device. If the user device does not provide an acknowledgment by the expiration of the acknowledgement delay period, the notification system selects an additional user de-

vice from the plurality of user devices eligible for receiving notifications and waits an additional acknowledgement delay period to receive an acknowledgement of the notification from the selected additional user device. In some embodiments, the acknowledgement delay period may vary depending on the device to which the notification is transmitted.

**[0004]** Embodiments according to the invention are in particular disclosed in the attached claims directed to a computer-implemented method.

**[0005]** In an embodiment a computer-implemented method comprises:  
generating a notification designating a user;

identifying a plurality of user devices eligible to receive the notification, each user device associated with the user and configured to provide an acknowledgment responsive to the user interacting with the notification on the user device;

selecting a user device from the plurality of user devices;

transmitting the notification to the selected user device;

selecting an additional user device from the plurality of user devices if an acknowledgement is not received from the selected user device within an acknowledgment delay period;

removing the selected user device from the plurality of user devices eligible to receive the notification; and

transmitting the notification to the selected additional user device.

**[0006]** In particular selecting the additional user device comprises:

determining an additional acknowledgment delay period associated with the additional user device.

**[0007]** In a further embodiment the method further comprises:

selecting another user device from the plurality of user devices if an acknowledgement is not received from the selected additional user device within the additional acknowledgment delay period.

**[0008]** The acknowledgment delay period is preferably based on user activity associated with the selected user device.

**[0009]** The selected user device is in particular a user device from which an interaction was most recently received and/or a user device selected based on a profile describing a frequency with which user interactions are received different user devices in the plurality of user devices, wherein preferably selected user device is a user device having a highest

frequency with which user interactions are received and/or wherein preferably the frequency with which user interactions are received is relative to a time of day.

In an embodiment the user device is configured to provide an acknowledgment of the notification responsive to the user interacting with the notification; and the method further comprises determining whether the acknowledgment is received from the user device within an acknowledgement delay period; and responsive to determining acknowledgment was not received from the user device within the acknowledgment delay period, transmitting the notification to an additional user device from the plurality of user devices associated with the user.

**[0010]** In a further embodiment which can be claimed independently or in combination with any other embodiment a computer-implemented method comprises:

generating a notification identifying a user;

selecting a user device from a plurality of user devices associated with the user;

transmitting the notification to the user device, the user device configured to provide an acknowledgment of the notification responsive to the user interacting with the notification;

determining whether the acknowledgment is received from the user device within an acknowledgement delay period; and

responsive to determining acknowledgment was not received from the user device within the acknowledgment delay period, transmitting the notification to an additional user device from the plurality of user devices associated with the user.

**[0011]** In a further embodiment the computer-implemented method further comprises:

responsive to determining acknowledgment was not received from the additional user device within the acknowledgment delay period, transmitting the notification to an alternative user device from the plurality of user devices associated with the user

and/or

responsive to receiving an acknowledgment of the notification from the alternative user device, removing the notification transmitted to the user device and transmitted to the additional user device.

The acknowledgment delay period is preferably based on user activity associated with the user device.

**BRIEF DESCRIPTION OF THE DRAWINGS**

- [0012] FIG. 1 is a block diagram of a system environment including a notification system according to one embodiment.
- [0013] FIG. 2 is a flowchart of a method for sending notifications to a user associated with multiple user devices according to one embodiment.
- [0014] FIG. 3 is an interaction diagram of a method for sending notifications to user devices associated with a user according to one embodiment.
- [0015] The figures depict various embodiments of the present invention for purposes of illustration only. One skilled in the art will readily recognize from the following discussion that alternative embodiments of the structures and methods illustrated herein may be employed without departing from the principles of the invention described herein.

**DETAILED DESCRIPTION**System Architecture

[0016] FIG. 1 is a block diagram of one embodiment of an environment including a notification system 100. The environment includes the notification system 100, a plurality of user devices 110, and a network 120. The notification system 100 communicates with the plurality of user devices 110 through a network 120.

[0017] A user communicates with the notification system 100 using one or more of the plurality of user devices 110. Each user device 110 is associated with a particular user of the notification system 100. A user device 110 is any device capable of processing data as well as transmitting and/or receiving data via the network 120. Examples of a user device 110 include a mobile device, a tablet computer, a laptop computer, a desktop computer, a set-top box, or any other computing device.

[0018] A user device 110 receives a notification of an event from the notification system 110 via the network 120 and presents the received notification to a user of the user device 110. Different types of user devices 110 may present the notification to a user in different formats. For example, a mobile device turns on a message indicator light or displays a notification icon on a home screen of the device, while a desktop computer displays a pop-up window, plays a sound, or changes a description of an application in a task bar display. Hence, user devices 110 present a notification to a user in a manner configured to draw the user's attention to the notification.

**[0019]** For many user devices 110, when a notification is received the notification is presented to the user until it is viewed or cleared by the user. Hence, a user device 110 continues to draw the user's attention to a notification until the user accesses the user device to acknowledge the notification. When the user views the notification on the user device 110, an acknowledgment is communicated from the user device 110 to the notification system 100 via the network 120. The acknowledgment may be specific to the notification, or may be included in a communication to the notification system 100, such as an interaction of the user with the notification to request further information from the notification system 100. For example, a notification from a notification system 100 incorporated into a social networking system notifies a user that the user is tagged in a photo; the user interacting with the notification to access the photo may be an acknowledgement of the notification by the user. Alternatively, the user device 110 provides an acknowledgment to the notification system 100 when the user accesses the notification.

**[0020]** To simplify user access to notifications, the notification system 100 communicates notifications to user devices 110 in series, while conventional notification techniques communicate notifications to user devices 110 in parallel. When the notification system 100 receives an acknowledgement of a notification from a user device 110 associated with the user, the notification system 100 stops transmitting notifications to additional user devices 110 associated with the user. Thus, when a user acknowledges a notification from one user device 110, the notification is not communicated to additional user devices 110 associated with the user.

**[0021]** The notification system 100 selects a user device 110 associated with a user from which the user is most likely to respond to the notification and initially communicates the notification to the selected user device 110. After the selected user device receives the notification, the user is provided a period of time, also referred to as an acknowledgement delay period, to acknowledge the notification. After the acknowledgment delay period elapses, the notification system 110 communicates the notification to an additional user device 110 associated with the user.

**[0022]** In the embodiment shown by FIG. 1, the notification system 100 includes an event module 102, a user device tracker 104, and a notification module 106. The event module 102 identifies events for notifying to a user and communicates the identified events to the notification module 106. In one embodiment, the event module 102 generates events. Alternatively, the event module 102 receives events from another component of

the notification system 110 or from an external system. For example, if the notification system 100 is part of a social networking system, the event module 102 generates or receives an event when a new post is created, when a user is tagged in a photo, or when other actions are taken in the social networking system. The event module 102 also determines whether to notify a user of a specific event. System settings and user settings determine whether a user is notified of an event or of a particular type of event. The event module 102 associates users with an event and provides the event and associated users to the notification module 106.

**[0023]** The user device tracker 104 maintains records of the user devices 110 eligible to receive notifications for each user and data describing user activity on user devices 110 associated with a user. User devices eligible to receive a notification a user are user devices 110 that are associated with the user by the notification system 100 and that the user identifies as devices for receiving a notification. Additional information may be used to determine if a user device 110 is eligible to receive a notification; for example, if a user device 110 received a notification within a threshold amount of time and no acknowledgement of the notification is received, the user device 110 may be ineligible to receive notifications. In one embodiment, the user device 110 is identified as eligible or ineligible for notifications based on whether the user is logged into an account associated with the notification system 100 from the user device 110.

**[0024]** As a user interacts with the notification system 100 or with a system associated with the notification system 100, the user interactions are recorded by the device tracker 104. For each interaction by a user, the user device tracker 104 identifies the user device 110 from which the interaction was received and may also associate a timestamp with the received interaction. The user device activity indicates which user devices 110 have been used access the notification system 100 and to acknowledge notifications.

**[0025]** The notification module 106 selects a user device 110 associated with a user from the user devices associated with the user and eligible to receive notifications based on user activity stored by the user device tracker 104. The selected user device may be determined in several ways based on the user device activity. In one embodiment, the user device 110 associated with the activity having the most recent timestamp is selected. In one embodiment, the user device 110 associated with the activity having the most recent timestamp within a threshold idle time of a current time (e.g., within the past five minutes) is selected. When no user device is used within the threshold idle time, the notification

module 106 may predict which of the user devices 110 is most likely to be viewed based on historical interactions associated with different user devices 110. The notification module 106 transmits the notification to the selected user device.

**[0026]** In one embodiment, the notification module 106 generates a profile of a user's prior interactions associated with different user devices 110. The profile may specify an order in which a user is likely to access different user devices 110. For example, the notification module 106 generates the profile using user interactions stored by the user device tracker 104 to determine a user device 110 most likely to be accessed first if user is not actively using a user device 110. For example, when available to receive notifications on three devices, after an idle time threshold, a user may be likely to interact with a user device 110 50% of the time, with another user device 110 30% of the time, and with an additional user device 110 20% of the time. Thus, the frequency of a user's interaction with different user devices 110 after the idle time threshold is used to predict the user device 110 most likely to be accessed by the user. In some embodiments, the user's frequency of interaction with user devices 110 may be determined with respect to various parameters. Examples of parameters include time of day, time differences between interactions received from various user devices 110, ordering in which interactions are received from various user devices 110. For example, many users have common schedules throughout a day and interact with different user devices 110 during different portions of their schedule. As an example, an office employee may acknowledge notifications using a desktop computer during work hours, using a mobile device during lunch, and using a tablet computer outside of work hours. Associating the user device activity 110 with times of day allows the profile to more effectively identify the user device 110 from which the user is most likely to interact with the notification.

#### Notification Transmission

**[0027]** FIG. 2 is a flowchart of one embodiment of a method for sending notifications to a user associated with multiple user devices 110. The notification module 106 of the notification system 100 receives 200 an event from the event module 102. The received event identifies a user to receive a notification of the event. In another embodiment, the notification module 106 determines whether to notify a user associated with the event of the event based on preferences associated with the user and an event type associated with the event.



**[0028]** User devices 110 associated with the user and eligible to receive notifications are identified 210. The identified devices are the user devices 110 specified by the user as available to receive notifications. For example, the user devices 110 are associated with an account for the user maintained by the notification system 100. A user device 110 is selected 220 from the identified devices associated with the user and eligible to receive a notification. The user device 110 is selected 220 based on user interactions associated with various user devices 110, as further described above in conjunction with FIG. 1. In one embodiment, if the user has communicated with the notification system 100 within an idle time threshold, the user device 110 from which a most recent communication from the user was received is selected 220. If the user has not communicated with the notification system 100 within the idle time threshold, a user device 110 from which the user is most likely to acknowledge the notification is selected from the user profile is selected using one or more parameters such as the time of day. In one embodiment, more than one user device 110 is selected for notification. After selecting 220 the user device 110, the notification is transmitted 230 to the selected user device.

**[0029]** After transmitting 230 the notification to the selected user device 110, the notification system 100 waits to receive an acknowledgment for an acknowledgement delay period and determines 240 whether an acknowledgment is received within an acknowledgment delay period. The acknowledgment may be received from any user device 110 to which the notification was previously transmitted 230. If the notification system 100 determines 240 an acknowledgment was received from a user device previously receiving the notification within the acknowledgment delay period, the notification process ends 250. If the notification system 100 determine 240 an acknowledgment was not received within the acknowledgment delay period, the selected device is removed 260 from the user devices 110 eligible to receive the notification and an additional user device 110 is selected 220 to receive the notification and the notification is transmitted 230 to the additional user device.

**[0030]** In one embodiment, an acknowledgement delay period is determined for different notifications. Various factors may modify the acknowledgment delay period for different notifications. For example, the acknowledgement delay period may increase as the number of user devices 110 to which notifications are transmitted 230 increases. As another example, the acknowledgment delay period is determined based on characteristics of different user devices 110. User interactions received by the notification system 100 from different user devices 110 are stored and used to determine an average time to receive ac-

knowledgments to notifications from different user devices 110. The acknowledgment delay period for a user device 110 may be selected as the average time to respond to a notification presented by the user device 110 or as a time corresponding to one or more standard deviations from the average response time.

[0031] Alternatively, the acknowledgment delay period associated with a user device 110 is selected to encompass a percentile of acknowledgments received from a user device 110. For example, an acknowledgement delay period is set so that 80% of the acknowledgements from the user device 110 were received within the acknowledgement delay period. Alternatively, the user acknowledgment times may be analyzed to determine a drop-off point in user response times. For example, the user may acknowledge within 3 minutes of a user device 110 receiving a notification 90% of the time, while the acknowledgement time becomes variable after 3 minutes, making 3 minutes is a drop-off point in the user acknowledgment time for the user device 110.

[0032] FIG. 3 is interaction diagram of one embodiment of a method for transmitting notifications to user devices associated with a user. The example of FIG. 3 depicts the event module 102, the notification module 106, and three user devices 110A, 110B, 110C associated with a user of the notifications system 110. The event module 102 generates 310 an event and provides the event to the notification module 106. The notification module 106 identifies the user devices 110A, 110B, 110C associated with the user and selects one of the user devices 110A, 110B, 110C to receive the notification. In the example of FIG. 3, the notification module 106 selects the first user device 110A and transmits 320 the notification to the first user device 110A.

[0033] After transmitting 320 the notification, the notification module waits for an acknowledgment delay period 325 to receive an acknowledgement of the notification from the first user device 110A. In FIG. 3, the first user device 110A does not transmit an acknowledgement of the notification within the acknowledgement delay period 325. Accordingly, the notification module 106 selects the second user device 110B and transmits 330 the notification to the second user device 110B. After transmitting the notification to the second user device 110B, the notification module 106 waits for a second acknowledgement delay period 335. In the example of FIG. 3, the second acknowledgement delay period 335 has a different length than the acknowledgement delay period 325.

[0034] The second user device 110B transmits 340 an acknowledgment to the notification module 106 within the second acknowledgment delay period 335. The acknowledge-

ment indicates the user received the notification using the second user device 110B. In FIG. 3, although the third user device 110C is associated with the user and eligible to receive a notification, it is not notified because the notification module 106 receives the acknowledgement from the second user device 110B within the second acknowledgement delay period 335. Hence, the notification is not transmitted to the third user device 110C, preventing the user from viewing and clearing the notification from the third user device 110C. In embodiments where notifications may be cleared, a message is also sent to the first user device to clear the notification for the user. In this way, once the user has interacted with the notification at one user device (here, the second user device), the notification is not transmitted to additional user devices and notifications previously transmitted to other user device 110 are removed.

### Summary

**[0035]** The foregoing description of the embodiments of the invention has been presented for the purpose of illustration; it is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Persons skilled in the relevant art can appreciate that many modifications and variations are possible in light of the above disclosure.

**[0036]** Some portions of this description describe the embodiments of the invention in terms of algorithms and symbolic representations of operations on information. These algorithmic descriptions and representations are commonly used by those skilled in the data processing arts to convey the substance of their work effectively to others skilled in the art. These operations, while described functionally, computationally, or logically, are understood to be implemented by computer programs or equivalent electrical circuits, microcode, or the like. Furthermore, it has also proven convenient at times, to refer to these arrangements of operations as modules, without loss of generality. The described operations and their associated modules may be embodied in software, firmware, hardware, or any combinations thereof.

**[0037]** Any of the steps, operations, or processes described herein may be performed or implemented with one or more hardware or software modules, alone or in combination with other devices. In one embodiment, a software module is implemented with a computer program product comprising a computer-readable medium containing computer program code, which can be executed by a computer processor for performing any or all of the steps, operations, or processes described.

**[0038]** Embodiments of the invention may also relate to an apparatus for performing the operations herein. This apparatus may be specially constructed for the required purposes, and/or it may comprise a general-purpose computing device selectively activated or reconfigured by a computer program stored in the computer. Such a computer program may be stored in a non-transitory, tangible computer readable storage medium, or any type of media suitable for storing electronic instructions, which may be coupled to a computer system bus. Furthermore, any computing systems referred to in the specification may include a single processor or may be architectures employing multiple processor designs for increased computing capability.

**[0039]** Embodiments of the invention may also relate to a product that is produced by a computing process described herein. Such a product may comprise information resulting from a computing process, where the information is stored on a non-transitory, tangible computer readable storage medium and may include any embodiment of a computer program product or other data combination described herein.

**[0040]** Finally, the language used in the specification has been principally selected for readability and instructional purposes, and it may not have been selected to delineate or circumscribe the inventive subject matter. It is therefore intended that the scope of the invention be limited not by this detailed description, but rather by any claims that issue on an application based hereon. Accordingly, the disclosure of the embodiments of the invention is intended to be illustrative, but not limiting, of the scope of the invention, which is set forth in the following claims.

**CLAIMS**

1. A computer-implemented method comprising:  
generating a notification designating a user;  
identifying a plurality of user devices eligible to receive the notification, each  
user device associated with the user and configured to provide an  
acknowledgment responsive to the user interacting with the notification  
on the user device;  
selecting a user device from the plurality of user devices;  
transmitting the notification to the selected user device;  
selecting an additional user device from the plurality of user devices if an  
acknowledgement is not received from the selected user device within  
an acknowledgement delay period;  
removing the selected user device from the plurality of user devices eligible to  
receive the notification; and  
transmitting the notification to the selected additional user device.
2. The computer-implemented method of claim 1, wherein selecting the  
additional user device comprises:  
determining an additional acknowledgment delay period associated with the  
additional user device.
3. The computer-implemented method of claim 2, further comprising:  
selecting another user device from the plurality of user devices if an  
acknowledgement is not received from the selected additional user  
device within the additional acknowledgment delay period.
4. The computer-implemented method of claim 1, wherein the  
acknowledgment delay period is based on user activity associated with the selected user  
device.

5. The computer-implemented method of claim 1, wherein the selected user device is a user device from which an interaction was most recently received.
6. The computer-implemented method of claim 1, wherein the selected user device is a user device selected based on a profile describing a frequency with which user interactions are received different user devices in the plurality of user devices.
7. The computer-implemented method of claim 6, wherein the selected user device is a user device having a highest frequency with which user interactions are received.
8. The computer-implemented method of claim 6, wherein the frequency with which user interactions are received is relative to a time of day.
9. A computer-implemented method comprising:
  - generating a notification identifying a user;
  - selecting a user device from a plurality of user devices associated with the user;
  - transmitting the notification to the user device, the user device configured to provide an acknowledgment of the notification responsive to the user interacting with the notification;
  - determining whether the acknowledgment is received from the user device within an acknowledgement delay period; and
  - responsive to determining acknowledgment was not received from the user device within the acknowledgment delay period, transmitting the notification to an additional user device from the plurality of user devices associated with the user.
10. The computer-implemented method of claim 9, wherein the user device is selected based on a profile describing a frequency with which interactions are received from user devices in the plurality of user devices

11. The computer-implemented method of claim 10, wherein the user device is a user device having a highest frequency with which user interactions are received.
12. The computer-implemented method of claim 11, wherein the frequency with which interactions are received is relative to a time of day.
13. The computer-implemented method of claim 9, further comprising:  
responsive to determining acknowledgment was not received from the additional user device within the acknowledgment delay period,  
transmitting the notification to an alternative user device from the plurality of user devices associated with the user.
14. The computer-implemented method of claim 13, further comprising:  
responsive to receiving an acknowledgment of the notification from the alternative user device, removing the notification transmitted to the user device and transmitted to the additional user device.
15. The computer-implemented method of claim 9, wherein the acknowledgment delay period is based on user activity associated with the user device.
16. A computer-implemented method comprising:  
generating a notification designating a user;  
identifying a plurality of user devices eligible to receive the notification, each user device associated with the user and configured to provide an acknowledgment responsive to the user interacting with the notification on the user device;  
selecting a user device from the plurality of user devices;  
transmitting the notification to the selected user device;  
selecting an additional user device from the plurality of user devices if an acknowledgement is not received from the selected user device within an acknowledgement delay period;

removing the selected user device from the plurality of user devices eligible to receive the notification; and  
transmitting the notification to the selected additional user device.

17. The computer-implemented method of claim 16, wherein selecting the additional user device comprises:

determining an additional acknowledgment delay period associated with the additional user device.

18. The computer-implemented method of claim 17, further comprising:

selecting another user device from the plurality of user devices if an acknowledgement is not received from the selected additional user device within the additional acknowledgment delay period.

19. The computer-implemented method of claim 16, wherein the acknowledgment delay period is based on user activity associated with the selected user device.

20. The computer-implemented method of claim 16, wherein the selected user device is a user device from which an interaction was most recently received.

21. The computer-implemented method of claim 16, wherein the selected user device is a user device selected based on a profile describing a frequency with which user interactions are received different user devices in the plurality of user devices.

22. The computer-implemented method of claim 21, wherein the selected user device is a user device having a highest frequency with which user interactions are received.

23. The computer-implemented method of claim 21, wherein the frequency with which user interactions are received is relative to a time of day.



24. The computer-implemented method of any of claims 16 to 23, further comprising:

the user device being configured to provide an acknowledgment of the notification responsive to the user interacting with the notification; determining whether the acknowledgment is received from the user device within an acknowledgement delay period; and responsive to determining acknowledgment was not received from the user device within the acknowledgment delay period, transmitting the notification to an additional user device from the plurality of user devices associated with the user.

25. The computer-implemented method of claim 24, further comprising:

responsive to determining acknowledgment was not received from the additional user device within the acknowledgment delay period, transmitting the notification to an alternative user device from the plurality of user devices associated with the user.

26. The computer-implemented method of claim 23 or 25, further comprising:

responsive to receiving an acknowledgment of the notification from the alternative user device, removing the notification transmitted to the user device and transmitted to the additional user device.

27. The computer-implemented method of any of claims 24 to 26, wherein the acknowledgment delay period is based on user activity associated with the user device.

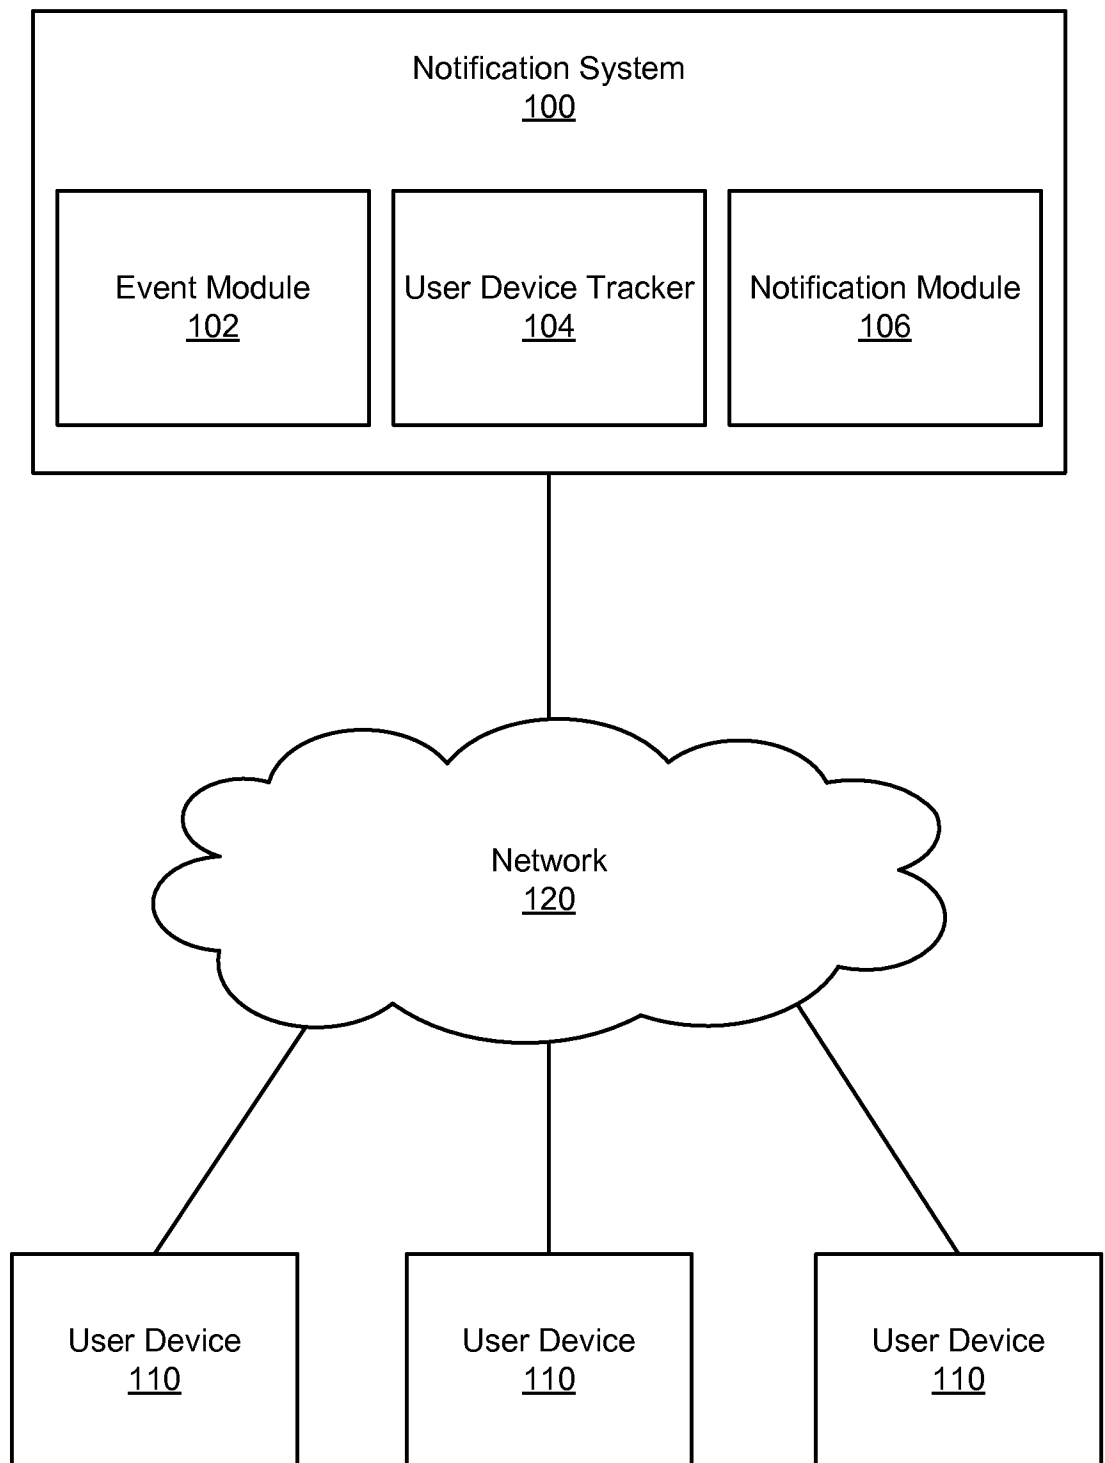


Fig. 1

2/3

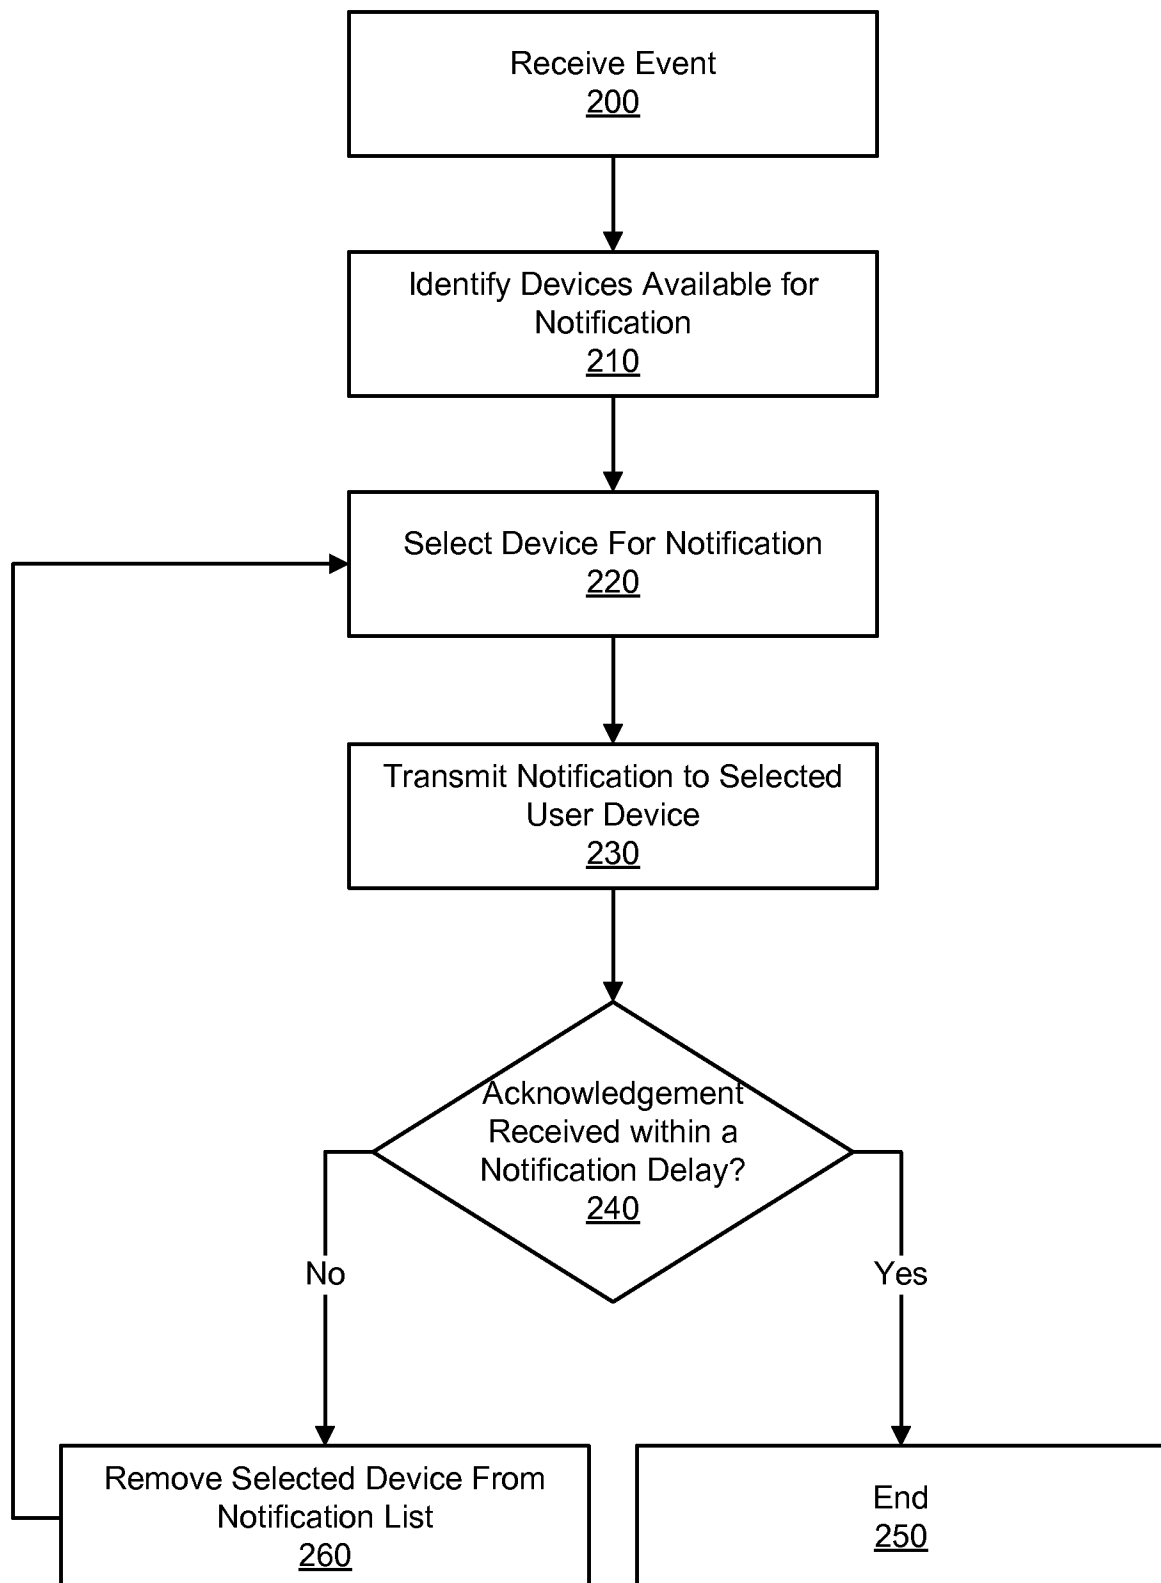


Fig. 2

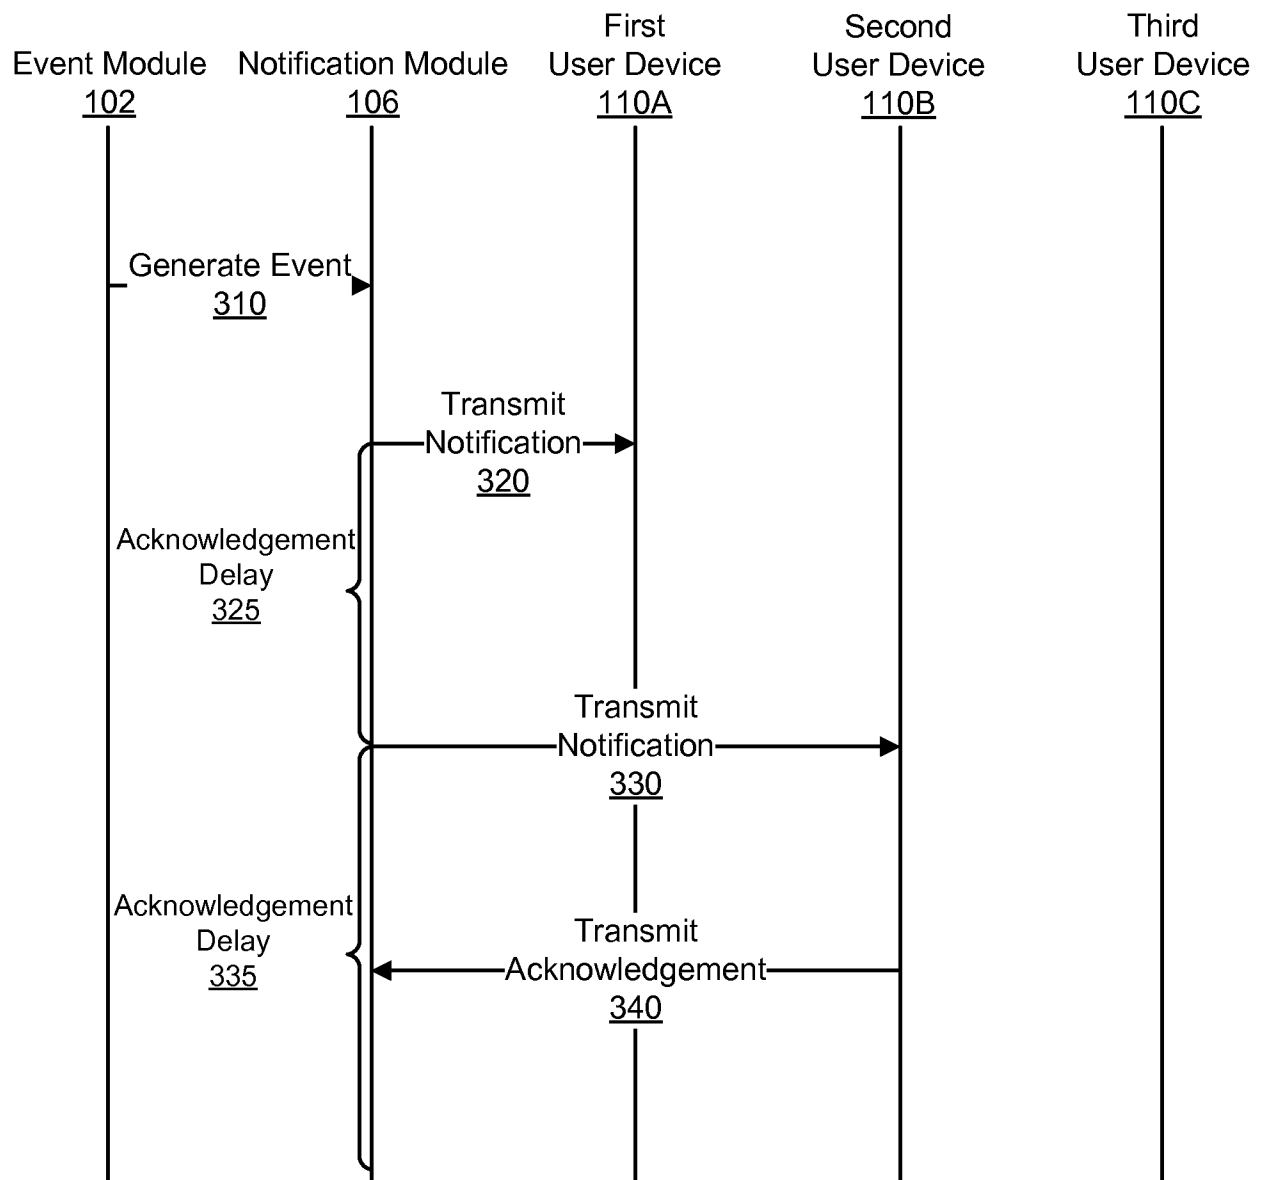


Fig. 3

## INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/US2013/069842****A. CLASSIFICATION OF SUBJECT MATTER****G06F 15/16(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

G06F 15/16; G06F 15/173; G06F 19/00; G06F 12/00; G06F 17/40; G06F 11/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords:notify, acknowledgement,delay, time,

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 7647202 B2 (LAMONTAGNE DONALD R.) 12 January 2010 See column 3, line 50 - column 5, line 11; column 8, line 46 - column 16, line 20; claims 1-18 and figures 1,7-9.	1-27
A	US 7308617 B2 (Michael R. Artobello et al.) 11 December 2007 See column 6, line 19 - column 14, line 60; claims 1-11 and figures 2-6.	1-27
A	US 2012-0198185 A1 (KEIICHI AOKI) 02 August 2012 See paragraph 22 - paragraph 29; paragraph 64 - paragraph 71; and figures 1,2,4-5.	1-27
A	US 7853662 B2 (HA SAM-CHUL et al.) 14 December 2010 See column 4, line 17 - column 5, line 38; and figures 5-10.	1-27



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

28 February 2014 (28.02.2014)

Date of mailing of the international search report

**28 February 2014 (28.02.2014)**

Name and mailing address of the ISA/KR

International Application Division  
Korean Intellectual Property Office  
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,  
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

PARK, Sang Hyun

Telephone No. +82-42-481-8263



## INTERNATIONAL SEARCH REPORT

### Information on patent family members

International application No.

**PCT/US2013/069842**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7647202 B2	12/01/2010	BR PI0713937 A2	18/12/2012
		CA 2656636 A1	10/01/2008
		CN 101512533 A	19/08/2009
		CN 101512533 B	14/12/2011
		EP 2047395 A2	15/04/2009
		EP 2047395 A4	01/05/2013
		JP 2009-543231 A	03/12/2009
		JP 2012-239375 A	06/12/2012
		KR 10-2009-0031929 A	30/03/2009
		US 2009-0009351 A1	08/01/2009
		WO 2008-006008 A2	10/01/2008
		WO 2008-006008 A3	16/10/2008
US 7308617 B2	11/12/2007	US 2006-069775 A1	30/03/2006
US 2012-0198185 A1	02/08/2012	EP 2472387 A1	04/07/2012
		EP 2472387 A4	21/08/2013
		JP 04-682353B2	11/05/2011
		JP 2011-048472A	10/03/2011
		WO 2011-024334 A1	03/03/2011
US 7853662 B2	14/12/2010	AU 2001-269567 A1	09/12/2002
		AU 2001-269567 A8	09/12/2002
		CN 1533519 A	29/09/2004
		CN 1533519 C0	25/07/2007
		CN 1538689 A	20/10/2004
		CN 1538709 A	20/10/2004
		DE 60131197 D1	13/12/2007
		DE 60131197 T2	07/08/2008
		DE 60137979 D1	23/04/2009
		EP 1390817 A2	25/02/2004
		EP 1390817 B1	31/10/2007
		EP 1443708 A2	04/08/2004
		EP 1443708 A3	26/04/2006
		EP 1443709 A2	04/08/2004
		EP 1443709 A3	08/03/2006
		EP 1443709 B1	11/03/2009
		EP 1863189 A2	05/12/2007
		EP 1863189 A3	05/05/2010
		EP 1863189 B1	14/11/2012
		ES 2295179 T3	16/04/2008
		ES 2320214 T3	20/05/2009
		ES 2395559 T3	13/02/2013
		KR 10-0425762 B1	03/04/2004
		KR 10-0431523 B1	17/05/2004
		KR 10-0434270 B1	04/06/2004
		KR 10-2004-0016921 A	25/02/2004
		KR 2002-0091312 A	06/12/2002
		US 2004-0158333 A1	12/08/2004

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2013/069842**Patent document  
cited in search reportPublication  
datePatent family  
member(s)Publication  
date

US 2004-0243684 A1	02/12/2004
US 2004-0249903 A1	09/12/2004
US 7873699 B2	18/01/2011
WO 02-097555 A2	05/12/2002
WO 02-097555 A3	27/03/2003