

(19)



(11)

EP 2 143 407 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.10.2011 Bulletin 2011/41

(51) Int Cl.:
A61G 5/04 ^(2006.01) **A61G 5/10** ^(2006.01)

(21) Application number: **08012317.7**

(22) Date of filing: **08.07.2008**

(54) **A wheelchair structure**

Rollstuhlstruktur

Structure de fauteuil roulant

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**

(43) Date of publication of application:
13.01.2010 Bulletin 2010/02

(73) Proprietor: **Wu's Tech Co., Ltd.
Taipei (TW)**

(72) Inventor: **Chiu, Chien-Liang
Taipei (TW)**

(74) Representative: **Zeitler - Volpert - Kandlbinder
Herrnstrasse 44
80539 München (DE)**

(56) References cited:
DE-U1- 20 003 481 GB-A- 2 281 727

EP 2 143 407 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF INVENTION

1. Field of the Invention

[0001] The present invention relates generally to a wheelchair, and more particularly to an innovative one.

2. Description of Related Art

[0002] An independent auxiliary drive unit is already developed in the industry as shown e.g. in DE 200034814. The auxiliary drive unit is composed of wheel body, drive motor, fuel cell and an integrated control seat; the auxiliary drive unit is mounted at rear side of the wheelchair for driving the wheelchair; the integrated control seat of the auxiliary drive unit is assembled onto the handle of the wheelchair, and also provided with a starting switch and acceleration lever for startup/closing and speed control of the drive unit.

[0003] As for the typical integrated control seat, the coupling portion is often designed according to the specification and shape of the wheelchair handle, so the integrated control seat could only be assembled onto the customized wheelchair handle. Yet, there are currently available with various specifications and shapes of the wheelchair handles, along with different sizes of hands and operating habits of the users. When the user is intended to install an auxiliary drive unit on the wheelchair, he/she may find it difficult for assembly and positioning since the integrated control seat cannot be mated with the wheelchair handle. To this end, this auxiliary drive unit cannot be widely applied.

[0004] Moreover, the shortcoming of the typical auxiliary drive unit lies in inconvenient assembly and disassembly of the drive unit and the wheelchair, making it necessary for further improvement to meet the customer demands.

[0005] Thus, to overcome the aforementioned problems of the prior art, it would be an advancement if the art to provide an improved structure that can significantly improve the efficacy.

[0006] Therefore, the inventor has provided the present invention of practicability after deliberate design and evaluation based on years of experience in the production, development and design of related products.

SUMMARY OF THE INVENTION

[0007]

1. Based upon the innovative design that the assembly end of integrated control seat is provided with adjustable clamp and swinging portion, the integrated control seat can be assembled securely onto the wheelchair handles of different diameters and curvatures, and the swinging angle can be adjusted flex-

ibly, it is possible to guarantee outstanding adaptability of assembly, convenient adjustment and ease-of-operation to meet the diversified customer demands.

2. Based upon the arrangement of the combined positioning member, the assembly frame and the wheel body of wheelchair body can be connected and fixed easily; when it is intended for disassembly, the rings of pulling portion at top of left and right pins are pulled upwards via the connector, so that the assembly frame can be released. This design ensures simple assembly and disassembly of the auxiliary drive unit and wheelchair body for efficient and convenient operation with improved applicability.

[0008] Although the invention has been explained in relation to its preferred embodiment, it is to be understood that many other possible modifications and variations can be made as defined by the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009]

FIG. 1 depicts an application perspective view of the present invention that the integrated control seat is adapted onto the existing wheelchair handle.

FIG. 2 depicts a partial exploded perspective view of the integrated control seat of the present invention.

FIG. 3 depicts a partial assembled perspective view of the integrated control seat of the present invention.

FIG. 4 depicts a schematic view of the integrated control seat of the present invention with adjustable swinging angle.

FIG. 5 depicts an application view of the present invention that the integrated control seat is adapted onto another wheelchair handle.

FIG. 6 depicts an exploded perspective view of the wheel body and auxiliary drive unit of the present invention.

FIG. 7 depicts an assembled schematic view of the assembly end of the assembly frame and the connecting slot of the wheelchair frame.

FIG. 8 depicts an operation view of the present invention that the pins at both sides of the wheelchair frame can be driven by the connector.

DETAILED DESCRIPTION OF THE INVENTION

[0010] The features and the advantages of the present invention will be more readily understood upon a thoughtful deliberation of the following detailed description of a preferred embodiment of the present invention with reference to the accompanying drawings.

[0011] FIGS. 1~8 depict preferred embodiments of wheelchair structure of the present invention, which, however, are provided for only explanatory objective for patent claims.

[0012] Said wheelchair structure comprising:

a wheelchair body 10, available with a handle 11, a seat 12 and a wheel body 13;
 an integrated control seat 20, used to control the operating state of the auxiliary drive unit 30 installed on the wheelchair body 10; the integrated control seat 20 comprises a starting switch 21 and an acceleration lever 22; an electrical connecting wire 23 is fixed laterally on the integrated control seat 20; the integrated control seat 20 is provided with an assembly end 24 allowing for assembly onto the handle 11 of the wheelchair body 10; the assembly end 24 of the integrated control seat 20 is provided with an adjustable clamp 25, which contains clamping port allowing to change the clamping amplitude; the assembly end 24 of the integrated control seat 20 comprises a swinging portion 27, which enables the integrated control seat 20 to change dynamically the swinging angle, and a control member 28 is assembled to adjust the adjustable positioning or release state of the swinging portion 27; the auxiliary drive unit 30 comprises a wheel body 31, a drive member 32 and a power supply assembly 33;
 a assembly frame 40, transversely assembled onto the auxiliary drive unit 30; the assembly frame 40 is defined into two assembly ends 41, and also provided with adjustment member 42 that determines the extension length of two assembly ends 41;
 a combined positioning member 50, assembled at left and right sides of the wheel body 13 of wheelchair body 10; the combined positioning member 50 contains a connecting slot 51, which is provided with a lateral guide inlet 52 and an internal retaining wall 53; at top of the connecting slot 51, there is an accommodating seat 54, wherein a groove 55 is used for inserting a pin 56 and elastic member 57; a retaining portion 58 with single-sided oblique guide surface 581 is arranged at bottom of the pin 56; the elastic member 57 is used for supporting downwards the pin 56 normally, enabling the retaining portion 58 to be protruded into the connecting slot 51 for positioning purpose, or enabling the single-sided oblique guide surface 581 to align with the lateral guide inlet 52 of the connecting slot 51; at top of the pin 56, a pulling portion 59 is protruded from the accommodating seat 54 to pull upwards the pin 56 into a release state.

[0013] Based on internal and external plywood 251, 252 arranged symmetrically, the adjustable clamp 25 is screwed at the middle section via a pivot bolt 60; and a torsion spring 61 is assembled at the pivot bolt 60; at inner side of the exterior of internal and external plywood 251, 252, a corresponding arched flange 253 is arranged to form the clamping port, of which the interior of the internal plywood 251 is fastened onto the integrated control seat 20 via a bolt 62; the adjustable clamp 25 also

comprises a packing locator 63; the packing locator 63 has a screw bolt 632 with rotary knob 631 so that a rotating cylinder 65 with tapped hole 64 is screwed onto the interior of the external plywood 252, and a long through-hole 66 is opened on the inner wall of the internal plywood 251; then, the screw bolt 632 is allowed to penetrate the long through-hole 66, and the tapped hole 64 of the rotating cylinder 65 is abutted into the trough 622 of the bolt head 621 at inner end of the internal plywood 251.

[0014] As for the preferred embodiment of the swinging portion 27 at the assembly end 24 of integrated control seat 20, a protruding seat 241 is formed on the assembly end 24 of the integrated control seat 20; the protruding seat 241 is defined to form an internal wall 242 and external wall 243; the protruding seat 241 is transversely provided with a through-hole 244, so that the inner wall of the internal plywood 251 of aforementioned adjustable clamp 25 is abutted onto the internal wall 242 of the protruding seat 241; the control member 28 is comprised of a rotary knob 282 with a threaded hole 281, and then the bolt 62 is used to penetrate the internal plywood 251 of the adjustable clamp 25, through-hole 244 of the protruding seat 241 and the threaded hole 281 of rotary knob 282, enabling the bolt head 621 of the bolt 62 to be abutted onto the internal plywood 251 of the adjustable clamp 25; the stud of the bolt 62 is screwed onto the threaded hole 281 of the rotary knob 282.

[0015] The assembly end 41 of the assembly frame 40 could be embedded into the lateral guide inlet 52 of the connecting slot 51, then forcibly pushed forwards the single-sided oblique guide surface 581 to cross the retaining portion 58 of the pin 56; next, the assembly end 41 of the assembly frame 40 is limited securely between the internal retaining wall 53 of the connecting slot 51 and the retaining portion 58 of the pin 56; conversely, when the pin 56 is pulled upwards by the pulling portion 59, the retaining portion 58 is disengaged from the connecting slot 51, so the assembly end 41 of the assembly frame 40 could be released from the connecting slot 51.

[0016] A reducing through-hole 551 is arranged at top of the groove 55 of the accommodating seat 54, so that the top of the pin 56 penetrates the reducing through-hole 551 to form the pulling portion 59; rings 70 are arranged on the pulling portion 59; then, the rings 70 at left and right sides of the pin 56 of the wheel body 13 of wheelchair body 10 are linked by a connector 71 (strip, rope, chain, rod) for simultaneous motion.

[0017] Based upon above-specified structural design, the present invention is operated as follows:

One function of the integrated control seat 20 is that, it allows to be assembled onto the wheelchairs of different diameters via the design of adjustable clamp 25. Referring to FIG. 4, the rotary knob 631 of the packing locator 63 could be rotated clockwise or counterclockwise to drive the screw bolt 632 and tapped hole 64 of the rotating cylinder 65 for relative

screwing motion; the rotating cylinder 65 will shift forwards and backwards on the screw bolt 632, thus driving the external plywood 252 to generate swinging behavior, and leading to varied clearance of the clamping port 26 formed between internal and external plywood 251, 252 of the adjustable clamp 25; based on the adjustable design of the clamping port 26 of the adjustable clamp 25, the integrated control seat 20 could be assembled onto the handle 11 of different diameters, meanwhile the adjustable clamp 25 could be fastened securely with the use of packing locator 63.

The second function of the integrated control seat 20 is to change the swinging angle of the integrated control seat 20 via the design of the swinging portion 63, so as to adjust the spacing between the acceleration lever 22 and handle 11 for manual operation; referring to FIG. 4, the rotary knob 282 of the control member 28 could be rotated clockwise or counter-clockwise to control the positioning or adjustment state of the integrated control seat 20; when the rotary knob 282 is loosened, the internal wall 242 of the protruding seat 241 and the internal plywood 251 of the adjustable clamp 25 will become loosened, so the swinging angle of the integrated control seat 20 can be adjusted; conversely, when the rotary knob 282 is tightened, the internal wall 242 of the protruding seat 241 and the internal plywood 251 of the adjustable clamp 25 will become tightened for positioning the integrated control seat 20.

[0018] Additionally, based on the adjustable swinging characteristics, the integrated control seat 20 can be applied to wheelchair handles of different shapes. Referring to FIG. 4, the adjustable clamp 25 of the integrated control seat 20 is adapted onto the cross-bar section of the handle 11; referring also to FIG. 5, the adjustable clamp 25 of the integrated control seat 20 is adapted onto the curved section of the handle 11B.

[0019] Referring to FIG. 6, the assembly frame 40 is provided with adjustment member 42 that can define the protruding length of two assembly ends 41 in line with the extended width of the wheelchair body 10;

[0020] Referring to FIG. 7, when the assembly end 41 of the assembly frame 40 enters transversely into the lateral guide inlet 52 of the connecting slot 51, the assembly end 41 will slide along the single-sided oblique guide surface 581, so that the retaining portion 58 will push upwards the elastic member 57 and make it accumulate elastic force under the transverse force applied by the assembly end 41; as such, the assembly end 41 can smoothly slide into the connecting slot 51; when the assembly end 41 passes through the retaining portion 58, the elastic member 57 will release the elastic force, then the retaining portion 58 will slide down and protrude from the groove 55; the assembly end 41 is just positioned between the internal retaining wall 53 and retaining portion 58.

Referring to FIG. 8, the pulling portion 59 is fitted with a ring 70; and the rings 70 at left and right sides of the pin 56 of the wheel body 13 are linked by a connector 71 (strip, rope, chain, rod) for simultaneous motion. When it is intended to be disengaged from the assembly end 41 at both ends of the assembly frame 40, the connector 71 could be pulled so that the pulling portion 59 at top of the pin 56 can protrude simultaneously from the reducing through-hole 551, allowing the retaining portion 58 to recess into the groove 55 and then disengage the assembly end 41 of the assembly frame 40.

Claims

1. A wheelchair structure, comprising:

a wheelchair body (10), available with a handle (11), a seat (12) and a wheel body (13), an integrated control seat (20), comprising a starting switch (21) and an acceleration lever (22); an electrical connecting wire (23) is fixed laterally on the integrated control seat; the integrated control seat is provided with an assembly end (24) allowing for assembly onto the handle (11) of the wheelchair body; the assembly end of the integrated control seat is provided with an adjustable clamp (25), which contains a clamping port allowing to change the clamping amplitude; the assembly end (24) of the integrated control seat also comprises a swinging portion (27); which enables the integrated control seat (20) to change dynamically the swinging angle, and a control member (28) is assembled to adjust the adjustable positioning or release state of the swinging portion (27), an auxiliary drive unit (30), comprising a wheel body (31), a drive member (32) and a power supply assembly (33); an assembly frame (40), transversely assembled onto the auxiliary drive unit (30); the assembly frame is defined into two assembly ends (41);

characterised by

a combined positioning member (50), assembled at left and right sides of the wheel body (13) of wheelchair body (10); the combined positioning member contains a connecting slot (51); which is provided with a lateral guide inlet (52) and an internal retaining wall (53); at top of the connecting slot, there is an accommodating seat (54); wherein a groove (55) is used for inserting a pin (56) and elastic member (57); a retaining portion (58) with a single-sided oblique guide surface (581) is arranged at bottom of the pin; the elastic member is used for supporting downwards the pin normally, enabling the retaining portion (58) to be protruded into the connecting slot (51) for positioning purpose, or enabling the

single-sided oblique guide surface (581) to align with the lateral guide inlet (52) of the connecting slot; at top of the pin (56); a pulling portion is protruded from the accommodating seat (54) to pull upwards the pin into a release state.

2. The structure defined in Claim 1, wherein the adjustable clamp is screwed via a pivot bolt at the middle section through symmetrical internal and external plywood via a pivot bolt, and a torsion spring is assembled at the pivot bolt; at inner side of the exterior of internal and external plywood, a corresponding arched flange is arranged to form the clamping port, of which the interior of the internal plywood is fastened onto the integrated control seat via a bolt; the adjustable clamp also comprises a packing locator; the packing locator has a screw bolt with rotary knob so that a rotating cylinder with tapped hole is screwed onto the interior of the external plywood, and a long through-hole is opened on the inner wall of the internal plywood; then, the screw bolt is allowed to penetrate the long through-hole, and the tapped hole of the rotating cylinder is abutted into the trough of the bolt head at inner end of the internal plywood.
3. The structure defined in Claim 1, wherein the preferred embodiment of the swinging portion of the assembly end of integrated control seat is involved; a protruding seat is formed on the assembly end of the integrated control seat; the protruding seat is defined to form internal and external walls; the protruding seat is transversely provided with a through-hole, so that one side of aforementioned adjustable clamp is abutted onto the internal wall of the protruding seat; the control member is comprised of a rotary knob with a threaded hole, and then the bolt is used to penetrate the adjustable clamp, through-hole of the protruding seat and the threaded hole of rotary knob, enabling the bolt head of the bolt to be abutted onto one end of the adjustable clamp; the stud of the bolt is screwed onto the threaded hole of the rotary knob.
4. The structure defined in Claim 1, wherein the assembly end of the assembly frame could be embedded into the lateral guide inlet of the connecting slot, then forcibly pushed forwards the single-sided oblique guide surface, allowing the assembly end to enter into the connecting slot for a positioning state; and the pulling portion is provided with a ring; then, the rings at left and right sides of the pin of the wheel body of wheelchair body are linked by a connector for simultaneous motion.
5. The structure defined in Claim 4, wherein said connector can be strip, rope, chain or rod.

Patentansprüche

1. Ein Rollstuhl, umfassend:

einem Rollstuhlaufbau (10) mit einem Handgriff (11), einem Sitz (12) und mit einem Radlager (13);
einer Steuerungseinheit (20), die aus einem Startschalter (21) und einem Beschleunigungshebel (22) aufgebaut ist; einem Stromverbindungskabel (23), das seitlich an der Steuerungseinheit (20) befestigt ist; die integrierte Steuerungseinheit (20) mit einem Montageende (24) für das Befestigen auf dem Handgriff (11) des Rollstuhlaufbaus (10) gebildet und das Montageende (24) dieser integrierten Steuerungseinheit (20) mit einer verstellbaren Klammer (25) aufgebaut ist, die aus einer Klammeröffnung gebildet ist,
wobei mit dieser Klammeröffnung die Klammerungshöhe verstellt wird; das Montageende (24) der integrierten Steuerungseinheit (20) ebenfalls aus einem Schwenkteil (27) aufgebaut ist, mit dem der Schwenkwinkel mit Hilfe dieser integrierten Steuerungseinheit (20) dynamisch verstellt wird, wobei mit einem Justierknopf (28) die verstellbare Position oder der Ausrückzustand des Schwenkteils (27) verstellt wird;
einem Hilfsantriebsaggregat (30), das aus einem Radlager (31), einem Antriebselement (32) und aus einem Stromversorgungsgerät (33) aufgebaut ist;
einem Befestigungsrahmen (40), der quer auf das Radlager (30) befestigt wird (30), wobei dieser Befestigungsrahmen (40) mit zwei Befestigungsenden (41) gebildet ist;
einem kombinierten Positionierelement (50), das auf der linken und rechten Seite des Radlagers (13) des Rollstuhlaufbaus (10) montiert ist; dieses kombinierte Positionierelement (50) aus einem Verbindungsschlitz (51) gebildet ist, das mit einem seitlichen Führungsschlitz (52) und einer inneren Sicherungswand (53) geformt ist; oben auf dem Verbindungsschlitz (51) ein Aufnahmesitz (54) montiert ist, wobei ein Stift (56) und ein elastisches Element (57) in eine Schlitzöffnung (55) eingesteckt werden; der Stift (56) unten aus einem Halterungsteil (58) mit einer schrägen Führungsfläche (581) auf einer Seite gebildet ist; mit diesem elastischen Element (57) der Stift (56) nach unten gestützt wird, damit das Halterungsteil (58) zum Positionieren in den Verbindungsschlitz (51) hervorsteht, oder um die schräge Führungsfläche (581) auf einer Seite nach dem seitlichen Führungsschlitz (52) des Verbindungsschlitzes (51) auszurichten; oben auf dem Stift (56) vom Aufnahmesitz (54) eine Zugelement (59) hervorsteht, mit dem der

Stift (56) in einen Ausrückzustand hochgezogen wird.

2. Der Rollstuhl nach Anspruch 1, **dadurch gekennzeichnet, dass** die verstellbare Klammer (25) mit einem Bolzen (60) am mittleren Teil durch das symmetrische innere und äußere Sperrholzteil (251) (252) und festgeschraubt wird, während eine Torsionsfeder (61) auf diesen Bolzen (60) aufgesetzt wird; auf der inneren Seite der Außenseite dieses inneren und äußeren Sperrholzteils (251)(252) je ein gebogener Flansch gebildet ist, mit dem eine Klammeröffnung geformt wird, deren Innenseite des inneren Sperrholzteils (251) mit einer Schraube (62) an der Steuerungseinheit (20) befestigt ist; die verstellbare Klammer (25) besteht ebenfalls aus einem Dichtungsknauf (63), wobei dieser Dichtungsknauf (63) aus einer Schraube ohne Mutter (632) mit einem Drehknauf (631) gebildet ist, um ein Rotierzylinder (65) mit einem Gewindeloch (64) ins Innere der äußeren Sperrholzteile (251)(252) einzuschrauben und ein durchgehendes Loch (66) an der Innenwand des inneren Sperrholzteils (251) geöffnet wird, damit eine Schraube ohne Mutter (632) durch das durchgehende Loch (66) hindurch geschoben werden kann und das Gewindeloch (64) des Rotierzylinders (65) an die Mulde des Bolzenkopfs (621) am inneren Ende des inneren Sperrholzteils (251) anstößt.
3. Der Rollstuhl nach Anspruch 1, **dadurch gekennzeichnet, dass** die bevorzugte Ausführungsform mit dem Schwenkteil (27) des Befestigungsendes (41) der integrierten Steuerungseinheit (20) aufgebaut ist; am Montageende (24) der integrierten Steuerungseinheit (20) ein hervorstehender Sitz (241) gebildet ist; mit diesem hervorstehenden Sitz (241) Innen- und Außenwände (242)(243) gebildet werden, wobei dieser hervorstehende Sitz (241) quer mit einem durchgehenden Loch (244) geformt ist, so dass eine Seite dieser oben genannten verstellbaren Klammer (25) an die Innenwand (242) des hervorstehenden Sitzes (241) anliegt; der Justierknauf (28) aus einem Drehknauf (282) mit einem Gewindeloch (281) gebildet ist, wobei die Schraube (62) durch die verstellbare Klammer (25), das durchgehende Loch (244) des hervorstehenden Sitzes (241) und durch das Gewindeloch (281) des Drehknaufes (282) geschraubt wird, um den Schraubenkopf der Schraube an ein Ende der verstellbaren Klammer (25) anzu stoßen, und der Gewindebolzen der Schraube (62) in das Gewindeloch (281) des Drehknaufes (282) einzuschrauben.
4. Der Rollstuhl nach Anspruch 1, **dadurch gekennzeichnet, dass** das Befestigungsende (41) des Befestigungsrahmens (40) in den seitlichen Führungsschlitz (52) des Verbindungsschlitzes (51) aufgenommen und danach an der schrägen Führungsflä-

che (581) auf einer Seite unter Kraftaufwendung vorwärts geschoben wird, um das Befestigungsende (41) zum Positionieren in den Verbindungsschlitz (51) einzurücken; am Zugelement (59) ein Ring (70) befestigt ist, wonach die Ringe auf der linken und rechten Seite des Stifts (56) des Radlagers (13) des Rollstuhlaufbaus (10) für eine gleichzeitige Betätigung an einer Verbindungsschnur (71) befestigt werden.

5. Der Rollstuhl nach Anspruch 4, **dadurch gekennzeichnet, dass** als Verbindungsschnur (71) ein Band, eine Schnur, eine Kette oder eine Stange verwendet werden kann.

Revendications

1. Structure de fauteuil roulant, comprenant :

un corps de fauteuil roulant (10), équipé d'une poignée (11), d'un siège (12) et d'un corps à roues (13), un bloc de commande intégré (20), comprenant un commutateur de démarrage (21) et un levier d'accélération (22) ; un fil de connexion électrique (23) est fixé latéralement sur le bloc de commande intégré ; le bloc de commande intégré est doté d'une extrémité d'assemblage (24) permettant l'assemblage sur la poignée (11) du corps de fauteuil roulant ; l'extrémité d'assemblage du bloc de commande intégré est dotée d'une pince ajustable (25) qui contient une portion de serrage permettant de changer l'amplitude de serrage ; l'extrémité d'assemblage (24) du bloc de commande intégrée comprend également une portion pivotante (27), qui permet de changer de manière dynamique l'angle de pivotement du bloc de commande intégré (20) ; et un élément de commande (28) est assemblé pour ajuster la situation de positionnement ajustable ou la situation de relâchement de la portion pivotante (27), une unité d'entraînement auxiliaire (30), comprenant un corps à roues (31), un élément d'entraînement (32) et un ensemble d'alimentation de puissance (33), un cadre d'assemblage (40), assemblé transversalement sur l'unité d'entraînement auxiliaire (30), le cadre d'assemblage étant défini dans deux extrémités d'assemblage (41), **caractérisé par** un élément de positionnement combiné (50) assemblé sur le côté gauche et le côté droit du corps à roues (13) du corps de fauteuil roulant (10) ; l'élément de positionnement combiné contient une fente de connexion (51), qui est pourvue d'une entrée de guidage latérale (52) et d'une paroi de retenue interne (53) ; au sommet de la fente de connexion est prévu un

- siège de réception (54), dans lequel une gorge (55) est utilisée pour introduire une broche (56) et un élément élastique (57) ; une portion de retenue (58) avec une surface de guidage oblique (581) d'un seul côté est agencée à la partie basse de la broche ; l'élément élastique est utilisé pour supporter la broche normalement vers le bas, permettant à la portion de retenue (58) de se projeter dans la fente de connexion (51) à des fins de positionnement, ou permettant à la surface de guidage oblique (581) d'un seul côté de s'aligner avec l'entrée de guidage latérale (52) de la fente de connexion ; et au sommet de la broche (56), une portion de traction se projette depuis le siège de réception (54) pour tirer la broche vers le haut jusqu'à une situation de relâchement.
2. Structure définie dans la revendication 1, dans laquelle la pince ajustable est vissée via un boulon-pivot au niveau de la section médiane en traversant des morceaux de contreplaqué interne et externe symétrique via un boulon-pivot, et un ressort de torsion est assemblé au niveau du boulon-pivot ; sur un côté intérieur à l'extérieur des morceaux de contreplaqué interne et externe, une bride arquée correspondante est agencée pour former la portion de serrage, l'intérieur du morceau de contreplaqué interne est fixé sur le bloc de commande intégrée via un boulon ; la pince ajustable comprend aussi un élément de localisation de garniture ; l'élément de localisation de garniture comprend un boulon vissé avec un bouton rotatif de sorte qu'un cylindre rotatif avec un trou taraudé est vissé à l'intérieur du morceau de contreplaqué externe, et un trou traversant allongé s'ouvre sur la paroi intérieure du morceau de contreplaqué interne ; le boulon vissé étant alors autorisé à pénétrer le trou traversant allongé, et le trou taraudé du cylindre rotatif vient buter dans la gorge de la tête du boulon à l'extrémité intérieure du morceau de contreplaqué interne.
3. Structure selon la revendication 1, dans laquelle le mode de réalisation préféré de la portion pivotante de l'extrémité d'assemblage du bloc de commande intégrée est impliqué ; un siège en projection est formé sur l'extrémité d'assemblage du bloc de commande intégrée ; le siège en projection est défini pour former des parois interne et externe ; le siège en projection est pourvu transversalement d'un trou traversant de telle façon qu'un côté de la pince ajustable précitée vient buter contre la paroi interne du siège en projection ; l'élément de commande comprend un bouton rotatif avec un trou taraudé, et le boulon est alors utilisé pour pénétrer dans la pince ajustable, dans le trou traversant du siège en projection, et dans le trou taraudé de bouton rotatif, permettant à la tête du boulon de venir buter contre l'extrémité de
- la pince ajustable ; la tige du boulon étant vissée dans le trou taraudé du bouton rotatif.
4. Structure selon la revendication 1, dans laquelle l'extrémité d'assemblage du cadre d'assemblage peut être noyée dans l'entrée de guidage latérale de la fente de connexion, être ensuite poussée à force vers l'avant sur la surface de guidage oblique d'un seul côté, en permettant à l'extrémité d'assemblage de pénétrer dans la fente de connexion pour adopter un état de positionnement ; et la portion de traction est équipée d'une bague ; de sorte que les bagues du côté gauche et du côté droit de la broche du corps à roues du corps de fauteuil roulant sont articulées par un connecteur pour un mouvement simultané.
5. Structure selon la revendication 4, dans laquelle ledit connecteur peut être un ruban, un câble, une chaîne ou un barreau.

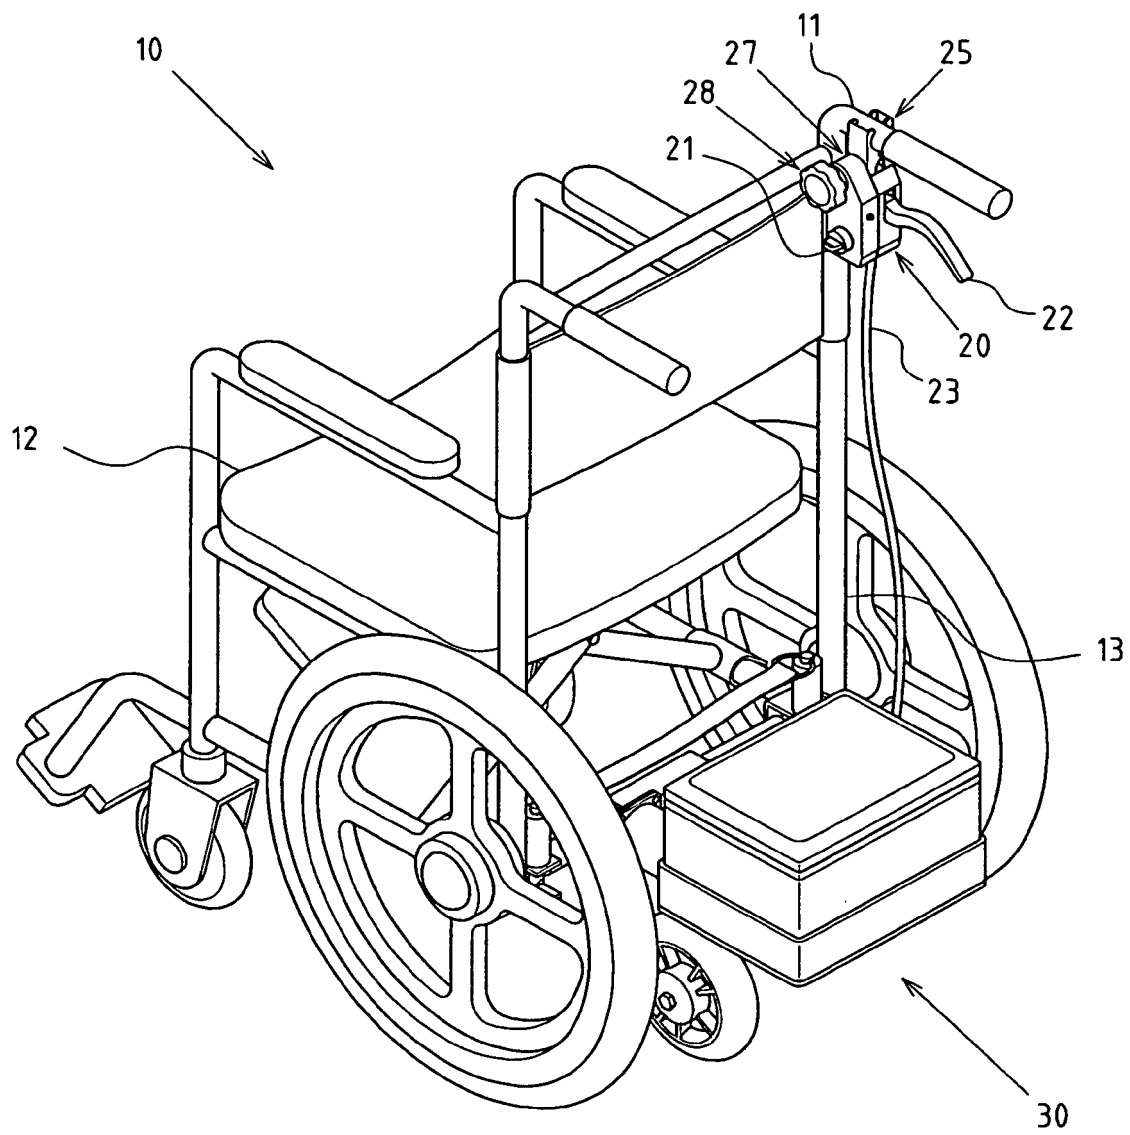


FIG.1

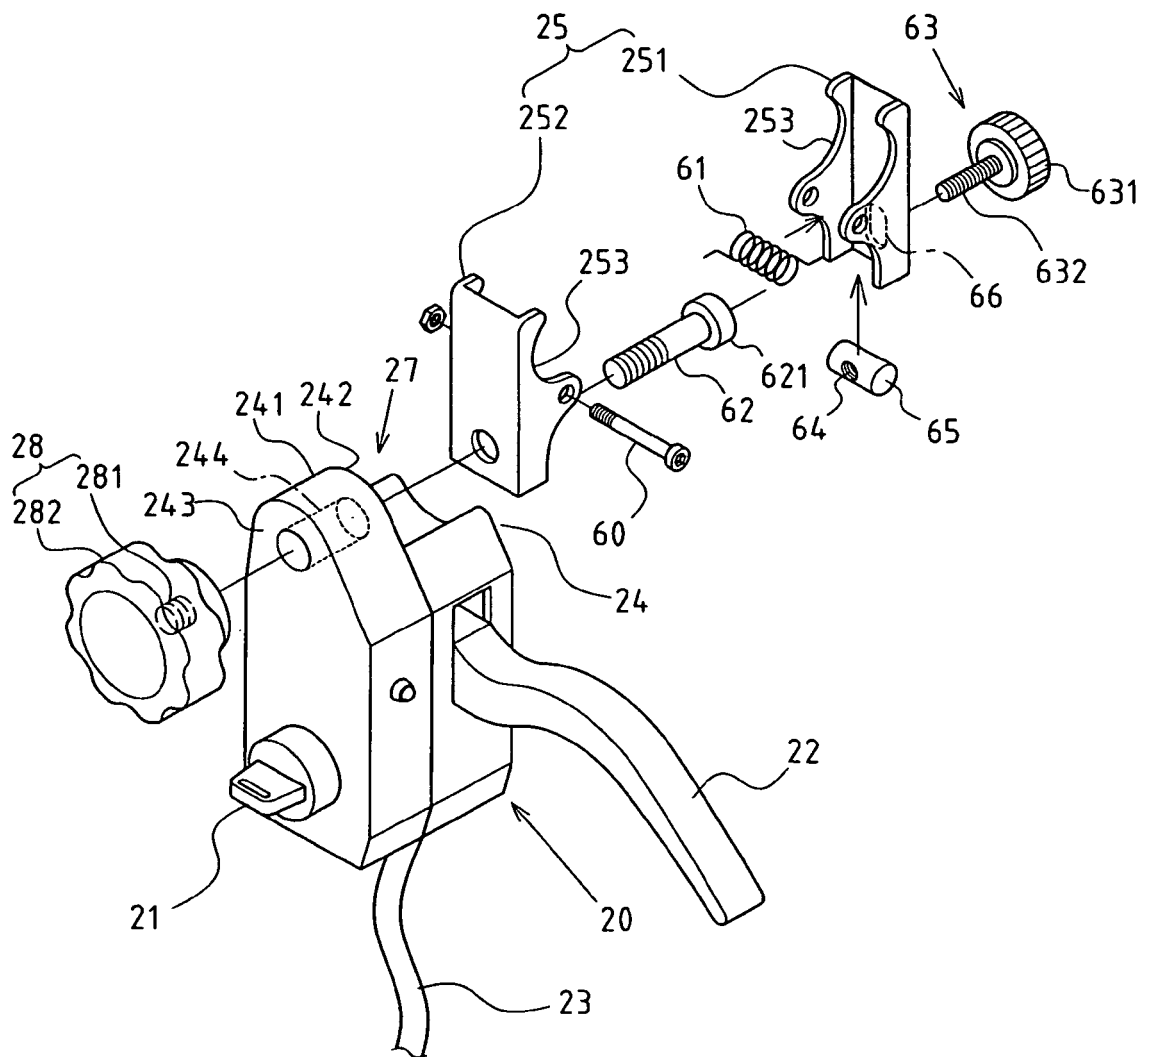


FIG.2

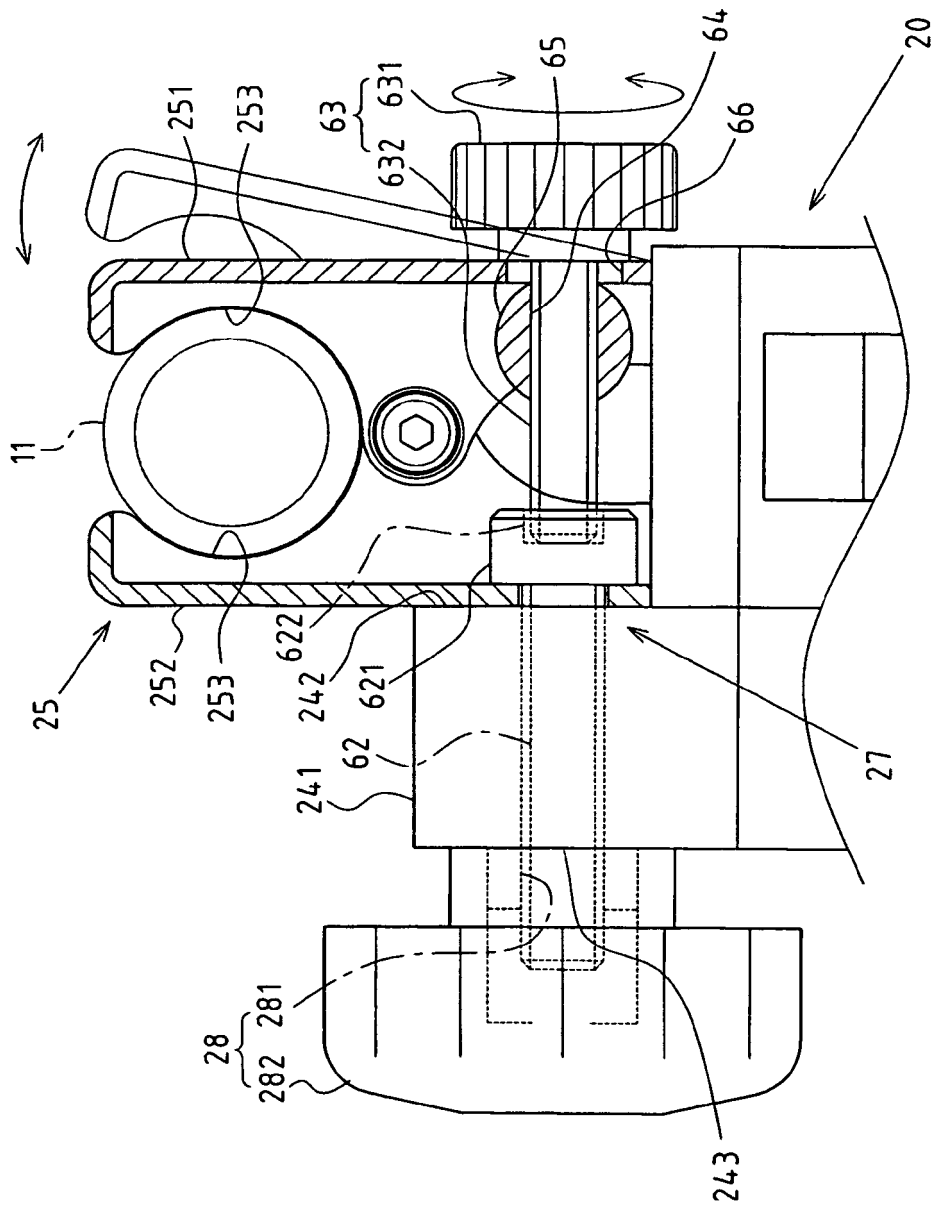


FIG. 3

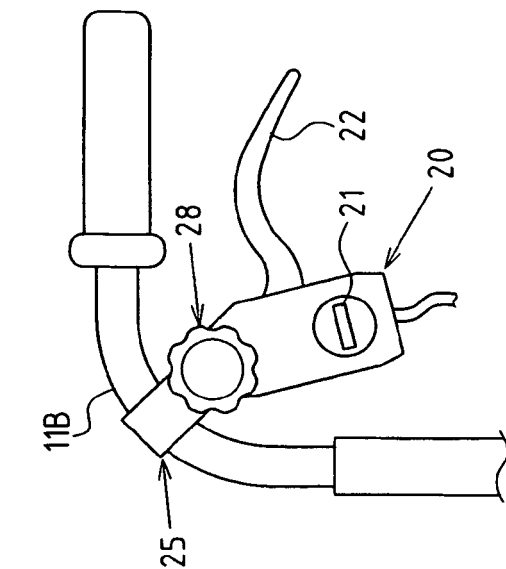


FIG. 4

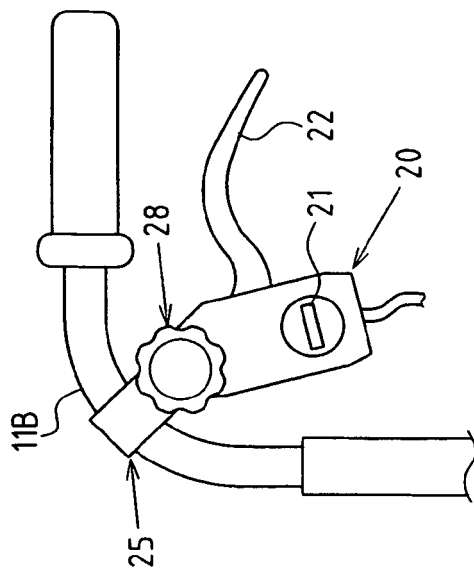


FIG. 5

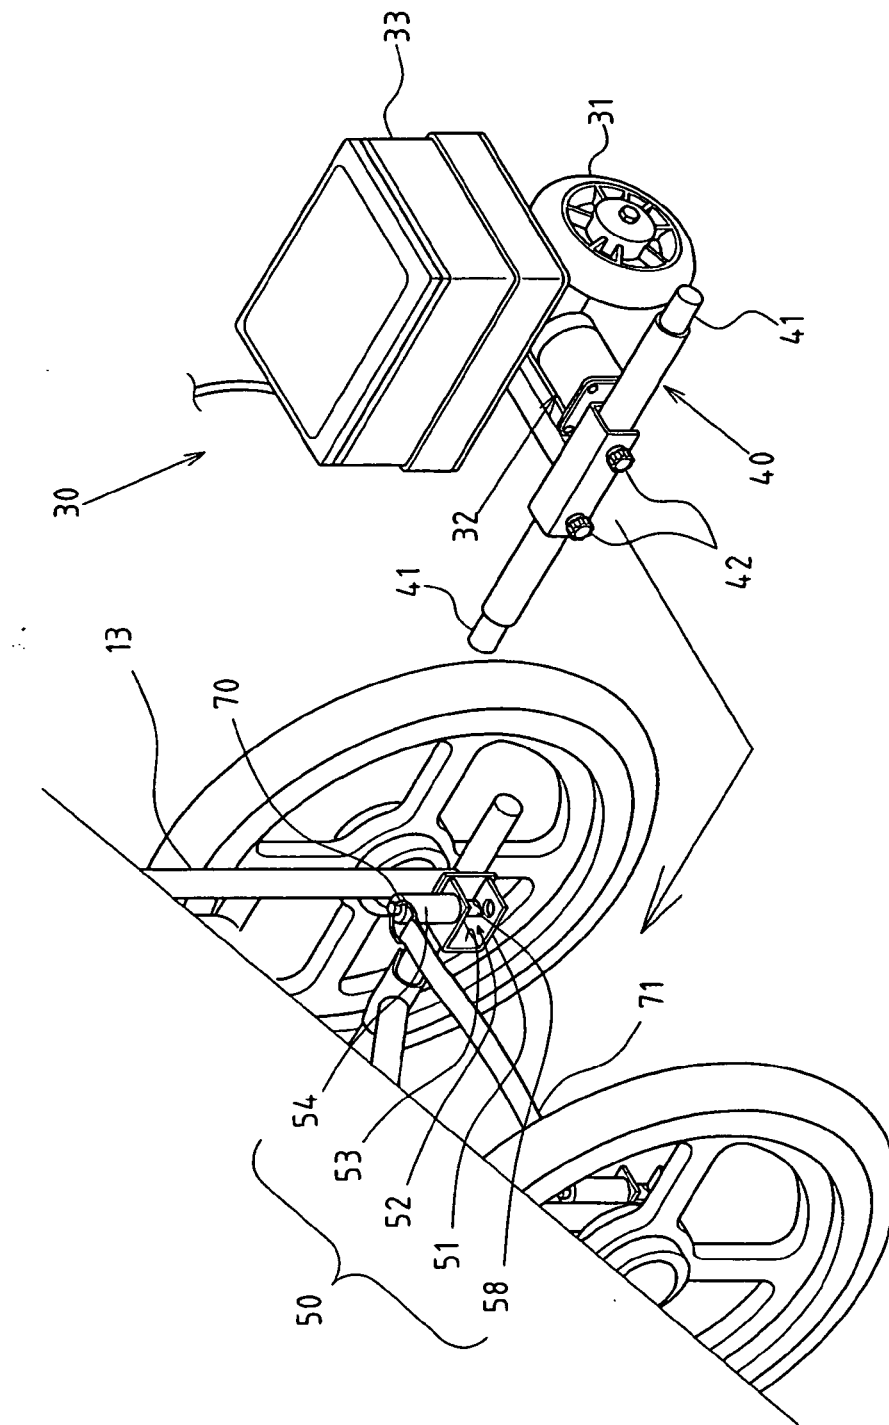


FIG. 6


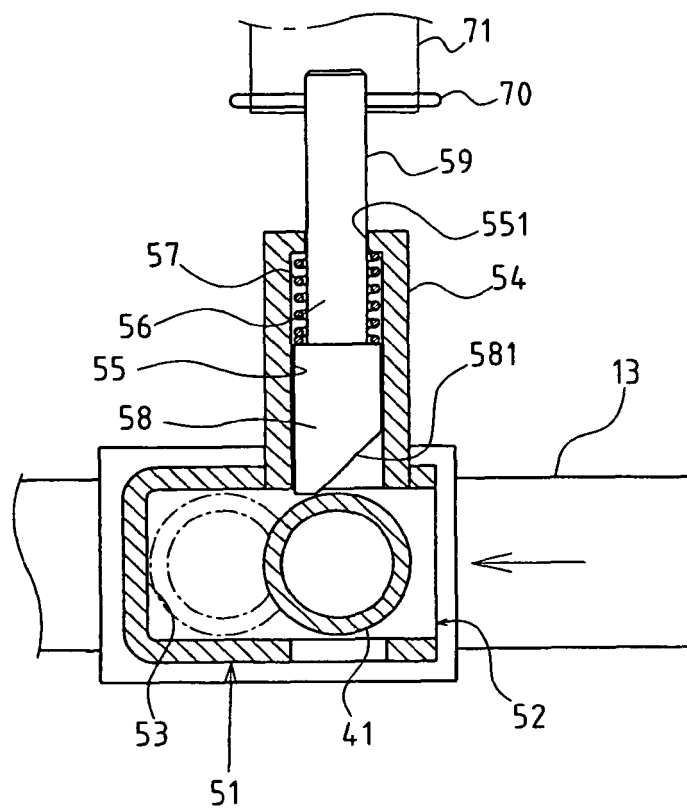


FIG.7

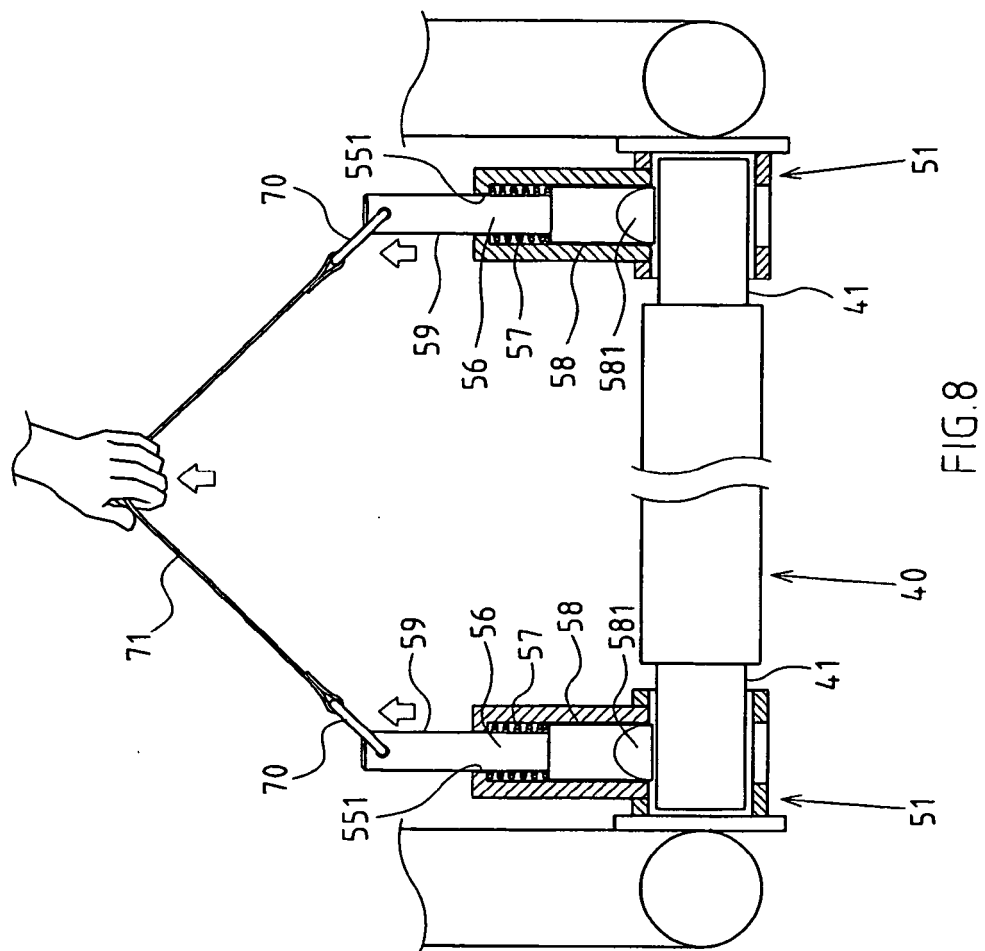

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 200034814 [0002]