

(19)



(11)

EP 3 007 572 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

18.10.2017 Bulletin 2017/42

(51) Int Cl.:

A41D 13/018 ^(2006.01)

(21) Application number: **14744155.4**

(86) International application number:

PCT/IB2014/062123

(22) Date of filing: **11.06.2014**

(87) International publication number:

WO 2014/199308 (18.12.2014 Gazette 2014/51)

(54) **PERSONAL PROTECTION DEVICE**

PERSONENSCHUTZVORRICHTUNG

DISPOSITIF DE PROTECTION PERSONNELLE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(72) Inventors:

- **AZZOLIN, Andrea**
I-36060 Molvena (Vicenza) (IT)
- **BENCINI, Marcello**
I-36060 Molvena (Vicenza) (IT)

(30) Priority: **12.06.2013 IT VR20130138**

(43) Date of publication of application:

20.04.2016 Bulletin 2016/16

(74) Representative: **Manfrin, Marta et al**

Società Italiana Brevetti
Stradone San Fermo, 21 sc. B
37121 Verona (IT)

(60) Divisional application:

17185511.7

(56) References cited:

WO-A1-2010/067288 JP-A- H11 124 087
JP-A- 2007 308 818 US-A- 4 416 641
US-A1- 2008 178 370

(73) Proprietor: **Dainese S.p.A.**
36060 Molvena (VI) (IT)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 007 572 B1

Description

[0001] The present disclosure relates to a protection device for personal protection including an inflatable member adapted to protect from impacts and/or falls a passenger or a rider of a motorcycle or a horse-racing rider or a similar user, during a sporting and/or working activity.

[0002] During recent years, following constant research into safety during all sporting activities, but more generally all those dangerous activities practiced in extreme conditions, or at high speeds, in particular in the motorcycle sector, there has been an increase in the protection devices which have been developed with a view to providing both practical and effective protection of an upper portion of a user's body, using an inflatable member. During an impact, a sliding action or generally a fall, the inflatable bag is placed in fluid communication with a fluid source, such as a compressed-gas cylinder or a fluid generator.

[0003] During an impact, the inflatable element creates an air cushion around the upper portion of the user's body, allowing the user's body to be protected against impacts. The present disclosure is based on a recognition by the inventor of the present patent application that the inflatable bag has normally a shape or form which is similar to that of a vest or waistcoat so that it may be easily worn by a user or so that it may be associated with a garment. As a result the bag has, like a normal jacket, superficial discontinuities or interruptions, for example in a middle region of the chest. In these zones, the bag may be closed by means of a zip associated directly with the bag, or may be kept closed by the zip, or other closing device, of the jacket.

[0004] Other zones where there are superficial discontinuities or interruptions are, for example, those situated underneath the armpits along the sides.

[0005] These superficial discontinuities or interruptions, however, represent vulnerable zones for protection of a user, precisely because the protection is not continuous. Moreover, in particular the zones of the chest and sides are so-called vital zones for a user since they are zones via which, if there is not suitable protection, the vital organs may be reached.

[0006] As a result the similarity in terms of form and shape of the inflatable bag with a vest or waistcoat, if on the one hand it results in the inflatable bag being easier to wear, on the other hand it may have a negative impact on the protective capacity of the inflatable bag, owing to superficial interruptions or discontinuities.

[0007] Moreover, the inventor of the present disclosure has realized that, in some bags, in order to avoid superficial interruptions on the chest and allow positioning of a bag completely in front of the chest, it is necessary to displace the zone of the superficial discontinuity or interruption onto one side of the chest, towards the shoulder.

[0008] Basically, the bag is continuous on the chest and has an interruption on one side, namely no longer in

the center of the chest, which allows the bag to be opened and worn. A zip is also provided in the interruption zone.

[0009] The positioning of the zip in a side zone, however, results in a user having to operate the zip in this side zone which is zone situated off-center and is therefore less accessible.

[0010] This displacement to one side may also have an impact or effect, which is not always positive, on the wearability of garments associated with these bags, since zips for opening the garment are provided in the shoulder zone, and also on the general appearance of the garment which may not be liked by a large number of users. JP2007-308818 discloses a shock-absorbing garment with over-lapping chambers. The garment is donned by pulling over the head. Based on these realizations, a technical problem forming the basis of the present disclosure is that of providing a protection device which is able to ensure continuous superficial protection, while ensuring at the same time satisfactory wearability by the user.

[0011] In order to solve this technical problem, a personal protection device is provided, having the main characteristic features which are respectively specified in claim 1, together with a garment according to claim 12 and a method for protecting a user according to claim 17.

[0012] Secondary characteristic features forming the subject of the present disclosure are defined in the corresponding dependent claims.

[0013] In particular, in accordance with the present disclosure, in order to avoid superficial interruptions, a personal protection device is provided where the inflatable member includes at least two inflatable member portions which are superimposed in a corresponding overlapping or superimposition area and wherein a connecting device or structure is associated with the two inflatable member portions in the superimposition area. The connecting device or structure may be a reversible connecting structure, namely a structure which may be opened or closed as required, and may also be an adjustable connecting structure, namely a structure which may allow superimposition or overlapping of the two portions to be adjusted. For example, in some embodiments, the connecting structure includes a zip structure, a string or lace structure, optionally with Velcro™ a structure with buckles and ties, or similar structures.

[0014] As a result, in accordance with the present disclosure, in order to avoid superficial discontinuities, two portions of a same inflatable member or of two inflatable members are superimposed. These inflatable member portions may be terminal or end portions facing each other when the inflatable member is worn. Each inflatable member portion is associated with the connecting or closing structure so as to ensure stable closing of the two terminal or end portions of the inflatable member.

[0015] The arrangement of the connecting structure in the overlapping area allows this connecting structure to be arranged in a centre zone and not off-centre zone, so as not to impede the wearability of the protection device

or the garment associated with it.

[0016] In fact the two inflatable member portions may be superimposed, for example, on the chest of a user and the connecting structure may be arranged centered, likewise on the chest, for example in the centre of the chest so as to allow easy central opening/closing of the protection device. The two inflatable member portions may be superimposed, for example, also on the sides of a user, or in another part of the body.

[0017] In one embodiment of the present disclosure, the connecting and closing structure comprises two flaps or panels made of soft material, such as fabric. Each of the two flaps is fixed, for example stitched or glued, on one side, to one of the two inflatable member portions in a zone adjacent to the superimposition or overlapping area and is free and movable on the other side, where the overlapping is present. In this way, when the two inflatable member portions are superimposed, the two flaps are situated close and may be connected together. Each of the two flaps may be fixed in an intermediate zone between the overlapping area and a non-overlapping area of the inflatable member.

[0018] The two flaps may be pieces or panels of cloth or fabric which extend along the inflatable member portions. These flaps may be provided with a zip portion or other connecting device of the type which can be opened or reversed. In particular, a zip portion associated with a flap is connected in a reversible or temporary manner to a complementary zip portion associated with the other flap. Similarly a Velcro portion associated with one flap and a complementary portion of Velcro associated with the other flap may be connected together.

[0019] In one embodiment of the present disclosure the flaps may be also be provided with elastic inserts or be made of elastic material, so as to allow adjustment of the dimensions of the personal protection device to the body of the user at the moment of inflation. In particular, when inflation occurs, the two superimposed portions of the inflatable member move away momentarily from each other with a reduction in mutual overlapping. At the end of an inflation condition, the elastic means return into an original condition such that the two inflatable member portions move back towards each other again.

[0020] The inflatable member described above may be easily incorporated inside a garment, for example inside respective pockets of a garment. The garment may be structured so as to have pockets which are superimposed like the inflatable member. Alternatively, the inflatable member portions which are superimposed may protrude from the pockets of the garment.

[0021] The connecting structure described above may be fixed to the garment so as to be indirectly connected to the inflatable member of the personal protection device.

[0022] In one embodiment, the inflatable member may be lined externally, or covered, with a fabric suitable for clothing, and assume the appearance of a garment which may be worn on its own.

[0023] Further characteristic features and modes of use forming the subject of the present disclosure will become clear from the following detailed description of a number of preferred examples of embodiment thereof, provided by way of a non-limiting example. It is evident, however, that each example of embodiment may have one or more of the advantages listed above; in any case it is not required that each embodiment should have simultaneously all the advantages listed.

[0024] Reference will be made to the figures of the accompanying drawings in which:

- Figure 1 shows a front view of a protection device according to an embodiment of the present disclosure, in a condition where worn;
- Figure 2 shows a rear view of a protection device according to an embodiment of the present disclosure, in a condition where worn;
- Figure 3 shows a cross-sectional view along the line III-III of the protection device according to Figure 1;
- Figure 4 shows a top plan view of a protection device according to an embodiment of the present disclosure, in an extended condition on a surface;
- Figure 5 shows a cross-sectional view along the line V-V of the protection device according to Figure 4;
- Figure 6 shows a side view of a protection device according to an embodiment of the present disclosure, in a condition where worn;
- Figure 7 shows a cross-sectional view along the line VII-VII of the protection device according to Figure 6;
- Figure 8 shows a front view of a garment including a protection device according to an embodiment of the present disclosure;
- Figure 9 shows a cross-sectional view along the line IX-IX of the protection device according to Figure 8;

[0025] With reference to the accompanying figures, the reference number 10 indicates a personal protection device according to the present disclosure in accordance with an embodiment of the present disclosure.

[0026] The personal protection device 10 comprises an inflatable member 12 which is adapted to assume substantially a first rest condition or deflated condition, and a second active condition or inflated condition. The modes for inflating the inflatable member 12 will be described in the description below.

[0027] In one embodiment of the present disclosure the inflatable element 12 is in the form of a vest and is adapted to surround a top or chest zone of a user's body. In particular, the inflatable member 12 includes a chest zone 12a, a back zone 12b and a side zone 12c, 12d. The zones 12a, 12b, 12c, 12d are connected together in fluid communication via the shoulders.

[0028] The inflatable member 12 may be made using the technology described in patent applications WO2010/067288 and WO2010/067393. The inflatable member 12 includes a first inflatable member portion 20, 30, 40 and a second inflatable member portion 21, 31,

41. This first inflatable member portion 20, 30, 40 and this second inflatable member portion 21, 31, 41 are terminal or end portions of the inflatable member 12 and are partially superimposed. In other words, the first inflatable member portion 20, 30, 40 and second portion 21, 31, 41 of the inflatable member are portions arranged at the free ends of the inflatable member 12

[0029] Even more particularly, in one embodiment of the present disclosure such as that illustrated in the figures, three superimposition areas, indicated by the reference letters A, B, C, are provided. A first superimposition area A corresponds to a central zone of the chest. A second superimposition area B corresponds to a first side zone of the user. A third superimposition area C corresponds to a second side zone of the user. It is to be understood that a single superimposition area may be provided in the chest zone or the side zone or in another zone of the user's body. Consequently, in an embodiment of the present disclosure such as that shown in the figures, the first portion 20 and the second portion 21 of the inflatable member 12 are end portions situated in the chest region of a user. The first portion 30 and the second portion 31 of the inflatable member are end portions situated along a first side of a user. The first portion 40 and the second portion 41 of the inflatable member are end portions situated along a second side of a user.

[0030] A remaining part of the inflatable member 12 which does not have superimposed or overlapped zones is adjacent to the overlapping area A, B, C and is indicated generally by the reference number 18. As a result the inflatable member 12 also covers substantially the entire torso without superficial discontinuities.

[0031] According to one aspect of the present disclosure, the personal protection device 10 includes one or more connecting and closing devices or structures 50, associated with the first portion 20, 30, 40 of the inflatable member and the second portion 21, 31, 41 of the inflatable member in the region of the superimposition area A, B, C. The connecting device or structure 50 is a zip structure, for example in the superimposition area A, and a structure with strings, straps or laces in the area B and in the superimposition area C. It is to be understood that the connecting structures 50 of the three superimposition areas may be all the same or inverted in different ways with respect to the embodiment shown in the figures.

[0032] It can be seen that each of the first inflatable member portion 20, 30, 40 and second inflatable member portion 21, 31, 41 is associated with a part of the connecting structure 50 which is connected to the complementary part of the connecting structure 50 so as to ensure stable closing of the first inflatable member portion 20, 30, 40 and the second inflatable member portion 21, 31, 41.

[0033] In one embodiment, such as that shown in the figures, the connecting structure 50, such as that which is situated on the user's chest, comprises two flaps or panels made of soft material 51, 52 such as fabric. Each of the two flaps 51, 52 is fixed, for example stitched or

glued to one of the two portions 20, 21 of the inflatable member 12 in a zone adjacent to the superimposition or overlapping area A. These flaps may extend over the entire inflatable member 12, lining it on the outer side.

[0034] In the overlapping area A the two flaps 51 and 52 are free and movable with respect to the inflatable member 12.

[0035] In this way, when the two portions 20, 21 of the inflatable member 12 are superimposed, the two flaps 51, 52 are situated close and may be connected together. The two flaps 51, 52 may be pieces or panels of cloth or fabric which extend over an entire length of the portions 20, 21 of the inflatable member 12, so as to allow a continuous connection between the two portions 20, 21. These flaps 51, 52 may be provided at respective ends with a zip portion 53, 54 or other connecting device of the type which can be opened or reversed. A zip portion 53 associated with a flap 51 is connected in a reversible or temporary manner to a complementary zip portion 54 associated with the other flap 52.

[0036] Consequently, the two inflatable member portions 20, 21 may be superimposed, for example, on the chest of a user and the connecting structure 50 may be arranged in the centre of the chest so as to allow convenient central opening/closing of the protection device 10.

[0037] Even more particularly, the flaps 51, 52 are provided with elastic inserts 55, for example in the superimposition area A, namely where the flaps 51, 52 are freely movable. In an alternative embodiment, the flaps 51, 52 are made of a totally elastic fabric. The presence of the flaps with inserts 55 which are elastic or made of elastic fabric allows widening of the inflatable member 12 during inflation, thus preventing an increase in volume of the inflatable member from causing any constriction of the user's body. In other words, the elastic material allows adaptation of the entire inflation device of the inflatable member 12 and is also able to favor the return of the inflatable member into the deflated condition; this is possible owing to the typical properties of the elastic material which, once deformed under a deforming action (in this case caused by the inflation of the inflatable member), resumes its normal or initial configuration when the deforming action ceases.

[0038] In fact, when the inflatable member 12 is inflated, the insert is in a completely deformed condition and the overall extension of the protection device in fact increases, whereas, when the inflatable member in the deflated condition, the elastic insert returns into an undeformed or only partially deformed condition, thus also causing the entire inflatable member 12 to return into its initial condition.

[0039] It should be noted that the portions 20, 21, 30, 31, 40, 41 of the inflatable member move away from each other during inflation and, owing to the elastic material, return into the initial position.

[0040] In one embodiment, such as that shown in the figures and as already mentioned above, the connecting

structure 50, such as that associated with the area B and with the superimposition area C includes a strip or strap, and more particularly in the example two pairs of fabric strips or straps 60 with a suitable resistance to tensile stress. The strips 60 are provided with Velcro sections 61 for fixing together. Each strip 60 is associated with one of the portions of the inflatable member 12 (first portion 30, 40 and second portion 31, 41). The strip or string 60 is connected by means of Velcro to the other strip by fixing together the Velcro™ so as to connect the first inflatable member portion 30, 40 and the second inflatable member portion 31, 41 in a reversible manner (Figure 7). The extension of the Velcro™ is such as to allow the degree of overlapping to be adjusted and the fit of the protection device to be adapted to the chest of a user.

[0041] The strip 60 may also be provided with an elastic insert 55, as can be seen in Figure 7.

[0042] As a result, the two portions 30, 31; 40, 41 of the inflatable member may be superimposed for example on the sides of a user, or on the chest, so as to allow easy central opening/closing of the protection device 10 and also adjustment of the mutual superimposition, with adaptation of the fit.

[0043] In one embodiment of the present disclosure, the height of the first portion 20, 30, 40 of the inflatable member and the second portion 21, 31, 41 of the inflatable member when superimposed is, in the overlapping area, smaller than the height of the remaining part of the personal protection device so as to ensure a substantially uniform height of the entire personal protection device (as can be seen in Figure 3), independently of the overlapping. The different height is obtained using textile structures with threads of different height, as described in the patent applications WO2010/067288 and WO2010/067393 which are mentioned above.

[0044] More particularly, in accordance with said technology, the inflatable member has a height which can be determined beforehand. In fact, the inflatable member 12 comprises a plurality of tie members 13, in the example threads, which are indicated diagrammatically in Figure 3 and Figure 5 and are distributed inside the inflatable member 12, said tie members 13 being stably connected to opposite surface portions of the inflatable member 12.

[0045] Said tie members 13 have in particular a length such that, when the inflatable member 12 is in the deflated rest condition, the tie members 13 are in a non-tensioned condition and are collapsed inside the inflatable member 12, whereas, when the inflatable member 12 is in the inflated condition, the tie members 13 are subjected to tensile stress. More particularly, the tie members 13 are connected to respective meshes 14 which are lined or covered externally by sheets or walls 15. In practice, the inflatable member 12 includes a first sheet 15 or first wall, to which a first mesh 14 is adheringly fixed, and a second sheet 15, or second wall, to which a second mesh is adheringly fixed, wherein said meshes 14 are connected together by means of the plurality of tie members 13. The two sheets 15 are situated opposite each other and

are perimetally connected in a sealed manner along respective perimetral edges.

[0046] The height of the inflatable member 12 can be adjusted by suitably setting the maximum distance which can be obtained between the meshes 14 with a maximum longitudinal extension of the tie members. Essentially, the inflatable member 12 has a height which can be determined beforehand, since the maximum expansion of the inflatable member can be controlled by controlling the length and the maximum tension of the tie members.

[0047] As a result, in order to obtain an inflatable member having different height portions, it is possible to use two structures 114a, 114b (formed by meshes 14 and tie members 13 of suitable height) where the length is chosen so as to determine a maximum mutual distance between the meshes 14 corresponding to a maximum local expansion of the respective inflatable member in the inflated condition. Basically two textile structures 114a, 11b with tie members 13 having different lengths are used.

[0048] An edge of a first mesh 14 of a textile structure 114a having a smaller height may be joined or stitched to a respective edge of a mesh of another textile structure 114b having a greater height, and similarly the edges of the respective opposite meshes are stitched or joined together, as shown in Figures 3 and 5. In this way, the portions in which the tie members 13 have different lengths are joined together. The meshes 14 and the tie members with different lengths are enclosed between the sheets 15 of soft material and are gas-tight, for example made of polyurethane or polyamide, having a greater surface area than the meshes 14.

[0049] In some embodiments, the smaller length of the tie members is chosen so as to obtain a portion 20, 21; 30, 31, 40, 41 of the inflatable member 12 of about 37 mm height.

[0050] The remaining part of the inflatable member 12 has instead a height of 50 mm.

[0051] In this way, in the overlapping areas A, B, C it is possible to control and limit the overall volume.

[0052] It is also pointed out that the inflatable member 12 described above may be easily incorporated inside a garment, such as a jacket 100 (Figure 8), for example inside respective pockets 80 of a garment.

[0053] The garment 100 may be designed with a structure having pockets 80 for containing the inflatable member 12, which are superimposed in the same way as the inflatable member. More particularly, each pocket 80 has an inner wall 80a which acts as an inner lining and an outer wall which coincides with a visible surface of the garment.

[0054] The garment includes flaps 81, 82 which are entirely comparable in terms of structure and function to the flaps 51, 52 described above and provided, where appropriate, with an elastic insert 83. The flaps 81, 82 are fixed to the outer wall 80b of the pocket and are free and movable in a superimposition area, so as to allow the garment to be closed and a closed condition of the inflatable member to be maintained in the superimposi-

tion area.

[0055] Alternatively, as mentioned above, in one embodiment, the inflatable member 12 may be lined externally, or covered, with a fabric suitable for clothing, and assume the appearance of a garment which may be worn on its own.

[0056] With regard to inflation, in order to perform inflation of the inflatable element 12, in the event of a sudden fall and/or sliding and/or an impact involving a user or a vehicle being ridden/driven, the protection device 10 is adapted to cooperate with special activation means (not shown) which are operationally connected to the cylinder (not shown) containing compressed cold gas, for example helium. The cylinder may be provided with a respective shut-off valve (not shown).

[0057] Alternatively, the inflation fluid source may comprise gas generators of the pyrotechnical or other hybrid type or other types known according to the state of the art.

[0058] Opening of the shut-off valve of each inflation cylinder is preferably controlled by a control unit depending on detection of the state of the vehicle/rider system; for example said control unit may implement a system for predicting the fall which allows early identification of the fall event and a reliable prediction of this by accelerometer sensor means fixed to the vehicle (or rider) and a unit for processing the signals produced by the said sensors.

[0059] Alternatively, the device according to the present disclosure may also be applied using an activation cable connected to a vehicle ridden by a user, which cable activates inflation of the inflatable element following the movement of the user away from the vehicle, for example following a fall or a sudden impact. Use of a cable is employed in particular in the horse-riding sector.

[0060] In any case the aforementioned activation and inflation means may be integrated in the protection device according to the present invention or located on the outside thereof.

[0061] It should also be noted that the activation modes, although being an aspect of particular importance for effective operation of the device, will not be further described in greater detail since they are methods which are essentially already known to a person skilled in the art of protection of an individual from sudden impacts.

[0062] The subject-matter of the present disclosure has been described hitherto with reference to preferred embodiments thereof. It is to be understood that other embodiments relating to the same inventive idea may exist, all of these falling within the scope of protection of the claims which are attached below.

Claims

1. Personal protection device (10) for the protection of a portion of the body of a user, said device comprising an inflatable member (12) intended to protect at

least partially a zone of the body of a user, wherein the personal protection device (10) includes at least a first portion (20, 30, 40) of the inflatable member (12) and a second portion (21, 31, 41) of the inflatable member (12), wherein the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12) are superimposed in a corresponding overlapping area or superimposition area (A, B, C), and wherein the personal protection device includes at least one connecting device or structure (50) associated with the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12) in the overlapping (area A, B, C), **characterized in that** the connecting structure (50) comprises two flaps (51, 52), or panels, made of soft material, wherein one side of one of the two flaps (51, 52) is, directly or indirectly, fixed or connected to one (20, 30, 40, 21, 31, 41) of the two portions of the inflatable member (12), and the other side of the two flaps (51, 52), on a side facing the other of the two portions of the inflatable member (12), is free and mobile and adapted to be connected to the other of the two flaps (51, 52) which is, directly or indirectly, fixed or connected to the other of the first portion (20, 30, 40) and the second portion (21, 31, 41) of the inflatable member (12).

2. Personal protection device (10) according to claim 1, wherein the connecting device or structure (50) is a structure which allows a reversible connection between the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12).
3. Personal protection device (10) according to claim 1 or 2, wherein the connecting device or structure (50) is a structure which allows adjustment of the superimposition of the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12).
4. Personal protection device (10) according to any one of the preceding claims, wherein the connecting device or structure (50) is a zip structure or a structure with strings, straps or laces.
5. Personal protection device (10) according to any one of the preceding claims 1 to 4, wherein the connecting device or structure (50) is centered in said superimposition area (A, B, C).
6. Personal protection device (10) according to any one of the preceding claims, wherein each of the two flaps (51, 52) is a cloth or fabric piece or panel which is, directly or indirectly, connected to the respective first portion (20, 30, 40) of the inflatable member (12) or second portion (21, 31, 41) of the inflatable member

(12) in an intermediate region between the overlapping area (A, B, C) and a remaining part (18) of the inflatable member (12).

7. Personal protection device (10) according to any one of the preceding claims, wherein the connecting structure (50) comprises elastic inserts (55) or is made of elastic material. 5
8. Personal protection device (10) according to claim 6 or 7, wherein each or one of the two flaps includes elastic inserts (55) or is made of elastic material. 10
9. Personal protection device (10) according to any one of the preceding claims, wherein the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12) are terminal portions, or end portions, of the inflatable member (12) intended to face to each other. 15
10. Personal protection device (10) according to any one of the preceding claims, wherein the overlapping area (A, B, C) is a front area of the torso of a user and/or a side area of the torso of a user. 20
11. Personal protection device (10) according to any one of the preceding claims, wherein the inflatable member (12) is lined externally, or covered, with a fabric suitable for clothing, and assume the appearance of a garment which may be worn on its own. 25
12. Garment (100) including, or in combination with, a personal protection device according to any one of the preceding claims. 30
13. Garment (100) according to claim 12, wherein said connecting device or connecting structure (50) is part of the garment (100) and is indirectly associated with the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12) in the overlapping area (A, B, C). 35
14. Garment (100) according to claim 12 or 13, wherein the inflatable member (12) is incorporated inside respective pockets (80) of the garment. 40
15. Garment (100) according to claim 14, wherein the pockets (80) for containing the inflatable member (12) are superimposed in the same way as the inflatable member (12). 45
16. Garment (100) according to claim 15, wherein, each pocket (80) has an inner wall (80a) which acts as an inner lining and an outer wall which coincides with a visible surface of the garment and wherein the garment includes flaps (81, 82) which are entirely comparable in terms of structure and function to said flaps (51, 52) of the connecting structure (50), wherein the 50

flaps (81, 82) of the garments are fixed to the outer wall (80b) of the pocket and are free and movable in a superimposition area, so as to allow the garment to be closed and a closed condition of the inflatable member to be maintained in the superimposition area.

17. Method for protecting a user comprising the steps of

- arranging an inflatable member (12) at least partially on a region of the user's body, wherein
- a first portion (20, 30, 40) of said inflatable member (12) is superimposed on a second portion (21, 31, 41) of the inflatable member (12) in a corresponding overlapping area or superimposition area (A, B, C), and wherein the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12) are connected together in the superimposition area (A, B, C), wherein the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12) are connected by means of a connecting structure (50), wherein the connecting structure (50) comprises two flaps (51, 52), or panels, made of soft material, wherein one side of one of the two flaps (51, 52) is, directly or indirectly, fixed or connected to one (20, 30, 40, 21, 31, 41) of the two portions of the inflatable member (12), and the other side of the two flaps (51, 52), on a side facing the other of the two portions of the inflatable member (12), is free and mobile and adapted to be connected to the other of the two flaps (51, 52) associated with the other of the first portion (20, 30, 40) and the second portion (21, 31, 41) of the inflatable member (12).

18. Method according to claim 17, wherein the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12) are connected by elastic means such that, during inflation of the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12), the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12) move temporarily away from each other thus decreasing a respective overlapping condition and, at the end of inflation, the elastic means return into an original condition such that the first portion (20, 30, 40) of the inflatable member (12) and the second portion (21, 31, 41) of the inflatable member (12) move again close to each other. 55

Patentansprüche

1. Persönliche Schutzvorrichtung (10) zum Schutz eines Teils des Körpers eines Benutzers, wobei die Vorrichtung ein aufblasbares Element (12) umfasst, das dazu bestimmt ist, zumindest teilweise eine Zone des Körpers eines Benutzers zu schützen, wobei die persönliche Schutzvorrichtung (10) mindestens einen ersten Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und einen zweiten Abschnitt (21, 31, 41) des aufblasbaren Elements (12) einschließt, wobei der erste Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und der zweite Abschnitt (21, 31, 41) des aufblasbaren Elements (12) in einem entsprechenden Überlappungsbereich oder Überlagerungsbereich (A, B, C) überlagert sind, und wobei die persönliche Schutzvorrichtung zumindest eine Verbindungseinrichtung oder -vorrichtung (50) aufweist, die mit dem ersten Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und dem zweiten Abschnitt (21, 31, 41) des aufblasbaren Elements (12) in dem überlappenden Bereich (A, B, C) verbunden ist, **dadurch gekennzeichnet, dass** die Verbindungsvorrichtung (50) zwei Klappen (51, 52) oder Platten aus weichem Material aufweist, wobei eine Seite einer der beiden Klappen (51, 52) direkt oder indirekt mit einem (20, 30, 40, 21, 31, 41) der beiden Abschnitte des aufblasbaren Elements (12) verbunden oder daran fixiert ist, und die andere Seite der beiden Klappen (51, 52) auf einer dem anderen der beiden Abschnitte des aufblasbaren Elements (12) zugewandten Seite frei und beweglich ist, und dazu angepasst ist, mit der anderen der beiden Klappen (51, 52) verbunden zu werden, die direkt oder indirekt mit dem anderen des ersten Abschnitts (20, 30, 40) und des zweiten Abschnitts (21, 31, 41) des aufblasbaren Elements (12) verbunden oder daran fixiert ist.
2. Persönliche Schutzvorrichtung (10) gemäß Anspruch 1, in der die Verbindungseinrichtung oder -vorrichtung (50) eine Vorrichtung ist, die eine reversible Verbindung zwischen dem ersten Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und dem zweiten Abschnitt (21, 31, 41) des aufblasbaren Elements (12) ermöglicht.
3. Persönliche Schutzvorrichtung (10) gemäß Anspruch 1 oder 2, in der die Verbindungseinrichtung oder -vorrichtung (50) eine Vorrichtung ist, die eine Einstellung der Überlagerung des ersten Abschnitts (20, 30, 40) des aufblasbaren Elements (12) und des zweiten Abschnitts (21, 31, 41) des aufblasbaren Elements (12) ermöglicht.
4. Persönliche Schutzvorrichtung (10) gemäß einem der vorhergehenden Ansprüche, wobei die Verbindungseinrichtung oder -vorrichtung (50) eine Reißverschlussvorrichtung oder eine Vorrichtung mit Saiten, Riemen oder Schnürsenkeln ist.
5. Persönliche Schutzvorrichtung (10) gemäß einem der vorhergehenden Ansprüche 1 bis 4, wobei die Verbindungseinrichtung oder -vorrichtung (50) in dem Überlagerungsbereich (A, B, C) zentriert ist.
6. Persönliche Schutzvorrichtung (10) gemäß einem der vorhergehenden Ansprüche, wobei jede der beiden Klappen (51, 52) ein Stoff oder Gewebeteil oder eine Platte ist, das oder die direkt oder indirekt mit dem jeweiligen ersten Abschnitt (20, 30, 40) des aufblasbaren Elements (12) oder mit dem zweiten Abschnitt (21, 31, 41) des aufblasbaren Elements (12) in einem Zwischenbereich zwischen dem Überlappungsbereich (A, B, C) und einem verbleibenden Teil (18) des aufblasbaren Elements (12) verbunden ist.
7. Persönliche Schutzvorrichtung (10) gemäß einem der vorhergehenden Ansprüche, wobei die Verbindungseinrichtung (50) elastische Einsätze (55) aufweist oder aus elastischem Material besteht.
8. Persönliche Schutzvorrichtung (10) gemäß Anspruch 6 oder 7, wobei jede oder eine der beiden Klappen elastische Einsätze (55) aufweist oder aus elastischem Material besteht.
9. Persönliche Schutzvorrichtung (10) gemäß einem der vorhergehenden Ansprüche, wobei der erste Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und der zweite Abschnitt (21, 31, 41) des aufblasbaren Elements (12) Endabschnitte oder Endabschnitte des aufblasbaren Elements (12) sind, die dazu bestimmt sind, einander gegenüber zu liegen.
10. Persönliche Schutzvorrichtung (10) gemäß einem der vorhergehenden Ansprüche, wobei der Überlappungsbereich (A, B, C) ein vorderer Bereich des Rumpfes eines Benutzers und / oder ein Seitenbereich des Rumpfes eines Benutzers ist.
11. Persönliche Schutzvorrichtung (10) gemäß einem der vorhergehenden Ansprüche, wobei das aufblasbare Element (12) außen mit einem Stoff gefüttert oder bedeckt ist, der für Bekleidung geeignet ist, und die Anmutung eines Kleidungsstückes annimmt, das für sich allein getragen werden kann.
12. Kleidungsstück (100) einschließlich oder in Kombination mit einer persönlichen Schutzvorrichtung gemäß einem der vorhergehenden Ansprüche.
13. Kleidungsstück (100) gemäß Anspruch 12, in dem die Verbindungseinrichtung oder -vorrichtung (50) Teil des Kleidungsstücks (100) ist und mit dem ers-

ten Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und dem zweiten Abschnitt (21, 31, 41) des aufblasbaren Elements (12) im Überlappungsbereich (A, B, C) indirekt verbunden ist.

14. Kleidungsstück (100) gemäß Anspruch 12 oder 13, in dem das aufblasbare Element (12) innerhalb jeweiliger Taschen (80) des Kleidungsstückes integriert ist.

15. Kleidungsstück (100) gemäß Anspruch 14, in dem die Taschen (80) für die Integration des aufblasbaren Elements (12) in der gleichen Weise übereinander angeordnet sind, wie das aufblasbare Element (12).

16. Kleidungsstück (100) gemäß Anspruch 15, in dem jede Tasche (80) eine innere Wandung (80a) aufweist, die als ein inneres Futter und eine äußere Wandung fungiert und die mit einer sichtbaren Oberfläche des Kleidungsstücks übereinstimmt oder zusammenfällt, und in dem das Kleidungsstück Klappen (81, 82) einschließt, die in Bezug auf Struktur und Funktion vollständig vergleichbar sind mit den Klappen (51, 52) der Verbindungsvorrichtung (50), wobei die Klappen (81, 82) des Kleidungsstücks an der äußeren Wandung (80a) der Tasche befestigt sind und in einem Überlappungsbereich frei und beweglich sind, damit das Kleidungsstück geschlossen werden kann und damit ein geschlossener Zustand des aufblasbaren Elements in dem Überlappungsbereich beibehalten werden kann.

17. Verfahren zum Schützen eines Benutzers, umfassend die Schritte:

- des Anordnens eines aufblasbaren Elements (12) zumindest teilweise auf einem Bereich des Körpers des Benutzers, wobei
- ein erster Abschnitt (20, 30, 40) des aufblasbaren Elements (12) über einem zweiten Abschnitt (21, 31, 41) des aufblasbaren Elements (12) in einem entsprechenden Überlappungsbereich oder Überlagerungsbereich (A, B, C) angeordnet ist oder wird, und wobei der erste Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und der zweite Abschnitt (21, 31, 41) des aufblasbaren Elements (12) im Überlagerungsbereich (A, B, C) miteinander verbunden sind, wobei der erste Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und der zweite Abschnitt (21, 31, 41) des aufblasbaren Elements (12) mittels einer Verbindungsvorrichtung (50) verbunden sind, wobei die Verbindungsvorrichtung (50) zwei Klappen (51, 52) oder Platten aus weichem Material aufweist, wobei eine Seite einer der beiden Klappen (51, 52) direkt oder indirekt mit einem (20, 30, 40, 21, 31, 41) der beiden Abschnitte des aufblasbaren Elements (12)

verbunden oder daran fixiert ist, und die andere Seite der beiden Klappen (51, 52) auf einer dem anderen der beiden Abschnitte des aufblasbaren Elements (12) zugewandten Seite frei und beweglich ist, und dazu angepasst ist, mit der anderen der beiden Klappen (51, 52) verbunden zu werden, die mit dem anderen des ersten Abschnitts (20, 30, 40) und des zweiten Abschnitts (21, 31, 41) des aufblasbaren Elements (12) verbunden ist.

18. Verfahren gemäß Anspruch 17, in dem der erste Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und der zweite Abschnitt (21, 31, 41) des aufblasbaren Elements (12) mittels elastischer Mittel derart verbunden sind, dass während des Aufblasens des ersten Abschnitts (20, 30, 40) des aufblasbaren Elements (12) und des zweiten Abschnitts (21, 31, 41) des aufblasbaren Elements (12) der erste Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und der zweite Abschnitt (21, 31, 41) des aufblasbaren Elements (12) sich vorübergehend voneinander weg bewegen, wodurch ein jeweiliger überlappender Zustand verringert wird, und am Ende des Aufblasens die elastischen Mittel wieder einen ursprünglichen Zustand einnehmen, so dass der erste Abschnitt (20, 30, 40) des aufblasbaren Elements (12) und der zweite Abschnitt (21, 31, 41) des aufblasbaren Elements (12) sich wieder nah zu einander bewegen.

Revendications

1. Dispositif de protection personnelle (10) pour la protection d'une partie du corps d'un utilisateur, ledit dispositif comprenant un élément gonflable (12) prévu pour protéger au moins partiellement une zone du corps d'un utilisateur, dans lequel le dispositif de protection personnelle (10) comprend au moins une première partie (20, 30, 40) de l'élément gonflable (12) et une seconde partie (21, 31, 41) de l'élément gonflable (12), dans lequel la première partie (20, 30, 40) de l'élément gonflable (12) et la seconde partie (21, 31, 41) de l'élément gonflable (12) sont superposées dans une zone de chevauchement ou une zone de superposition (A, B, C) correspondante, et dans lequel le dispositif de protection personnelle comprend au moins un dispositif ou structure de raccordement (50) associé(e) avec la première partie (20, 30, 40) de l'élément gonflable (12) et la seconde partie (21, 31, 41) de l'élément gonflable (12) dans la zone de chevauchement (A, B, C), **caractérisé en ce que :**

la structure de raccordement (50) comprend deux rabats (51, 52) ou panneaux, réalisés avec un matériau souple, dans lequel un côté de l'un des deux rabats (51, 52) est, directement ou in-

- directement, fixé ou raccordé à l'une (20, 30, 40, 21, 31, 41) des deux parties de l'élément gonflable (12) et l'autre côté des deux rabats (51, 52), sur un côté faisant face à l'autre des deux parties de l'élément gonflable (12), est libre et mobile et adapté pour être raccordé à l'autre des deux rabats (51, 52) qui est, directement ou indirectement, fixé ou raccordé à l'autre parmi la première partie (20, 30, 40) et la seconde partie (21, 31, 41) de l'élément gonflable (12).
2. Dispositif de protection personnelle (10) selon la revendication 1, dans lequel le dispositif ou structure de raccordement (50) est une structure qui permet un raccordement réversible entre la première partie (20, 30, 40) de l'élément gonflable (12) et la seconde partie (21, 31, 41) de l'élément gonflable (12).
 3. Dispositif de protection personnelle (10) selon la revendication 1 ou 2, dans lequel le dispositif ou structure de raccordement (50) est une structure qui permet l'ajustement de la superposition de la première partie (20, 30, 40) de l'élément gonflable (12) et de la seconde partie (21, 31, 41) de l'élément gonflable (12).
 4. Dispositif de protection personnelle (10) selon l'une quelconque des revendications précédentes, dans lequel le dispositif ou structure de raccordement (50) est une structure de fermeture éclair ou une structure avec des bandes, des sangles ou des lacets.
 5. Dispositif de protection personnelle (10) selon l'une quelconque des revendications 1 à 4, dans lequel le dispositif ou structure de raccordement (50) est centré(e) dans ladite zone de superposition (A, B, C).
 6. Dispositif de protection personnelle (10) selon l'une quelconque des revendications précédentes, dans lequel chacun des deux rabats (51, 52) est une pièce ou panneau d'étoffe ou de tissu qui est, directement ou indirectement, raccordé(e) à la première partie (20, 30, 40) respective dudit élément gonflable (12) ou la seconde partie (21, 31, 41) de l'élément gonflable (12) dans une région intermédiaire entre la zone de chevauchement (A, B, C) et une partie résiduelle (18) de l'élément gonflable (12).
 7. Dispositif de protection personnelle (10) selon l'une quelconque des revendications précédentes, dans lequel la structure de raccordement (50) comprend des inserts élastiques (55) ou est réalisée avec un matériau élastique.
 8. Dispositif de protection personnelle (10) selon la revendication 6 ou 7, dans lequel chacun ou l'un des deux rabats comprend des inserts élastiques (55) ou est réalisé avec un matériau élastique.
 9. Dispositif de protection personnelle (10) selon l'une quelconque des revendications précédentes, dans lequel la première partie (20, 30, 40) de l'élément gonflable (12) et la seconde partie (21, 31, 41) de l'élément gonflable (12) sont des parties terminales ou parties d'extrémité, de l'élément gonflable (12) prévues pour se faire face.
 10. Dispositif de protection personnelle (10) selon l'une quelconque des revendications précédentes, dans lequel la zone de chevauchement (A, B, C) est une zone avant du torse d'un utilisateur et/ou une zone latérale du torse d'un utilisateur.
 11. Dispositif de protection personnelle (10) selon l'une quelconque des revendications précédentes, dans lequel l'élément gonflable (12) est doublé extérieurement ou recouvert avec un tissu approprié pour l'habillement, et prend l'apparence d'un vêtement qui peut être porté tout seul.
 12. Vêtement (100) comprenant, ou en combinaison avec, un dispositif de protection personnelle selon l'une quelconque des revendications précédentes.
 13. Vêtement (100) selon la revendication 12, dans lequel ledit dispositif de raccordement ou structure de raccordement (50) fait partie du vêtement (100) et est indirectement associé(e) à la première partie (20, 30, 40) de l'élément gonflable (12) et la seconde partie (21, 31, 41) de l'élément gonflable (12) dans la zone de chevauchement (A, B, C).
 14. Vêtement (100) selon la revendication 12 ou 13, dans lequel l'élément gonflable (12) est incorporé à l'intérieur de poches (80) respectives du vêtement.
 15. Vêtement (100) selon la revendication 14, dans lequel les poches (80) pour contenir l'élément gonflable (12) sont superposées de la même façon que l'élément gonflable (12).
 16. Vêtement (100) selon la revendication 15, dans lequel chaque poche (80) a une paroi interne (80a) qui sert de doublure interne et une paroi externe qui coïncide avec la surface visible du vêtement et dans lequel le vêtement comprend des rabats (81, 82) qui sont tout à fait comparables, en termes de structure et de fonction, auxdits rabats (51, 52) de la structure de raccordement (50) dans lequel les rabats (81, 82) des vêtements sont fixés sur la paroi externe (80b) de la poche et sont libres et mobiles dans une zone de superposition, afin de permettre de fermer le vêtement et de maintenir une condition fermée de l'élément gonflable dans la zone de superposition.
 17. Procédé pour protéger un utilisateur, comprenant les étapes suivantes :

agencer un élément gonflable (12) au moins partiellement sur une région du corps de l'utilisateur, dans lequel :

une première partie (20, 30, 40) dudit élément gonflable (12) est superposée sur une seconde partie (21, 31, 41) de l'élément gonflable (12) dans une zone de chevauchement ou une zone de superposition (A, B, C) correspondante, et dans lequel la première partie (20, 30, 40) de l'élément gonflable (12) et la seconde partie (21, 31, 41) de l'élément gonflable (12) sont raccordées ensemble dans la zone de superposition (A, B, C), dans lequel la première partie (20, 30, 40) de l'élément gonflable (12) et la seconde partie (21, 31, 41) de l'élément gonflable (12) sont raccordées au moyen d'une structure de raccordement (50), dans lequel la structure de raccordement (50) comprend deux rabats (51, 52) ou panneaux, réalisés avec un matériau souple, dans lequel un côté de l'un des deux rabats (51, 52) est, directement ou indirectement, fixé ou raccordé à l'une (20, 30, 40, 21, 31, 41) des deux parties de l'élément gonflable (12), et l'autre côté des deux rabats (51, 52), sur un côté faisant face à l'autre des deux parties de l'élément gonflable (12), est libre et mobile et adapté pour être raccordé à l'autre des deux rabats (51, 52) associé à l'autre parmi la première partie (20, 30, 40) et la seconde partie (21, 31, 41) de l'élément gonflable (12).

18. Procédé selon la revendication 17, dans lequel la première partie (20, 30, 40) de l'élément gonflable (12) et la seconde partie (21, 31, 41) de l'élément gonflable (12) sont raccordées par des moyens élastiques de sorte que, pendant le gonflage de la première partie (20, 30, 40) de l'élément gonflable (12) et de la seconde partie (21, 31, 41) de l'élément gonflable (12), la première partie (20, 30, 40) de l'élément gonflable (12) et la seconde partie (21, 31, 41) de l'élément gonflable (12) sont temporairement éloignées, diminuant ainsi une condition de chevauchement respective et à la fin du gonflage, les moyens élastiques reviennent dans une condition d'origine, de sorte que la première partie (20, 30, 40) de l'élément gonflable (12) et la seconde partie (21, 31, 41) de l'élément gonflable (12) se rapprochent à nouveau.

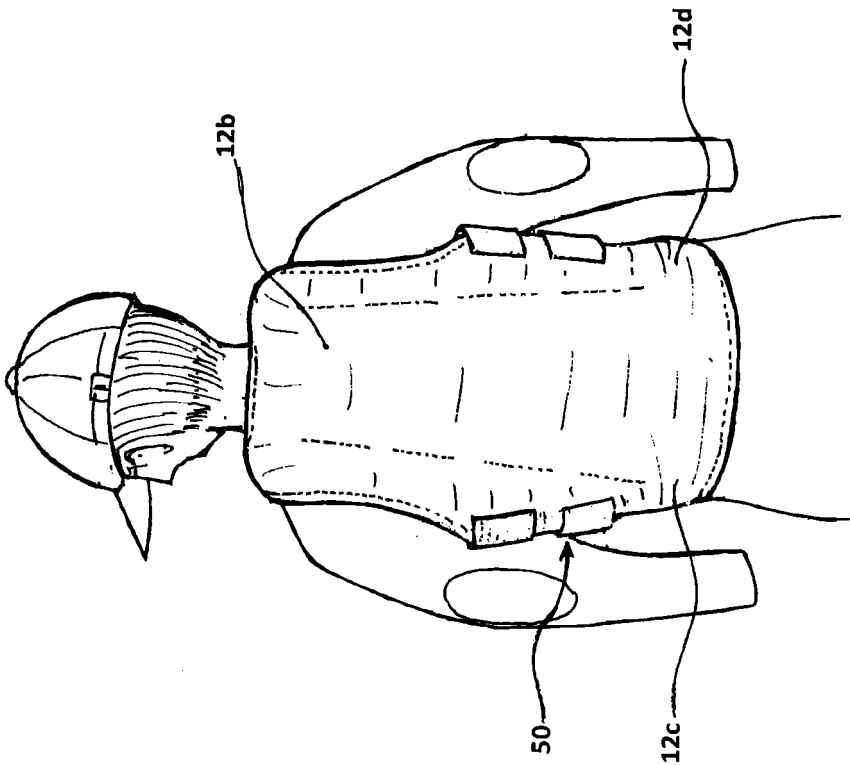


FIG. 2

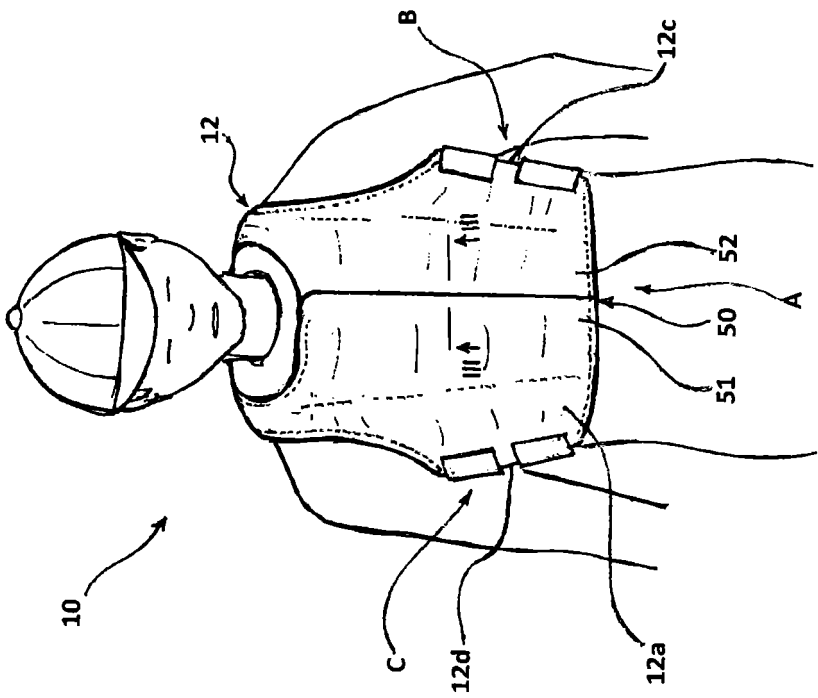


FIG. 1

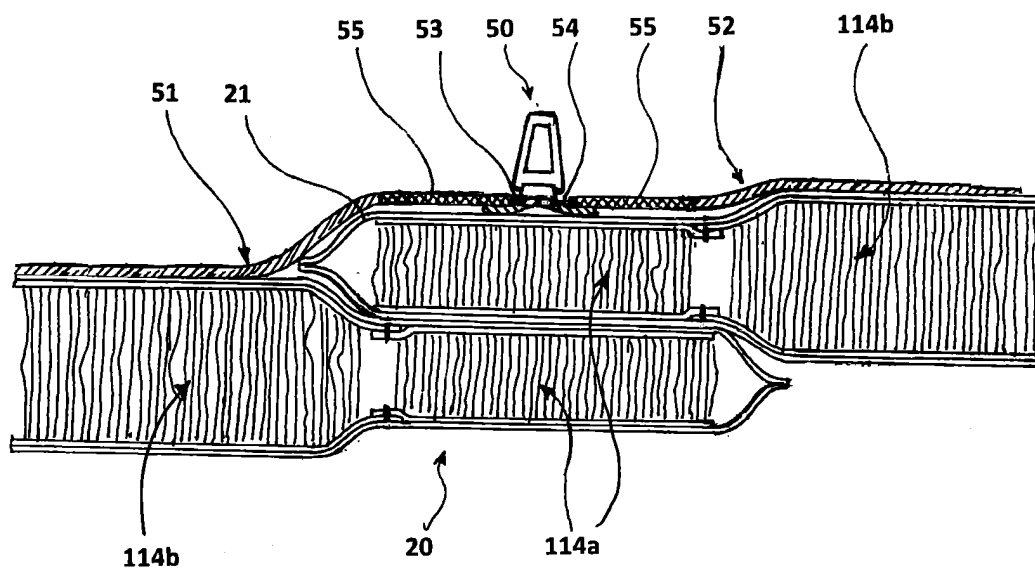


FIG. 3

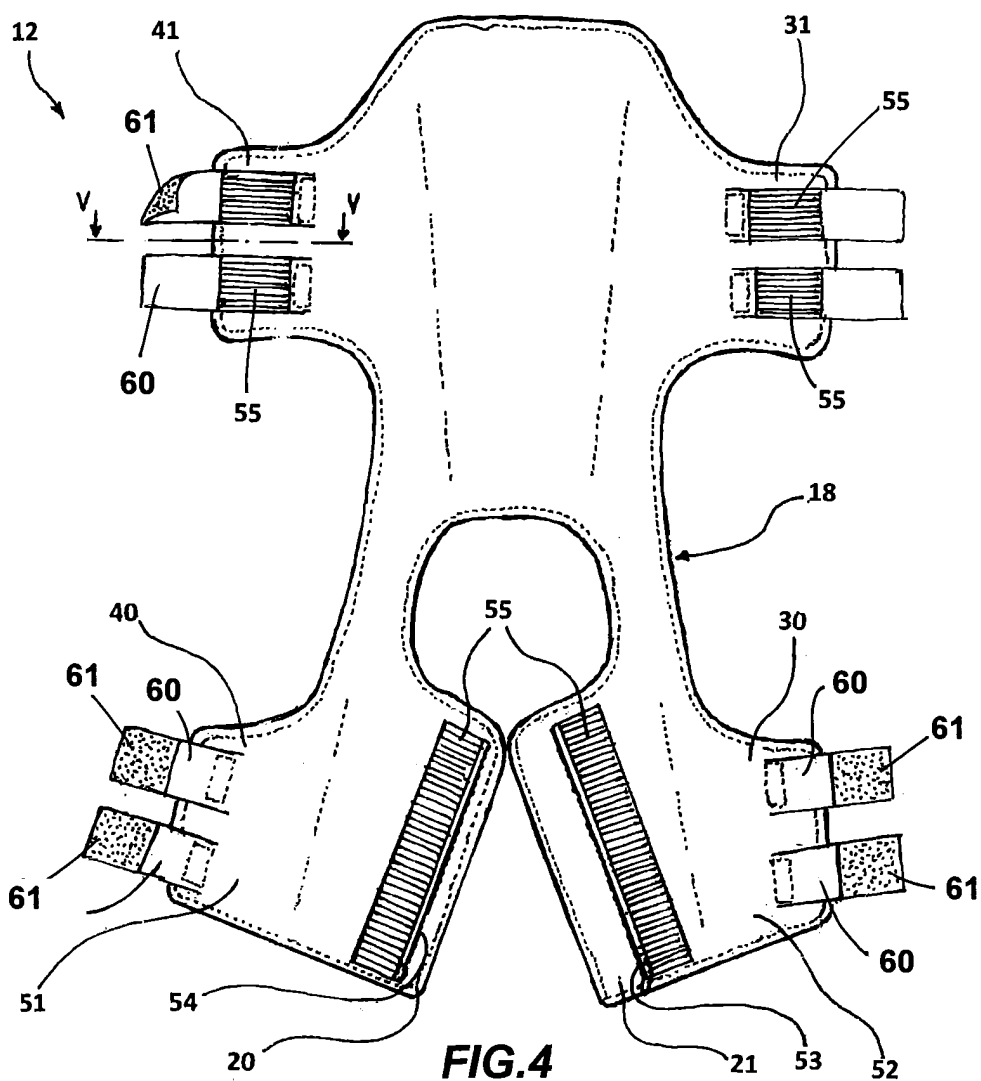


FIG. 4

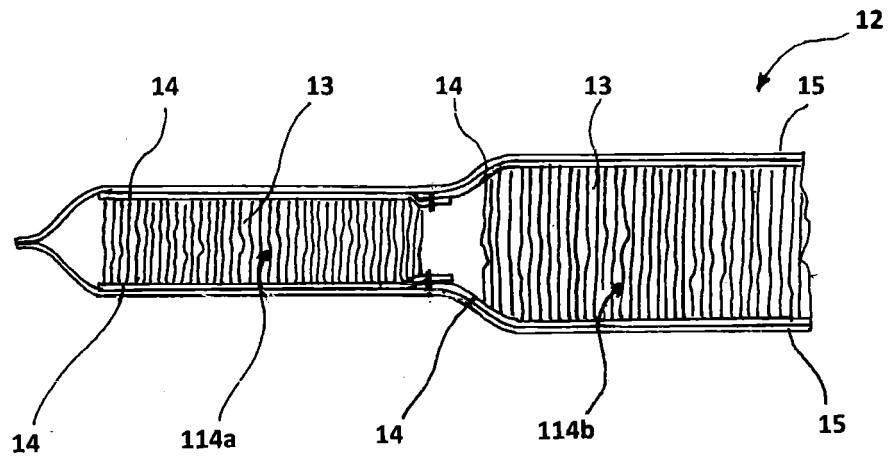


FIG.5

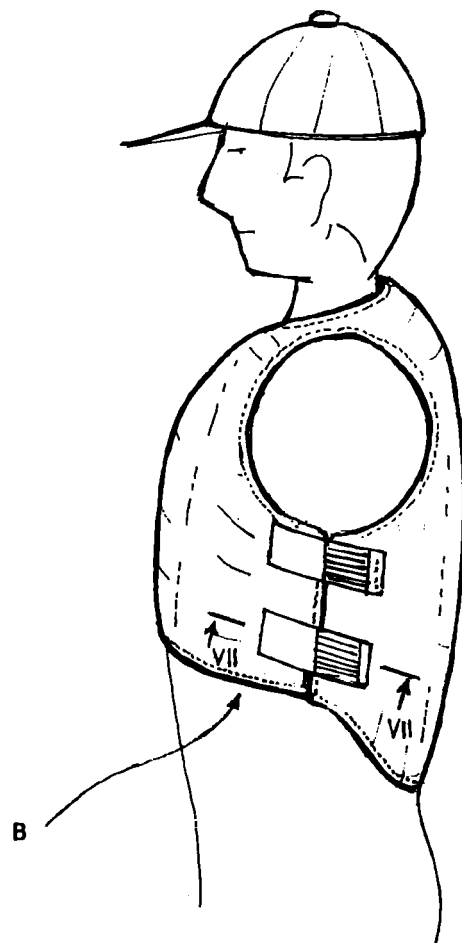


FIG.6

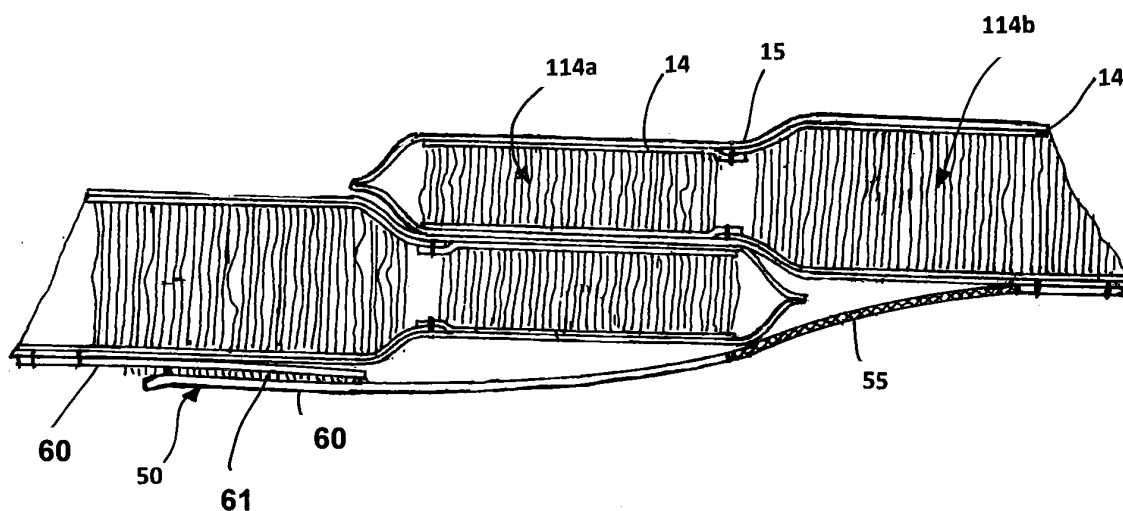


FIG. 7

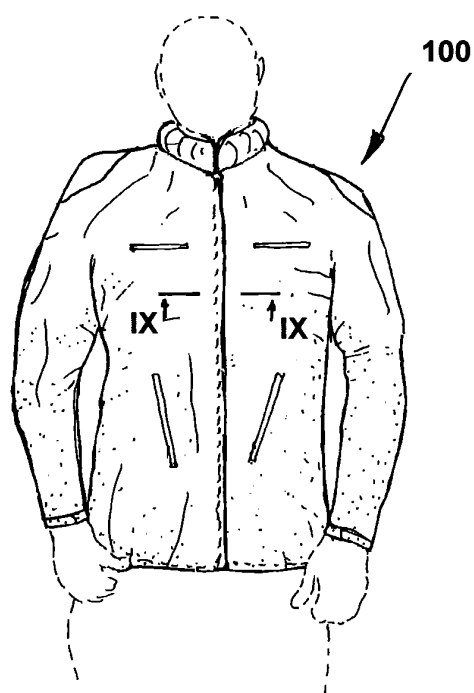


FIG. 8

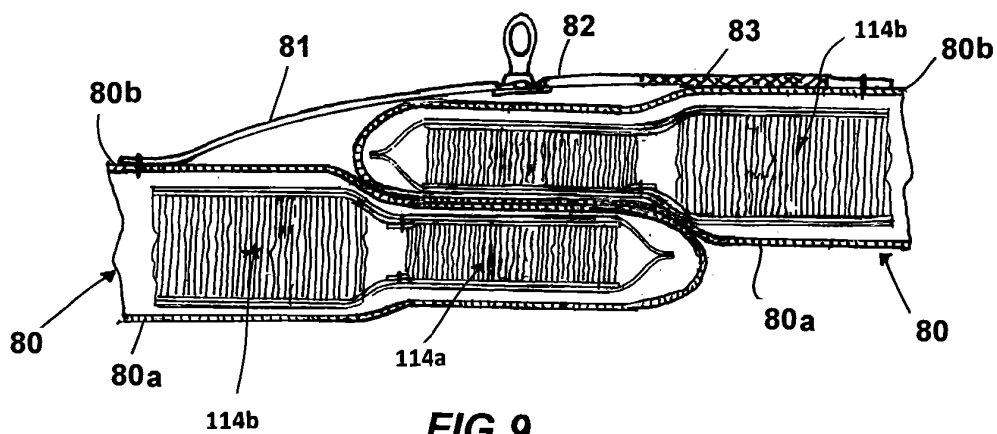


FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2007308818 A [0010]
- WO 2010067288 A [0028] [0043]
- WO 2010067393 A [0028] [0043]