

68 0976

7/00/91 Series 20
AUSTRALIA


Patents Act 1990

NOTICE OF ENTITLEMENT

We, **NIPPON STEEL CORPORATION** of 6-3, Otemachi 2-chome, Chiyoda-ku, TOKYO, 100, JAPAN the Applicant in respect of Application No.12013/95 state the following:

- 1 NIPPON STEEL CORPORATION is the Nominated Person in respect of the application.
- 2 The actual inventor of the invention, the subject of the application, is KOJIUCHINO.
- 3 The Nominated Person, NIPPON STEEL CORPORATION, is entitled to the grant of a patent in respect of the application because the said Nominated Person derived title to the invention from the actual inventor by way of assignment.
- 4 The Nominated Person is entitled to claim priority from the application listed in the declaration under Article 8 of the PCT because the Nominated Person is the applicant in respect of the application listed in the declaration under Article 8 of the PCT, and because the application was the first application made in a Convention country in respect of the invention the subject of the application.

Dated this 27th day of May, 1997.



A member of the firm of:
DAVIES COLLISON CAVE
for and on behalf of the applicant.



AU9512013

(12) PATENT ABRIDGMENT (11) Document No. AU-B-12013/95
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 680976

- (54) Title
RAIL OF HIGH ABRASION RESISTANCE AND HIGH TENACITY HAVING PEARLITE
METALLOGRAPHIC STRUCTURE AND METHOD OF MANUFACTURING THE SAME
- (51)⁶ International Patent Classification(s)
C22C 038/04 C21D 008/00 C21D 009/04 C22C 038/12
C22C 038/18 C22C 038/22 C22C 038/24 C22C 038/26
C22C 038/30
- (21) Application No. : 12013/95 (22) Application Date : 19.12.94
- (87) PCT Publication Number : WO95/17532
- (30) Priority Data
- | (31) Number | (32) Date | (33) Country |
|-------------|-----------|--------------|
| 5-320098 | 20.12.93 | JP JAPAN |
| 6-244440 | 07.10.94 | JP JAPAN |
| 6-244441 | 07.10.94 | JP JAPAN |
- (43) Publication Date : 10.07.95
- (44) Publication Date of Accepted Application : 14.08.97
- (71) Applicant(s)
NIPPON STEEL CORPORATION
- (72) Inventor(s)
KOUICHI UCHINO; TOSHIYA KUROKI; MASAHARU UEDA
- (74) Attorney or Agent
DAVIES COLLISON CAVE, GPO Box 3876, SYDNEY NSW 2001
- (56) Prior Art Documents
DE 3446794
JP 62-099438
US 4895605
- (57) Claim

1. A pearlitic steel rail of high wear resistance and toughness having a pearlitic structure consisting, by weight, of 0.60 to 1.20 % carbon, 0.10 to 1.20 % silicon, 0.40 to 1.50 % manganese, with the remainder consisting of iron and unavoidable impurities, the grain diameter of pearlite blocks averaging 20 to 50 μm in a part up to within at least 20 mm from the top surface of the rail head and in a part up to within at least 15 mm from the surface of the rail base and 35 to 100 μm in other parts, having an elongation of not less than 10 % and a V notch Charpy impact value of not less than 15 J/cm² in the part where the grain diameter of pearlite blocks averages 20 to 50 μm .

the surface of the rail base and 35 to 100 μ m in other parts, having an elongation of not less than 10% and a V notch Charpy impact value of not less than 15 J/cm² in the part where the grain diameter of pearlite blocks averages 20 to 50 μ m.

5. A process for manufacturing a pearlitic steel rail of high wear resistance and toughness as claimed in claim 1 comprising the steps of (i) roughing a billet of carbon or low-alloy steel containing, by weight, 0.60 to 1.20% carbon, 0.10 to 1.20% silicon, 0.40 to 1.50% manganese, with the remainder consisting of iron and impurities, into a semi-finished breakdown; (ii) continuously finish rolling the breakdown while the surface temperature thereof remains between 850° and 1000°C by giving three or more passes, with a reduction rate of 5 to 30 % per pass and a time interval of not longer than 10 seconds between the individual passes; and (iii) allowing the finished rail to cool naturally in the air, thereby adjusting the grain size of the pearlite blocks and the mechanical properties of the rail.



AU9512013


(51) 国際特許分類 6 C22C 38/00, 38/30, C21D 8/00		A1	(11) 国際公開番号 WO 95/17532
		(43) 国際公開日 1995年6月29日 (29.06.95)	
(21) 国際出願番号 PCT/JP94/02137		添付公開書類 国際調査報告書	
(22) 国際出願日 1994年12月19日 (19. 12. 94)			
(30) 優先権データ 特願平5/320098 1993年12月20日 (20. 12. 93) JP 特願平6/244440 1994年10月7日 (07. 10. 94) JP 特願平6/244441 1994年10月7日 (07. 10. 94) JP		680976	
(71) 出願人 (米国を除くすべての指定国について) 新日本製鐵株式会社 (NIPPON STEEL CORPORATION) (JP/JP) 〒100 東京都千代田区大手町二丁目6番3号 Tokyo, (JP)			
(72) 発明者; および (75) 発明者/出願人 (米国についてのみ) 内野耕一 (UCHINO, Kouichi) (JP/JP) 黒木俊哉 (KUROKI, Toshiya) (JP/JP) 上田正治 (UEDA, Masaharu) (JP/JP) 〒804 福岡県北九州市戸畑区飛船町1番1号 新日本製鐵株式会社 八幡製鐵所内 Fukuoka, (JP)			
(74) 代理人 弁理士 田村弘明, 外 (TAMURA, Hiroaki et al.) 〒111 東京都台東区浅草橋3丁目1番1号 ハリファックス浅草橋ビル3階 Tokyo, (JP)			
(81) 指定国 AU, BR, CA, CN, KR, RU, US, 欧州特許 (AT, DE, FR, GB, LU).			

(54) Title : RAIL OF HIGH ABRASION RESISTANCE AND HIGH TENACITY HAVING PEARLITE METALLOGRAPHIC STRUCTURE AND METHOD OF MANUFACTURING THE SAME

(54) 発明の名称 パーライト金属組織を呈した高耐摩耗性・高靱性レールおよびその製造法

(57) Abstract

This invention relates to a high-tenacity rail having a strength, an abrasion resistance, and a high carbon pearlite structure excellent in ductility and tenacity; and a method of manufacturing the same. A high-tenacity rail having elongation of not less than 12 % and a U-notch Charpy impact value of not less than 25 J/cm² obtained by forming fine pearlite blocks by a special rolling operation in steel of a high abrasion resistance containing 0.60-1.20 wt.% of C, 0.10-1.20 wt.% of Si and 0.40-1.50 wt.% of Mn, and one or not less than two kinds of elements out of Cr, Mo, V, Nb and Co as necessary; and a method of manufacturing the same. This invention enables the ductility and tenacity of a high carbon steel rail of a high abrasion resistance to be improved, and a rail of a high safety to be provided for railways in a cold district.

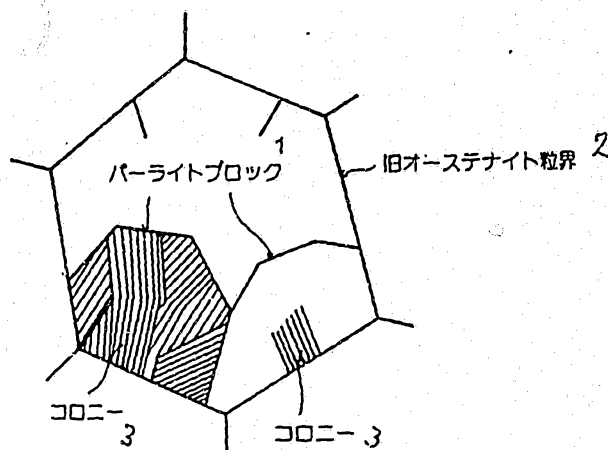

- 1 ... pearlite blocks
- 2 ... old austenite grain boundary
- 3 ... colonies

SPECIFICATION

Rails of Pearlitic Steel with High Wear Resistance and Toughness and Their Manufacturing Methods

Field of the Invention

This invention relates to rails with high toughness of high-carbon pearlitic steels having high strength and wear resistance intended for railroad rails and industrial machines and their manufacturing processes.

Description of the Prior Art

Because of high strength and wear resistance, high-carbon steels with pearlitic structures are used in structural applications, for railroad rails required to withstand heavier axial loads due to increases in the weight of railroad cars and intended for faster transportation.

Many technologies for manufacturing high-performance rails have been known. Japanese Provisional Patent Publication No. 55-2768 (1980) discloses a process of manufacturing hard rails by cooling heated steel having a special composition that is liable to produce a pearlitic structure from above the A_{c3} point to between 450 and 600° C, thereby producing a fine pearlitic structure through isothermal transformation. Japanese Provisional Patent Publication No. 58-221229 (1983) discloses a process of heat treatment for producing rails with improved wear resistance that

produces fine pearlite by quenching a heated rail containing 0.65 to 0.85 % carbon and 0.5 to 2.5 % manganese, thereby producing fine pearlite in the rail or the head thereof. Japanese Provisional Patent Publication No. 59-133322 (1984) discloses a process of heat treatment for producing rails with a fine pearlitic structure having a hardness of Hv > 350 and extending to a depth of approximately 10 mm from the surface of the rail head by immersing a rolled rail having a special composition that forms a stable pearlitic structure and heated to a temperature above the Ar₃ point in a bath of molten salt of a certain specific temperature.

Although pearlitic steel rails of desired strength and wear resistance can be readily produced by adding appropriate alloying elements, their toughness is much lower than that of steels consisting essentially of ferritic structures. In tests made on V notch Charpy test specimens No. 3 according to JIS at normal temperatures, for example, rails of eutectoid carbon steels with a pearlitic structure exhibit a toughness of approximately 10 to 20 J/cm² and those of steels containing carbon above the eutectoid point exhibit a toughness of approximately 10 J/cm². Tensile specimens No. 4 according to JIS exhibit an elongation of less than 10 %. When steels having such low toughness are used in structural applications subject to repeated loading

and vibration, fine initial defects and fatigue cracks can lead to brittle fractures at low stresses.

Generally, toughness of steel is improved by grain refinement of the metal structure or, more specifically, by refinement of austenite grains or transgranular transformation. Refinement of austenite grains is accomplished by application of low-temperature heating during or after rolling, or a combination of controlled rolling and heating treatment as disclosed in Japanese Provisional Patent Publication No. 63-277721 (1988). In the manufacture of rails, however, low-temperature heating during rolling, controlled rolling at low temperatures and heavy-draft rolling are not applicable because of formability limitations. Even today, therefore, toughness is improved by conventional heating treatment at low temperatures. Still, this process involves several problems, such as costliness and lower productivity, requiring prompt solutions to make itself as efficient as the latest technologies that provide greater energy and labor savings and higher productivity.

The object of this invention is to solve the problem described above. More specifically, the object of this invention is to provide rails with improved wear resistance, ductility and toughness and processes for manufacturing such rails by eliminating the problems in the conventional controlled rolling processes dependent upon

low temperatures and heavy drafts, and applying a new controlled rolling process to control the grain size of the pearlite in eutectoid steels or carbon steels above the eutectoid point.

Summary of the Invention

The inventors found the following from many experiments on the composition and manufacturing process of fine-grained pearlitic steels with improved toughness. Rails are generally required to have high wear resistance in the head and high bending fatigue strength and ductility in the base. Rails with good wear resistance, ductility and toughness can be obtained by making the carbon content in the rail head and base eutectoid or hypereutectoid and controlling the size of fine-grained pearlite blocks. When rolled in the austenitic state, high-carbon steels recrystallize immediately even after rolling at relatively low temperatures and with light drafts. Fine-grained uniformly sized austenite grains that form a fine-grained pearlitic structure can be obtained by applying continuous rolling with light drafts and more closely spaced rolling passes than before to the steels just described.

Here, the pearlite block is made up of an aggregate of pearlite colonies with the same crystal and lamella orientation, as shown in Fig. 1. The lamella is a banded structure consisting of layers of ferrite and cementite.

When fracturing, each pearlite grain breaks into pearlite blocks.

Based on the above finding, this invention provides:

Rails of carbon steel or low-alloy steels having high toughness, high wear resistance, and pearlitic structures consisting of 0.60 to 1.20 % carbon, 0.10 to 1.20 % silicon, 0.40 to 1.50 % manganese, and, as required, one or more of 0.05 to 2.00 % chromium, 0.01 to 0.30 % molybdenum, 0.02 to 0.10 % vanadium, 0.002 to 0.01 % niobium and 0.1 to 2.0 % cobalt, by weight, with the remainder consisting of iron and unavoidable impurities, the grain diameter of pearlite blocks averaging 20 to 50 μm in a part up to within at least 20 mm from the top surface of the rail head and in a part up to within at least 15 mm from the surface of the rail base and 35 to 100 μm in other parts, having an elongation of not less than 10 % and a V notch Charpy impact value of not less than 15 J/cm² in the part where the grain diameter of pearlite blocks averages 20 to 50 μm ; and

Processes for manufacturing high toughness rails with pearlitic structures by improving mechanical properties, particularly ductility and toughness, by the control of the size of pearlite blocks that is achieved by applying three or more passes of continuous finish rolling at intervals of not more than 10 seconds to semifinished rails roughly

rolled from billets of carbon or low-alloy steels of the above composition while the surface temperature thereof remains between 850 and 1000° C, with a reduction in area of 5 to 30 % per pass, and then allowing the finish-rolled rails to cool spontaneously or from above 700° C to between 700 and 500° C at a rate of 2 to 15° C per second.

In particular, carbon and low-alloy steels containing 0.60 to 0.85 % carbon, by weight, exhibit higher toughness, with an elongation of 12 % or above and a V notch Charpy impact value of 25 J/cm² in the part where the grain diameter of pearlite blocks averages 20 to 50 μ m, while carbon and low-alloy steels containing 0.85 to 1.20 % by weight carbon exhibit higher wear resistance.

Brief Description of the Drawing

Fig. is a schematic illustration of a crystal grain of pearlite.

Description of the Preferred Embodiments

Details of this invention are described in the following.

The reason for limiting the composition of steel as described before will be discussed first.

Carbon: Carbon imparts wear resistance to steel by producing pearlitic structures. Usually, rail steels contain 0.60 to 0.85 % carbon in order to obtain high toughness. Sometimes, proeutectoid ferrite is formed at

austenite grain boundaries. To improve wear resistance and inhibit the initiation of fatigue damage in rails, it is preferable for rail steels to contain 0.85 % or more of carbon. The quantity of proeutectoid cementite at austenite grain boundaries increases with increasing carbon content. When carbon content exceeds 1.2 %, deterioration in ductility and toughness becomes uncontrollable even by the grain refinement of pearlitic structures that is described later. Hence, carbon content is limited to between 0.60 and 1.20 %.

Silicon: The content of silicon, which strengthens the ferrite in pearlitic structures, is 0.1 % or above. However, silicon in excess of 1.20 % embrittles steel by producing martensitic structures. Hence, silicon content is limited to between 0.10 and 1.20 %.

Manganese: Manganese not only strengthens pearlitic structures but also suppresses the production of proeutectoid cementite by lowering the pearlite transformation temperature. Manganese below 0.40 % does not produce the desired effects. Conversely, manganese in excess of 1.50 % embrittles steel by producing martensitic structures. Therefore, manganese content is limited to between 0.40 and 1.50 %.

Chromium: Chromium raises the equilibrium transformation temperature of pearlite and, as a consequence, refines

the grain size of pearlitic structures and suppresses the production of proeutectoid cementite. Chromium is therefore selectively added as required. While not producing satisfactory results when its content is below 0.05 %, manganese embrittles steel by producing martensitic structures when its content exceeds 2.0 %. Thus, chromium content is limited to between 0.05 and 2.00 %.

Molybdenum and Niobium: Molybdenum and niobium, which strengthen pearlite, are selectively added as required. Molybdenum below 0.01 % and niobium below 0.002 % do not produce the desired effects. On the other hand, molybdenum over 0.30 % and niobium over 0.01 % suppress the recrystallization of austenite grains during rolling, which is preferable to the grain refining of metal structures, form elongated coarse austenite grains, and embrittles pearlitic steels. Therefore, molybdenum and niobium contents are limited to between 0.01 and 0.30 % and between 0.002 and 0.01 %, respectively.

Vanadium and Cobalt: Vanadium and cobalt strengthening pearlitic structures are selectively added between 0.02 and 0.1 % and between 0.10 and 2.0 %. Addition below the lower limits does not produce sufficient strengthening effects, while addition in excess of the upper limits produce excessive strengthening effects.

This invention is based on eutectoid or hypereutectoid

steels whose austenite exhibits a recrystallization behavior characteristic of high-carbon steels. Any of the alloying elements described before may be added as required so long as the metal structure remains pearlitic.

The range in which the grain size of pearlite blocks averages 20 to 50 μm is limited to a part up to within 20 mm from the surface of the rail head and up to within 15 mm from the surface of the rail base for the following reason. Damages caused by the contact of the rail head with the wheels of running trains are confined to a part up to within 20 mm from the surface of the rail head, whereas those caused by the tensile stress built up at the rail base are confined to a part up to within 15 mm from the surface thereof.

The average grain size of pearlite blocks in the rail head and base is limited to between 20 and 50 μm because the grains finer than 20 μm do not provide high enough hardness to obtain the wear resistance required of rails, while those coarser than 50 μm bring about a deterioration in ductility and toughness.

The average grain size of pearlite blocks in other parts than the rail head and base is limited to between 35 and 100 μm because the grains finer than 35 μm do not provide the strength required of rail steels while those coarser than 100 μm deteriorate the ductility and toughness

thereof.

The reason why the elongation and V notch Charpy impact value of the portions of the rail in which the grain size of pearlite blocks averages 20 to 50 μm are limited to not less than 10 % and not lower than 15 J/cm² is as follows: Rails with an elongation below 10 % and V notch Charpy impact value below 15 J/cm² cannot cope with the longitudinal strains and impacts imposed by the trains running thereover and might develop cracks over long periods of time. With rail steels containing 0.60 to 0.85 % by weight of carbon, elongation and V notch Charpy impact value may be increased to 12 % or above and 25 J/cm² or above, thus providing high toughness than that of conventional rails.

Processes for manufacturing rails having the above compositions and characteristics are described below.

Billets of carbon steels cast from liquid steel prepared in an ordinary melting furnace through a continuous casting or an ingot casting route or those of low-alloy steels containing small amounts of chromium, molybdenum, vanadium, niobium, cobalt and other strength and toughness increasing elements are heated to 1050° C or above, roughly rolled into rail-shaped semifinished products, and then continuously finished into rails. Though not specifically limited, the temperature at which breakdown rolling is

finished should preferably be not lower than 1000° C in order to provide good formability. Continuous finish rolling that finishes a breakdown into a rail of final size and shape start at the temperature at which breakdown rolling was finished, reducing the cross-section by 5 to 30 % per pass while the surface temperature of the rail remains 850 to 1000° C .

Continuous finish rolling under the above conditions is necessary to produce austenitic structures of uniformly sized fine grains that are essential for the production of fine-grained pearlitic structures. Because of higher carbon contents, (1) fine-grained austenitic structures can readily recrystallize at lower temperatures and with lower reductions, (2) recrystallization will be completed quickly after rolling, and (3) recrystallization repeats each time rolling is applied even if the amount of reduction is small, thus suppressing the grain growth in austenitic structures.

As the growth of pearlite initiates from austenite grain boundaries, austenite grains must be refined in order to reduce the size of pearlite blocks. Austenite grains are refined by hot-working steels in the austenite temperature range. As austenite grains recrystallize each time hot working is repeated, grain refinement is achieved by repeating hot working or increasing the reduction rate. On

the other hand, rolling time intervals must be reduced as the growth of austenite grains begin shortly after rolling.

The rails finished by this continuous finish rolling of this invention have a surface temperature is between 850 and 1000° C. If the finishing temperature is lower than 850° C, austenitic metal structures remain unrecrystallized, with the formation of fine-grained pearlitic metal structures prevented. Finish rolling at temperatures above 1000° C causes the growth of austenite grains and then forms coarse-grained austenitic metal structures during the subsequent pearlite transformation, as a result of which the production of uniformly sized fine pearlite grains is again prevented.

A reduction in area of 5 to 30 % per pass produces fine-grained austenitic metal structures. Lighter reductions under 5 % do not provide large enough strain hardening to cause recrystallization of austenitic metal structures. Heavier reductions over 30 %, in contrast, present difficulty in rail forming. To facilitate the production of fine-grained austenitic metal structures with a reduction in area of not more than 30 %, rolling must be performed in three or more passes so that the recrystallization and grain growth of austenitic metal structures are suppressed.

Between the individual passes in the rolling opera-

tion, austenite metal structures grow to produce coarser grains that deteriorate the strength, toughness and other properties required of rails because of the heat retained therein. Accordingly, this invention reduces the time interval between the individual passes to not longer than 10 seconds. Continuous finish rolling comprising passes at short intervals is conducive to the attainment of fine-grained of austenitic metal structures which, in turn, leads to the production of fine-grained pearlitic metal structures. The time interval between the passes of ordinary reversing-mill rolling is from approximately 20 to 25 seconds. This time interval is long enough to allow the grain size of austenitic metal structures to grow to such an extent that relief of strains, recrystallization and grain growth are possible. Then, the effect of rolling-induced recrystallization to cause grain refinement will be marred so seriously that the manufacture of rail steels having fine-grained pearlite blocks becomes impossible. This is the reason why the time intervals between the rolling passes must be reduced to a minimum. The rails thus finished to the desired shape and size under the rolling conditions described above and still hot are allowed to cool naturally in the air to lower temperatures.

When high strength is required, rails after continuous finish rolling are cooled from above 700° C, where trans-

formation-induced strengthening can take place, to a temperature range between 700° and 500° C in which the cooling rate of steel affects its transformation, at a rate of 2° to 15° C per second. A cooling rate slower than 2° C per second does not provide the desired strength because the resulting transformation-induced strengthening is analogous to that which results from natural cooling in the air. A cooling rate faster than ¹⁵2° C per second, on the other hand, produces bainite, martensite and other structures that greatly impair the toughness of steel and thereby lead to the production of brittle rails.

As is obvious from the above, the manufacturing processes of this invention permit imparting higher toughness to rails through the production of fine-grained pearlitic metal structures.

[Examples]

Table 1 shows the chemical compositions of test specimens with pearlitic metal structures. Table 2 shows the heating and finish rolling conditions applied to the steels of the compositions given in Table 1 in the processes of this invention and the conventional processes tested for comparison. Table 3 shows the conditions for post-rolling cooling.

Table 4 lists the mechanical properties of the rails manufactured by the processes of this invention and the

conventional processes tested for comparison by combining the steel compositions, rolling and cooling conditions shown in Tables 1 to 3.

The rails manufactured by the processes of this invention exhibited significantly higher ductilities and toughness (2UE + 20° c) than those manufactured by the conventional processes, with strength varying with the compositions and cooling conditions.

Table 1

Steel	C	S i	M n	C r	M o	V	N b	C o
A	0.62	0.20	0.90	—	—	—	—	—
B	0.80	0.50	1.20	0.20	—	0.05	—	—
C	0.75	0.80	0.80	0.50	—	—	0.01	0.10
D	0.83	0.25	0.90	1.20	0.20	—	—	—
E	0.86	0.20	0.70	—	—	—	—	—
F	0.90	0.50	1.20	0.50	—	0.05	0.01	0.10
G	1.00	0.50	1.00	—	0.20	—	—	—
H	1.19	0.20	0.90	—	—	—	—	—

Table 2

	Designation	Heating Temperature °C	Finish Rolling Conditions										
			First Pass		Interval (Second)	Second Pass		Interval (Second)	Third Pass		Interval (Second)	Fourth Pass	
			Temperature °C	Reduction Rate %		Temperature °C	Reduction Rate %		Temperature °C	Reduction Rate %		Temperature °C	Reduction Rate %
Processes of This Invention	a	1250	1000	25	1	1000	5	5	995	15	1	995	5
	b	1250	950	25	1	950	5	5	945	15	1	945	5
	c	1250	900	25	1	900	5	5	895	15	1	895	5
Conventional Processes	d	1250	1000	25	1	1000	5	25	980	15	1	980	5
	e	1250	950	25	1	950	5	25	930	15	1	930	5

Table 3

Designation	Cooling Start Temperature °C	Cooling Rate °C / S
I	800	2
II	800	4
III	720	10
IV	680	12

Table 4

	Reference No.	Steel	Rolling Process	Cooling Method	Tensile Strength (MPa)	Hardness (Hv10)	Ductility (%)	ZUE + 20°C (J/cm ²)	Mean Diameter of Pearlite Block in Rail Head and Base (μm)	Amount of Wear / 500,000 Times of Rolling Over (g)
Processes of This Invention	1	A	a	A.C.	930	285	14	26	42	—
	2	B	b	I	1210	365	16	33	28	—
	3	B	b	III	1290	395	17	43	29	—
	4	D	b	A.C.	1100	335	13	28	31	—
	5	C	a	II	1280	390	15	32	43	—
	6	B	c	III	1260	380	17	45	22	—
	7	E	a	A.C.	920	280	11	16	48	0.65
	8	E	b	II	1150	345	12	19	23	0.20
	9	F	a	A.C.	1050	320	11	17	41	0.30
	10	F	b	I	1310	400	15	24	39	0.02
	11	G	a	A.C.	1040	315	10	17	46	0.40
	12	G	b	II	1280	390	14	22	29	0.03
	13	G	c	III	1340	410	15	23	21	0.01
	14	H	b	I	1335	410	12	16	31	0.02
Conventional Processes	15	A	d	A.C.	940	285	<u>10</u>	<u>16</u>	<u>123</u>	—
	16	B	d	I	1200	365	<u>11</u>	<u>16</u>	<u>120</u>	—
	17	E	d	A.C.	930	285	<u>7</u>	<u>5</u>	<u>122</u>	<u>1.10</u>
	18	G	e	II	1300	395	<u>9</u>	<u>9</u>	<u>95</u>	0.20
	19	B	d	IV	1100	335	11	15	122	—

A.C. : Air Cooling

Use in Industrial Applications

As will be obvious from the above, the rails manufactured by the processes of this invention under specific finish rolling and cooling conditions have fine-grained pearlitic structures that impart high wear resistance and superior ductility and toughness. The rails according to this invention thus prepared are strong enough to withstand the increasing load and speed of today's railroad services.

What is claimed is:

1. A pearlitic steel rail of high wear resistance and toughness having a pearlitic structure consisting, by weight, of 0.60 to 1.20 % carbon, 0.10 to 1.20 % silicon, 0.40 to 1.50 % manganese, with the remainder consisting of iron and unavoidable impurities, the grain diameter of pearlite blocks averaging 20 to 50 μm in a part up to within at least 20 mm from the top surface of the rail head and in a part up to within at least 15 mm from the surface of the rail base and 35 to 100 μm in other parts, having an elongation of not less than 10 % and a V notch Charpy impact value of not less than 15 J/cm² in the part where the grain diameter of pearlite blocks averages 20 to 50 μm .

2. A pearlitic steel rail of high wear resistance and toughness having a pearlitic structure consisting, by weight, of 0.60 to 1.20 % carbon, 0.10 to 1.20 % silicon, 0.40 to 1.50 % manganese, and one or more elements selected from the group of 0.05 to 2.00 % chromium, 0.01 to 0.30 % molybdenum, 0.02 to 0.10 % vanadium, 0.002 to 0.01 % niobium and 0.1 to 2.0 % cobalt, with the remainder consisting of iron and unavoidable impurities, the grain diameter of pearlite blocks averaging 20 to 50 μm in a part up to within at least 20 mm from the top surface of the rail head and in a part up to within at least 15 mm from

the surface of the rail base and 35 to 100 μ m in other parts, having an elongation of not less than 10% and a V notch Charpy impact value of not less than 15 J/cm² in the part where the grain diameter of pearlite blocks averages 20 to 50 μ m.

- 5 3. A pearlitic steel rail of high wear resistance according to claim 1 or 2, in which carbon content is limited to between over 0.85% and 1.20% by weight.
4. A pearlitic steel rail of high toughness according to claim 1 or 2, in which carbon content is limited to between 0.60 and 0.85% by weight, with an elongation of not less than 12% and a V notch Charpy impact value of not less than 25 J/cm² in the part where the grain diameter of pearlite blocks averages 20 to 50 μ m.
- 10
5. A process for manufacturing a pearlitic steel rail of high wear resistance and toughness as claimed in claim 1 comprising the steps of (i) roughing a billet of carbon or low-alloy steel containing, by weight, 0.60 to 1.20% carbon, 0.10 to 1.20% silicon, 0.40 to 1.50% manganese, with the remainder consisting of iron and impurities, into a semi-finished breakdown; (ii) continuously finish rolling the breakdown while the surface temperature thereof remains between 850° and 1000°C by giving three or more passes, with a reduction rate of 5 to 30 % per pass and a time interval of not longer than 10 seconds between the individual passes; and (iii) allowing the finished rail to cool naturally in the air, thereby adjusting the grain size of the pearlite blocks and the mechanical properties of the rail.
- 15
- 20
6. A process for manufacturing a pearlitic steel rail of high wear resistance and toughness as claimed in claim 2 comprising the steps of (i) roughing a billet of carbon or low-alloy steel containing, by weight, 0.60 to 1.20% carbon, 0.10 to 1.20% silicon, 0.40 to 1.50% manganese, and one or more elements selected from the group of 0.05 to 2.00% chromium, 0.01 to 0.30% molybdenum, 0.02 to 0.10% vanadium, 0.002 to 0.01% niobium and 0.2 to 2.0% cobalt, with the remainder consisting of iron and unavoidable impurities, into a semi-finished breakdown, (ii) continuously finish rolling the breakdown while the surface temperature thereof remains between 850° and 1000°C by
- 25



giving three or more passes, with a reduction rate of 5 to 30% per pass and a time interval of not longer than 10 seconds between the individual passes, and (iii) allowing the finishing rail to cool naturally in the air, thereby adjusting the grain size of the pearlite blocks and the mechanical properties of the rail.

5

7. A process as claimed in claim 5 or 6 modified in that, instead of allowing the finished rail to cool naturally in the air, the rail is cooled from 700°C or above to between 700°C and 500°C at a rate of 2°C to 15°C per second, thereby adjusting the grain size of the pearlite blocks and the mechanical properties of the rail.

10

8. A process as claimed in any one of claims 5 to 7 in which the carbon content is limited to between over 0.85 and 1.20% by weight.

9. A process as claimed in any one of claims 5 to 7, in which carbon content is limited to between 0.60 and 0.85% by weight.

15

DATED this 27th day of May, 1997.


NIPPON STEEL CORPORATION

20 By Its Patent Attorneys

DAVIES COLLISON CAVE



FIG. 1

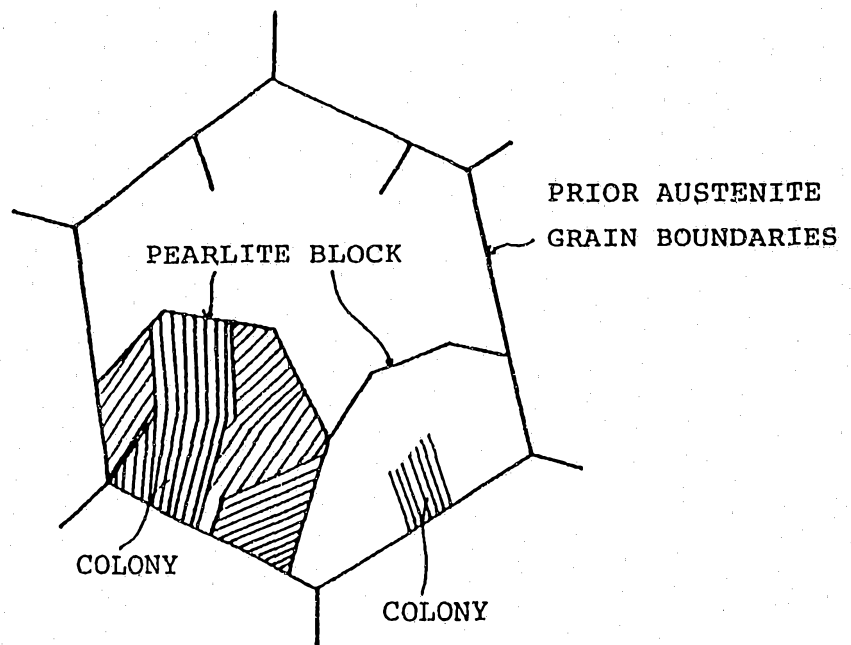

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP94/02137

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl⁶ C22C38/00-38/30, C21D8/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int. Cl⁶ C22C38/00-38/30, C21D8/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1926 - 1994

Kokai Jitsuyo Shinan Koho 1971 - 1994

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP, A, 51-2616 (Nippon Steel Corp.), January 10, 1976 (10. 01. 76), Lines 24 to 33, column 1 (Family: none)	2-4
A	JP, A, 62-99438 (NKK Corp.), May 8, 1987 (08. 05. 87), Lines 16 to 30, column 1 & US, A, 4767475	1-8
A	JP, A, 47-7606 (Uendel-Shideroll), April 24, 1972 (24. 04. 72), Lines 3 to 16, column 3 (Family: none)	1-8

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

March 3, 1995 (03. 03. 95)

Date of mailing of the international search report

April 4, 1995 (04. 04. 95)

Name and mailing address of the ISA/

Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.