

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 April 2002 (25.04.2002)

PCT

(10) International Publication Number
WO 02/33393 A2

(51) International Patent Classification⁷: **G01N 27/00**

(21) International Application Number: PCT/US01/32138

(22) International Filing Date: 15 October 2001 (15.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/240,619 16 October 2000 (16.10.2000) US
60/246,946 9 November 2000 (09.11.2000) US

(71) Applicant (for all designated States except US): **E. I. DU PONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, Wilmington, DE 19898 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MORRIS, Patricia, A.** [US/US]; P.O. Box 532, Montchanin, DE 19710 (US).

(74) Agent: **LANGWORTHY, John, A.**; E.I. Du Pont De Nemours and Company, Legal Patent Records Center, 1007 Market Street, Wilmington, DE 19898 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR ANALYZING MIXTURES OF GASES

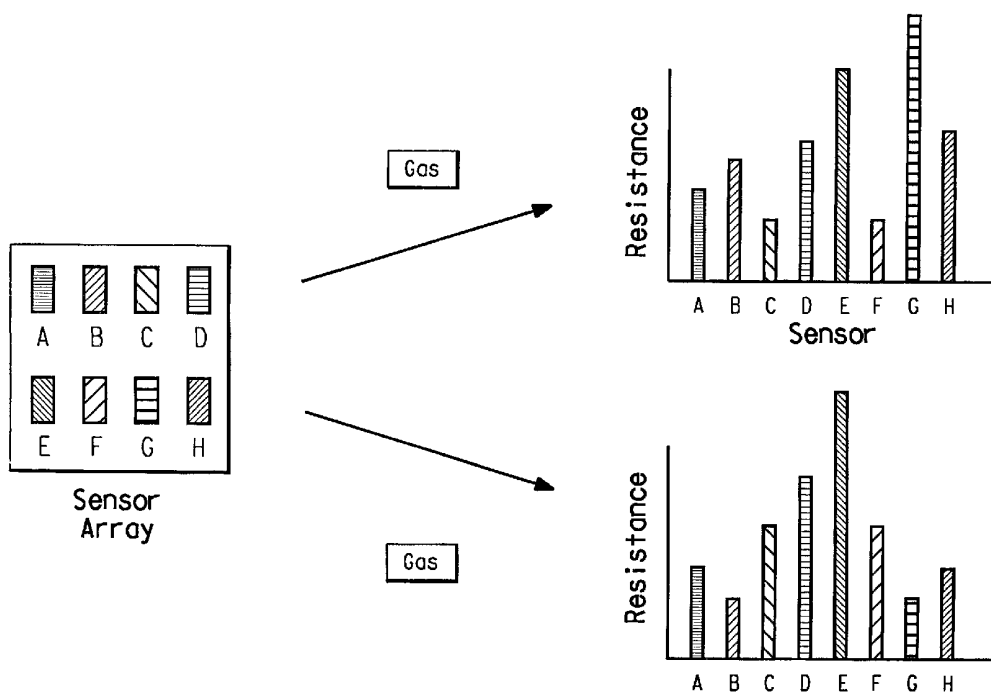

(57) Abstract: Disclosed herein is a method and apparatus for analyzing, sensing and measuring the concentrations of various gases, including NO_x, hydrocarbons, carbon monoxide and oxygen, in a multi-component gas system using chemical sensors and chemical sensor arrays. The sensors and sensor arrays use chemo/electro-active materials to analyze and detect the presence of gases.



WO 02/33393 A2

TITLE

METHOD AND APPARATUS FOR ANALYZING MIXTURES OF GASES

Field of the Invention

This application claims the benefit of the filing
5 date of U.S. Provisional Application No. 60/240,619,
filed October 16, 2000, and of U.S. Provisional
Application No. 60/246,946, filed November 9, 2000.

The present invention is a method and apparatus for
sensing and analyzing certain gases, including NO_x,
10 hydrocarbons, carbon monoxide and oxygen in a multi-
component gas system using chemical sensors and
chemical sensor arrays. The sensors and sensor arrays
use chemo/electro-active materials to detect the
presence of and/or calculate the concentration of
15 individual gases within the multi-component gas system.

Technical Background

The use of chemical sensing devices to detect
certain gases is known. Many attempts have been made
to find a material with selectivity and sensitivity for
20 a specific gas. For example, US 4,535,316 discloses a
resistive sensor for measuring oxygen. See also H.
Meixner et al, *Sensors and Actuators*, B 33 (1996)
198-202. It is apparent that different materials must
be used for each gas to be detected. However, when a
25 gas is part of a multi-component system, using one
material to detect a specific gas is difficult because
of the cross-sensitivities of the material to the
various component gases of the mixture.

One example of a multi-component gaseous system is
30 a combustion gas emission, which can include oxygen,
carbon monoxide, nitrogen oxides, hydrocarbons, CO₂,
H₂S, sulfur dioxide, hydrogen, water vapor, halogens
and ammonia. See H. Meixner et al, *Fresenius' J. Anal.
Chem.*, 348 (1994) 536-541. In many combustion
35 processes, there is a need to determine whether the gas
emissions meet requirements established by federal and
state air quality regulations in various jurisdictions.
Several types of gas sensors have been developed to

address this need. See US 5, 630,920, Friese et al, which discloses an electrochemical oxygen sensor; US 4,770,760, Noda et al, which discloses a sensor for detecting oxygen and oxides of nitrogen; and
5 US 4,535,316, which discloses a resistive sensor for measuring oxygen. It would be advantageous to be able to simultaneously analyze two or more components of a mixture such as a combustion gas emission, to calculate concentration for example, in terms only of data
10 generated by direct contact of the gases with a sensor and without having to separate any of the gases in the mixture. Prior art methods do not currently meet this need.

Numerous sensors have been disclosed to detect
15 gases evolving from foods and from other relatively low temperature applications. See K. Albert et al, *Chem. Rev.*, 200 (2000) 2595-2626. Arrays of several undoped and doped tin oxide sensors have also been disclosed for use in detecting various combustion gases up to
20 450°C. See C. Di Natale et al, *Sensors and Actuators*, B 20 (1994) 217-224; J. Getino et al, *Sensors and Actuators*, B33 (1996) 128-133; and C. Di Natale et al, *Sensors and Actuators*, B 23 (1995) 187-191. However, at higher temperatures and in the highly corrosive
25 environment in which one would use chemical sensors to monitor combustion gases, operating temperature can alter or impair the performance of the sensor array. That being the case, high temperature environments require the use of materials that are both chemically
30 and thermally stable and that maintain measurable responses to the gases of interest. The effect of the operating temperature on the response of tin oxide bases sensor arrays was studied up to 450°C. See C. Di Natale, *Sensors and Actuators* B23 (1995) 187-191.
35 However, materials in addition to those previously known in the art are still needed to be able to provide a method and apparatus capable of directly monitoring the gas emissions of multi-component gas systems at

higher temperatures, such as would be encountered in the operation of combustion gas systems.

Addressing this need would permit the use of a chemical sensor to measure combustion emissions, such as automobile exhausts, and determine whether those emissions meet functional and mandated requirements. In addition, it has surprisingly been found that the method and apparatus of this invention that are useful for analyzing high temperature gases, such as automotive emissions, may be employed with equal effect in analyzing low temperature gases.

Summary of the Invention

This invention provides a method for directly sensing gas components in a multi-component gas system, comprising the steps of: (i) exposing a chemical sensor comprising an array of at least two chemo/electro-active materials to a multi-component gas system, detecting a response, and directly measuring the response of each chemo/electro-active material. Preferably the chemo/electro-active material is a semiconducting material, and the multi-component gas system is a combustion process emission. The response that is measured can be a measurement of capacitance, voltage, current, AC impedance, or DC resistance.

This invention also provides a chemical sensor for directly sensing the presence of gas components in a multi-component gas system, comprising a substrate; an array of at least two chemo/electro-active materials on said substrate; and a means for detecting a response from said chemo/electro-active materials when exposed to said analyte gas component(s) in the system. Preferably the chemo/electro-active material is a semiconducting material, and the multi-component gas system is a combustion process emission. The response that is detected can be an electrical property such as capacitance, voltage, current, AC impedance, or DC resistance. The device can additionally contain a housing, means for measuring the detected responses,

and means for analyzing the results of the measured responses in order to identify the presence and/or concentrations of the analyte gas component(s).

This invention also provides for a chemical sensor
5 device for directly sensing the presence and/or
concentration of gas component(s) in a multi-component
gas system, comprising: a substrate; an array of at
least two chemo/electro-active materials deposited on
said substrate; a means for detecting a change in
10 electrical properties of said chemo/electro-active
materials upon exposure to said multi-component gas
component(s); means for analyzing the results of the
detected changes in electrical properties in order to
identify the presence and/or concentrations of said gas
15 component(s); and a housing. The chemo/electro-active
materials may be semiconducting materials.

In another embodiment, this invention involves an
apparatus for analyzing at least one individual gas
component in a multi-component gas mixture, containing:
20 (a) an array of at least two chemo/electro-active
materials connected in parallel circuitry, each
chemo/electro-active material exhibiting a different
electrical response characteristic upon exposure to the
individual gas component than each other chemo/electro-
25 active material;

(b) means for determining an electrical response
of each chemo/electro-active material upon exposure of
the array to the gas mixture;

(c) means for determining a value for the
30 temperature of the array connected in parallel
circuitry with the chemo/elctro-active materials; and

(d) means for digitizing the electrical responses
and the temperature value, and calculating a value from
the digitized electrical responses and temperature
35 value, to perform an analysis of the individual gas
component.

In a further embodiment, this invention involves,
in a multi-component gas mixture having a temperature

of about 400°C or more, an apparatus for calculating the concentration of at least two individual analyte gas components in the mixture, containing:

(a) an array of at least three chemo/electro-active materials, the array being situated within the gas mixture, and each chemo/electro-active material having a different electrical response characteristic upon exposure to each of the individual analyte gas components than each of the other chemo/electro-active materials;

(b) means for determining an electrical response of each chemo/electro-active material upon exposure of the array to the unseparated components of the gas mixture; and

(c) means for calculating the concentration of each of the individual analyte gas components from the electrical responses of the chemo/electro-active materials upon exposure to the multi-component gas mixture only.

In yet another embodiment, this invention involves, in a multi-component gas mixture having a temperature of about 400°C or more, an apparatus for calculating the concentration of at least two individual analyte gas components in the mixture, containing:

(a) an array of at least three chemo/electro-active materials connected in parallel circuitry, the array being situated within the gas mixture, and each chemo/electro-active material exhibiting a change in electrical resistance upon exposure to each of the individual analyte gas components, wherein at least one chemo/electro-active material, when at a temperature of about 400°C or more, (i) has an electrical resistivity in the range of about 1 ohm-cm to about 10^5 ohm-cm, and (ii) exhibits a change in electrical resistance of at least about 0.1 percent upon exposure of the material to an analyte gas component, as compared to the resistance before exposure;

(b) means for determining the change in resistance of each chemo/electro-active material upon exposure of the array to the gas mixture; and

(c) means for calculating the concentration of
5 each of the individual analyte gas components from the changes in resistance of the chemo/electro-active materials.

In yet another embodiment, this invention involves an apparatus for analyzing at least one individual gas
10 component in a multi-component gas mixture, containing:

(a) an array of at least two chemo/electro-active materials, each chemo/electro-active material having a different electrical response characteristic upon exposure at a selected temperature to the individual
15 gas component than each of the other chemo/electro-active materials, the electrical response characteristic of each material being quantifiable as a value, wherein the response value of at least one material is constant or varies by no more than about
20 twenty percent during exposure of the material to an individual gas component at the selected temperature for a period of at least about one minute;

(b) means for determining the electrical response value of each chemo/electro-active material upon
25 exposure of the array to the gas mixture; and

(c) means for performing an analysis of the individual gas component from the electrical response values.

In yet another embodiment, this invention
30 involves, in a multi-component gas mixture having a temperature of less than about 400°C, an apparatus for analyzing at least one individual gas component in the mixture, containing:

(a) an array of at least two chemo/electro-active
35 materials, each chemo/electro-active material having a different electrical response characteristic upon exposure at a selected temperature to the individual gas component than each of the other chemo/electro-

active materials, the array being situated within the gas mixture and having a substantially constant temperature of about 400°C or more;

(b) means for determining the electrical response value of each chemo/electro-active material upon exposure of the array to the gas mixture; and

(c) means for performing an analysis of the individual gas component from the electrical response values.

10 In yet another embodiment, this invention involves an apparatus for analyzing at least one individual gas component in a multi-component gas mixture, containing:

(a) an array of first and second chemo/electro-active materials, each chemo/electro-active material having a different electrical response characteristic upon exposure at a selected temperature to the individual gas component than each of the other chemo/electro-active materials, wherein the chemo/electro-active materials are selected from the pairings in the group consisting of

(i) the first material is M^1O_x , and the second material is $M^1_aM^2_bO_x$;

(ii) the first material is M^1O_x , and the second material is $M^1_aM^2_bM^3_cO_x$;

25 (iii) the first material is $M^1_aM^2_bO_x$, and the second material is $M^1_aM^2_bM^3_cO_x$;

(iv) the first material is a first M^1O_x , and the second material is a second M^1O_x ;

(v) the first material is a first $M^1_aM^2_bO_x$, and the second material is a second $M^1_aM^2_bO_x$; and

30 (vi) the first material is a first $M^1_aM^2_bM^3_cO_x$, and the second material is a second $M^1_aM^2_bM^3_cO_x$;

wherein M^1 is selected from the group consisting of Ce, Co, Cu, Fe, Ga, Nb, Ni, Pr, Ru, Sn, Ti, Tm, W, Yb, Zn, and Zr; M^2 and M^3 are each independently selected from the group consisting of Al, Ba, Bi, Ca, Cd, Ce, Co, Cr, Cu, Fe, Ga, Ge, In, K, La, Mg, Mn, Mo, Na, Nb, Ni, Pb,

Pr, Rb, Ru, Sb, Sc, Si, Sn, Sr, Ta, Ti, Tm, V, W, Y, Yb, Zn, and Zr, but M^2 and M^3 are not the same in $M^1_a M^2_b M^3_c O_x$; a, b and c are each independently about 0.0005 to about 1, provided that $a+b+c = 1$; and x is a
5 number sufficient so that the oxygen present balances the charges of the other elements in the compound;

(b) means for determining the electrical response of each chemo/electro-active material upon exposure of the array to the gas mixture; and

10 (c) means for performing an analysis of the individual gas component from the electrical responses.

In yet another embodiment, this invention involves a method for analyzing at least one individual gas component in a multi-component gas mixture, including
15 the steps of:

(a) providing an array of at least two chemo/electro-active materials connected in parallel circuitry, each chemo/electro-active material exhibiting a different electrical response
20 characteristic upon exposure to the individual gas component than each other chemo/electro-active material;

(b) exposing the array to the gas mixture ;

(c) determining an electrical response of each
25 chemo/electro-active material upon exposure of the array to the gas mixture;

(d) determining a value for the temperature of the gas mixture independently of the determination of the electrical responses of the chemo/elctro-active
30 materials; and

(e) digitizing the electrical responses and the temperature value, and calculating a value from the digitized electrical responses and temperature value to perform an analysis of the individual gas component.

35 In yet another embodiment, this invention involves a method for calculating the concentration of at least two individual analyte gas components in a multi-

component gas mixture having a temperature of about 400°C or more, including the steps of:

(a) providing within the gas mixture an array of at least three chemo/electro-active materials, each
5 chemo/electro-active material having a different electrical response characteristic upon exposure to each of the individual analyte gas components than each of the other chemo/electro-active materials, wherein at least one chemo/electro-active material, when at a
10 temperature of about 400°C or more, (i) has an electrical resistivity in the range of about 1 ohm-cm to about 10^5 ohm-cm, and (ii) exhibits a change in electrical resistance of at least about 0.1 percent upon exposure of the material to an analyte gas
15 component, as compared to the resistance before exposure;

(b) determining an electrical response of each chemo/electro-active material upon exposure of the array to the unseparated components of the gas mixture;
20 and

(c) calculating the concentration of each of the individual analyte gas components from the electrical responses of the chemo/electro-active materials upon exposure to the multi-component gas mixture only.

25 In yet another embodiment, this invention involves a method for analyzing at least one individual gas component in a multi-component gas mixture, including the steps of:

(a) providing an array of at least two
30 chemo/electro-active materials, each chemo/electro-active material having a different electrical response characteristic upon exposure at a selected temperature to the individual gas component than each of the other chemo/electro-active materials, the electrical response
35 characteristic of each material being quantifiable as a value, wherein the response value of at least one material is constant or varies by no more than about twenty percent during exposure of the material to an

individual gas component at the selected temperature for a period of at least about one minute;

(b) determining the electrical response value of each chemo/electro-active material upon exposure of the array to the gas mixture; and

(c) performing an analysis of the individual gas component from the electrical response values.

Description of the Drawings

Figure 1 depicts the sensor array concept.

Figure 2 is a schematic of the pattern of interdigitated electrodes overlaid with the dielectric overlayer, forming sixteen blank wells.

Figure 3 depicts the electrode pattern, dielectric pattern, and sensor material pattern used in preparing array chips for measurement.

Detailed Description of the Invention

The present invention is a method and apparatus for directly sensing one or more analyte gases in multi-component gas systems under variable temperature conditions. By "directly sensing" is meant that an array of gas-sensing materials will be exposed to a mixture of gases that constitutes a multi-component gas system, such as in a stream of flowing gases. The array may be situated within the gas mixture, and more particularly within the source of the gas mixture, if desired. Alternatively, the array may reside in a chamber to which the gas mixture is directed from its source at another location. The gas mixture may be inserted in and removed from the chamber by piping, conduits or any other suitable gas transmission equipment.

A response may be obtained upon exposure of the gas-sensing materials to the multi-component gas mixture, and the response will be a function of the concentrations of one or more of the analyte gases themselves in the gas mixture. The sensor materials will be exposed substantially simultaneously to each of the analyte gases, and the analyte gas(es) do not have

to be physically separated from the multi-component gas mixture in order to be analyzed. This invention can be used, for example, to detect and/or measure the concentrations of combustion gases, such as oxygen,
5 carbon monoxide, nitrogen oxides, hydrocarbons such as butane, CO₂, H₂S, sulfur dioxide, halogens, hydrogen, water vaopr and ammonia, at variable temperatures in automobile emissions.

This invention is therefore useful at the higher
10 temperatures found in automotive emission systems, typically in the range of from about 400°C to about 1000°C. In addition there are a variety of other combustion processes for which this invention could be applied, including diesel engines and home heating.
15 These applications require the detection of gases such as nitrogen oxides, ammonia, carbon monoxide, hydrocarbons and oxygen at the ppm to per cent levels, typically in a highly corrosive environment. This invention is also useful for detecting gases in other
20 gas systems such as those found in manufacturing processes, waste streams, and environmental monitoring; or in systems in which odor detection important and/or which are at lower temperature, such as in the medical, agricultural or food and beverage industries.

25 This invention utilizes an array of sensing materials to analyze the components of a gas system to, for example, detect the presence of and/or calculate the concentration of one or more individual analyte gas components in the system. By "array" is meant at least
30 two different materials that are spatially separated, as shown for example in Fig. 1. The array may contain, for example, 3, 4, 5, 6, 8, 10 or 12, or other desirable numbers of, gas-sensing materials. It is preferred that there be provided at least one sensor
35 material for each of the individual gases in the mixture to be analyzed. Preferably the mole percentages of the major components of each gas-sensing material differs from that of each of the others.

The sensing materials used are chemo/electro-active materials. A "chemo/electro-active material" is a material that has an electrical response to at least one particular gas. Some metal oxide semiconducting materials, mixtures thereof, or mixtures of metal oxide semiconductors with other inorganic compounds are chemo/electro-active, and are particularly useful in this invention. Each of the various chemo/electro-active materials used herein preferably exhibits an electrically-detectable response of a different kind and/or extent upon exposure to an analyte gas of interest than each of the other chemo/electro-active materials. As a result, an array of appropriately chosen chemo/electro-active materials can be used to analyze a multi-component gas mixture, such as by interacting with an analyte gas, sensing an analyte gas, or determining the presence and/or concentration of one or more analyte gases in a gas stream, despite the presence of interfering gases that are not of interest.

This invention is useful for detecting those gases that are expected to be present in the gas stream. For example, in a combustion process, gases that are expected to be present include oxygen, nitrogen oxides, carbon monoxide, hydrocarbons, ammonia or hydrogen sulfide. Other gases of interest may include alcohol vapors, solvent vapors, hydrogen, water vapor, and those deriving from saturated and unsaturated hydrocarbons, ethers, ketones, aldehydes, carbonyls, biomolecules and microorganisms.

The measurement of gas concentrations using these sensor materials can be based on a change in an electrical property, such as AC impedance, of each of the materials upon exposure of the materials to a mixture containing one or more analyte gases. Analysis of a gas mixture can also be performed in terms of extent of change in other electrical properties of the sensor materials, such as capacitance, voltage, current

or DC resistance. Change in DC resistance may be determined, for example, by measuring change in temperature at constant voltage. The change in one of these illustrative properties of a sensor material is a function of the partial pressure of an analyte gas within the gas mixture, which in turn determines the concentration in which the molecules of the analyte gas become adsorbed on the surface of a sensor material, thus affecting the electrical response characteristics of that material. By using an array of chemo/electro-active materials, a pattern of the respective responses exhibited by the materials upon exposure to one or more analyte gas can be used to simultaneously and directly detect the presence of, and/or measure the concentration of, at least one gas in a multi-component gas system. The invention, in turn, can be used to determine the composition of the gas system. The concept is illustrated schematically in Figure 1 and is exemplified below.

To illustrate, consider the theoretical example below where a response is obtained, which is depicted as positive (+), or no response is obtained, which is depicted as negative (-). Material 1 responds to Gas 1 and Gas 2, but shows no response to Gas 3. Material 2 responds to Gas 1 and Gas 3, but shows no response to Gas 2, and Material 3 responds to Gas 2 and Gas 3, but shows no response to Gas 1.

	Material 1	Material 2	Material 3
Gas 1	+	+	-
Gas 2	+	-	+
Gas 3	-	+	+

Therefore, if an array consisting of Materials 1, 2 and 3 gives the following response to an unknown gas,

	Material 1	Material 2	Material 3
Unknown Gas	+	-	+

then the unknown gas would be identified as Gas 2. The response of each material would be a function of the partial pressure within the mixture of, and thus the concentration of, the analyte gas; and the response could be recorded as a numerical value. In such case, the numerical values of the responses can be used to give quantitative information on the concentration within the mixture of the analyte gas. In a multicomponent gas system, chemometrics, neural networks or other pattern recognition techniques could be used to calculate the concentration of one or more analyte gases in the mixture of the system.

The chemo/electro-active material can be of any type, but especially useful are semiconducting metal oxides such as ZnO, TiO₂, WO₃, and SnO₂. These particular materials are advantageous due to their chemical and thermal stability. The semiconducting material can be a mixture of a semiconducting material with other semiconducting materials, or with any inorganic material, or combinations thereof. The semiconducting materials of interest can be deposited on a suitable solid substrate that is an insulator such as, but not limited to, alumina or silica and is stable under the conditions of the multi-component gas mixture. The array then takes the form of the sensor materials as deposited on the substrate. Other suitable sensor materials include single crystal or polycrystalline semiconductors of the bulk or thin film type, amorphous semiconducting materials, and semiconductor materials that are not composed of metal oxides.

The chemo/electro-active materials used as sensor materials in this invention may, for example, be metal oxides of the formula M^1O_x , $M^1_aM^2_bO_x$, or $M^1_aM^2_bM^3_cO_x$; or mixtures thereof, wherein

M^1 , M^2 and M^3 are metals that form stable oxides when fired in the presence of oxygen above 500°C;

M^1 is selected from Periodic Groups 2-15 and the lanthanide group;

5 M^2 and M^3 are independently selected from Periodic Groups 1-15 and the lanthanide group;

a, b, and c are each independently in the range of about 0.0005 to about 1, provided that $a+b+c = 1$; and

10 x is a number sufficient so that the oxygen present balances the charges of the other elements in the compound.

The metal oxides that contain more than one metal do not have to be a compound or solid solution, but can be a mixture of discrete metal oxides. They may
 15 exhibit composition gradients, and can be crystalline or amorphous. Suitable metal oxides are those that are
 1) when at a temperature of about 400°C or above, have a resistivity of about 1 to about 10^5 ohm-cm, and preferably about 10 to about 10^4 ohm-cm,
 20 2) show a chemo/electro response to at least one gas of interest, and
 3) are stable and have mechanical integrity, that is are able to adhere to the substrate and not degrade at the operating temperature.

25 The metal oxides may also contain minor or trace amounts of hydration and elements present in the precursor materials.

In certain preferred embodiments, the metal oxide materials may include those in which

30 M^1 is selected from the group consisting of Ce, Co, Cu, Fe, Ga, Nb, Ni, Pr, Ru, Sn, Ti, Tm, W, Yb, Zn, and Zr; and/or

M^2 and M^3 are each independently selected from the group consisting of Al, Ba, Bi, Ca, Cd, Ce, Co, Cr, Cu,
 35 Fe, Ga, Ge, In, K, La, Mg, Mn, Mo, Na, Nb, Ni, Pb, Pr, Rb, Ru, Sb, Sc, Si, Sn, Sr, Ta, Ti, Tm, V, W, Y, Yb, Zn, and Zr, but M^2 and M^3 are not the same in $M^1_a M^2_b M^3_c O_x$.

In certain other preferred embodiments, the metal oxide materials may include those in which

M^1O_x is Ce_aO_x , CoO_x , CuO_x , FeO_x , GaO_x , NbO_x , NiO_x , PrO_x , RuO_x , SnO_x , Ta_aO_x , TiO_x , TmO_x , WO_x , YbO_x , ZnO_x ,
 5 ZrO_x , SnO_x with Ag additive, ZnO_x with Ag additive, TiO_x with Pt additive, ZnO_x with frit additive, NiO_x with frit additive, SnO_x with frit additive, or WO_x with frit additive; and/or

$M^1_aM^2_bO_x$ is $Al_aCr_bO_x$, $Al_aFe_bO_x$, $Al_aMg_bO_x$,
 10 $Al_aNi_bO_x$, $Al_aTi_bO_x$, $Al_aV_bO_x$, $Ba_aCu_bO_x$, $Ba_aSn_bO_x$, $Ba_aZn_bO_x$, $Bi_aRu_bO_x$, $Bi_aSn_bO_x$, $Bi_aZn_bO_x$, $Ca_aSn_bO_x$, $Ca_aZn_bO_x$, $Cd_aSn_bO_x$, $Cd_aZn_bO_x$, $Ce_aFe_bO_x$, $Ce_aNb_bO_x$, $Ce_aTi_bO_x$, $Ce_aV_bO_x$, $Co_aCu_bO_x$, $Co_aGe_bO_x$, $Co_aLa_bO_x$, $Co_aMg_bO_x$, $Co_aNb_bO_x$, $Co_aPb_bO_x$, $Co_aSn_bO_x$, $Co_aV_bO_x$,
 15 $Co_aW_bO_x$, $Co_aZn_bO_x$, $Cr_aCu_bO_x$, $Cr_aLa_bO_x$, $Cr_aMn_bO_x$, $Cr_aNi_bO_x$, $Cr_aSi_bO_x$, $Cr_aTi_bO_x$, $Cr_aY_bO_x$, $Cr_aZn_bO_x$, $Cu_aFe_bO_x$, $Cu_aGa_bO_x$, $Cu_aLa_bO_x$, $Cu_aNb_bO_x$, $Cu_aNi_bO_x$, $Cu_aPb_bO_x$, $Cu_aSn_bO_x$, $Cu_aSr_bO_x$, $Cu_aTi_bO_x$, $Cu_aZn_bO_x$, $Cu_aZr_bO_x$, $Fe_aGa_bO_x$, $Fe_aLa_bO_x$, $Fe_aMo_bO_x$, $Fe_aNb_bO_x$,
 20 $Fe_aNi_bO_x$, $Fe_aSn_bO_x$, $Fe_aTi_bO_x$, $Fe_aW_bO_x$, $Fe_aZn_bO_x$, $Fe_aZr_bO_x$, $Ga_aLa_bO_x$, $Ga_aSn_bO_x$, $Ge_aNb_bO_x$, $Ge_aTi_bO_x$, $In_aSn_bO_x$, $K_aNb_bO_x$, $Mn_aNb_bO_x$, $Mn_aSn_bO_x$, $Mn_aTi_bO_x$, $Mn_aY_bO_x$, $Mn_aZn_bO_x$, $Mo_aPb_bO_x$, $Mo_aRb_bO_x$, $Mo_aSn_bO_x$, $Mo_aTi_bO_x$, $Mo_aZn_bO_x$, $Nb_aNi_bO_x$, $Nb_aTi_bO_x$, $Nb_aSr_bO_x$,
 25 $Nb_aTi_bO_x$, $Nb_aW_bO_x$, $Nb_aZr_bO_x$, $Ni_aSi_bO_x$, $Ni_aSn_bO_x$, $Ni_aY_bO_x$, $Ni_aZn_bO_x$, $Ni_aZr_bO_x$, $Pb_aSn_bO_x$, $Pb_aZn_bO_x$, $Rb_aW_bO_x$, $Ru_aSn_bO_x$, $Ru_aW_bO_x$, $Ru_aZn_bO_x$, $Sb_aSn_bO_x$, $Sb_aZn_bO_x$, $Sc_aZr_bO_x$, $Si_aSn_bO_x$, $Si_aTi_bO_x$, $Si_aW_bO_x$, $Si_aZn_bO_x$, $Sn_aTa_bO_x$, $Sn_aTi_bO_x$, $Sn_aW_bO_x$, $Sn_aZn_bO_x$,
 30 $Sn_aZr_bO_x$, $Sr_aTi_bO_x$, $Ta_aTi_bO_x$, $Ta_aZn_bO_x$, $Ta_aZr_bO_x$, $Ti_aV_bO_x$, $Ti_aW_bO_x$, $Ti_aZn_bO_x$, $Ti_aZr_bO_x$, $V_aZn_bO_x$, $V_aZr_bO_x$, $W_aZn_bO_x$, $W_aZr_bO_x$, $Y_aZr_bO_x$, $Zn_aZr_bO_x$,
 $Al_aNi_bO_x$ with frit additive, $Cr_aTi_bO_x$ with frit additive, $Fe_aNi_bO_x$ with frit additive, $Fe_aTi_bO_x$ with
 35 frit additive, $Nb_aTi_bO_x$ with frit additive, $Nb_aW_bO_x$ with frit additive, $Ni_aZn_bO_x$ with frit additive, $Ni_aZr_bO_x$ with frit additive, or $Ta_aTi_bO_x$ with frit additive;
 and/or

$M^1_a M^2_b M^3_c O_x$ is $Al_a Mg_b Zn_c O_x$, $Al_a Si_b V_c O_x$,
 $Ba_a Cu_b Ti_c O_x$, $Ca_a Ce_b Zr_c O_x$, $Co_a Ni_b Ti_c O_x$, $Co_a Ni_b Zr_c O_x$,
 $Co_a Pb_b Sn_c O_x$, $Co_a Pb_b Zn_c O_x$, $Cr_a Sr_b Ti_c O_x$, $Cu_a Fe_b Mn_c O_x$,
 $Cu_a La_b Sr_c O_x$, $Fe_a Nb_b Ti_c O_x$, $Fe_a Pb_b Zn_c O_x$, $Fe_a Sr_b Ti_c O_x$,
5 $Fe_a Ta_b Ti_c O_x$, $Fe_a W_b Zr_c O_x$, $Ga_a Ti_b Zn_c O_x$, $La_a Mn_b Na_c O_x$,
 $La_a Mn_b Sr_c O_x$, $Mn_a Sr_b Ti_c O_x$, $Mo_a Pb_b Zn_c O_x$, $Nb_a Sr_b Ti_c O_x$,
 $Nb_a Sr_b W_c O_x$, $Nb_a Ti_b Zn_c O_x$, $Ni_a Sr_b Ti_c O_x$, $Sn_a W_b Zn_c O_x$,
 $Sr_a Ti_b V_c O_x$, $Sr_a Ti_b Zn_c O_x$, or $Ti_a W_b Zr_c O_x$.

In certain other preferred embodiments, the metal
10 oxide materials may include those which are in an array
of first and second chemo/electro-active materials,
wherein the chemo/electro-active materials are selected
from the pairings in the group consisting of

- (i) the first material is $M^1 O_x$, and the second
15 material is $M^1_a M^2_b O_x$;
- (ii) the first material is $M^1 O_x$, and the second
material is $M^1_a M^2_b M^3_c O_x$;
- (iii) the first material is $M^1_a M^2_b O_x$, and the
second material is $M^1_a M^2_b M^3_c O_x$;
- 20 (iv) the first material is a first $M^1 O_x$, and the
second material is a second $M^1 O_x$;
- (v) the first material is a first $M^1_a M^2_b O_x$, and
the second material is a second $M^1_a M^2_b O_x$; and
- (vi) the first material is a first $M^1_a M^2_b M^3_c O_x$, and
25 the second material is a second $M^1_a M^2_b M^3_c O_x$;

wherein M^1 is selected from the group consisting of Ce,
Co, Cu, Fe, Ga, Nb, Ni, Pr, Ru, Sn, Ti, Tm, W, Yb, Zn,
and Zr; M^2 and M^3 are each independently selected from
the group consisting of Al, Ba, Bi, Ca, Cd, Ce, Co, Cr,
30 Cu, Fe, Ga, Ge, In, K, La, Mg, Mn, Mo, Na, Nb, Ni, Pb,
Pr, Rb, Ru, Sb, Sc, Si, Sn, Sr, Ta, Ti, Tm, V, W, Y,
Yb, Zn, and Zr, but M^2 and M^3 are not the same in
 $M^1_a M^2_b M^3_c O_x$; a, b and c are each independently about
0.0005 to about 1, provided that $a+b+c = 1$; and x
35 is a number sufficient so that the oxygen present
balances the charges of the other elements in the
compound.

The sensor materials may optionally contain one or more additives to promote adhesion or to alter the conductance, resistance or selectivity thereof. Examples of additives to promote adhesion are frits, which are finely ground glass, or finely ground inorganic minerals that are transformed into glass or enamel on heating. Illustrative frits include those designated as F2834, F3876, F2967, KH770, KH710 and KH375, available from DuPont Technologies. These may be used in amounts of up to 30 volume percent of the composition from which the sensor material is made. Examples of additives to alter the conductance, resistance or selectivity include Ag, Au or Pt as well as frits. If desired, the sensor materials may also contain additives, for example, that catalyze the oxidation of a gas of interest or promote the selectivity for a particular analyte gas, or other dopants that convert an n semiconductor to a p semiconductor, or vice versa. These additives may be used in amounts of up to 30 weight percent of the composition from which the sensor material is made. Any frits or other additives used need not be uniformly or homogeneously distributed throughout the sensor material, but may be localized on or near a particular surface thereof as desired.

Any method of depositing the chemo/electro-active material to the substrate is suitable. One technique used for deposition is applying the semiconducting material on an alumina substrate on which electrodes are screen printed. The semiconducting material can be deposited on top of electrodes by hand painting semiconducting materials onto the substrate, nanopipetting materials into wells, thin film deposition, or thick film printing techniques. Most techniques are followed by a final firing to sinter the semiconducting materials.

Techniques for screen-printing substrates with the electrodes and chemo/electro-active materials are

illustrated in Figures 2-3. Figure 2 depicts a method of using interdigitated electrodes overlaid with dielectric material, forming blank wells into which the chemo/electro-active materials can be deposited.

5 Figure 3 depicts an electrode screen pattern for an array of 6 materials which is printed on both sides of the substrate to provide for a 12-material array chip. Two of the electrodes are in parallel so it holds only 6 unique materials. Below that is the screen pattern
10 for the dielectric material, which is screen printed on top of the electrodes on both side of the substrate to prevent the material from being fouled by contact with the gas mixture, such as becoming covered with soot from an auto, truck, machine or equipment engine, and
15 shorting out. Below that is the screen pattern for the actual sensor materials. This is printed in the holes in the dielectric on top of the electrodes. When more than one material is used in the array the individual materials are printed one at a time.

20 The sensor materials are interconnected by conductors, and those conductors are in turn connected to electrical input and output circuitry. The circuitry includes meters, data acquisition means and other devices as appropriate to measure and record the
25 response exhibited by a sensor material upon exposure to an analyte gas, to generate a signal in relation to that response, and to process the signals in a manner that completes the quantitative analysis of the gas mixture by presenting a report or display of a result
30 indicating the presence and/or concentration of the analyte gas. For example, the several sensors in an array may be accessed serially by a multiplexer, and the data retrieved may then be processed on the basis of the proportionality of the value of an electrical
35 property measured to the concentration of an individual analyte gas in a multi-component mixture. The data acquisition, processing, storage and display system may include means for conversion from analog to digital

format to enable the digitization of the responses of the sensors and other values, such as the measurement of temperature.

A response model is constructed using equations in which constants, coefficients or other factors are derived from pre-determined values characteristic of a precisely measured electrical response of an individual sensor material to a particular individual gas expected to be present as a component in the mixture to be analyzed. The equation may be constructed in an manner that takes temperature into account as a value separate and apart from the electrical responses exhibited by the sensor materials upon exposure to the gas mixture. Each individual sensor material in the array differs from each of the other sensors in its response to at least one of the component gases in the mixture, and the responses of each of the sensors to each analyte gas by itself is known.

The gas of interest to which the chemo/electro-active material will be exposed can be a single gas, a mixture, or one or more gases mixed with an inert gas such as nitrogen. Particular gases of interest are donor and acceptor gases. These are gases that either donate electrons to the semiconducting material, such as carbon monoxide, H_2S and hydrocarbons, or accept electrons from the semiconducting material, such as O_2 , nitrogen oxides (commonly depicted as NO_x), and halogens. When exposed to a donor gas, an n-type semiconducting material will have a decrease in electrical resistance, increasing the current, and it, therefore, will show an increase in temperature due to I^2R heating. When exposed to an acceptor gas, an n-type semiconducting material will have an increase in electrical resistance, decreasing the current, and therefore will show a decrease in temperature due to I^2R heating. The opposite occurs with p-type semiconducting materials.

The geometry of the sensor materials, selection of material, thickness of material, and voltages used can vary and depend on the sensitivity required. The sensor materials are preferably connected in parallel
5 in a circuit to which a voltage of about 1 to about 20, preferably about 1 to about 12, volts is applied across the sensor materials. When performing an analysis of a multi-component gas mixture, it is preferred that each chemo/electro-active sensor material in the array
10 exhibit a different electrical response characteristic than each of the other chemo/electro-active materials in the array upon exposure to an analyte gas component of interest in the mixture.

As noted, the types of electrical response
15 characteristics that may be measured include AC impedance or resistance, capacitance, voltage, current or DC resistance. It is preferred to use resistance as the electric response characteristic of the sensor materials that is measured to perform analysis of a
20 component within the gas mixture. For example a suitable sensor material may be that which, when at a temperature of about 400°C or above, has a resistivity of at least about 1 ohm-cm, and preferably at least about 10 ohm-cm, and yet no more than about
25 10^5 ohm-cm, and preferably no more than about 10^4 ohm-cm. Such a sensor material may also be characterized as that which exhibits, preferably at a temperature of about 400°C or above, upon exposure to an analyte in the gas mixture, a change in resistance of at least
30 about 0.1 percent, and preferably at least about 1 percent, as compared to the resistance before exposure.

Regardless of the type of response characteristic that is measured for the purpose of analyzing the
35 gaseous component(s) of interest, it is desirable that a sensor material be utilized for which that response value is stable over an extended period of time. When the sensor material is exposed to the analyte, the

concentration of the analyte being a function of the composition of the particular gas mixture in which it is contained, the response characteristic of the sensor material will preferably remain constant or vary to
5 only a small extent over an extended period of time at a constant temperature. For example, the response characteristic, if it varies, will vary by no more than about twenty percent, preferably no more than about ten percent, more preferably no more than about
10 five percent, and most preferably no more than about one percent over a period of at least about 1 minute, or preferably a period of hours such as at least about 1 hour, preferably at least about 10 hours, more preferably at least about 100 hours, and most
15 preferably at least about 1000 hours. One of the advantages of the sensor materials described above is that they are characterized by this kind of stability of response.

In applications in which the gas mixture is above
20 about 400°C, the temperature of the sensor materials and the array may be determined substantially only, and preferably is determined solely, by the temperature of the gas mixture in which the analyte gas(es) are contained. This is typically a variable temperature.
25 When higher-temperature gases are being analyzed, it may be desirable to provide a heater with the array to bring the sensor materials quickly to a minimum temperature. Once the analysis has begun, however, the heater (if used) is typically switched off, and no
30 method is provided to maintain the sensor materials at a preselected temperature. The temperature of the sensor materials thus rises or falls as does the temperature of the surrounding environment. The temperature of the surrounding environment, and thus
35 the sensors and the array, is determined by (or results from) substantially only the temperature of the gas mixture to which the array is exposed.

In applications in which the gas mixture is below about 400°C, it may be preferred to maintain the sensor materials and the array at a preselected temperature of about 400°C or above. This preselected temperature may
5 be substantially constant, or preferably is constant. The preselected temperature may also be about 500°C or above, about 600°C or above, or about 700°C or above. This may be conveniently done with a heater incorporated with the array, in a manner as known in
10 the art. The temperature of the gas mixture may also be below about 300°C, below about 200°C, or below about 100°C.

A change of temperature in the array may be indicated by a change in the quantified value of the
15 electrical response characteristic, resistance for example, of a sensor material. At a constant partial pressure in the mixture of a gas of interest, the electrical response characteristic of a sensor material may vary with a change in temperature of the array, and
20 thus the material. This change in the value of the electrical response characteristic may be measured for the purpose of determining or measuring the extent of change of, and thus a value for, temperature. It is preferred that this measurement of temperature be made
25 independently of the determination of the electrical responses of the chemo/electro-active materials. This can be done by connecting the temperature measuring device in parallel circuitry with the sensor materials, rather than in series. A thermocouple or a pyrometer
30 is useful for the purpose of determining the temperature of the array. Particularly if the temperature determining device is a thermistor, typically a material that is not responsive to an analyte gas, the thermistor is preferably made from a
35 different material than the material from which any of the gas sensors is made. Regardless of the method by which temperature or change in temperature is determined, a temperature value or a quantified change

in temperature is a desirable input, preferably in digitized form, from which an analysis of an analyte gas in a mixture of gases may be performed.

Unlike various prior-art technologies, in the method and apparatus of this invention, there is no need to separate the component gases of the mixture for purposes of performing an analysis, such as by a membrane or electrolytic cell. There is also no need when performing an analysis by means of this invention to employ a reference gas, to bring the response or analytical results back to a base line value. With the exception of preliminary testing to determine a standardized response value to be assigned to the exposure of each individual sensor material to each individual analyte gas. The sensor materials are exposed only to the mixture that contains an analyte gas component. The sensor materials are not exposed to any other gas to obtain response values for comparison to those obtained from the analyte. The analysis of the component gas(es) of interest is therefore performed only from the electrical responses obtained upon exposure of the chemo/electro-active materials to the mixture containing the analyte. No information about an anyalte gas is inferred by exposure of the sensor materials to any gas other than the analyte itself as contained within the mixture.

This invention therefore provides a method and apparatus for directly sensing the presence and/or concentration of one or more gases in an multi-component gas system, comprising an array of at least two chemo/electro-active materials chosen to detect the gases in a multi-component gas stream. The array, gas of interest, gas stream, and chemo/electro-active materials are as described above. The multi-component gas system can be at essentially any temperature that is not so low or so high that the sensor materials are degraded or the sensor apparatus otherwise malfunctions. In one embodiment, the gas system may be

at a lower temperature such as room temperature (about 25°C) or elsewhere in the range of about 0°C to less than about 100°C, whereas in another embodiment the gas mixture may at a higher temperature such as in the
5 range of about 400°C to about 1000°C.

The invention is applicable to gas mixtures that may be at higher temperatures - gases for example in combustion streams such as automobile exhausts, diesel engines and home heating systems. The invention is
10 also applicable, however, to gas mixtures derived from other sources, such as in manufacturing processes, waste streams, and environmental monitoring; or in systems in which odor detection is important and/or which are at lower temperature, such as in the medical,
15 agricultural or food and beverage industries. The gas mixture may therefore have a temperature that is about 100°C or more, about 200°C or more, about 300°C or more, about 400°C or more, about 500°C or more, about 600°C or more, about 700°C or more, or about 800°C or
20 more, and yet is less than about 1000°C, is less than about 900°C, is less than about 800°C, is less than about 700°C, is less than about 600°C, is less than about 500°C, is less than about 400°C, is less than about 300°C, is less than about 200°C, or is less than
25 about 100°C.

This invention will further comprise means to determine, measure and record responses exhibited by each of the chemo/electro-active materials present upon exposure to the gas mixture. For example, any means
30 that will determine, measure and record changes in electrical properties can be used. This may, for example, be a device that is capable of measuring the change in AC impedance of the materials in response to the concentration of adsorbed gas molecules at their
35 surfaces. Other means for determining electrical properties can be suitable devices used to measure, for example, capacitance, voltage, current or DC resistance. Alternatively a change in temperature of

the sensing material may be measured and recorded. The chemical sensing method and apparatus may further comprise a means to measure or analyze the detected gases such that the presence of the gases are
5 identified and their concentrations are measured. These means can include devices, such as instrumentation or equipment that is capable of performing chemometrics, neural networks or other pattern recognition techniques. The chemical sensor
10 device will further comprise a housing for the array of chemo/electro-active materials, the means for detecting, and a means for analyzing.

The invention also provides a chemical sensor for directly sensing the presence and/or concentration of
15 one or more gases in an multi-component gas system, said sensor comprising: a substrate, an array of at least two chemo/electro-active materials chosen to detect the predetermined gases in a multi-component gas stream, and a means to detect changes in electrical
20 properties in each of the chemo/electro-active materials present upon exposure to the gas system. The array, gas of interest, gas stream, chemo/electro-active materials, and means for detecting are as described above.

25 The array of sensor materials should be able to detect an individual gas of interest despite competing reactions caused by the presence of the several other components of the multi-component mixture. For this purpose, this invention uses a an array of multiple
30 sensor materials, as described herein, each of which has a different sensitivity for at least one of the gas components of the mixture to be detected. A sensors that has the needed sensitivity, that has the other attributes described herein, and that can operate in
35 the types of conditions described herein, is obtained by selection of appropriate compositions of materials from which the sensor is made. Various suitable compositions of materials for this purpose are

described herein. The number of sensors in the array is typically greater than or equal to the number of individual gas components to be analyzed in the mixture.

5 The following non-limiting examples are meant to illustrate the invention but are not intended to limit it in any way. In the examples provided below, "chip" is used to describe an alumina substrate comprising an electrode and sensing material, and dielectric, if a
10 dielectric is used. The notation "X% A:MO" means that another inorganic compound (A) has been added at the specified concentration (X% on an atomic basis) to the metal oxide (MO). The term "frit" is used to describe a mixture of inorganic compounds that usually form a
15 glass at some temperature.

Examples

Described below are exemplary techniques that may be used to prepare sensor materials, and to measure signals using infrared (IR) thermographic and AC
20 impedance techniques.

IR Thermographic Samples and Measurements

The change in impedance of a sensor material when exposed to a gas or gas mixture may be determined by measuring the change in temperature of the material
25 sample by a technique such as infrared thermographic imaging.

A. Array Chip Fabrication

A blank array chip was made by screen printing an interdigitated electrode pattern, shown in Figure 2,
30 onto an alumina substrate (obtained from Coors Tek, 96% alumina, 1" x 0.75" x 0.025"). A semi-automatic screen printer (ETP Electro-dial, Series L-400) was used. The electrode paste is available from DuPont iTechnologies, product #5715. The electrode screen that was used
35 (obtained from Microcircuit Engineering Corporation) had an emulsion thickness of 0.5 mil. After screen printing, the parts were dried in a convection oven at 120°C for 10 minutes and then fired. Firing was done

in air using a 10 zone belt Lindberg furnace with a cycle time of 30 minutes and a peak temperature of 850°C for 10 minutes. After the electrodes were fired onto the substrate a dielectric (DuPont iTechnologies, product #5704) pattern, shown in Figure 2, was screen printed over the electrodes with a screen (Microcircuit Engineering Corporation), having an emulsion thickness of 0.9 mil. The parts were then dried at 120°C for 10 minutes and fired using the same firing cycle as described above.

B. Semiconducting Metal Oxide Preparation and Application on the Array Chip

Approximately 175 mg of the semiconducting metal oxide powder or the mixture of a semiconducting metal oxide with a suitable glass frit (DuPont iTechnologies product #F2889 or F3876) or the mixture of the semiconducting metal oxide powder with other inorganic compounds was weighed out on to a glass slide with approximately 75 mg of a suitable medium (DuPont iTechnologies product #M2619) and 1 mg of a suitable surfactant (DuPont iTechnologies product #R0546). The medium and surfactant were mixed together and the metal oxide powder or mixture was added to the medium and surfactant gradually to ensure wetting. If needed, a suitable solvent (DuPont iTechnologies product #R4553) was added at this time to reduce the viscosity. The paste was then transferred to an agate mortar and pestle for more thorough mixing. Using a finely pointed wooden applicator, a very small amount of paste was then placed into one of the wells of the array chip. This procedure was repeated with each of the metal oxide powders or mixtures until all of the wells on the array chip were filled. Once the wells on the array chip were filled with pastes, the array chip was allowed to sit in a closed chamber with a low flow of N₂ gas passing over the chip. The array chip was then dried at 120°C for 10 minutes. Firing was done in air using a Fisher programmable box furnace with a

1°C/minute ramp rate up to 650°C, where it was held at temperature for 30 minutes. The cooling rate was 5°C/minute to room temperature.

C. Wiring of the Array Chip

5 Lead wires were fabricated using approximately 1.5" of 0.005" platinum wire. One end of the wire was bare and the other end was connected to a female RS232 connector. The bare end of a platinum lead wire was attached to one of the open conductor pads on the array
10 chip using a conducting paste (Pelco product #16023). A second lead wire was attached the same way to the other open conductor pad on the array chip. The chip was then allowed to dry for at least 4 hours at 120°C.

D. IR Thermographic Measurements

15 The test chamber comprised a 2.75" cube containing input and output valves for gas flow, a 1" MgF window, two thermocouple feedthroughs and two electrical feedthroughs. The electrical feedthroughs provided connections to the sample heater (Advanced Ceramics,
20 Boraletric heater # HT-42) and the voltage/current measuring unit (Keithley Instruments model #236). The gas flows were regulated using a multi-gas controller (MKS model #647B). The sample heater was controlled using a unit from Hampton Controls (70VAC/700W phase
25 angle). The infrared camera (Inframetrics PM390) was focused on the front surface of the array chip using a 100 µm close-up lens during the measurements.

 Before the measurements were made the sample was placed inside the test chamber on top of the sample
30 heater. The female pins on the lead wires connected to the array chip were then connected to the electrical feedthrough connected to the voltage/current measuring unit. The chamber was closed and placed in the visual path of the IR camera. Gas (100 sccm N₂, 25 sccm O₂)
35 was then allowed to flow into the chamber during heating of the sample. Next, the sample was heated (approximately 10°C/minute) to the desired temperature and equilibrated before the voltage/current measuring

unit was turned on and a voltage applied. The voltage was typically adjusted to allow a current flow of between 10-20 mA through the array.

IR thermographic images of the array of materials were taken 20 minutes after each change in the flows of the following gases: N₂, O₂, and gas mixtures as follows: 1%CO/99% N₂, 1% NO₂/99% N₂ and 1% C₄H₁₀/99%N₂. Unless otherwise noted, the content of all gas mixtures described below is stated in percent by volume. The temperatures of the materials in 2% O₂/98% N₂ were subtracted from their temperatures in the other gas mixtures to determine the temperature signals in the examples. ThermMonitor 95 Pro, version 1.61 (Thermoteknix Systems, Ltd.) was used to do the temperature subtractions. When exposed to a donor gas, n-type semiconducting materials will have a decrease in resistivity, increasing the current and therefore, will show an increase in temperature due to I²R heating. When exposed to an acceptor gas, n-type semiconducting materials will have an increase in resistivity, decreasing the current and therefore will show a decrease in temperature due to I²R heating. The opposite occurs with p-type semiconducting materials.

AC Impedance Samples and Measurements

25 A. Semiconducting Metal Oxide Paste Preparation

Approximately 2-3 grams of the semiconducting metal oxide powder or the mixture of a semiconducting metal oxide with a suitable glass frit (DuPont iTechnologies product #F2889 or F3876) or the mixture of the semiconducting metal oxide with other inorganic compounds was weighed out with an amount of a suitable medium (DuPont iTechnologies product #M2619) sufficient to provide approximately 40-70 weight % solids. These materials were then transferred to a muller (Hoover automatic muller, model #M5) where they were mixed together using a spatula until no dry powder was left. If needed, a suitable surfactant, such as DuPont iTechnologies product #R0546, was added to reduce the

viscosity. Further mixing was done using the muller with 500 grams of weight for approximately 6 passes at 25 revolutions per pass. The finished pastes were then transferred to containers until needed.

5 B. Single Sensor Fabrication

Some of the sensing chips were prepared using a single material and not arrays of sensing materials. The single sensing sample chips were made by screen printing an interdigitated electrode pattern with
10 electrodes, which are 0.4" long and have a 0.008" spacing onto an alumina substrate (Coors Tek, 96% alumina, 1" x 1" x 0.025"). A semi-automatic screen printer (ETP Electro-dial, Series L-400) was used. The electrode paste (product #5715) is available from
15 DuPont *i*Technologies. The electrode screen (Microcircuit Engineering Corporation) had an emulsion thickness of 0.5 mil. After printing, the parts were dried in a convection oven at 120°C for 10 minutes and then fired. Firing was done using a 10 zone belt
20 furnace (Lindberg) with a cycle time of 30 minutes and a peak temperature of 850°C for 10 minutes. The sensor material was then screen printed on the substrate using a screen (Microcircuit Engineering Corporation) with an open area 0.5" x 0.5". This screen had an emulsion
25 thickness of 1.0 mil. After the sensor material was printed the part was dried in a convection oven at 120°C for 10 minutes. At this point the part was fired in air to 850°C for 10-45 minutes using a Lindberg tube furnace.

30 C. Sensor Array Fabrication

A variety of electrode and sensor configurations can be used to acquire the AC impedance data of the sensor array. Described immediately below is the fabrication of a 12-material array.

35 The sensor array chip was made by screen printing an electrode pattern (Figure 3) onto an alumina substrate (Coors Tek, 96% alumina, 2.5" x 0.75" x 0.040"). A semi-automatic screen printer (ETP Electro-

dial, Series L-400) was used. The electrode paste (product #4597) is available from DuPont *i*Technologies. The electrode screen (Microcircuit Engineering Corporation) had an emulsion thickness of 0.4 mil.

5 Note in Figure 3 that two of the sensor pads are in parallel, so that only six unique sensor material measurements can be made from this electrode configuration. After printing, the parts were dried in a convection oven at 130°C for 10 minutes and then
10 fired. Firing was done in air using a 10 zone belt furnace (Lindberg) with a cycle time of 30 minutes and a peak temperature of 850°C for 10 minutes. After the electrodes were fired onto the substrate a dielectric (DuPont *i*Technologies, product #QM44) pattern, shown in
15 Figure 3, was screen printed over the electrodes with a screen (Microcircuit Engineering Corporation), having an emulsion thickness of 1.0 mil. The parts were then dried at 130°C for 10 minutes and fired using the same firing cycle as described above. At this point, each
20 sensor material was screen printed on the substrate into the wells of the dielectric using the screen (Microcircuit Engineering Corporation), shown in Figure 3. This screen had an emulsion thickness of 1.0 mil. After each sensor material was printed the
25 part was dried in a convection oven at 130°C for 10 minutes. After all of the sensor materials (6) were applied to this side of the sensor, the part was fired using the same firing cycle as described above. After this firing step, the above printing, drying and firing
30 steps were repeated on the back side of the substrate to add 6 more sensor materials to the array chip.

D. AC Impedance Measurements

For single sensor material samples, a 1.2" platinum wire was connected to each of the electrodes
35 on the samples with stainless steel screws. The ends of the platinum wires were then connected to 0.127" diameter inconel wires that run to the exterior of the test chamber. The entire lengths of the inconel wires

were encased in aluminum oxide and grounded inconel tubing to eliminate interference from electromagnetic fields present in the furnace. The inconel tubes were welded into a stainless steel flange that was mounted
5 on the end of a closed-one-end fused quartz reactor that is 4" in diameter and 24" long. The quartz reactor was wrapped with grounded stainless steel screen also to eliminate electromagnetic interference from the furnace. The entire chamber assembly was
10 placed in the cavity of a hinged Lindberg tube furnace and the furnace was closed.

The samples were connected to the dielectric interface (Solartron 1296) and frequency response analyzer (Solartron 1260) using ten pairs of coaxial
15 cables (one pair per sample) which ran from the inconel wires on the furnace exterior to a switch (Keithley 7001 containing two Keithley 7062 high frequency cards) and one pair of coaxial cables from the switch to the interface and analyzer. The switch, dielectric
20 interface and frequency analyzer were all computer controlled.

The gas flows into the quartz chamber were regulated using a computer controlled system comprised of 4 independent flowmeters (MKS product #1179) and
25 multi gas controller (MKS product #647B). The temperature of the furnace was determined using a computer controlled fuzzy logic controller (Fuji PYX).

After the samples were loaded into the furnace, the quartz reactor was purged with a synthetic air
30 mixture during heating of the furnace. After the furnace was equilibrated at the measurement temperature, the gas concentrations (N_2 , O_2 , 1%CO/99% N_2 , and 1% NO_2 /99% N_2) were set to the desired values and sufficient time was allowed for the equilibration
35 of the atmosphere in the reactor. At this point the AC impedance measurements (1 Hz to 1 MHz) from each sample were measured sequentially. Then the gas concentrations were typically set to a new value, the

atmosphere was equilibrated, and another round of measurements were made. The procedure was repeated until the samples were measured in all of the desired atmospheres at a particular temperature. At this point
 5 the temperature was changed and the process repeated. After all of the measurements had been made the furnace was cooled to room temperature and the samples removed.

For the sensor array chips, a measurement system similar to that described above can be used. The only
 10 difference is that the platinum wires, which are connected to the inconel wires in the furnace, must be connected to the electrode pads on the array chip using a conducting paste (Pelco product #16023). The number of connections from the sample to the switch depends on
 15 the number of sensors on the array.

Example 1

This example shows the change in the electrical properties of 20 metal oxide semiconducting materials in the presence of 4 combustion gas compositions at
 20 450°C. The signals listed in Table 1 below are from the infrared thermographic technique described above. The signals represent differences in temperature (°C) of the materials when exposed to one of the 4 gas compositions shown relative to that in a comparison gas
 25 which is 2% O₂/ 98% N₂ and reflect the change in the electrical resistance of the semiconducting materials. All of the signals were generated with 10 V across the materials, unless otherwise specified. Blank spaces indicate that there was no detectable signal when that
 30 gas composition was contacted with that material. Unless otherwise specified, the gases were measured at 2000 ppm in N₂.

Table 1
 Change in temperature in °C

	ZnO	SnO ₂	NiFe ₂ O ₄	WO ₃	1% Nb:TiO ₂	Pr ₆ O ₁₁	SrNb ₂ O ₆
NO ₂ in N ₂	-38.1	-35.4	-27.4	-16.4	-2.7	-5.6	-2.8
NO ₂ in 2%	-35.2	-32.5	-13.7	-13.5	-2.7	-	-

O ₂ / 98% N ₂							
CO in N ₂	27.2	8.2	14	13.7	-	-	8.3
N ₂ ref.	16.9	9.6	11.2	5.6	12.4	-	-

	NiO	CuO	Cu ₂ O	MnTiO ₃	BaCuO _{2.5}	AlVO ₄	CuMnFeO ₄
NO ₂ in N ₂	5.5	8.2	8.2	5.6	6.6	-	-
NO ₂ in 2% O ₂ / 98% N ₂	5.5	5.6	5.5	-	2.6	-2.7	2.6
CO in N ₂	-	-5.5	-13.8	-	-2.7	11.3	-
N ₂ ref.	-2.8	-5.6	-2.8	-	-2.7	8.3	-

	LaFeO ₃	CuGaO ₂	CuFe ₂ O ₄	Zn ₄ TiO ₆	La ₂ CuO ₄	SrCu ₂ O ₂
NO ₂ in N ₂	-	-2.8	-5.5	-5.7	4.2	-
NO ₂ in 2% O ₂ / 98% N ₂	-	-	-2.5	-	-	2.6
CO in N ₂	-2.8	-	-	7.3	-	-
N ₂ ref.	-	-	-	-	-	-

- 5 The following measurements were done with other than 10 V. Pr₆O₁₁ was measured using 1 V; BaCuO_{2.5}, CuMnFeO₄, CuGaO₂ and CuFe₂O₄ were measured using 16 V; Zn₄TiO₆ was measured using 20 V; LaCuO₄ and SrCu₂O₂ were measured using 12 V.

10 Example 2

- This example shows the change in the electrical properties of 8 metal oxide semiconducting materials in the presence of 5 combustion gas compositions at 450°C. The signals listed in Table 2 below are from the
- 15 infrared thermographic technique. The signals are differences in temperature (°C) of the semiconducting materials when exposed to the gas compositions shown relative to that in a comparison gas which is 2% O₂/ 98% N₂. All of the signals were generated with 10 V
- 20 across the semiconducting materials, unless otherwise specified. Blank spaces indicate that there was no detectable signal when that gas composition was contacted with that material. Unless otherwise specified, the gases were measured at 2000 ppm in N₂.

25

Table 2

Change in temperature in °C

	ZnO	SnO ₂	WO ₃	SrNb ₂ O ₆	NiO	CuO	Cu ₂ O	AlVO ₄
NO ₂ in N ₂	-38.1	-35.4	-16.4	-2.8	5.5	8.2	8.2	-
NO ₂ in 2% O ₂ / 98% N ₂	-35.2	-32.5	-13.5	-	5.5	5.6	5.5	-2.7
CO in N ₂	27.2	8.2	13.7	8.3	-	-5.5	-13.8	11.3
N ₂ ref.	16.9	9.6	5.6	-	-2.8	-5.6	-2.8	8.3
1% C ₄ H ₁₀ / 99% N ₂	38	28	22	-	-6	-7	-11	11

Example 3

5 This example shows the change in the electrical properties of 26 metal oxide semiconducting materials in the presence of 4 combustion gas compositions at 600°C. The signals listed in Table 3 immediately below were obtained using an infrared thermographic

10 technique. The signals are measurements of the differences in temperature (°C) of the materials when exposed to the gas compositions shown relative to that in a comparison gas which is 2% O₂/ 98% N₂. All of the signals were generated with 10 V across the materials,

15 unless otherwise specified. Blank spaces indicate that there was no detectable signal when that gas composition was contacted with that material. Unless otherwise specified, the gases were measured at

20 2000 ppm in N₂.

Table 3
Change in temperature in °C

	ZnO	SnO ₂	NiFe ₂ O ₄	1% Nb:TiO ₂	WO ₃	FeTiO ₃	SrTiO ₃	NiO
NO ₂ in N ₂	-54.4	-48.3	-36.3	-24.2	-18.1	-6.1	3	6
NO ₂ in 2% O ₂ / 98% N ₂	-48.3	-48.3	-30.2	-12.1	-18.1	-6.1	6	6
CO in N ₂	28.5	18.1	18.5	42.3	24.1	-	-	-6
N ₂	30.2	24.1	15.1	24.1	6	3	-	-9.1

	AlVO ₄	CuO	Cu ₂ O	LaFeO ₃	BaCuO _{2.5}	Fe ₂ O ₃	SrNb ₂ O ₆	ZnO + 2.5% F2889
--	-------------------	-----	-------------------	--------------------	----------------------	--------------------------------	----------------------------------	------------------

NO ₂ in N ₂	-	-	-	-	-	-	-	-24
NO ₂ in 2% O ₂ /98% N ₂	-6.1	6	6	-	-	-	-	-18
CO in N ₂	18.1	-6	-12.1	-3	-6	72.5	28.5	18
N ₂	18.1	-3	-	-	-6	-	18.1	21

	ZnO + 10% F3876	SnO ₂ + 5% F2889	WO ₃ + 10% F3876	CuFe ₂ O ₄	Zn ₄ TiO ₆	ZnTiO ₃	Tm ₂ O ₃	Yb ₂ O ₃
NO ₂ in N ₂	-42	-6	-15	-6	-12	-6	-6	-6
NO ₂ in 2% O ₂ /98% N ₂	-24	-6	-18	-6	-	-	-	-
CO in N ₂	12	24	6	-	6	-	-	-
N ₂	27	9	18	-	6	-	-	-

	Fe:ZrO ₂	MnCrO ₃
NO ₂ in N ₂	-6	-
NO ₂ in 2% O ₂ /98% N ₂	-	-
CO in N ₂	6	24
N ₂	-	-

All of the measurements were obtained using 10 V, except that BaCuO_{2.5} was measured with 4 V; Fe₂O₃ was measured with 1 V; ZnO + 2.5% F2889, ZnO + 10% F3876, SnO₂ + 5% F2889, Tm₂O₃, Yb₂O₃, Fe:ZrO₂ and MnCrO₃ were measured with 5 V; WO₃ + 10% F3876 was measured with 2 V; CuFe₂O₄ was measured with 6 V; and Zn₄TiO₆ and ZnTiO₃ were measured using 20 V.

Example 4

This example illustrates that a set of 4 metal oxide materials of Example 3 could be used to differentiate the 4 gas compositions shown at 600°C using the IR thermographic signals. The results are shown in Table 4 below. The signals are measurements of the differences in temperature (°C) of the materials when exposed to the gases shown relative to that in a

comparison gas which is 2% O₂/ 98% N₂. All of the signals were generated with 10 V across the materials, unless otherwise specified. Blank spaces indicate that there was no detectable signal when that gas composition was contacted with that material. Unless otherwise specified, the gases were measured at 2000 ppm in N₂.

Table 4

Change in temperature in °C

	SrTiO ₃	Cu ₂ O	Fe ₂ O ₃	SrNb ₂ O ₆
NO ₂ in N ₂	3	-	-	-
NO ₂ in 2% O ₂ / 98% N ₂	6	6	-	-
CO in N ₂	-	-12.1	72.5	28.5
N ₂	-	-	-	18.1

Example 5

This example demonstrates that this second set of 4 metal oxide materials of Example 3 could be used to differentiate the 4 gas compositions shown at 600°C using the IR thermographic signals. The results are shown in Table 5 below. The signals are measurements of the differences in temperature (°C) of the materials when exposed to the gases shown relative to that in a comparison gas which is 2% O₂/ 98% N₂. All of the signals were generated with 10 V across the materials, unless otherwise specified. Blank spaces indicate that there was no detectable signal when that gas composition was contacted with that material. Unless otherwise specified, the gases were measured at 2000 ppm in N₂.

Table 5

Change in temperature in °C

	ZnO	AlVO ₄	LaFeO ₃	BaCuO _{2.5}
NO ₂ in N ₂	-54.4	-	-	-
NO ₂ in 2% O ₂ / 98%	-48.3	-6.1	-	-

N ₂				
CO in N ₂	28.5	18.1	-3	-6
N ₂	30.2	18.1	-	-6

Comparative Example A

This comparative example demonstrates that this set of 6 materials of Example 3 can not be used to differentiate the 2 gas compositions at 600°C using the IR thermographic signals, and illustrates the importance of the proper selection of materials. The results are shown in Table 5A below. The signals are measurements of the differences in temperature (°C) of the materials when exposed to the gas compositions shown relative to that in a comparison gas which is 2% O₂/ 98% N₂. All of the signals were generated with 10 V across the materials, unless otherwise specified. Blank spaces indicate that there was no detectable signal when that gas composition was contacted with that material. Unless otherwise specified, the gases were measured at 2000 ppm in N₂.

Table 5a

Change in temperature in °C

	SnO ₂	WO ₃	FeTiO ₃	Ni O	SnO ₂ + 5% F2889	CuFe ₂ O ₄
NO ₂ in N ₂	-48.3	-18.1	-6.1	6	-6	-6
NO ₂ in 2% O ₂ / 98% N ₂	-48.3	-18.1	-6.1	6	-6	-6

Comparative Example B

This comparative example demonstrates that this set of 3 materials can not be used to differentiate the 2 gas compositions at 600°C using the IR thermographic signals, and illustrates the importance of the proper selection of materials. The results are shown in Table 5B below. The signals are measurements of the differences in temperature (°C) of the materials when exposed to the gas compositions shown relative to that

in a comparison gas which is 2% O₂/ 98% N₂. All of the signals were generated with 10 V across the materials, unless otherwise specified. Blank spaces indicate that there was no detectable signal when that gas composition was contacted with that material. Unless otherwise specified, the gases were measured at 2000 ppm in N₂.

Table 5b

Change in temperature in °C

	AlVO ₄	BaCuO _{2.5}	Zn ₄ TiO ₆
CO in N ₂	18.1	-6	6
N ₂	18.1	-6	6

Example 6

This example illustrates the use of the AC impedance technique for the measurement of the response of 19 metal oxide semiconducting materials in the presence of 4 gas compositions at 400°C. The signals listed in Table 6 below are the ratios of the magnitudes of the impedances of the materials when exposed to the gas compositions shown to the magnitudes of the impedances in 10,000 ppm O₂ in N₂. The gases used were 200 ppm NO₂ in N₂, 200 ppm NO₂ and 10,000 ppm O₂ in N₂, 1000 ppm CO in N₂, and N₂.

Table 6

	MgAl ₂ O ₄	1% Zn:MgAl ₂ O ₄	ZnO	WO ₃	NiFe ₂ O ₄	SnO ₂	TiO ₂
NO ₂ in N ₂	0.6245	0.5544	55.85	8.772	5.008	9.243	1.536
NO ₂ in O ₂ /N ₂	0.7680	0.6787	47.38	9.468	12.93	10.56	1.585
CO in N ₂	1.531	1.459	0.1235	0.1865	1.248	0.0051	0.0116
N ₂	0.8242	0.9219	4.1290	1.716	1.327	0.3208	1.055

	MnTiO ₃	NiO	SrNb ₂ O ₆	CeVO ₄	1% Nb:TiO ₂	FeTiO ₃	Pr ₆ O ₁₁
NO ₂ in N ₂	0.8643	0.5692	1.217	0.9847	1.937	1.299	0.5475
NO ₂ in O ₂ /N ₂	0.8475	0.9662	1.228	0.9977	1.674	1.034	0.5452

CO in N ₂	37.35	9.679	0.6501	1.045	0.0112	0.6009	1.184
N ₂	1.264	1.257	1.011	1.001	0.8811	1.028	1.103

	SrTiO ₃	Ba ₂ Cu ₂ O ₅	CuMnFe ₂ O ₄	LaFeO ₃	Zn ₂ V ₂ O ₇
NO ₂ in N ₂	0.6524	0.7869	0.9559	0.8401	1.209
NO ₂ in O ₂ /N ₂	0.7596	0.7834	0.9399	0.8506	1.114
CO in N ₂	0.0178	0.7603	0.6089	2037	0.8529
N ₂	1.061	1.063	1.136	1.756	0.9900

Example 7

This example illustrates the use of the AC impedance technique for the measurement of the response of 19 metal oxide semiconducting materials in the presence of 4 gas compositions at 550°C. The signals listed in the table are from the AC impedance technique. The signals are the ratios of the magnitudes of the impedances of the materials when exposed to the gas compositions shown to the magnitudes of the impedances in 10,000 ppm O₂ in N₂. The gases used were 200 ppm NO₂ in N₂, 200 ppm NO₂ & 10,000 ppm O₂ in N₂, 1000 ppm CO in N₂, and N₂.

Table 7

	MgAl ₂ O ₄	1% Zn:MgAl ₂ O ₄	ZnO	WO ₃	NiFe ₂ O ₄	SnO ₂
NO ₂ in N ₂	0.9894	0.9583	3.866	2.335	3.025	1.655
NO ₂ in O ₂ /N ₂	0.8937	0.8984	5.272	2.006	3.553	3.390
CO in N ₂	1.046	0.9697	0.0133	0.2034	0.2506	0.0069
N ₂	1.067	1.060	0.7285	0.9526	1.208	0.2666

	TiO ₂	MnTiO ₃	NiO	SrNb ₂ O ₆	CeVO ₄	1% Nb:TiO ₂	FeTiO ₃
NO ₂ in N ₂	1.135	1.010	0.9483	1.006	1.003	1.271	1.193
NO ₂ in O ₂ /N ₂	1.314	1.014	0.5207	1.044	0.9975	1.302	1.073
CO in N ₂	0.0017	44.00	1.194	0.2814	1.104	0.0021	0.6743
N ₂	0.7263	1.280	1.341	0.9830	1.024	0.477	1.054

	Pr ₆ O ₁₁	SrTiO ₃	Ba ₂ Cu ₂ O ₅	CuMnFe ₂ O ₄	LaFeO ₃	Zn ₂ V ₂ O ₇
NO ₂ in N ₂	1.223	0.9055	0.7071	1.148	1.302	1.199
NO ₂ in O ₂ /N ₂	0.9656	0.9881	0.3812	0.9891	0.9429	1.086
CO in N ₂	62.76	0.0029	3.0892	2.557	123.3	0.4726
N ₂	1.495	1.210	1.333	1.681	1.789	0.9034

Example 8

This example illustrates the use of the AC impedance technique for the measurement of the response of 23 semiconducting materials in the presence of 4 gas compositions at 650-700°C. The signals listed in the table are from the AC impedance technique. The signals are the ratios of the magnitudes of the impedances of the materials when exposed to the gas compositions shown to the magnitudes of the impedances in 10,000 ppm O₂ in N₂. The gases used were 200 ppm NO₂ in N₂, 200 ppm NO₂ & 10,000 ppm O₂ in N₂, 1000 ppm CO in N₂, and N₂.

Table 8

	MgAl ₂ O ₄	1% Zn:MgAl ₂ O ₄	ZnO	WO ₃	NiFe ₂ O ₄	SnO ₂	TiO ₂
NO ₂ in N ₂	0.9450	1.022	0.4876	0.7151	0.5807	0.5419	0.5617
NO ₂ in O ₂ /N ₂	0.6412	0.8310	1.235	1.281	1.105	0.8265	1.030
CO in N ₂	0.9074	0.9684	0.0348	0.2693	0.0408	0.0238	0.0015
N ₂	1.056	1.100	0.2753	0.6332	0.4421	0.3521	0.3957

	MnTiO ₃	NiO	SrNb ₂ O ₆	CeVO ₄	1% Nb:TiO ₂	FeTiO ₃	Pr ₆ O ₁₁
NO ₂ in N ₂	1.445	1.379	0.8852	1.050	0.5711	0.9072	1.516
NO ₂ in O ₂ /N ₂	0.9561	0.8127	0.9862	1.135	0.8263	0.9524	0.9814
CO in N ₂	113.3	1.782	0.0301	1.565	0.0035	0.4346	8005
N ₂	1.877	1.409	0.8788	1.080	0.2802	0.8050	1.962

	SrTiO ₃	Ba ₂ Cu ₂ O ₅	CuMnFe ₂ O ₄	LaFeO ₃	Zn ₂ V ₂ O ₇
NO ₂ in N ₂	1.051	0.5615	3.401	1.331	0.8631
NO ₂ in O ₂ /N ₂	0.9320	0.9703	1.001	1.013	0.9459

O ₂ /N ₂					
CO in N ₂	0.0020	381.3	2.198	43.11	0.4672
N ₂	1.076	1.308	4.250	1.673	0.6574

	ZnO + 2.5% F2889	ZnO + 10% F3876	SnO ₂ + 5% F2889	WO ₃ + 10% F3876
NO ₂ in N ₂	0.5810	0.7944	0.6270	0.6055
NO ₂ in O ₂ /N ₂	1.141	1.176	0.8927	1.284
CO in N ₂	0.0020	0.0016	0.0043	0.0122
N ₂	0.1054	0.1338	0.2780	0.4862

Example 9

This example illustrates the use of the AC impedance technique for the measurement of the response of 16 semiconducting materials in the presence of 4 gas compositions at 800°C. The signals listed in the table are from the AC impedance technique. The signals are the ratios of the magnitudes of the impedances of the materials when exposed to the gas compositions shown to the magnitudes of the impedances in 10,000 ppm O₂ in N₂. The gases used were 200 ppm NO₂ in N₂, 200 ppm NO₂ & 10,000 ppm O₂ in N₂, 1000 ppm CO in N₂, and N₂.

Table 9

	ZnO	WO ₃	NiFe ₂ O ₄	SnO ₂	TiO ₂	MnTiO ₃	NiO	SrNb ₂ O ₆
NO ₂ in N ₂	0.3980	0.5737	0.6710	0.4050	0.4859	1.981	1.917	0.7555
NO ₂ in O ₂ /N ₂	1.594	1.117	4.795	6.456	1.052	1.497	0.8529	0.9928
CO in N ₂	0.688	0.2610	0.0642	0.2349	0.0014	123.2	5.129	0.0144
N ₂	0.3070	0.5103	0.5339	0.2852	0.3093	2.882	2.124	0.5167

	CeVO ₄	1% Nb:TiO ₂	FeTiO ₃	Pr ₆ O ₁₁	SrTiO ₃	Ba ₂ Cu ₂ O ₅	CuMnFe ₂ O ₄	LaFeO ₃
NO ₂ in N ₂	1.013	0.3280	0.6799	1.569	0.0049	4.061	2.869	1.252
NO ₂ in O ₂ /N ₂	1.058	1.006	0.9982	1.010	0.0260	0.9811	0.9389	1.326
CO in N ₂	2.165	0.0047	0.2831	3530	1.004	216.0	0.8810	63.36
N ₂	1.075	0.1960	0.5600	2.999	1.048	7.445	3.413	1.612

CLAIMS

What is claimed is:

1. An apparatus for analyzing at least one
5 individual gas component in a multi-component gas mixture, comprising:
 - (a) an array of at least two chemo/electro-active materials connected in parallel circuitry, each chemo/electro-active
10 material exhibiting a different electrical response characteristic upon exposure to the individual gas component than each other chemo/electro-active material;
 - (b) means for determining an electrical
15 response of each chemo/electro-active material upon exposure of the array to the gas mixture;
 - (c) means for determining a value for the temperature of the array connected in parallel circuitry with the chemo/elctro-active materials; and
 - (d) means for digitizing the electrical
20 responses and the temperature value, and calculating a value from the digitized electrical responses and temperature
25 value, to perform an analysis of the individual gas component.
2. An apparatus according to Claim 1 wherein the array is situated within the gas mixture, which has a
30 temperature of about 400°C or more.
3. An apparatus according to Claim 1 wherein the gas mixture is an emission from a combustion process.
4. An apparatus according to Claim 1 wherein the component gases in the gas mixture are not separated.
- 35 5. An apparatus according to Claim 1 wherein the temperature of each chemo/electro-active material is determined substantially only by the variable temperature of the gas mixture.

6. An apparatus according to Claim 1 wherein the analysis is performed from the electrical responses of the chemo/electro-active materials upon exposure to the multi-component gas mixture only.

5 7. An apparatus according to Claim 1 wherein the means for performing analysis is means for calculating the concentration within the gas mixture of the individual gas component.

8. An apparatus according to Claim 1 wherein at
10 least one chemo/electro-active material, when at a temperature of about 400°C or more, (i) has an electrical resistivity in the range of about 1 ohm-cm to about 10^5 ohm-cm, and (ii) exhibits a change in electrical resistance of at least about 0.1 percent
15 upon exposure of the material to an individual gas component, as compared to the resistance before exposure.

9. An apparatus according to Claim 1 wherein the electrical response characteristic of each material
20 upon exposure to the gas mixture at a selected temperature is quantifiable as a value, and the response value of at least one material is constant or varies by no more than about twenty percent during exposure of the material to an individual gas component
25 at the selected temperature for a period of at least about one minute.

10. An apparatus according to Claim 1 wherein the electrical response is selected from the group consisting of resistance, impedance, capacitance,
30 voltage or current.

11. An apparatus according to Claim 1 wherein at least one chemo/electro-active material is a metal oxide.

12. In a multi-component gas mixture having a
35 temperature of about 400°C or more, an apparatus for calculating the concentration of at least two individual analyte gas components in the mixture, comprising:

- 5 (a) an array of at least three chemo/electro-active materials, the array being situated within the gas mixture, and each chemo/electro-active material having a different electrical response characteristic upon exposure to each of the individual analyte gas components than each of the other chemo/electro-active materials;
- 10 (b) means for determining an electrical response of each chemo/electro-active material upon exposure of the array to the unseparated components of the gas mixture; and
- 15 (c) means for calculating the concentration of each of the individual analyte gas components from the electrical responses of the chemo/electro-active materials upon exposure to the multi-component gas mixture only.
- 20

13. An apparatus according to Claim 12 wherein the gas mixture is an emission from a combustion process.

25 14. An apparatus according to Claim 12 wherein the temperature of each chemo/electro-active material is determined substantially only by the variable temperature of the gas mixture.

30 15. An apparatus according to Claim 12 wherein at least one chemo/electro-active material, when at a temperature of about 400°C or more, (i) has an electrical resistivity in the range of about 1 ohm-cm to about 10^5 ohm-cm, and (ii) exhibits a change in electrical resistance of at least about 0.1 percent upon exposure of the material to an analyte gas component, as compared to the resistance before exposure

35

16. An apparatus according to Claim 12 wherein the electrical response characteristic of each material upon exposure to the gas mixture at a selected

temperature is quantifiable as a value, and the response value of at least one material is constant or varies by no more than about twenty percent during exposure of the material to an analyte gas component at
5 the selected temperature for a period of at least about one minute.

17. An apparatus according to Claim 12 wherein the electrical response is selected from the group consisting of resistance, impedance, capacitance,
10 voltage or current.

18. An apparatus according to Claim 12 wherein at least one chemo/electro-active material is a metal oxide.

19. In a multi-component gas mixture having a
15 temperature of about 400°C or more, an apparatus for calculating the concentration of at least two individual analyte gas components in the mixture, comprising:

- (a) an array of at least three chemo/electro-
20 active materials connected in parallel circuitry, the array being situated within the gas mixture, and each chemo/electro-active material exhibiting a change in electrical resistance upon exposure to
25 each of the individual analyte gas components, wherein at least one chemo/electro-active material, when at a temperature of about 400°C or more, (i) has an electrical resistivity in the range
30 of about 1 ohm-cm to about 10^5 ohm-cm, and (ii) exhibits a change in electrical resistance of at least about 0.1 percent upon exposure of the material to an analyte gas component, as compared to the
35 resistance before exposure;
- (b) means for determining the change in resistance of each chemo/electro-active

material upon exposure of the array to the gas mixture; and

- (c) means for calculating the concentration of each of the individual analyte gas components from the changes in resistance of the chemo/electro-active materials.

20. An apparatus according to Claim 19 wherein the gas mixture is an emission from a combustion process.

21. An apparatus according to Claim 19 wherein the temperature of each chemo/electro-active material is determined substantially only by the variable temperature of the gas mixture.

22. An apparatus according to Claim 19 wherein the electrical response characteristic of each material upon exposure to the gas mixture at a selected temperature is quantifiable as a value, and the response value of at least one material is constant or varies by no more than about twenty percent during exposure of the material to an analyte gas component at the selected temperature for a period of at least about one minute.

23. An apparatus according to Claim 19 wherein at least one chemo/electro-active material is a metal oxide.

24. An apparatus for analyzing at least one individual gas component in a multi-component gas mixture, comprising:

- (a) an array of at least two chemo/electro-active materials, each chemo/electro-active material having a different electrical response characteristic upon exposure at a selected temperature to the individual gas component than each of the other chemo/electro-active materials, the electrical response characteristic of each material being quantifiable as a value, wherein the response value of at least one material is constant or varies by no more

than about twenty percent during exposure of the material to an individual gas component at the selected temperature for a period of at least about one minute;

5 (b) means for determining the electrical response value of each chemo/electro-active material upon exposure of the array to the gas mixture; and

10 (c) means for performing an analysis of the individual gas component from the electrical response values.

25. An apparatus according to Claim 24 wherein the array is situated within the gas mixture, which has a temperature of about 400°C or more.

15 26. An apparatus according to Claim 24 wherein the gas mixture is an emission from a combustion process.

27. An apparatus according to Claim 24 wherein the means for performing analysis is means for calculating the concentration within the gas mixture of the
20 individual gas component.

28. An apparatus according to Claim 24 wherein the temperature of each chemo/electro-active material is determined substantially only by the variable temperature of the gas mixture.

25 29. An apparatus according to Claim 24 wherein the electrical response is selected from the group consisting of resistance, impedance, capacitance, voltage or current.

30 30. An apparatus according to Claim 24 wherein at least one chemo/electro-active material is a metal oxide.

31. In a multi-component gas mixture having a temperature of less than about 400°C, an apparatus for analyzing at least one individual gas component in the
35 mixture, comprising:

(a) an array of at least two chemo/electro-active materials, each chemo/electro-active material having a different

- electrical response characteristic upon exposure at a selected temperature to the individual gas component than each of the other chemo/electro-active materials, the array being situated within the gas mixture, and having a substantially constant temperature of about 400C or more;
- (b) means for determining the electrical response value of each chemo/electro-active material upon exposure of the array to the gas mixture; and
- (c) means for performing an analysis of the individual gas component from the electrical response values.

32. An apparatus according to Claim 31 wherein the component gases in the gas mixture are not separated.

33. An apparatus according to Claim 31 wherein the analysis is performed from the electrical responses of the chemo/electro-active materials upon exposure to the multi-component gas mixture only.

34. An apparatus according to Claim 31 wherein the means for performing analysis is means for calculating the concentration within the gas mixture of the individual gas component.

35. An apparatus according to Claim 31 further comprising means for determining a value for the temperature of the gas mixture connected in parallel circuitry with the chemo/elctro-active materials, and wherein the individual gas component is analyzed from digitized electrical responses and a digitized temperature value.

36. An apparatus according to Claim 31 wherein at least one chemo/electro-active material, when at a temperature of about 400°C or more, (i) has an electrical resistivity in the range of about 1 ohm-cm to about 10^5 ohm-cm, and (ii) exhibits a change in electrical resistance of at least about 0.1 percent

upon exposure of the material to an individual gas component, as compared to the resistance before exposure.

37. An apparatus according to Claim 31 wherein the
5 electrical response characteristic of each material upon exposure to the gas mixture at a selected temperature is quantifiable as a value, and the response value of at least one material is constant or varies by no more than about twenty percent during
10 exposure of the material to an individual gas component at the selected temperature for a period of at least about one minute.

38. An apparatus according to Claim 31 wherein the electrical response is selected from the group
15 consisting of resistance, impedance, capacitance, voltage or current.

39. An apparatus according to Claim 31 wherein at least one chemo/electro-active material is a metal oxide.

20 40. An apparatus for analyzing at least one individual gas component in a multi-component gas mixture, comprising:

(a) an array of first and second
chemo/electro-active materials, each
25 chemo/electro-active material having a different electrical response characteristic upon exposure at a selected temperature to the individual gas component than each of the other
30 chemo/electro-active materials, wherein the chemo/electro-active materials are selected from the pairings in the group consisting of
(i) the first material is M^1O_x , and the
35 second material is $M^1_a M^2_b O_x$;
(ii) the first material is M^1O_x , and the second material is $M^1_a M^2_b M^3_c O_x$;

- (iii) the first material is $M^1_a M^2_b O_x$, and the second material is $M^1_a M^2_b M^3_c O_x$;
- (iv) the first material is a first $M^1 O_x$, and the second material is a second $M^1 O_x$;
- 5 (v) the first material is a first $M^1_a M^2_b O_x$, and the second material is a second $M^1_a M^2_b O_x$; and
- (vi) the first material is a first $M^1_a M^2_b M^3_c O_x$, and the second material is a
- 10 second $M^1_a M^2_b M^3_c O_x$;
- wherein M^1 is selected from the group consisting of Ce, Co, Cu, Fe, Ga, Nb, Ni, Pr, Ru, Sn, Ti, Tm, W, Yb, Zn, and Zr; M^2 and M^3 are each independently selected from the group consisting of Al, Ba, Bi, Ca, Cd, Ce, Co, Cr,
- 15 Cu, Fe, Ga, Ge, In, K, La, Mg, Mn, Mo, Na, Nb, Ni, Pb, Pr, Rb, Ru, Sb, Sc, Si, Sn, Sr, Ta, Ti, Tm, V, W, Y, Yb, Zn, and Zr, but M^2 and M^3 are not the same in $M^1_a M^2_b M^3_c O_x$; a, b and c are each independently about 0.0005 to about 1, provided that $a+b+c = 1$; and x is a
- 20 number sufficient so that the oxygen present balances the charges of the other elements in the compound;
- (b) means for determining the electrical response of each chemo/electro-active material upon exposure of the array to the
- 25 gas mixture; and
- (c) means for performing an analysis of the individual gas component from the electrical responses.

41. An apparatus according to Claim 40 wherein
- 30 (a) $M^1 O_x$ is selected from the group consisting of $Ce_a O_x$, $Co O_x$, $Cu O_x$, $Fe O_x$, $Ga O_x$, $Nb O_x$, $Ni O_x$, $Pr O_x$, $Ru O_x$, $Sn O_x$, $Ta_a O_x$, $Ti O_x$, $Tm O_x$, WO_x , $Yb O_x$, $Zn O_x$, $Zr O_x$, $Sn O_x$ with Ag additive, $Zn O_x$ with Ag additive, $Ti O_x$ with
- 35 Pt additive, $Zn O_x$ with frit additive, $Ni O_x$ with frit additive, $Sn O_x$ with frit additive, or WO_x with frit additive;

- (b) $M^1_a M^2_b O_x$ is selected from the group consisting of $Al_a Cr_b O_x$, $Al_a Fe_b O_x$, $Al_a Mg_b O_x$, $Al_a Ni_b O_x$, $Al_a Ti_b O_x$, $Al_a V_b O_x$, $Ba_a Cu_b O_x$, $Ba_a Sn_b O_x$, $Ba_a Zn_b O_x$, $Bi_a Ru_b O_x$, $Bi_a Sn_b O_x$, $Bi_a Zn_b O_x$, $Ca_a Sn_b O_x$, $Ca_a Zn_b O_x$, $Cd_a Sn_b O_x$, $Cd_a Zn_b O_x$, $Ce_a Fe_b O_x$, $Ce_a Nb_b O_x$, $Ce_a Ti_b O_x$, $Ce_a V_b O_x$, $Co_a Cu_b O_x$, $Co_a Ge_b O_x$, $Co_a La_b O_x$, $Co_a Mg_b O_x$, $Co_a Nb_b O_x$, $Co_a Pb_b O_x$, $Co_a Sn_b O_x$, $Co_a V_b O_x$, $Co_a W_b O_x$, $Co_a Zn_b O_x$, $Cr_a Cu_b O_x$, $Cr_a La_b O_x$, $Cr_a Mn_b O_x$, $Cr_a Ni_b O_x$, $Cr_a Si_b O_x$, $Cr_a Ti_b O_x$, $Cr_a Y_b O_x$, $Cr_a Zn_b O_x$, $Cu_a Fe_b O_x$, $Cu_a Ga_b O_x$, $Cu_a La_b O_x$, $Cu_a Nb_b O_x$, $Cu_a Ni_b O_x$, $Cu_a Pb_b O_x$, $Cu_a Sn_b O_x$, $Cu_a Sr_b O_x$, $Cu_a Ti_b O_x$, $Cu_a Zn_b O_x$, $Cu_a Zr_b O_x$, $Fe_a Ga_b O_x$, $Fe_a La_b O_x$, $Fe_a Mo_b O_x$, $Fe_a Nb_b O_x$, $Fe_a Ni_b O_x$, $Fe_a Sn_b O_x$, $Fe_a Ti_b O_x$, $Fe_a W_b O_x$, $Fe_a Zn_b O_x$, $Fe_a Zr_b O_x$, $Ga_a La_b O_x$, $Ga_a Sn_b O_x$, $Ge_a Nb_b O_x$, $Ge_a Ti_b O_x$, $In_a Sn_b O_x$, $K_a Nb_b O_x$, $Mn_a Nb_b O_x$, $Mn_a Sn_b O_x$, $Mn_a Ti_b O_x$, $Mn_a Y_b O_x$, $Mn_a Zn_b O_x$, $Mo_a Pb_b O_x$, $Mo_a Rb_b O_x$, $Mo_a Sn_b O_x$, $Mo_a Ti_b O_x$, $Mo_a Zn_b O_x$, $Nb_a Ni_b O_x$, $Nb_a Nb_b O_x$, $Nb_a Sr_b O_x$, $Nb_a Ti_b O_x$, $Nb_a W_b O_x$, $Nb_a Zr_b O_x$, $Ni_a Si_b O_x$, $Ni_a Sn_b O_x$, $Ni_a Y_b O_x$, $Ni_a Zn_b O_x$, $Ni_a Zr_b O_x$, $Pb_a Sn_b O_x$, $Pb_a Zn_b O_x$, $Rb_a W_b O_x$, $Ru_a Sn_b O_x$, $Ru_a W_b O_x$, $Ru_a Zn_b O_x$, $Sb_a Sn_b O_x$, $Sb_a Zn_b O_x$, $Sc_a Zr_b O_x$, $Si_a Sn_b O_x$, $Si_a Ti_b O_x$, $Si_a W_b O_x$, $Si_a Zn_b O_x$, $Sn_a Ta_b O_x$, $Sn_a Ti_b O_x$, $Sn_a W_b O_x$, $Sn_a Zn_b O_x$, $Sn_a Zr_b O_x$, $Sr_a Ti_b O_x$, $Ta_a Ti_b O_x$, $Ta_a Zn_b O_x$, $Ta_a Zr_b O_x$, $Ti_a V_b O_x$, $Ti_a W_b O_x$, $Ti_a Zn_b O_x$, $Ti_a Zr_b O_x$, $V_a Zn_b O_x$, $V_a Zr_b O_x$, $W_a Zn_b O_x$, $W_a Zr_b O_x$, $Y_a Zr_b O_x$, $Zn_a Zr_b O_x$, $Al_a Ni_b O_x$ with frit additive, $Cr_a Ti_b O_x$ with frit additive, $Fe_a Ni_b O_x$ with frit additive, $Fe_a Ti_b O_x$ with frit additive, $Nb_a Ti_b O_x$ with frit additive, $Nb_a W_b O_x$ with frit additive, $Ni_a Zn_b O_x$ with frit additive, $Ni_a Zr_b O_x$ with frit additive, or $Ta_a Ti_b O_x$ with frit additive; and/or

- (c) $M^1_a M^2_b M^3_c O_x$ is selected from the group consisting of $Al_a Mg_b Zn_c O_x$, $Al_a Si_b V_c O_x$, $Ba_a Cu_b Ti_c O_x$, $Ca_a Ce_b Zr_c O_x$, $Co_a Ni_b Ti_c O_x$,

Co_aNi_bZr_cO_x, Co_aPb_bSn_cO_x, Co_aPb_bZn_cO_x,
Cr_aSr_bTi_cO_x, Cu_aFe_bMn_cO_x, Cu_aLa_bSr_cO_x,
Fe_aNb_bTi_cO_x, Fe_aPb_bZn_cO_x, Fe_aSr_bTi_cO_x,
Fe_aTa_bTi_cO_x, Fe_aW_bZr_cO_x, Ga_aTi_bZn_cO_x,
5 La_aMn_bNa_cO_x, La_aMn_bSr_cO_x, Mn_aSr_bTi_cO_x,
Mo_aPb_bZn_cO_x, Nb_aSr_bTi_cO_x, Nb_aSr_bW_cO_x,
Nb_aTi_bZn_cO_x, Ni_aSr_bTi_cO_x, Sn_aW_bZn_cO_x,
Sr_aTi_bV_cO_x, Sr_aTi_bZn_cO_x, or Ti_aW_bZr_cO_x.

42. An apparatus according to Claim 40 wherein the
10 array is situated within the gas mixture, which has a
temperature of about 400°C or more.

43. An apparatus according to Claim 40 wherein the
gas mixture is an emission from a combustion process.

44. An apparatus according to Claim 40 wherein the
15 component gases in the gas mixture are not separated.

45. An apparatus according to Claim 40 wherein the
analysis is performed from the electrical responses of
the chemo/electro-active materials upon exposure to the
multi-component gas mixture only.

46. An apparatus according to Claim 40 wherein the
20 means for performing analysis is means for calculating
the concentration within the gas mixture of the
individual gas component.

47. An apparatus according to Claim 40 further
25 comprising means for determining a value for the
temperature of the gas mixture connected in parallel
circuitry with the chemo/elctro-active materials, and
wherein the individual gas component is analyzed from
digitized electrical responses and a digitized
30 temperature value.

48. An apparatus according to Claim 40 wherein the
temperature of each chemo/electro-active material is
determined substantially only by the variable
temperature of the gas mixture.

49. An apparatus according to Claim 40 wherein at
35 least one chemo/electro-active material, when at a
temperature of about 400°C or more, (i) has an
electrical resistivity in the range of about 1 ohm-cm

to about 10^5 ohm-cm, and (ii) exhibits a change in electrical resistance of at least about 0.1 percent upon exposure of the material to an individual gas component, as compared to the resistance before exposure.

50. An apparatus according to Claim 40 wherein the electrical response characteristic of each material upon exposure to the gas mixture at a selected temperature is quantifiable as a value, and the response value of at least one material is constant or varies by no more than about twenty percent during exposure of the material to an individual gas component at the selected temperature for a period of at least about one minute.

51. An apparatus according to Claim 40 wherein the electrical response is selected from the group consisting of resistance, impedance, capacitance, voltage or current.

52. An apparatus for analyzing at least one individual gas component in a multi-component gas mixture, comprising:

(a) an array of at least two chemo/electro-active materials connected in parallel circuitry, each chemo/electro-active material having a different electrical response characteristic upon exposure at a selected temperature to the individual gas component than each of the other chemo/electro-active materials, the electrical response characteristic of each material being quantifiable as a value, wherein the response value of at least one material is constant or varies by no more than about twenty percent during exposure of the material to an individual gas component at the selected temperature for a period of at least about one minute;

- (b) means for determining the electrical response value of each chemo/electro-active material upon exposure of the array to the gas mixture;
- 5 (c) means for determining a value for the temperature of the gas mixture connected in parallel with the chemo/elctro-active materials; and
- 10 (d) means for digitizing the electrical responses and the temperature value, and calculating a value from the digitized electrical response and temperature value, to perform an analysis of the individual gas component.

15 53. An apparatus according to Claim 52 wherein the array is situated within the gas mixture, which has a temperature of about 400°C or more.

54. An apparatus according to Claim 52 wherein the gas mixture is an emission from a combustion process.

20 55. An apparatus according to Claim 52 wherein the component gases in the gas mixture are not separated.

56. An apparatus according to Claim 52 wherein the temperature of each chemo/electro-active material is determined substantially only by the variable
25 temperature of the gas mixture.

57. An apparatus according to Claim 52 wherein the analysis is performed from the electrical responses of the chemo/electro-active materials upon exposure to the multi-component gas mixture only.

30 58. An apparatus according to Claim 52 wherein the means for performing analysis is means for calculating the concentration within the gas mixture of the individual gas component.

59. An apparatus according to Claim 52 wherein at
35 least one chemo/electro-active material, when at a temperature of about 400°C or more, (i) has an electrical resistivity in the range of about 1 ohm-cm to about 10^5 ohm-cm, and (ii) exhibits a change in

electrical resistance of at least about 0.1 percent upon exposure of the material to an individual gas component, as compared to the resistance before exposure.

5 60. An apparatus according to Claim 52 wherein the electrical response is selected from the group consisting of resistance, impedance, capacitance, voltage or current.

10 61. An apparatus according to Claim 52 wherein the array is situated within the gas mixture, which has a temperature of less than about 400°C, and the array has a substantially constant temperature of about 400°C or more.

15 62. An apparatus according to Claim 52 wherein at least one chemo/electro-active material is a metal oxide.

20 63. In a multi-component gas mixture having a temperature of about 400°C or more, an apparatus for calculating the concentration of at least two individual analyte gas components in the mixture, comprising:

25 (a) an array of at least three chemo/electro-active materials connected in parallel circuitry, the array being situated within the gas mixture, and each chemo/electro-active material exhibiting a change in electrical resistance upon exposure to each of the individual analyte gas components, wherein at least one
30 chemo/electro-active material, when at a temperature of about 400C or more, (i) has an electrical resistivity in the range of about 1 ohm-cm to about 10^5 ohm-cm, and (ii) exhibits a change in electrical
35 resistance of at least about 0.1 percent upon exposure of the material to an analyte gas component, as compared to the resistance before exposure;

- (b) means for determining the change in resistance of each chemo/electro-active material upon exposure of the array to the unseparated components of the gas mixture; and
- (c) means for calculating the concentration of each of the individual analyte gas components from the changes in resistance of the chemo/electro-active materials upon exposure to the multi-component gas mixture only.

64. An apparatus according to Claim 63 wherein the gas mixture is an emission from a combustion process.

65. An apparatus according to Claim 63 further comprising means for determining a value for the temperature of the gas mixture connected in parallel circuitry with the chemo/elctro-active materials, and wherein the individual gas component is analyzed from digitized electrical responses and a digitized temperature value.

66. An apparatus according to Claim 63 wherein the temperature of each chemo/electro-active material is determined substantially only by the variable temperature of the gas mixture.

67. An apparatus according to Claim 63 wherein the electrical response characteristic of each material upon exposure to the gas mixture at a selected temperature is quantifiable as a value, and the response value of at least one material is constant or varies by no more than about twenty percent during exposure of the material to an analyte gas component at the selected temperature for a period of at least about one minute.

68. An apparatus according to Claim 63 wherein at least one chemo/electro-active material is a metal oxide.

69. A method for analyzing at least one individual gas component in a multi-component gas mixture, comprising:

- 5 (a) providing an array of at least two chemo/electro-active materials connected in parallel circuitry, each chemo/electro-active material exhibiting a different electrical response characteristic upon exposure to the individual gas component
- 10 than each other chemo/electro-active material;
- (b) exposing the array to the gas mixture ;
- (c) determining an electrical response of each chemo/electro-active material upon
- 15 exposure of the array to the gas mixture;
- (d) determining a value for the temperature of the gas mixture independently of the determination of the electrical responses of the chemo/elctro-active materials; and
- 20 (e) digitizing the electrical responses and the temperature value, and calculating a value from the digitized electrical responses and temperature value to perform an analysis of the individual gas
- 25 component.

70. A method according to Claim 69 wherein the array is situated within the gas mixture, which has a temperature of about 400°C or more.

71. A method according to Claim 69 wherein the gas

30 mixture is an emission from a combustion process.

72. A method according to Claim 69 wherein the component gases in the gas mixture are not separated.

73. A method according to Claim 69 wherein the temperature of each chemo/electro-active material is

35 determined substantially only by the variable temperature of the gas mixture.

74. A method according to Claim 69 wherein the analysis is performed from the electrical responses of

the chemo/electro-active materials upon exposure to the multi-component gas mixture only.

75. A method according to Claim 69 wherein the analysis performed comprises calculating the
5 concentration within the gas mixture of the individual gas component.

76. A method according to Claim 69 wherein at least one chemo/electro-active material, when at a temperature of about 400°C or more, (i) has an
10 electrical resistivity in the range of about 1 ohm-cm to about 10^5 ohm-cm, and (ii) exhibits a change in electrical resistance of at least about 0.1 percent upon exposure of the material to an individual gas component, as compared to the resistance before
15 exposure.

77. A method according to Claim 69 wherein the electrical response characteristic of each material upon exposure to the gas mixture at a selected temperature is quantifiable as a value, and the
20 response value of at least one material is constant or varies by no more than about twenty percent during exposure of the material to an individual gas component at the selected temperature for a period of at least about one minute.

25 78. A method according to Claim 69 wherein the electrical response is selected from the group consisting of resistance, impedance, capacitance, voltage or current.

79. A method according to Claim 69 wherein the
30 array is situated in the gas mixture, which has a temperature of less than about 400°C, and the array has a substantially constant temperature of about 400C or more.

80. A method according to Claim 69 wherein at least
35 one chemo/electro-active material is a metal oxide.

81. A method for calculating the concentration of at least two individual analyte gas components in a

multi-component gas mixture having a temperature of about 400°C or more, comprising:

- 5 (a) providing within the gas mixture an array of at least three chemo/electro-active materials, each chemo/electro-active material having a different electrical response characteristic upon exposure to each of the individual analyte gas components than each of the other
- 10 chemo/electro-active materials, wherein at least one chemo/electro-active material, when at a temperature of about 400°C or more, (i) has an electrical resistivity in the range of about 1 ohm-cm to about 10^5
- 15 ohm-cm, and (ii) exhibits a change in electrical resistance of at least about 0.1 percent upon exposure of the material to an analyte gas component, as compared to the resistance before exposure;
- 20 (b) determining an electrical response of each chemo/electro-active material upon exposure of the array to the unseparated components of the gas mixture; and
- 25 (c) calculating the concentration of each of the individual analyte gas components from the electrical responses of the chemo/electro-active materials upon exposure to the multi-component gas mixture only.

30 82. A method according to Claim 81 wherein the gas mixture is an emission from a combustion process.

83. A method according to Claim 81 wherein the temperature of each chemo/electro-active material is determined substantially only by the variable

35 temperature of the gas mixture.

84. A method according to Claim 81 wherein the electrical response characteristic of each material upon exposure to the gas mixture at a selected

temperature is quantifiable as a value, and the response value of at least one material is constant or varies by no more than about twenty percent during exposure of the material to an analyte gas component at
5 the selected temperature for a period of at least about one minute.

85. A method according to Claim 81 wherein the electrical response is selected from the group consisting of resistance, impedance, capacitance,
10 voltage or current.

86. A method according to Claim 81 wherein at least one chemo/electro-active material is a metal oxide.

87. A method for analyzing at least one individual gas component in a multi-component gas mixture,
15 comprising:

- (a) providing an array of at least two chemo/electro-active materials, each chemo/electro-active material having a different electrical response
20 characteristic upon exposure at a selected temperature to the individual gas component than each of the other chemo/electro-active materials, the electrical response characteristic of each material being quantifiable as a value,
25 wherein the response value of at least one material is constant or varies by no more than about twenty percent during exposure of the material to an individual gas component at the selected temperature for
30 a period of at least about one minute;
- (b) determining the electrical response value of each chemo/electro-active material upon exposure of the array to the gas mixture;
35 and
- (c) performing an analysis of the individual gas component from the electrical response values.

88. A method according to Claim 87 wherein the array is situated within the gas mixture, which has a temperature of about 400°C or more.

89. A method according to Claim 87 wherein the gas
5 mixture is an emission from a combustion process.

90. A method according to Claim 87 wherein the analysis performed comprises calculating the concentration within the gas mixture of the individual gas component.


10 91. A method according to Claim 87 wherein the temperature of each chemo/electro-active material is determined substantially only by the variable temperature of the gas mixture.

92. A method according to Claim 87 wherein the
15 electrical response is selected from the group consisting of resistance, impedance, capacitance, voltage or current.

93. A method according to Claim 87 wherein at least one chemo/electro-active material is a metal oxide.

20 94. A method according to Claim 87 wherein the array is situated in the gas mixture, which has a temperature of less than about 400°C, and the array has a substantially constant temperature of about 400°C or more.

25

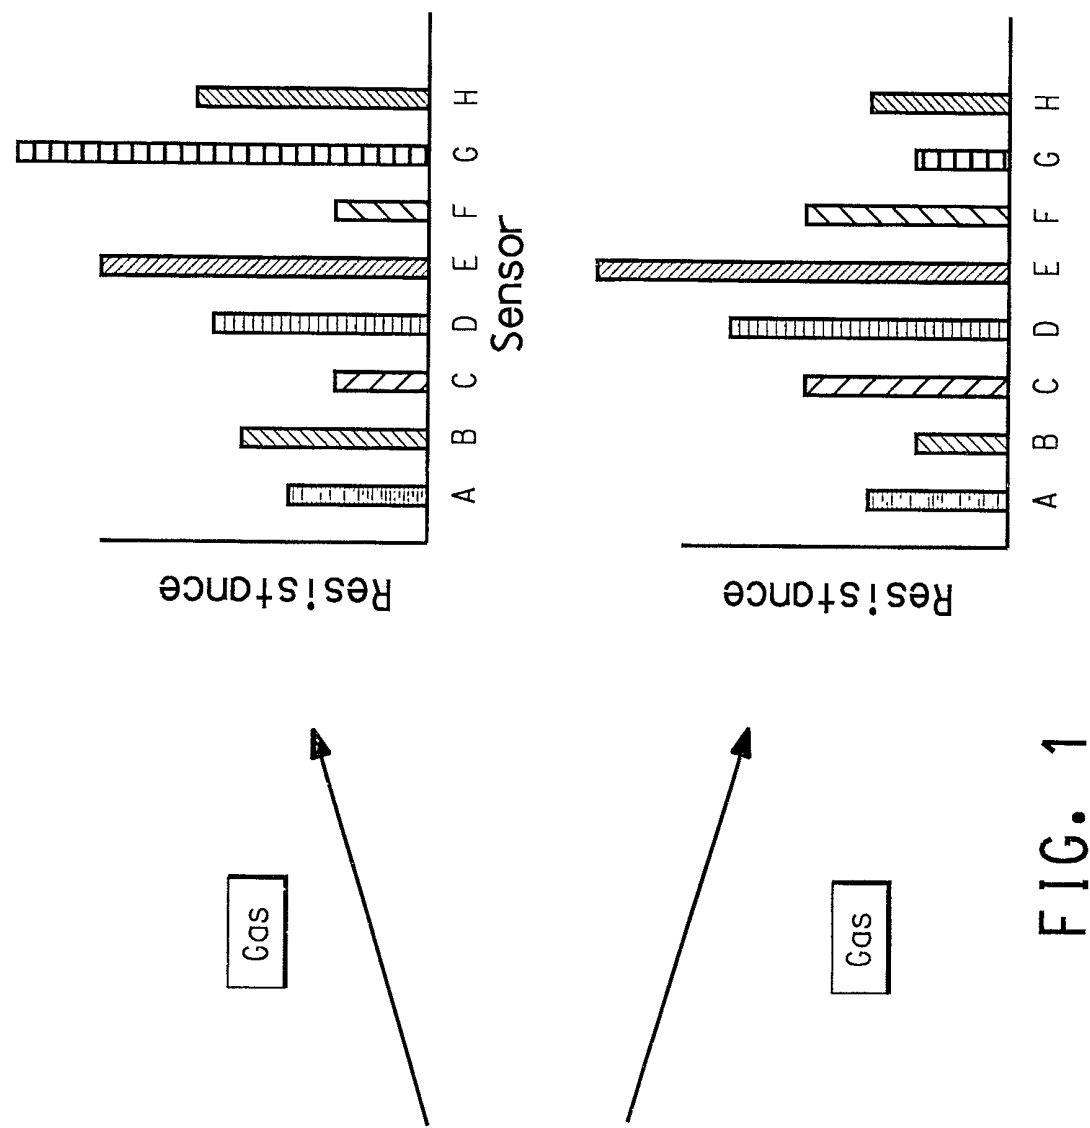

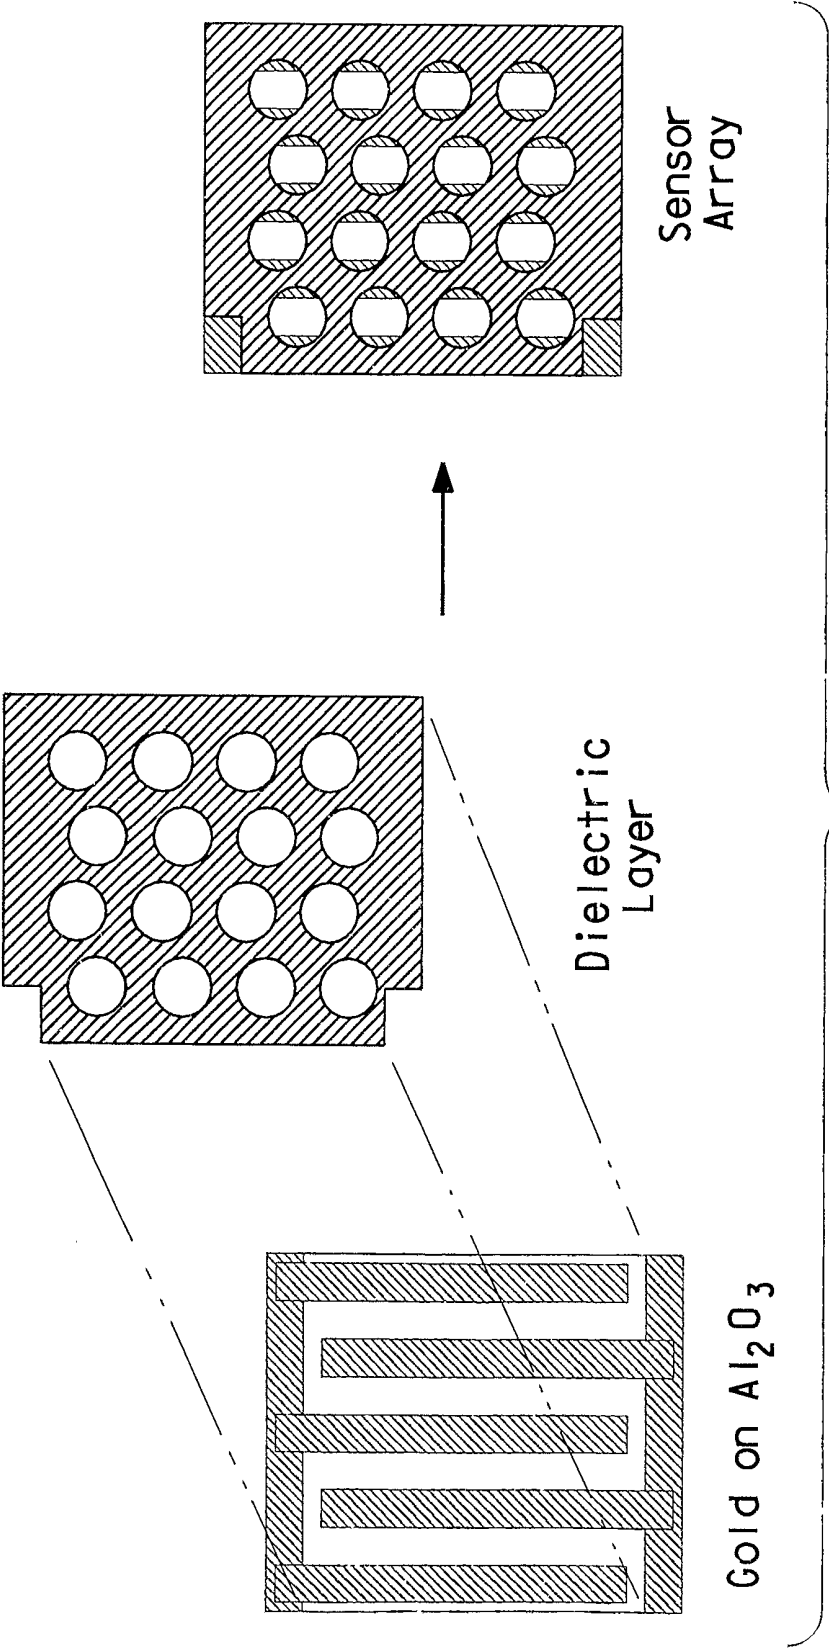


FIG. 2

3/3

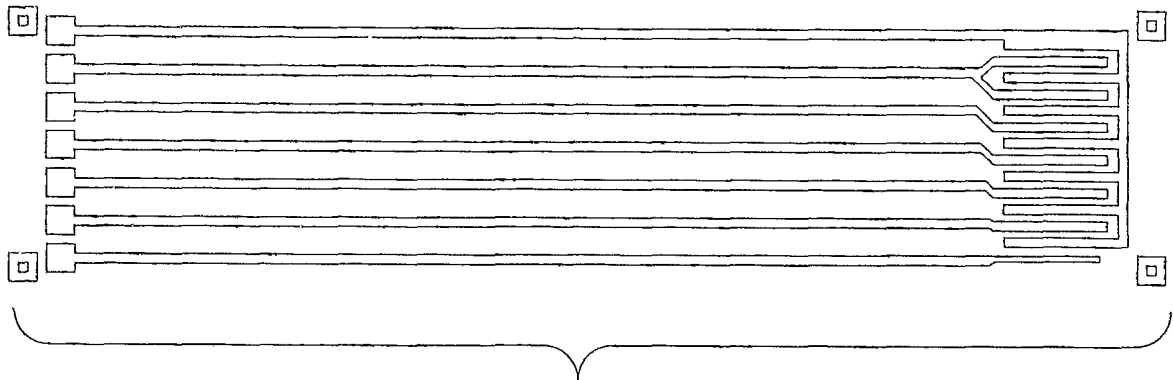


FIG. 3A

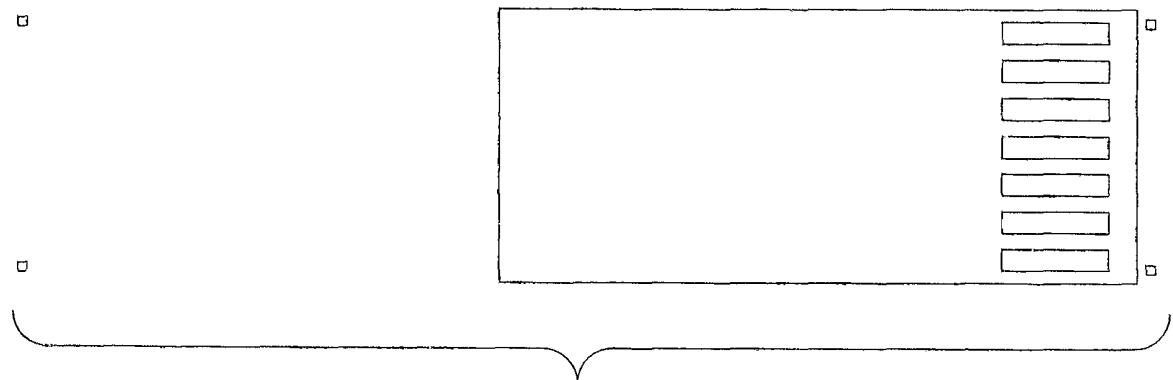


FIG. 3B

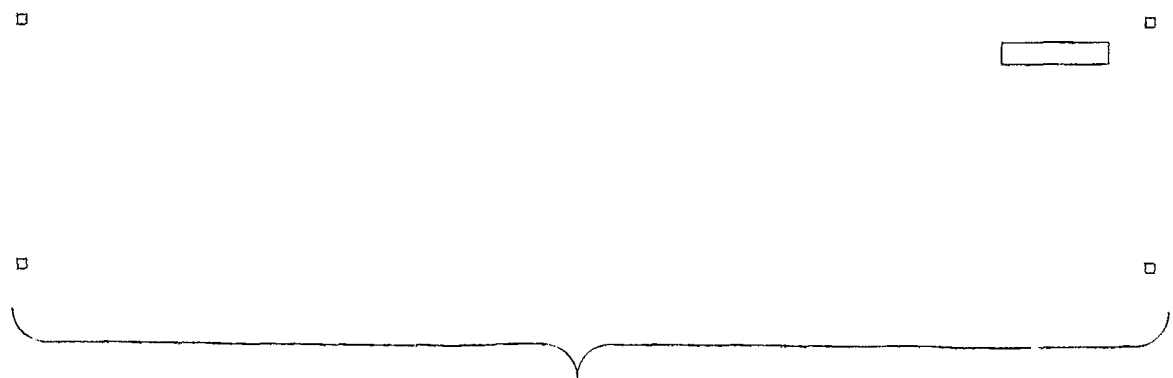


FIG. 3C