

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 August 2008 (28.08.2008)


PCT

(10) International Publication Number
WO 2008/103821 A2

- (51) International Patent Classification: Not classified
- (21) International Application Number: PCT/US2008/054574
- (22) International Filing Date: 21 February 2008 (21.02.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/903,179 23 February 2007 (23.02.2007) US
- (71) Applicant (for all designated States except US): DON-ALDSON COMPANY, INC. [US/US]; 1400 West 94th Street, P.O. Box 1299, Minneapolis, MN 55440-1299 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): ISRAEL, Joseph [US/US]; 2520 Kipling Avenue, St. Louis, MN 55416 (US). DUNN, Eugene, F. [US/US]; Bldg. 20, 94 Circle N.E. #204, Coon Rapids, MN 55448 (US).
- (74) Agent: BRUESS, Steven, C.; Merchant & Gould P.C., P.O. Box 2903, Minneapolis, MN 55402-0903 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published: — without international search report and to be republished upon receipt of that report

(54) Title: FORMED FILTER ELEMENT

FIG. 7E

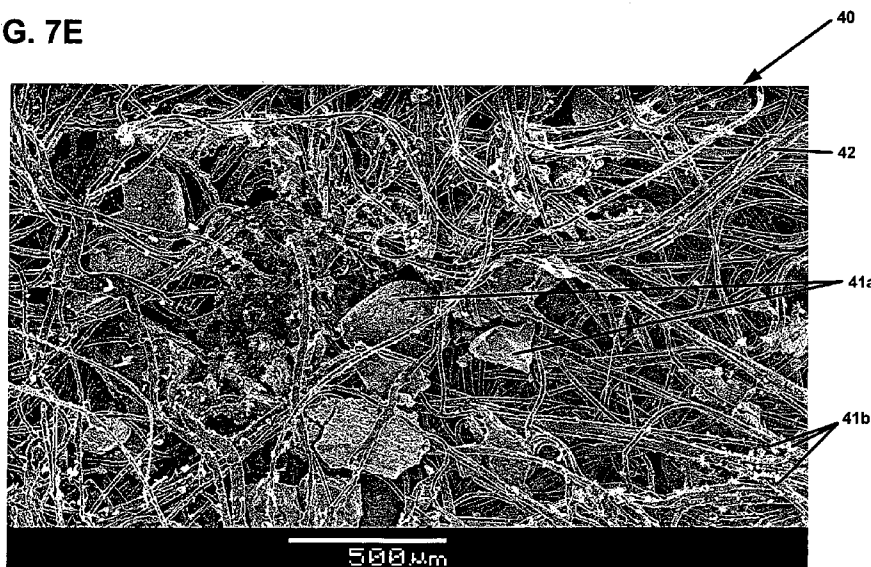

(57) Abstract: A filter medium for use in filtering a mobile fluid made from at least a bicomponent fiber. Other fibers, particles, or other materials can also be entrained in the filter medium. The filter medium has a substantial thickness compared to filters of the prior art. The fiber length and diameter dimensions are selected to obtain desired filter characteristics including thickness, basis weight, pore size, filtration efficiency, pressure drop, burst strength, and manufacturing efficiency. Further, a multilayer filter medium can be provided with ease. Each layer can have a different composition, pore size, basis weight, and so forth, thus providing the ability to build multiple functionality into the filter media of the invention.

WO 2008/103821 A2

FORMED FILTER ELEMENT

Cross Reference to Related Applications

This application is being filed on 21 February 2008, as a PCT International
5 Patent Application in the name of Donaldson Company, Inc., a U.S. national
corporation, applicant for the designation of all countries except the US, and Joe
Israel and Eugene F. Dunn III, both citizens of the U.S., applicants for the
designation of the US only, and claims priority to U.S. Provisional Patent
Application Serial No. 60/903,179, filed February 23, 2007 and is hereby
10 incorporated by reference in its entirety.

Field of the Invention

The invention relates to a filter element that can be used for general
filtration. One filtration application is removing a liquid or solid particulate from a
15 mobile fluid and methods of manufacturing the element. In one embodiment of the
invention, the filter element is used to remove an oily or aqueous/oil liquid aerosol
or particulate entrained in a gaseous or air mobile fluid. In such an embodiment, the
aerosol entrained in the fluid contacts the media, coalesces, and drains from the
media leaving the mobile fluid free of the entrained liquid aerosol particulate. The
20 liquid accumulates in the media and under the effect of gravity, drains from the
element and can be reserved.

Background of the Invention

Cellulosic, synthetic and mixed cellulosic synthetic media in the form of a
25 flexible paper filter have been known for many years. Such media layers have been
used as is and have been combined with other filter components to form active
filtration elements. Such elements can be made of a variety of macro and
microfibers having a range of fiber lengths and diameters. In large part, these layers
are made in papermaking machines resulting in a substrate layer typically less than 5
30 millimeters and most often less than 2 millimeters in thickness. Such thin flexible
filter media have found a number of useful applications, however, such layers have
limits in their applicability. The ability to achieve certain filtration attributes such as
pore size, basis weight, thickness, permeability and efficiency are limited by the

manufacturing techniques used to make the paper layers and by the components useful in such layers.

Because aerosols, as an example, may be as small as 1nm diameter or as large as 1mm (W. Hinds, *Aerosol Technology: Properties, Behavior, and Measurement of Airborne Particles* 8, 2nd ed., © 1999 J. Wiley & Sons), conventional technologies are not suitably flexible to effectively accommodate the range of particle sizes in which aerosols may be encountered in air. Further, aerosols may be present in large concentrations in the air streams in certain filtration applications. For example, in diesel engine blow-by or other heavy duty motor exhaust or industrial filtration applications, it is possible to encounter aerosols in concentrations of 700 ppm to 20,000 ppm. Such concentrations are not filtered with high efficiency using the thin filters of the prior art; thus, multiple layers are usually employed.

Accordingly, a substantial need exists in obtaining an improved filtration layer having a substantial thickness, a defined basis weight, solidity and pore size useful for a variety of filtration processes. One useful technique is to use an aqueous slurry based material such as that disclosed in U.S. Serial No. 11/267,958. Sugiura et al., U.S. Patent No. 5,755,963, teach a filter element comprising microfibers made from a slurry to obtain a density gradient structure useful in oil filtration. Nielsen et al., U.S. Patent No. 5,167,765, teach the use of polyester bicomponent fiber and other fibers in making bonded fibrous wet laid sheets for filtration applications.

Filter media have been configured in a variety of filter units for many different filtration applications. In one application, it has been common to remove liquid aerosol particulate from a mobile gaseous phase such as air by using filter elements comprising cellulosic and cellulosic/synthetic fiber combinations wet-laid flat media that has been corrugated and pleated into a useful cylindrical shaped elements of different heights and diameters. The use of formed media comprised wholly of glass fibers and aqueous or solvent based resins for the purpose of consolidating the fibers mass and providing strength and structural integrity has been practiced. Limitations thereof are specific to fiber size (approximately 0.08 to about 4 microns fiber diameter) and to the fact that a secondary process to apply the resin is necessary to consolidate the filter media and provide structural integrity for the performance and survivability of the element in such demanding applications. Further, these filter

media suffer from resin migration during the filter media life, which in turn causes a loss of porosity. In use, this loss of porosity is evidenced by increased pressure drop across the filter, clogging of pores, and cracking of the filter, thus leading to early filter failure. Further, these filter media are brittle and may shatter under
5 challenging conditions, leading to catastrophic failure. Finally, the above filter making technique has a practical limit of about 5.0mm thickness, such that the ability to make thicker media for use with different aerosols or adaptation for other filtration applications is not provided. Nevertheless, the use of wet-laid paper-like media is prevalent in the application of removing aerosol particulates from
10 airstreams.

Some examples of conventional commercially available filtration media for the separation of aerosols from air are products available from the Porous Media Company of St. Paul, MN; Keltec Technolab of Twinsburg, OH; ProPure Filtration Company of Tapei, Taiwan; Finite® and Balston® filters made by the Parker
15 Hannifin Corporation of Mayfield, OH; Fai Filtri s.r.l. of Pontirolo Nuovo, Italy; Mann + Hummel Group of Ludwigsburg, Germany; and PSI Global Ltd. Of Bowburn Durham, United Kingdom.

A substantial need exists to provide a filter medium having improved efficiency of removal of the liquid aerosol from the air stream and reduced pressure
20 drop, and acceptable basis weight and void volume which leads to an increased useful lifetime in application conditions. A substantial need exists to simplify the construction of such filtration apparatus, thereby decreasing the complication and expense of the manufacturing processes over those currently used. A substantial need also exists to provide a filter media having reduced brittleness that can
25 withstand challenging conditions without shattering. A substantial need also exists to provide a filter medium that does not undergo resin migration during use. A substantial need exists to provide a method of making filter media that is adaptable for other filtration applications, such as the removal of solid particulates from air or the removal of impurities from water. A substantial need also exists for a method of
30 making a filter that is adaptable for entraining materials such as particles and polymers that in turn provide functionality to the filter structure. Finally, there is a substantial need to provide a method of making filter media having multiple layers such that each layer has a different structure or composition, e.g. by varying

permeability of the layers or by incorporating particles into a layer. These and other advantages are found in the filtration media disclosed below.

Brief Discussion of the Invention

5 We have found that a useful filter element having a thickness of greater than 3 millimeters can be made by combining a bicomponent fiber and a glass fiber in a filter medium or element. A slurry of this combination of fibers can be used to form a layer. Once heated to the correct fusion temperature and cured the layer forms a mechanically stable medium. The medium can be used in a filter element having
10 unique filtration properties unlike those of thin cellulosic or synthetic paper layers, or other mist collection systems or other thick fibrous media.

The unique filter medium of the invention may have a thickness of greater than 3 millimeters, which may be made in one step, and comprises a bicomponent fiber. Such filter medium can be manufactured using only bicomponent fiber, but
15 can also contain other materials. Other fibers may be used, most preferably glass fibers. Two or more different kinds of glass fibers may be used advantageously in a single filter medium. Thermoplastic fibers, binder resins, natural fibers, particulate matter, or other filtration components may be advantageous to use along with, or instead of glass fibers depending on the application contemplated. Desirable
20 materials that can add functionality to the filters of the invention include carbon particles or fibers, metal particles or fibers, silica or other ceramic particles, ion exchange resins, catalysts, enzymes, and zeolites. Further, chemical modification of the surface of fibers and/or particles may be employed advantageously, for example by reacting glass fibers with a silane coupling agent to modify surface energy either
25 prior to, or after, inclusion of the glass fibers in the filters of the present invention. Other additive compounds may add functionality, such as antistatic or flame retardant compounds.

The invention may comprise a filter unit comprising the bicomponent fiber medium of the invention in combination with a perforate support that can be formed
30 in a housing with other conventional filtration components. The perforate support may be made from any suitable material, such as metal or plastic, depending on the intended application. The filter unit may also comprise end caps, housings, or other conventional filter unit parts.

A method of removing a particulate from a fluid medium can use the steps of introducing the fluid medium having entrained particulate into contact with the filter medium passing the mobile fluid through the filter medium wherein the particulate is retained by the filter medium leaving a purified fluid exiting the medium. While
5 removal of oily aerosol from a stream of air is particularly preferred and demonstrated, the skilled artisan will understand that the invention also contemplates filtration of particulates from liquids such as water, soot removal from air, and a variety of other applications generally known in the art of filtration.

A method of removing typically a liquid aerosol entrained in an air stream is
10 for aerosol particulate to contact the fibrous medium, coating the fibrous interior of the medium and accumulating on and within the fibrous interior. As the liquid accumulates within the filter, gravity will cause the liquid to drain from the filter medium. Such media are often used in conjunction with a reservoir into which the liquid drains and can be removed continually or in a batch-wise fashion.

15 Multiple layered filters, wherein each layer has a different composition, thickness, or density, may be made with ease by employing the methods of the invention. Various layers may also contain functional materials. For example, one layer may have a greater permeability than another, and a different layer may contain activated charcoal. Multiple layers are achieved with ease by virtue of the
20 flexibility of the process for making the filters of the present invention.

The unique media of this invention can be used in a variety of filtration processes including, but not limited to, removal of particulate matter from air or other gas phase materials such as nitrogen, natural gas, oxygen, and the like; particulate removal from a liquid phase material, such as water, hydraulic fluid,
25 diesel fuel, gasoline, crankcase oil, ethanol and the like; removal of fine particulates such as smoke, exhaust particles, dust, asbestos, silica, clay, water vapor, oil vapor, metal vapor, and the like; removal of nonparticulate impurities such as volatile organic compounds (VOCs) from air or water; or removal of ozone from air.

The filter media of this invention is particularly useful in separating an
30 entrained liquid aerosol from a mobile air phase. The media of the invention has excellent characteristics of removal of oily aerosol, for example, from a fluid stream that is largely made of air and aerosol. Thus, when a stream of air having between 2000 and 9000 ppm of oily aerosol per ppm of total fluid, more typically about 7000 ppm of oily aerosol per ppm of total fluid, is passed through the filter at 60 to 100

psi, less than or equal to 2 ppm of the aerosol remains in the air stream after filtration after a period as long as 1000 hours and after 4000 hours is able to remove the aerosol leaving less than or equal to 3 ppm or less of the aerosol in the mobile air phase after 4000 hours. The media of the invention is capable of maintaining a substantially low pressure drop over the lifetime of the media under these same conditions, wherein the lifetime can extend as long as 8000 hours. The pressure drop over the media during normal operating conditions as outlined above is less than 2 psi increase over 200 hours and is less than 1 psi additionally over a subsequent period of 7000 hours.

10 In a preferred embodiment, the filter medium of the invention has a permeability of about 1 to about 2 CFM, a basis weight of about 2,500 to about 3,000 gram/meter², a preferred thickness of about 8 to about 20 millimeters, and in typical filtration applications, removes the liquid aerosol from the air stream such that little or no aerosol penetrates the medium. We have found that less than 20
15 ppm, often less than 10 ppm and most often less than 5 ppm of the liquid aerosol penetrates the medium under typical operating conditions using the media of the invention.

We have further found that the media of the invention has substantially improved burst characteristics. In other words, under the force obtained from the pressure of the air flow through the media, that the media of the invention has the ability to withstand substantially increased pressure force during the lifetime of the media than prior structures. The strengths of the bicomponent/glass fiber media is such that it can survive pressure with a burst strength of at least 10 psi, more preferably about 25 to about 40 psi when measured according to ASTM D774
20 specifications.
25

Brief Discussion of the Figures

FIGURE 1 is a graphical representation of the data of Table 6, showing a Di-octyl Phthalate (DOP) efficiency (at 10.5 FPM) of experimental filter media FM-1 and FM-2, described in Example 1, when compared with CONTROL filter media of the present invention.
30

FIGURES 2 through 5 are graphical representations of the data shown in Tables 7 and 8 of the application. Generally, Tables 7 and 8 show that when compared to filter media made by prior art methodology employing aqueous based

binder resin and glass fiber, the filter medium FM-1 of Example 1 provides substantially improved removal of test oil aerosol both initially and as the filter medium ages in use, when compared to the CONTROL sample of the prior art. Further, the filter medium of the present invention maintains a substantially reduced
5 pressure drop over time, produces excellent operating conditions in terms of discharge temperature and produces an excellent flow rate in cubic feet per minute (CFM) over the lifetime of the filter medium.

FIGURE 6 shows the tensile strength and elongation at break for a filter of the present invention when compared to a filter of the prior art.

10 FIGURES 7A through 7F are photomicrographs of a view from the side or inside of the filter media of the present invention, further described in the Experimental section as FM-1, FM-2, and FM-3 in addition to similar photomicrographs of a filter of the prior art having glass fibers and binder resin.

FIGURES 8A and 8B show a fully formed functional coalescer of the
15 invention.

Detailed Discussion of the Invention

The unique filter media of the invention typically is manufactured employing a wet laid process. The process involves adding bicomponent fiber to an aqueous
20 media to form slurry, forming the slurry into a layer of fiber, and curing and drying the layer to form the filter media. Such media can be used for general filtration purposes, but particularly is useful in separating a liquid aerosol from an air stream. Bicomponent fiber is a known material in which the fiber contains an amount of polymer having a relatively high melting point and a second amount of a polymer
25 having a relatively low melting point. In the formation of a layer, the fiber is heated to a temperature such that the low melting point polymer can melt, fuse and bind the layer into a mechanically stable, unitary mass. The relatively high melting point polymer component can provide mechanical strength and stability to the layer.

Glass fiber is preferably employed along with the bicomponent fiber and
30 may be added along with the bicomponent fiber in the slurry. The use of glass fiber in conjunction with the bicomponent fiber provides control over the filtration properties for certain applications. However, glass fiber is not a requirement for making the filters of the invention. Bicomponent fiber alone may be formed into a filter of the invention. Additionally, materials such as thermoplastic fibers,

inorganic fibers, particles, binder resins, or other additives may be included in the filter making slurry to form a filter having functionality tailored for the application contemplated. Such materials may be included in addition to, or instead of, glass fiber.

5 In selecting the bicomponent fiber, various combinations of polymers may be useful in the present invention, but it is important that the first polymer component melt at a temperature lower than the melting temperature of the second polymer component and typically below 200°C. Further, the bicomponent fibers are integrally mixed and evenly dispersed with other materials in the filter making
10 slurry. Melting of the first polymer component of the bicomponent fiber is necessary to allow the bicomponent fibers to form a tacky skeletal structure, which upon cooling, binds to other bicomponent fibers as well as other fibers or particles in the formed filter layer.

Bicomponent fibers having a sheath-core structure are particularly useful in
15 making the filters of the invention. In the sheath-core structure, the low melting point (e.g., about 80 to 200°C) thermoplastic is typically extruded around a fiber of the higher melting (e.g., about 200 to 260°C) point material. In use, the bicomponent fibers typically have a fiber diameter of about 5 to 50 micrometers often about 10 to 20 micrometers and typically in a fiber form generally have a
20 length of 0.1 to 20 millimeters or often have a length of about 0.2 to about 15 millimeters. Any thermoplastic that can have an appropriate melting point can be used in the low melting component of the bicomponent fiber while higher melting polymers can be used in the higher melting "core" portion of the fiber.

The cross-sectional structure of such fibers can be, as discussed above, the
25 "sheath-core" structure, or other structures that provide the same thermal bonding function, such as "side-by-side" structures or lobed fibers where the fiber tips have lower melting point polymer. The value of the bicomponent fiber is that the relatively low-temperature melting resin can melt under sheet, media, or filter forming conditions to act to bind the bicomponent fiber, and other fibers present in
30 the sheet, media, or filter making material into a mechanically stable sheet, media, or filter. Once melted and fused to other fibers or particles in the filter media of the invention, the stability of the structure is manifested in the observation that there is no migration of materials in the filter. Such migration is typically seen in filters made using glass fiber and binder resins.

Typically, the polymers of the bicomponent fibers are made up of different thermoplastic materials. For example, polyolefin/polyester (sheath/core) bicomponent fibers may be used, such that the polyolefin, e.g. polyethylene sheath, melts at a temperature lower than the polyester, e.g. polyethylene terephthalate core.

5 Typical thermoplastic polymers having useful melting points for use either in a high or low melting portion can include polyolefins, e.g. polyethylene, polypropylene, polybutylene, and copolymers thereof, polytetrafluoroethylene, polyesters, e.g. polyethylene terephthalate, polyvinyl acetate, polyvinyl chloride acetate, polyvinyl butyral, acrylic resins, e.g. polyacrylate, and polymethylacrylate,

10 polymethylmethacrylate, polyamides, namely nylon, polyvinyl chloride, polyvinylidene chloride, polystyrene, polyvinyl alcohol, polyurethanes, cellulosic resins, namely cellulosic nitrate, cellulosic acetate, cellulosic acetate butyrate, ethyl cellulose, etc., copolymers of any of the above materials, e.g. ethylene-vinyl acetate copolymers, ethylene-acrylic acid copolymers, styrene-butadiene block copolymers,

15 KRATON® rubbers available from Kraton Polymers U.S. LLC of Houston, Texas, and the like.

Particularly preferred in the present invention is a bicomponent fiber known as Advansa 271P, a 14 micrometer diameter fiber available from EXSA Americas, New York, NY. Other useful fibers include FIT 201 (available from Fiber

20 Innovation Technology, Inc. of Johnson City, TN), Kuraray N720 (available from the Kuraray Co., Ltd. of Osaka, Japan) and similar commercially available materials. All of these commercially available bicomponent fibers can facilitate the cross-linking of a filter construction of the current invention by melting and fusing a sheath polymer to other fibers of the filter construction.

25 Selection of melting points for the portion of the bicomponent fiber that melts and fuses to bind the layer mechanically is important. In any filtration application, the mobile fluid will have an operating temperature. Mobile fluids of a high operating temperature such as lubricant oil, hydraulic fluid, etc. must be used with a filtration medium having fibers with a thermal characteristic such that the

30 material does not melt at operating temperatures. The filter medium made using glass fiber and bicomponent fiber tends to be relatively temperature stable due to the presence of a relatively large mass of glass and polymer. However, relatively little experimentation is needed to determine the temperature at which the lower temperature polymer might initiate failure of the medium when exposed to high

temperature mobile fluids in the filtration operation. The bicomponent fiber can then be selected in order to obtain a dimensionally and mechanically stable filtration medium in the presence of the target fluid temperature.

5 The preferred glass fiber used in media of the present invention include glass types known to those skilled in the art by their designations: A, C, D, E, Zero Boron E, ECR, AR, R, S, S-2, N, and the like. Generally, the skilled artisan will recognize that any glass that can be made into fibers either by drawing processes used for making reinforcement fibers or by spinning processes used for making thermal insulation fibers. Such fibers are typically about 0.1 to 50 micrometers (μm) in diameter, more typically about 0.2 to 20 μm , and have aspect ratio of about 10 to 10,000. These commercially available fibers can be sized with a sizing coating or can be unsized. Such coatings cause the otherwise ionically neutral glass fibers to form and remain in bundles. Glass fiber in diameter less than about 1.0 micron is not sized. Large diameter chopped glass is typically sized. The sizing composition and cationic antistatic agent eliminates fiber agglomeration and permits a uniform dispersion of the glass fibers upon agitation of the dispersion in the tank.

The typical amount of glass fibers for effective dispersion in the glass slurry is between about 5% to about 80%, more preferably about 50 to about 80%, by weight of the solids in the dispersion. Blends of glass fibers can substantially aid in improving permeability of the materials. We have found that a useful filtration medium can be made by combining bicomponent fiber and glass fiber. Such media, depending on glass content and glass fiber size can obtain permeability, efficiency, and filter lifetime sufficient for a number of applications. In applications involving removal of a liquid aerosol from a mobile air stream, a medium comprising a bicomponent fiber in combination with a relatively larger glass fiber with a relatively smaller glass fiber can obtain a useful and highly active filtration media. Such media contains a glass fiber that contains a substantial proportion of a glass fiber having a diameter of greater than about 1 micron and a substantial amount of a glass fiber having a fiber diameter of less than 1.0 micron.

30 The combination of bicomponent fiber and glass fiber can be formed into a useful layer which can be fused by heat into a mechanically stable useful filter medium. While no additional binder in the form of fiber or resin is generally needed for such structures, this invention contemplates the use of additional binder materials when needed for a specific application. Binder resins can comprise water-soluble,

solvent borne, or latex based materials. Binder materials may be provided in dry form, in a solvent, or in an aqueous dispersion. Such useful polymer materials include acrylic polymers, ethylene vinyl acetate polymers, ethylene vinyl polyvinyl alcohol, ethylene vinyl alcohol polymers, polyvinyl pyrrolidone polymers, and
5 natural gums and resins useful in aqueous solution.

Latex-based binders may also be used to bind together the filter media of the present invention. Latex binders can be selected from various latex adhesives known in the art. The skilled artisan can select the particular latex adhesive depending upon the type of fibers that are to be bound. The latex adhesive may be
10 applied by known techniques such as spraying or foaming. Generally, latex adhesives having from 15 to 25% solids are used. The dispersion can be made by dispersing the fibers and then adding the binder material or dispersing the binder material and then adding the fibers. The dispersion can, also, be made by combining a dispersion of fibers with a dispersion of the binder material. The concentration of
15 total fibers in the dispersion can range from 0.01 to 5 or 0.005 to 2 weight percent based on the total weight of the dispersion. The concentration of binder material in the dispersion can range from 10 to 50 weight percent based on the total weight of the fibers.

Alternatively, a binder resin may be delivered from a solvent other than
20 water. Solvent borne binders may be advantageous where a particular resin cannot be delivered from water, but the properties of the resin are highly desirable. Solvent delivery is also necessary where the polymer is reactive toward water, and the reaction should be prevented prior to contact with the filter fibers. Non-limiting examples of suitable solvents for delivery of binder resins include acetone, methyl
25 ethyl ketone, methyl isobutyl ketone, toluene, methanol, ethanol, isopropanol, methylene chloride, dichloromethane, hexane, cyclohexane, tetrahydrofuran, diethyl ether, mixtures thereof and mixtures with water, and the like. Polymers that are usefully delivered from water can include, but are not limited to, phenolic resins, polyvinyl acetate, polyvinyl alcohol, acrylic resins, methacrylic resins,
30 polyurethanes, cyanoacrylates, epoxies, melamine resins, and polycaprolactones.

Useful examples of commercially available solvent borne binders include phenolic resins available from Dynea of Helsinki, Finland, and Ashland, Inc. of Covington, KY, among others; polyvinyl acetate available from Rohm & Haas Company of Philadelphia, PA, H.B. Fuller Company of Vadnais Heights, MN, and

Air Products and Chemicals, Inc. of Allentown, PA, among others; polyvinyl alcohol available from Rohm & Haas, Dow Chemical Co. of Midland, MI, Reichhold, Inc. of Research Triangle Park, N.C., and Hexion Specialty Chemicals of Columbus, OH, among others; acrylic resins available from Rohm & Haas Company of Philadelphia, PA, H.B. Fuller Company of Vadnais Heights, MN, and Air Products and Chemicals, Inc. of Allentown, PA, among others; methacrylic resins available from Ciba Specialty Chemicals (Araldite® resins) of Tarrytown, NY, Dow Chemical Co. of Midland, MI, Hexion Specialty Chemicals of Columbus, OH, and Reichhold, Inc. of Research Triangle Park, N.C., among others; polyurethanes available from Dow Chemical Co. of Midland, MI and Ciba Specialty Chemicals of Tarrytown, NY, among others; cyanoacrylates available from Henkel Loctite of Rocky Hill, CT; epoxies available from Dow Chemical Co. of Midland, MI, Hexion Specialty Chemicals of Columbus, OH, and Ciba Specialty Chemicals of Tarrytown, NY, among others; melamine resins available from Ciba Specialty Chemicals of Tarrytown, NY, Cytec Industries, Inc. (Cymel®) of West Paterson, NJ, and Hexion Specialty Chemicals of Columbus, OH, among others; and polycaprolactones available from Solvay America Inc. (Capa®) of Houston, TX.

Binder resins such as those described above can be used to help bond such media fibers into a mechanically stable filter medium. Such thermoplastic binder resin materials can be used as a dry powder or solvent system, but are typically aqueous dispersions (a latex or one of a number of lattices) of vinyl thermoplastic resins. A resinous binder component is not necessary to obtain adequate strength for the filter construction of this invention, but can be used to help bond thermoplastic fibers into the filter media matrix. Resin used as binder can be in the form of water soluble or dispersible polymer added directly to the filter-making dispersion or in the form of thermoplastic binder fibers of the resin material intermingled with other fibers of the filter making slurry to be activated as a binder by heat applied after the filter media is formed.

Media fibers may also be incorporated into the filter media of the present invention. Media fibers are fibers that can aid in filtration or in forming a structural media layer. Such fiber may be made from a number of hydrophilic, hydrophobic, oleophilic, and oleophobic materials. Media fibers may be present with or without glass fibers in the filter media of the present invention. When needed, these fibers cooperate with the bicomponent fiber and any other components present in the slurry

to form a mechanically stable, but strong, permeable filtration media that can withstand the mechanical stress of the passage of fluid materials and can maintain the loading of particulate during use. Such fibers are typically monocomponent fibers with a diameter that can range from about 0.1 to about 50 micrometers and
5 can be made from a variety of materials including naturally occurring cotton, linen, wool, various cellulosic and proteinaceous natural fibers, synthetic fibers including rayon, acrylic, aramid nylon, polyolefin, polyester fibers.

One type of media fiber is a binder fiber that cooperates with other components to bind the materials into a sheet. Another type a structural fiber
10 cooperates with other components to increase the tensile and burst strength the materials in dry and wet conditions. Yet another type of media fiber is one that enhances the entrapment of specific components during filtration of the fluid stream.

Useful media fiber materials include, but are not limited to, polyester fibers, polyamide fibers, aramid fibers, polypropylene fibers, copolyetherester fibers,
15 polyethylene terephthalate fibers, polybutylene terephthalate fibers, polypropylene fibers, polyethylene fibers, polyvinyl acetate fibers, polyvinyl alcohol fibers (including various hydrolysis of polyvinyl alcohol such as 88% hydrolyzed, 95% hydrolyzed, 98% hydrolyzed and 99.5% hydrolyzed polymers), polylactic acid fibers, polyetherketoneketone (PEKK) fibers, polyetheretherketone (PEEK) fibers,
20 liquid crystalline polymer (LCP) fibers, and mixtures thereof. Polyamide fibers include, but are not limited to, nylon 6, 66, 11, 12, 612, and high temperature "nylons" (such as nylon 46). Further, cellulosic fibers such as cotton, viscose rayon, and other common fiber types may be used in some embodiments of the current invention. The thermoplastic fibers are generally fine (about 0.5-20 denier
25 diameter), short (about 0.1-5 cm long), staple fibers, possibly containing precompounded conventional additives, such as antioxidant, stabilizers, lubricants, tougheners, etc. In addition, the thermoplastic fibers may be surface treated with a dispersing aid. The preferred thermoplastic fibers are polyamide and polyethylene terephthalate fibers, with the most preferred being polyethylene terephthalate fibers.
30 Media fibers can also include inorganic fibers such as carbon/graphite fiber, metal fiber, metal oxide fiber, ceramic fiber, and combinations thereof.

The filter media of the present invention also contemplates the use of functional materials for specific filtration needs. Functional materials may be particulates of silica, clay, carbon, powdered metals or metal oxides; glass micro-

spheres, ceramics, thermoplastic or thermoset resin particles or fibers; catalysts such as Hopcalite type air purification catalysts, e.g. Carulite® Catalyst available from the Carus Corporation of Peru, IL; or other structures such as carbon nanotubes, zeolites, enzymes that are free or bound to polymeric backbones, or ion exchange
5 resins. Any material capable of being entrained in the filter making slurry may be used, where a specific application may require the use of a specialized filtration component.

The filter media of the present invention also contemplates the use of fiber treatments to modify the surface properties of the fibers or affect the bulk properties
10 of the filter media. Surface properties of glass fibers, bicomponent fibers, or other materials present in the filter media may be modified. Acidic or basic compounds may be added to the slurry; reactive materials that affect the hydrophobicity or hydrophilicity may be employed either in the slurry or by a post-treatment after fusing the bicomponent fibers; flame retardants may be entrained; surface finish
15 chemicals may be used; or antistatic agents may be employed. For example, hexamethyl disilazane (HMDZ) may be sprayed onto the formed filter or added by dipping the formed filter in a solution of HMDZ; HMDZ can react with e.g. glass fibers to provide a surface having trimethylsilyl functionality, thereby rendering the glass surface hydrophobic. Other agents may be employed to affect surface energy
20 of the fibers in the filter media of the present invention.

The media of the invention can be made using any system that can accumulate the fiber into a thick layer. The media of the invention can be made into any shape that can be formed using the fibers of the invention. Useful forms of such a layer are flat media, cylindrical media, and the like.

25 The technologies used in media making are typically related to papermaking processes adapted to thicker layers. The skilled artisan will appreciate that papermaking processes known as wet laid processes are particularly useful and many of the fiber components are designed for aqueous dispersion processing. The machines that can be used in wet laid sheet making include hand laid sheet
30 equipment, Fourdrinier papermaking machines, cylindrical papermaking machines, inclined papermaking machines, combination papermaking machines and other machines that can take a properly mixed slurry of components, form a layer or layers of the components of the needed thickness, and remove the fluid aqueous

components to form a wet sheet. Wet-laid manufacturing of the media/elements of the present invention typically comprises the following steps:

- 1- Weighing fibers to the specified recipe and proportions.
- 2- Mixing fibers into an aqueous slurry for a sufficient time [between
5 30 and 45 minutes], at a water-to-fiber ratio of approximately 1 :
0.002.
- 3- Vacuum forming the media/element onto a suitable perforated
cylinder, perforated sheet, cone or any suitable shape. The
forming support must be suitably open to allow water to flow
10 across, allow the free passage of water and the deposit of the fibers
onto the perforated form thus creating the desired element shape
and thickness. The perforated shape is completely immersed and
held under vacuum from 2 – 35 seconds, depending on the desired
thickness and basis weight. Vacuum level can be from 10in. Hg to
15 29in. Hg, depending on the thickness, basis weight, density and
solidity desired.
- 4- Retracting the formed media/element from the fiber slurry and
maintaining the vacuum for another 15 – 30 seconds to extract as
much of the water as possible.
- 20 5- Removing the media or element from vacuum fixture and placing
it in a thru-air drying oven to drive off remaining water. The oven
temperature and residence time in the oven is adjusted to melt the
low melting component of the bicomponent fibers and activate
fiber-to-fiber adhesion. In a preferred embodiment, the
25 bicomponent fiber used is Advansa 271P, and the oven
temperature is adjusted to 300°F and residence time is 25 – 60
minutes.
- 6- Cooling the media/element at room temperature.

The skilled artisan will recognize that an advantageous aspect of the current
30 invention is that no further media processing is necessary. After carrying out the
foregoing manufacturing steps, the formed filter media are ready for incorporation
into a filtration assembly. The skilled artisan will appreciate that a finished filter
assembly can comprise end caps, housings, and the like, and that the method of
assembly and the parts required for assembly will depend on the intended end use.

Once sufficiently dried and processed to filtration media, the sheets are typically about 5 to 50 millimeters in thickness, have a pore size of about 0.55 to about 50 micrometers, a basis weight of about 50.0 to about 3,000.0 grams/meter² or about 50.0 to about 1,000.0 grams/meter², a solidity of about 4.0 to about 7.0%, and
5 a permeability of about 0.5 to about 200 fpm.

In some embodiments, the filter media of the invention may be formed as a substantially planar web or a mat. The web or mat may further be coated with a binder by conventional means, e.g., by a flood and extract method and passed through a drying section which dries the mat and cures the binder, and thermally
10 bonds the sheet, media, or filter. The resulting web or mat may be collected in a large roll or left substantially flat as formed

The filter media of the invention can also be formed into a variety of geometric shapes using forms to hold the wet composition during thermal bonding. In forming shaped media, a layer is formed by dispersing fibers in an aqueous
15 system, and forming the filter on a mandrel with the aid of a vacuum. The formed structure is then dried and bonded in an oven. By using a slurry to form the filter, this process provides the flexibility to form several structures, such as cylinders, tubes, cones, and ovals.

The filter media of the present invention can further be formed as multilayer
20 filter media having different components in the different layers. For example, a first layer of filter media may be formed using the above techniques and materials, and formed into the desired shape and thickness, pore size, etc. After the oven drying step, the filter media may be immersed in a second slurry having a different composition to result in e.g. different permeability from the first layer, or by
25 imparting functionality such as by incorporating activated charcoal. The manufacturing process is thus repeated to provide a two-layer filter. In this manner, multiple filter layers may be added.

Similarly, instead of immersing the filter media in a second slurry after the first oven drying step, the second slurry may be applied after vacuum drying but
30 before the final oven drying step; in this manner, multiple layers may be deposited to the filter media, followed by a single oven drying step that is carried out after some or all of the filter media layers have been applied.

Thus, multiple layers may incorporate differing pore sizes, different permeability, different fiber materials to filter different specific components, or

addition of other additives such as particulates to different layers. The skilled artisan will appreciate the ability of a multiply layered filter media of the present invention to filter several specific particle types or sizes using one filter assembly, or alternatively to provide a media that both filters particles and entraps airborne
5 chemicals on a molecular scale, or media that combines any number of the uses contemplated by various embodiments of the invention into a single assembly.

Certain preferred arrangements according to the present invention include filter media as generally defined, in an overall filter construction. Some preferred arrangements for such use comprise the media arranged in a cylindrical, pleated
10 configuration with the pleats extending generally longitudinally, i.e. in the same direction as a longitudinal axis of the cylindrical pattern. For such arrangements, the media may be imbedded in end caps, as with conventional filters. Such arrangements may include upstream liners and downstream liners if desired, for typical conventional purposes.

15

Detailed Discussion of the Figures

FIGURE 1 is a graphical representation of the data derived from a filter efficiency test, wherein latexes having varying particle size borne in an air stream and passed through the filters of the present invention, labeled FM-1, FM-2, and a
20 control sample, labeled CONTROL. FM-1 is a single layer filter employing glass fibers, while FM-4 is a dual layer filter employing glass fibers. CONTROL is a filter of the prior art comprising glass fibers and a binder resin. Particles ranging in size from 0.05 micron to 0.3 micron are employed in the test, and the particles are present at about 6,800 ppm per million parts of the fluid passed through the media.
25 The number of particles present on the post-filtration side of the filters is measured, and the result is expressed in a percent efficiency for each particle size. It may be observed that the filters of the present invention have a superior ability to entrap particles over the range of particle sizes used.

FIGURE 2 is a graphical representation of data derived from an air
30 compressor test, wherein the experimental filter FM-1 and CONTROL were incorporated into filter elements and mounted inside an air compressor apparatus for 8000 hours of actual run time wherein the filters were filtering oily particulate from the air stream during operation of the compressor. Periodic measurements show the superior performance of the filter media of the present invention in trapping oily

aerosols in a long-term air filtration application. Oily aerosol particulate carryover into the filtered air was measured at both 60psig and 100psig. FIGURE 2 shows that the oil carryover passing through the FM-1 filter is 2.0 ppm or less (flowing from outside to inside) for the duration of the test, while the CONTROL filter media had about 2.0ppm carryover initially but became less effective over time, such that carryover was 5.0ppm or more by the end of the test.

FIGURE 3 is a graphical representation of data derived from the same air compressor test, showing that the pressure drop across the medium of the invention is acceptable even in view of the increased oil collection capacity of the medium. In the course of the same test as conducted above, resulting in the data represented by FIGURE 1, pressure drop across the filter was also monitored. The results show that the FM-1 filter media maintained acceptable pressure drop over the course of the 8000 hour test, despite entrapping more oily aerosol than CONTROL (as shown in FIGURE 2). The pressure drop for the FM-1 filter media stayed well below the industrially acceptable maximum level of 10.0psid for the duration of the test, even though it entraps more oily aerosol than CONTROL, as is shown in FIGURE 2.

FIGURE 4 is a graphical representation of data derived from the same air compressor test, showing the discharge temperature of the air stream passed through FM-1 over a test period of about 14 months (about 10,000 hours). The discharge temperature is indicative of operating conditions and compressed air temperature. Discharge temperatures of up to 120°C are considered the industrially acceptable limit, as temperatures above this typically exceed operating temperatures in machinery where the filters of the invention may be used. The discharge temperature was acceptable over time of the test, and in fact declined over the course of the first ten months (about 7200 hours), showing that FM-1 was not severely challenged or in danger of failure, even though it entraps a higher volume of oily aerosol particles than CONTROL, as is shown in FIGURE 1.

FIGURE 5 is a graphical representation of data derived from the same air compressor test, showing the flow rate, or volume, of air passing through the FM-1 filter medium compared to the CONTROL medium. The air flow of the medium of the invention remained substantially consistent over the lifetime of the test, thus showing that in long-term use a filter of the present invention does not become clogged, even though the FM-1 filter medium traps a higher volume of oily aerosol than CONTROL, as is shown in FIGURE 2.

FIGURE 6 is a graphical representation of the stress-strain properties of FM-1 and CONTROL. Both media were measured at a strain rate of 2.54 cm/min, and the resulting force measured. It can be observed that the filters of the present invention have a higher elongation at break, and a higher tensile strength, than the filters of the prior art.

FIGURES 7A through 7F are electron photomicrographs showing side views of the FM-1, FM-2 media and inside and side views of the FM-3 filter media of the invention, as well as a side view of the CONTROL sample. The photomicrographs clearly show the glass fiber and the bicomponent fiber in a combination matrix having a substantial void volume, effective pore size and uniform distribution of materials leading to a high quality, high strength filter medium that will display high efficiency, high burst strength, useful solidity, long lifetime, low pressure drop and other beneficial characteristics derived from the unique structure of the medium.

FIGURE 7A shows a side view of the CONTROL filter medium at 500X magnification. The filter medium 10 has glass fibers 11. FIGURES 7B and 7C show a side view of a filter medium of the present invention, FM-1, at 200X (FIG. 7B) and 1000X (FIG. 7C), respectively. The filter medium 20 has glass fibers 21 and bicomponent fibers 22. FIGURE 7D is a side view of a filter medium of the present invention, FM-2, at 500X. Filter medium 30 has glass fibers 31 and bicomponent fibers 32. FIGURE 7E is a view of the interior of a filter medium of the present invention, FM-3, at 50X. Filter medium 40 has larger carbon particles 41a, smaller carbon particles 41b, and bicomponent fibers 42. FIGURE 7F is a side view of FM-3 at 1000X. This view of medium 40 shows the smaller carbon particles 41b and bicomponent fibers 42.

FIGURES 8A and 8B are photographs of filter elements of the present invention which are coalescers made as described in Example 8. FIGURE 8A shows a coalescer formed from a filter medium of the present invention, FM-1. FIGURE 8a shows coalescer 50, having FM-1 filter medium 51 and endcaps 52. FIGURE 8B shows the same coalescer 50, FM-1 medium 51, and endcaps 52. In this view one endcap 52 has been removed to show the internal structure of coalescer 50. Filter medium 51 has substantial thickness 53 and cylindrical apertured support 54, upon which FM-1 filter medium 51 was formed. Also visible is coalescing medium 55 and gap 56 present between support 54 and coalescing medium 55.

The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended. As used in this specification and the appended claims, the singular forms "a", "an" and "the" include single and plural referents unless clearly dictated otherwise by specific specification or claim language. Thus, for example, reference to a composition containing "a compound" includes a mixture of two or more compounds.

Herein when reference is made to efficiency, unless otherwise specified, reference is meant to efficiency when measured according to ASTM-1215-89, with 0.78 μ monodisperse polystyrene spherical particles, at 20 fpm (6.1 meters/min) as described herein. However, efficiency may be specified to mean efficiency as measured by the DOP efficiency test which is described in detail below.

15

EXPERIMENTAL SECTION

General Experimental Techniques

1. Permeability:

As discussed in the examples set forth below, permeability relates to the quantity of air (ft³-min⁻¹, or CFM) that will flow through a filter medium at a pressure drop of 0.5 inches of water. In general, permeability as the term is used is assessed by the Frazier Permeability Test according to ASTM D737 using a Frazier Permeability Tester available from Frazier Precision Instrument Co. Inc., Gaithersburg, Maryland or a TexTest 3300 or TexTest 3310 available from Advanced Testing Instruments Corp (ATI), 243 East Black Stock Rd. Suite 2, Spartanburg, So. Carolina 29301, (864)989-0566, www.aticorporation.com.

25

2. Pore size:

Pore size means mean flow pore diameter determined using a capillary flow porometer instrument such as a Model APP 1200 AEXSC sold by Porus Materials, Inc., Cornell University Research Park, Bldg. 4.83 Brown Road, Ithaca, new York 14850-1298, 1-800-825-5764, www.pmiapp.com. A sample of filter media is cut to 2.24cm outer diameter and mounted on a specimen holder. The specimen holder is open at the top and the filter is mounted in the bottom of a well that is 1.90cm deep.

30

On the underside of the specimen is a chamber open to a path to a manometer, an air bleed needle, and a compressed air source. The air bleed valve is opened and the compressed air turned on to a level whereby the manometer reads 7.6 ± 1.3 cm. The well is filled with reagent grade isopropanol, and the air bleed valve is slowly closed until a bubble appears in the well containing isopropanol. The manometer reading is recorded at the first bubble sighting and the pressure recorded is used to calculate pore size. This measurement is repeated for five repetitions.

3. Filtration Efficiency (DOP) Test:

A 6-inch wide strip of filter media is mounted in the chuck of a TSI 8160 Automated Filter Tester, available from TSI Incorporated of Shoreview, MN. Dried air is fed with latex particles and this mixture of air and particles is applied at a pressure of 70 psi across the filter media. The face velocity of the air stream is set by adjusting the flow rate of the air/particle mixture as well as the opening size of the chuck. For example, a flow rate of 32 fpm through a chuck size of 100 cm^2 will result in a face velocity against the filter sample in the chuck of 5.334 cm/sec (or 10.5 fpm). In this manner, face velocities ranging from 0.35 fpm to 82 fpm may be achieved.

Particle sizes used in the test were 0.03, 0.05, 0.07, 0.09, 0.1, 0.2, 0.3, and 0.4 microns in diameter. The concentration of particles in the stream was about 6800 parts per million parts of air flow across the media. The concentration of each particle size in the effluent air is measured, so that the percent of each particle size trapped by the filter at the designated flow rate can be measured. The overall efficiency is the total percent of particles trapped by the filter apparatus. Each particle size is measured, so efficiency as a function of particle size can also be determined.

Example 1

A filter medium of the invention, FM-1, was made using the following technique. Into 250 gallons of untreated tap water was mixed Advansa 271P bicomponent fiber (obtained from EXSA Americas, New York, NY), Evanite #610 glass fiber, and Evanite #608 glass fiber (both obtained from the Evanite Fiber Corporation of Corvallis, OR) such that the relative weight of the components are as shown in Table 1. Mixing was carried out with a 2HP rotating paddle mixer for

between 30 and 45 minutes to obtain an aqueous slurry of fibers. The slurry was then vacuum formed onto a 5.25"x 9" perforated metal cylinder by completely immersing the cylinder in the slurry and holding it under a vacuum of approximately 20 inches Hg for 3-10 seconds.

5 The formed media was then retracted from the slurry and vacuum was maintained for 15-30s. The media was removed from the vacuum fixture and placed in a vented oven. The oven temperature was set to 300°C. Residence time in the oven was approximately 35 minutes. The filter media was cooled to room temperature at ambient conditions.

10

Table 1. Components of FM-1

Component	Wt. (gm)
DuPont-271 (14 μ)	1200
Evanite® glass fiber #610 (2.8 μ)	500
Evanite® glass fiber #608 (0.8 μ)	200

After removing from the oven and cooling, FM-1 was 2.29 cm thick. The basis weight of FM-1 was measured as 2645 grams/meter² (g/M²). The initial permeability of FM-1 was found to be 1.3 ft/min.

15

Example 2

A filter medium of the present invention, hereafter referred to as FM-2, was made using the filter making process of Example 1. The components of the filter slurry are shown in Table 2.

20

Table 2. Components of FM-2

Fibers	Wt. (g)
DuPont 271 fiber (14 μ)	980
Evanite® glass fiber #610 (2.8 μ)	200
Evanite® glass fiber #608 (0.8 μ)	420

After the oven drying step, FM-2 was 0.84 cm thick. FM-2 was found to have a basis weight of 1187 g/M². The initial air permeability of FM-2 was determined to be 1.4 feet/minute (fpm).

25

Example 3

A filter medium of the present invention, hereafter referred to as FM-3, was made using the filter making process of Example 1. The components of the filter were bicomponent fibers and carbon particles, added to the slurry at a ratio of approximately 1:1 by weight. The bicomponent fibers were DuPont-271 fibers. The carbon particles were Calgon MD5695, 50-200 mesh activated carbon particles from a coconut powder source, obtained from the Calgon Carbon Company of Pittsburgh, PA. The particles were mixed directly into the slurry with no prior treatment or washing. After the oven drying step, the filter was analyzed for weight percent of the components. The components of the filter are shown in Table 3. Micrographs of the inside and side views of FM-3 are shown in Figure 7e and 7f.

Table 3. Components of FM-3

Component	Wt. %
DuPont-271 (14 μ)	49.95
MD5695, 50-200 mesh carbon particles	50.05

The available surface area of the MD5695 particles and the FM-3 filter media containing 50% MD5695 particles were measured using Brunauer-Emmett-Teller (BET) nitrogen adsorption isotherm (BET; see S. Brunauer, P. H. Emmett and E. Teller, *J. Am. Chem. Soc.*, 1938, 60, 309.) Samples were placed in a sampling tube and out-gassed overnight under vacuum at 60°C. The sample was run under standard continuous flow conditions using a Micromeritics ASAP 2010 instrument (available from Micromeritics Corporation of Norcross, GA). The following measurements were made:

BET Surface Area: This is the amount of surface area on the molecular level and is measured between relative pressure values of 0.05 and 0.3. It incorporates the concept of multi-molecular layer adsorption.

t-plot Micropore Area: A method to normalize an isotherm and calculate the micropore area with an extrapolation of the linear portion of the adsorption axis.

Total Pore Volume: This is the total pore volume per weight of sample. This is the maximum volume of nitrogen penetrating at the highest pressure applied.

Average Pore Diameter: Model to aid in determining the pore diameter from the wall area and volume. The model assumes that the pores are right cylinders.

5 The available surface area of the carbon particles alone were compared to the surface area of the particles entrained in FM-3. The results of BET testing are shown in Table 4. The results show that the particles entrained in the filter of the invention did not show a significant decrease in available surface area when incorporated in the filter using the wet-laid technique described above.

10

Table 4. BET results for MD5695 particles and MD5695 particles entrained in FM-3.

Sample ID	BET Surface Area (m ² /g)	Micropore Area (m ² /g)	Total Pore Volume (cm ³ /g)	Average Pore Diameter (Å)
MD5695 (Carbon)	1876	668	0.942	20.1
FM-3 (values are per gram of Carbon)	1765	587	0.885	20.5
Percent Variation from MD5695 Base Carbon	-6%	-12%	-6%	NA

15

Example 4

A filter medium of the present invention, hereafter referred to as FM-4, was made using the filter making process above. The components of the filter were DuPont-271 bicomponent fibers and "media type #3" carbon fibers obtained from CarboPur Technologies, Inc. of Montreal, Quebec, Canada. The carbon fibers are approximately 12 – 14 micrometers in diameter. These two components were added to the slurry at a ratio of approximately 1:1 by weight. The carbon fibers were mixed directly into the slurry with no prior treatment or washing. After the oven drying step, the filter was analyzed for weight percent of the components and the filter was found to comprise 1:1 bicomponent fibers to carbon fibers by weight.

25

Example 5

A filter medium of the present invention, hereafter referred to as FM-5, was made using the filter making process of Example 1 above except that the filter was made in two steps using two slurries of differing composition. The first slurry was formed into a layer as described above. This sample also employed Lauscha EC-6, a 6 μ m glass fiber, available from the Lauscha Fiber International Corp. of Summerville S.C. The weight of the components of slurry 1 is shown in Table 5 below.

A second layer was added to the first by interrupting the first filter making procedure at the point where the layer would otherwise go into the oven. At this point the support with the first layer was immersed in the second slurry, slurry 2, and the filter making process repeated; the layers were placed in the vented oven as described in Example 1 above. Slurry 2 also differed from the first in that 83 gallons of tap water were used instead of 250 gallons as described in Example 1. The weight of the components of slurry 2 is shown in Table 5.

After the oven drying step, the basis weight of FM-5 was measured to be 1489 g/M². The Frazier permeability of FM-5 was found to be between 1.35 and 1.5 CFM at 0.5 inches.

Table 5. Components of FM-5 slurries

Slurry 1 Component	Wt. (gm)
DuPont-271 (14 μ)	980
EC-6 Lauscha glass fiber (6 μ m)	420
Slurry 2 Component	Wt. (gm)
DuPont-271 (12 μ)	330
Evanite® glass fiber #610 (2.8 μ)	66
Evanite® glass fiber #608 (0.8 μ)	140

Example 6

A filter medium of the present invention, hereinafter referred to as FM-6, was made using the same procedure as used in Example 5 to make FM-5, except that two oven drying steps were employed. The first oven drying step was carried out after the first layer of fibers from slurry 1 was applied; the second oven drying step was carried out after the second layer of fibers from slurry 2 was applied. The composition of Layer 1 of FM-6 was determined to be 70% DuPont-271 fibers and

30% Evanite® #610 glass fibers. The composition of Layer 2 of FM-6 was determined to be 71.4 DuPont-271 fibers and 28.6% 3 denier crimped polyester fibers, obtained from Wellman, Inc. of Fort Mill, S.C.

5

Example 7

DOP efficiency testing was carried out on filter media of the invention and compared to a control filter media sample. The control sample, hereinafter referred to as CONTROL, was a wet laid filter medium using conventional technology to provide a filter media of glass fibers and an aqueous binder material. CONTROL media was obtained from the Donaldson Company of Minneapolis, MN under the part number P046257. CONTROL is 1.17 cm thick, has a basis weight of 1526 g/M², and permeability of 1.5 ft/min.

DOP efficiency was measured at 10.5 fpm flow rate for FM-2, FM-5, and CONTROL. The results are shown in Table 6.

15

Table 6. Results of initial DOP efficiency testing for filter media FM-2, FM-4, and CONTROL.

Particle Size (µm)	EFFICIENCY, %		
	FM-2	FM-5	CONTROL
0.03	99.9999959	99.999929	99.9997
0.05	99.9999984	99.999946	99.9939
0.07	99.9999976	99.999939	99.9913
0.09	99.9999965	99.9999	99.987
0.10	99.9999966	99.999969	99.979
0.20	99.9999989	99.99987	99.97
0.30	99.999986	99.99926	99.98
0.40	99.999973	99.9989	99.9916

Example 8

20

FM-1 was incorporated into a functioning oil coalescer for long term testing in an oil coalescing application. A standard polyurethane potting compound, such as any such compounds commonly used in the filtration industry, for example materials sold under the trade name Sentrol® (available from the General Electric Company

PAGE INTENTIONALLY LEFT BLANK

results from the 8000 hour test are shown for FM-1 in Table 7, and for CONTROL in Table 8. The results of oil carryover, pressure drop, and corrected flow for FM-1 and CONTROL, as well as discharge temperature for FM-1, are graphically represented in Figures 2-5, respectively.

5 The results show that FM-1 had superior properties of oil retention, as oil carryover was significantly less than for CONTROL; that FM-1 had similar pressure drop to CONTROL, even though it entrapped more oil than did CONTROL; and the corrected flow was essentially unchanged for FM-1 throughout the 8000 hour test; and that FM-1 had acceptable discharge temperature over the duration of the test.

10

Table 7. Test results for long-term oil compressor use of FM-1.

Time, hr	Oil Carryover, ppm	Pressure Drop, psid	Applied Pressure, psi	Corrected Flow, CFM	Discharge Temp., °C
320	0.7	1.8	100	128.2	88
512	1.0	1.8	100	131.6	88
691	1.2	2.1	100	129.9	93
853	1.2	2.1	100	131.5	88
990	1.3	2.2	100	131.2	89
1163	1.5	2.2	100	130.7	89
1366	1.6	2.4	100	130.3	88
1554	1.8	2.3	100	137.5	88
1754	1.7	2.4	100	136.0	89
1918	1.6	2.5	100	139.5	82
2112	1.6	2.4	100	134.1	89
2322	1.5	2.4	100	137.0	88
2542	1.6	2.5	100	139.0	85
2729	1.4	2.7	100	137.0	85
2900	1.4	2.7	100	137.0	82
3069	1.3	2.6	100	137.0	82
3144	1.5	2.7	100	137.0	82
3262	2.1	2.7	100	135.0	85
3449	1.7	2.7	100	136.0	85
3589	1.7	2.6	100	136.0	87
3757	1.7	2.6	100	136.0	88
3920	1.6	2.7	100	137.0	85
4110	1.6	2.6	100	134.0	87
4373	1.2	3.2	60	133.0	86
4553	1.2	3.2	60	131.0	82
4764	1.2	3.2	60	131.0	83

4954	1.1	3.0	60	131.0	84
5210	1.4	2.9	60	128.1	82
5447	1.0	3.3	60	129.0	82
5945	1.0	3.0	60	125.0	82
6203	1.7	2.6	100	136.0	96
6367	1.5	2.7	100	131.0	99
6552	1.4	2.7	100	132.0	94
6724	1.6	2.7	100	130.0	100
6900	2.5	2.5	100	131.0	101
6977	1.4	2.5	100	132.0	99
7169	1.7	2.5	100	132.0	97
7310	1.9	2.7	100	129.0	100
7422	1.7	2.8	100	135.0	91
7591	1.6	2.7	100	131.0	100
7732	3.0	2.9	100	132.0	100
7894	1.8	2.8	100	133.0	98
8049	1.8	2.8	100	134.0	98

Table 8. Test results for long-term oil compressor use of CONTROL.

Time, hr	Oil Carryover, ppm	Pressure Drop, psid	Applied Pressure, psi	Corrected Flow, CFM	Discharge Temp., °C
123	0.9	1.3	100	133.5	92
406	0.6	1.7	100	136.4	93
555	1.8	1.6	100	134.6	91
716	2.0	1.8	100	136.4	93
1325	1.8	1.5	100	136.9	93
1660	1.7	1.6	101	139.4	86
2327	1.7		102	139.6	93
2931	1.6		102	140.1	84
3098	1.6		103	140.9	84
332	2.4	2.0	100	130.6	90
451	2.1	1.7	100	135.7	90
613	2.1	1.7	100	135.9	89
920	2.3	1.8	100	136.9	91
1110	3.0	2.4	60	144.2	85
1477	2.5	2.4	60	148.9	81
1804	3.2	2.6	60	147.1	84
1994	3.0	2.6	60	152.5	88
5336	5.4	2.0	100	136.5	82
5454	6.9	2.0	100	135.4	88
5621	5.2	2.0	100	133.3	99

5717	6.5	2.0	100	133.3	94
5911	4.4	2.0	100	135.0	90
6064	6.3	2.1	100	134.6	91
6131	6.7	2.2	100	135.0	97
6270	6.6	2.3	100	137.2	88
6431	6.6	2.0	100	137.2	88
6579	6.3	2.1	100	136.1	93
6886	5.9	2.2	100	137.0	89
7170	5.6	2.2	100	138.4	91
7289	5.1	2.2	100	138.2	88
7646	3.8	2.4	100	136.3	85
8024	4.9	2.3	100	134.6	96

Example 10

Mechanical properties were measured for FM-1 and CONTROL using 1.27 cm thick samples of each filter medium. Burst strength was measured for FM-1 and CONTROL using a TMI Monitor Burst 200 Mullen Burst Tester (available from the Standex Engraving Group of Chicopee, MA), in compliance with TAPPI T403 and ASTM D774 specifications. The burst strength of CONTROL was measured to be 14 - 20 psi. The burst strength of FM-1 was measured to be 37 - 49 psid.

Stress-strain properties of the filter media of the present invention were measured using a Sintech Model M3000W tester, available from the MTS Systems Corporation of Eden Prairie, MN. Stress-strain properties were measured using a 200 lb load cell and a strain rate of 1 inch/min until break. Samples were cut using a dog-bone shape die with neck proportion of 1.5 inches x 0.5 inches. All samples were tested in the axial direction, cross-machine direction, and 45 degrees from machine direction. Unless noted, no differences were observed among the samples cut in different directions.

The elongation at break was 0.44% for CONTROL, while the elongation at break for FM-1 was 10.97%. The tensile strength was determined to be 94.3 psi for CONTROL and 130.5 psi for FM-1. The results of the tensile test are shown in Figure 6. It can be observed that FM-1 has a greater elongation at break as well as superior tensile strength when compared to CONTROL. This result shows the effect on physical properties of using bicomponent fibers instead of the traditional binder resins of the prior art to bind glass fibers in the filter medium.

While the invention has been described in connection with specific embodiments thereof, it will be understood that it is capable of further modifications and this application is intended to cover any variations, uses, or adaptations of the invention following, in general, the principles of the invention and including such departures from the present disclosure as come with known or customary practice 5 within the art to which the invention pertains and as may be applied to the essential features hereinbefore set forth and as follows in scope of the appended claims.

Claims

What is claimed is:

1. A filter medium comprising:
a bicomponent fiber; and
a particle, the particle comprising at least one of a metal oxide, a metal, a ceramic, a zeolite, a carbon, an ion exchange resin, or a nanotube,
wherein the filter medium has a basis weight at least about 500 gram/meter², a permeability of about 0.5 to 200 fpm inclusive, a thickness equal to or greater than 8 millimeters, and a solidity of less than about 25%.
2. The filter medium of claim 1, wherein the bicomponent fiber is about 20 to 95 wt% inclusive of the filter medium.
3. The filter medium of claim 2, further comprising, about 80 to 5 wt% inclusive of a glass fiber having a fiber diameter of about 0.1 to 8.0 microns inclusive and aspect ratio of greater than about 1:100.
4. The filter medium of claim 3 wherein the filter medium has a thickness greater than about 5 centimeters.
5. The filter medium of claim 3 wherein the bicomponent fiber has a diameter of about 5 to 50 micrometers inclusive and a length of about 0.1 to 20 millimeters inclusive.
6. The filter medium of claim 3 wherein the bicomponent fiber has a diameter of about 10 to 20 micrometers inclusive and a length of about 0.2 to 15 millimeters inclusive.
7. The filter medium of claim 3, further comprising a binder.
8. The filter medium of claim 7 wherein the binder is a latex.

9. The filter medium of claim 3 further comprising an inorganic fiber.
10. The filter medium of claim 9 wherein the inorganic fiber comprises a carbon, a metal, a metal oxide, or a combination thereof.
11. The filter medium of claim 3 wherein the particle has an average particle size of 3 millimeters or less.
12. The filter medium of claim 3 wherein an oil carryover is less than about 2.0 ppm after 1000 hours of filtration at 60 psi of air containing oily particles.
13. The filter medium of claim 3 wherein an oil carryover is less than about 3.0 ppm after 4000 hours of filtration at 60 psi of air containing oily particles.
14. The filter medium of claim 3 wherein an oil carryover is less than about 5.0 ppm after 8000 hours of filtration at 60 psi of air containing oily particles.
15. The filter medium of claim 2 further comprising about 80 to 5 wt% inclusive of a first glass fiber having a diameter of less than about 1.0 micron and a second glass fiber having a diameter of more than 1.0 micron.
16. A process to form the filter medium of claim 1, comprising the steps of:
 - blending a first mixture of fibers comprising a bicomponent fiber to form a first aqueous slurry;
 - applying the first aqueous slurry to a support to form a first wet layer;
 - removing sufficient water from the first wet layer to make a first formed layer;
 - blending a second mixture of fibers to form a second aqueous slurry, wherein the composition of the second mixture of fibers differs from the composition of the first mixture of fibers;
 - applying the second aqueous slurry to the first formed layer to form a second wet layer;
 - removing sufficient water to form a second formed layer; and


heating the first and second formed layers to a temperature sufficient to melt one component of the bicomponent fiber.

17. The process of claim 16 wherein the water is removed from the first and second wet layers by a vacuum means.

18. The process of claim 16 wherein the fibers are substantially dried during the heating step.

19. A method of removing an impurity from a fluid stream comprising: contacting a stream containing an impurity with the filter medium of claim 1 comprising a bicomponent fiber, wherein the filter medium has a basis weight at least about 500 gram/meter², a permeability of about 0.5 to 200 fpm inclusive, a thickness equal to or greater than 8 millimeters, and a solidity of less than 25%; and passing the stream through the filter medium such that the impurity is removed from the fluid stream.

FIG. 1

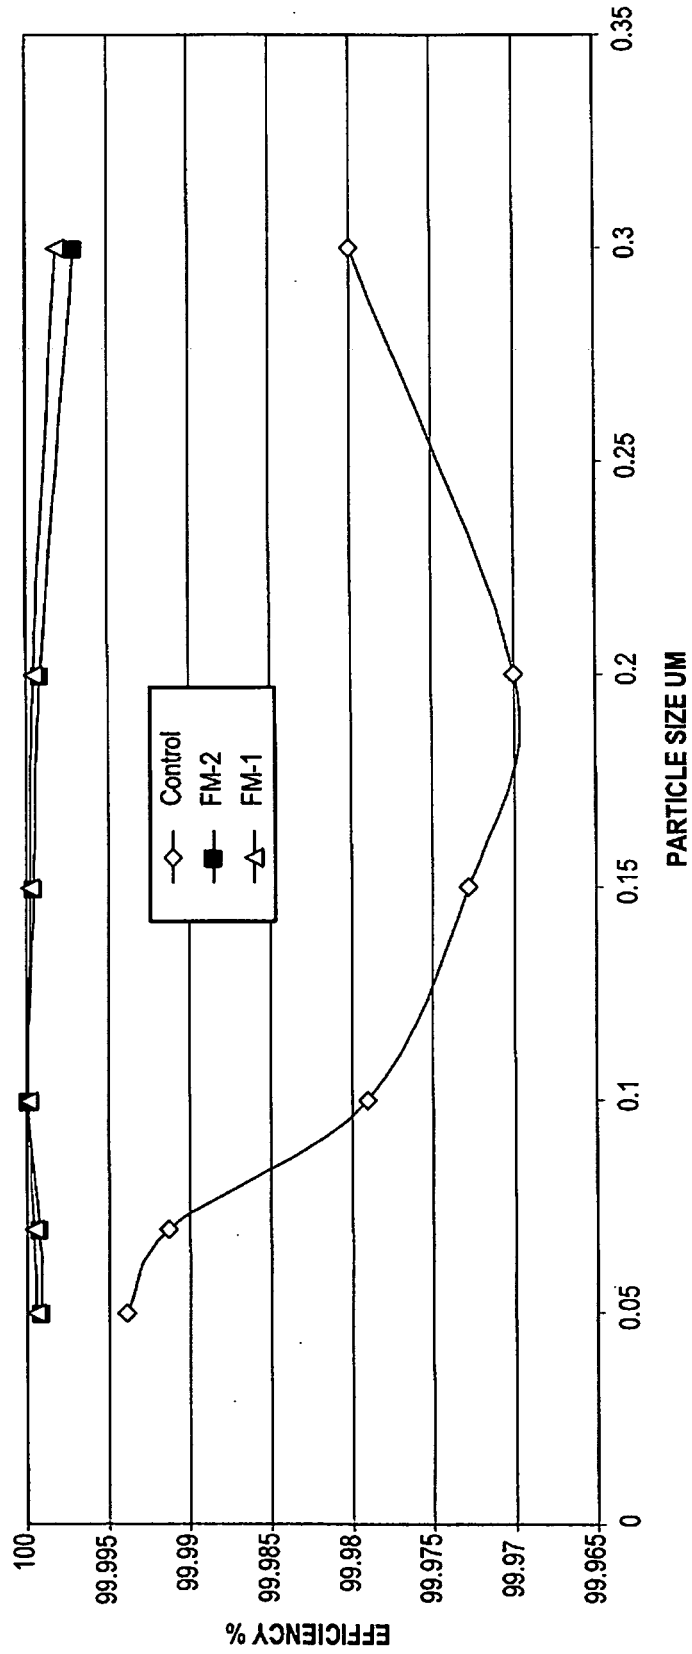

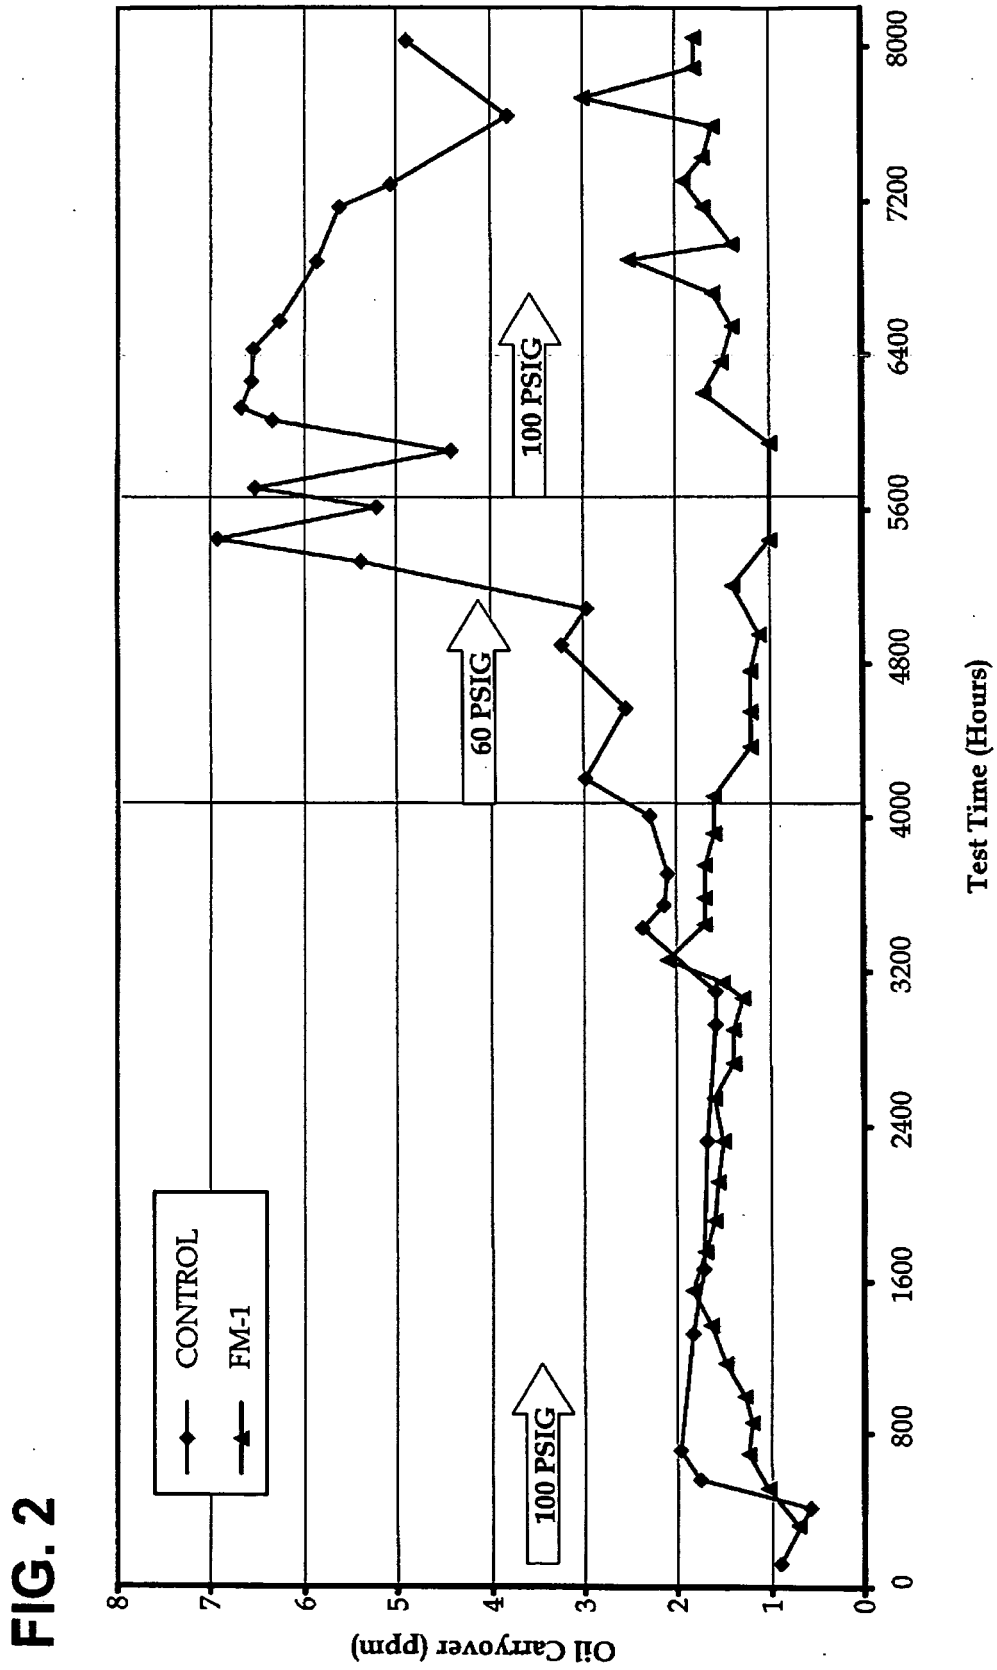


FIG. 2

3/14


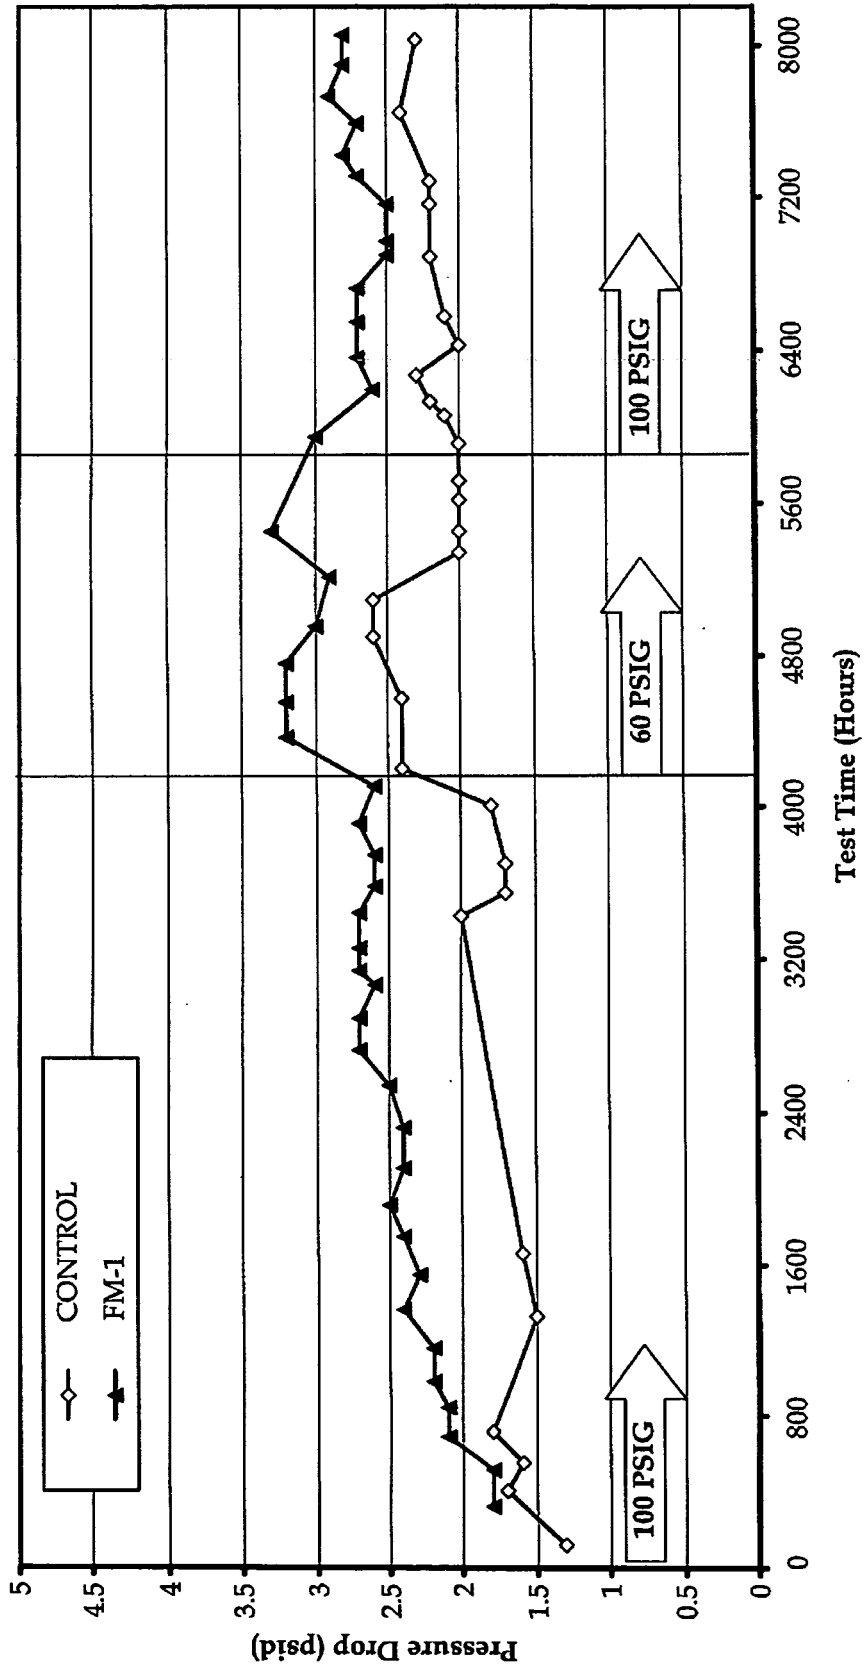


FIG. 3

FIG. 4

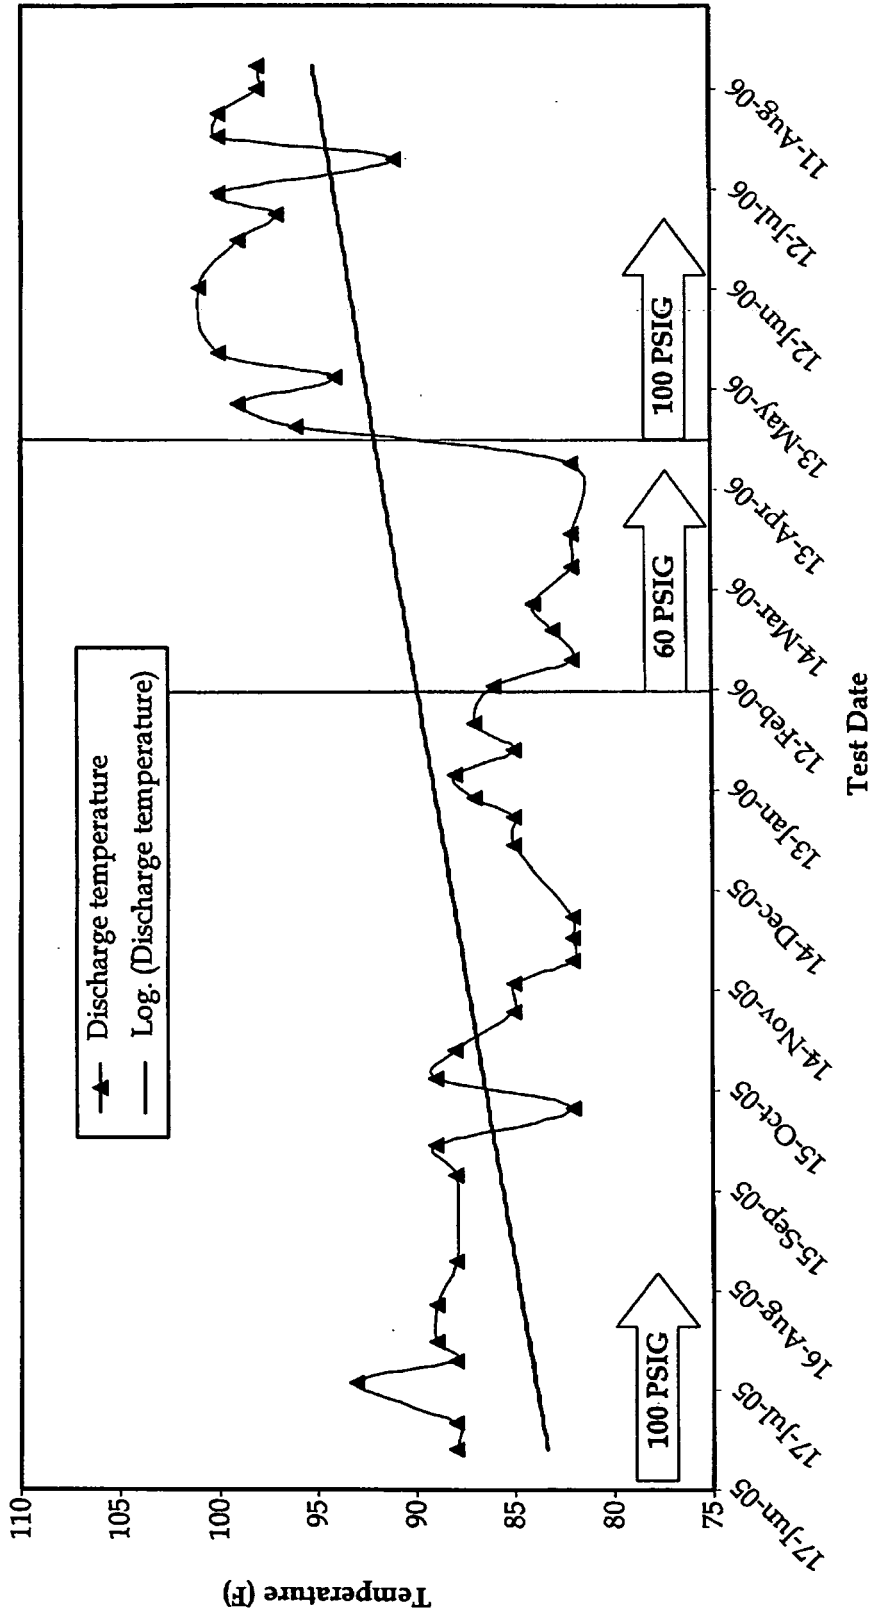

5/14


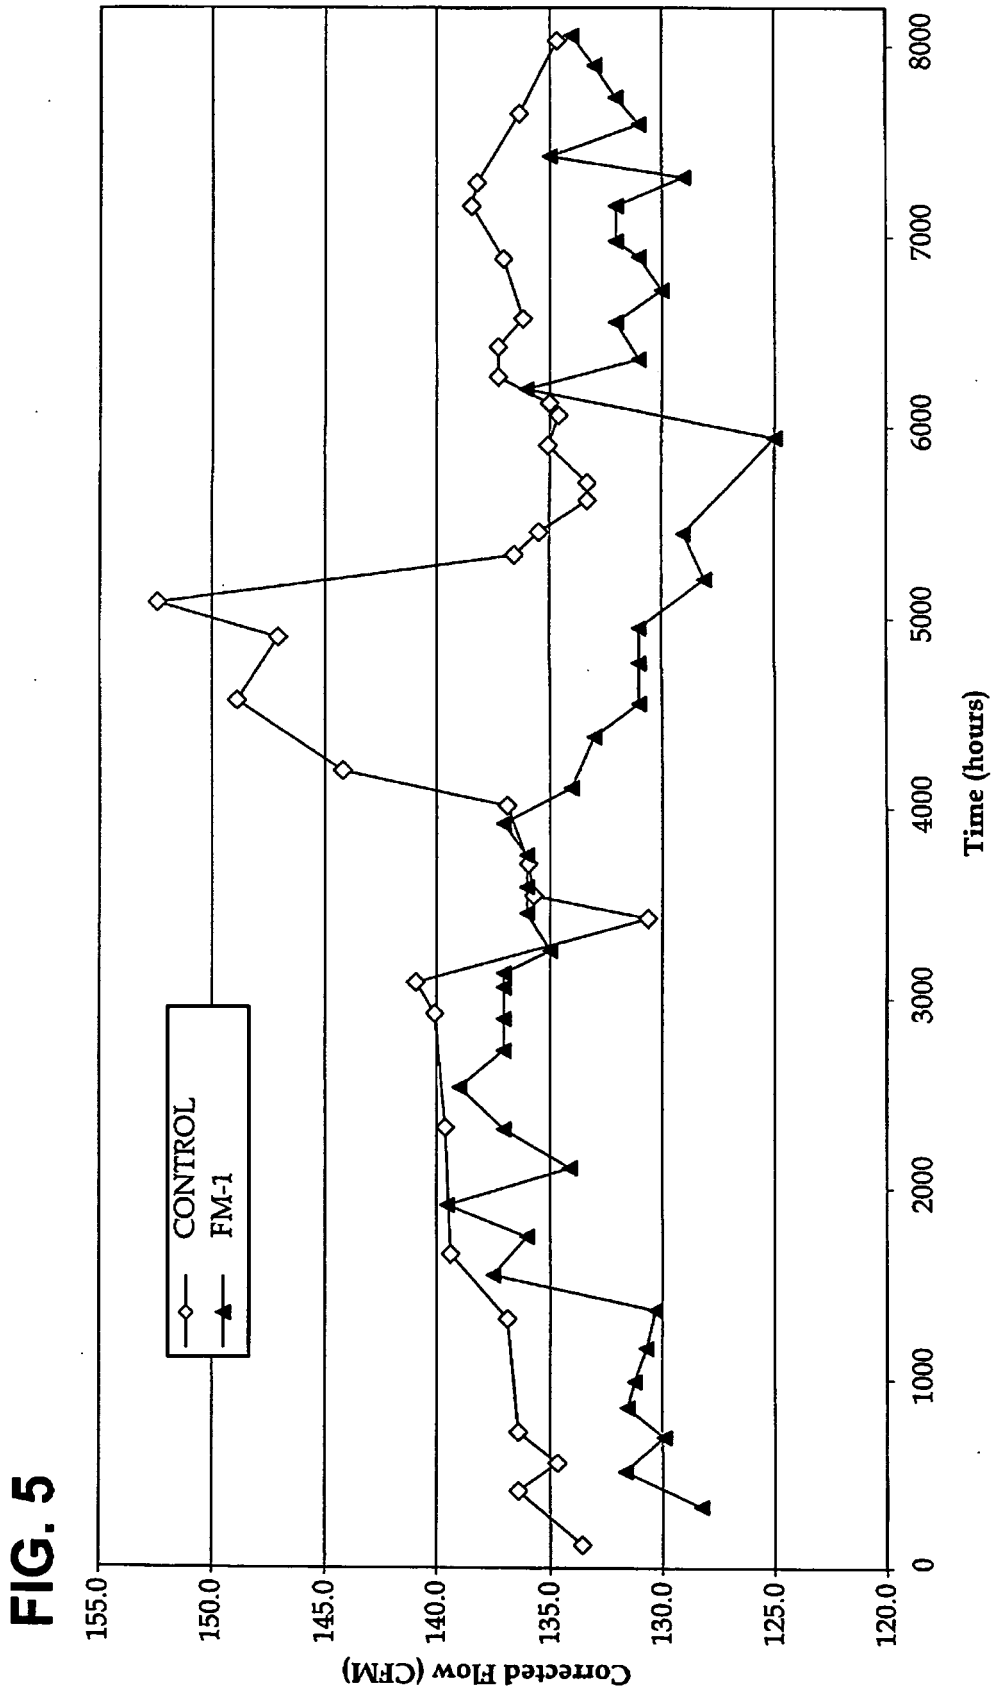


FIG. 5

FIG. 6

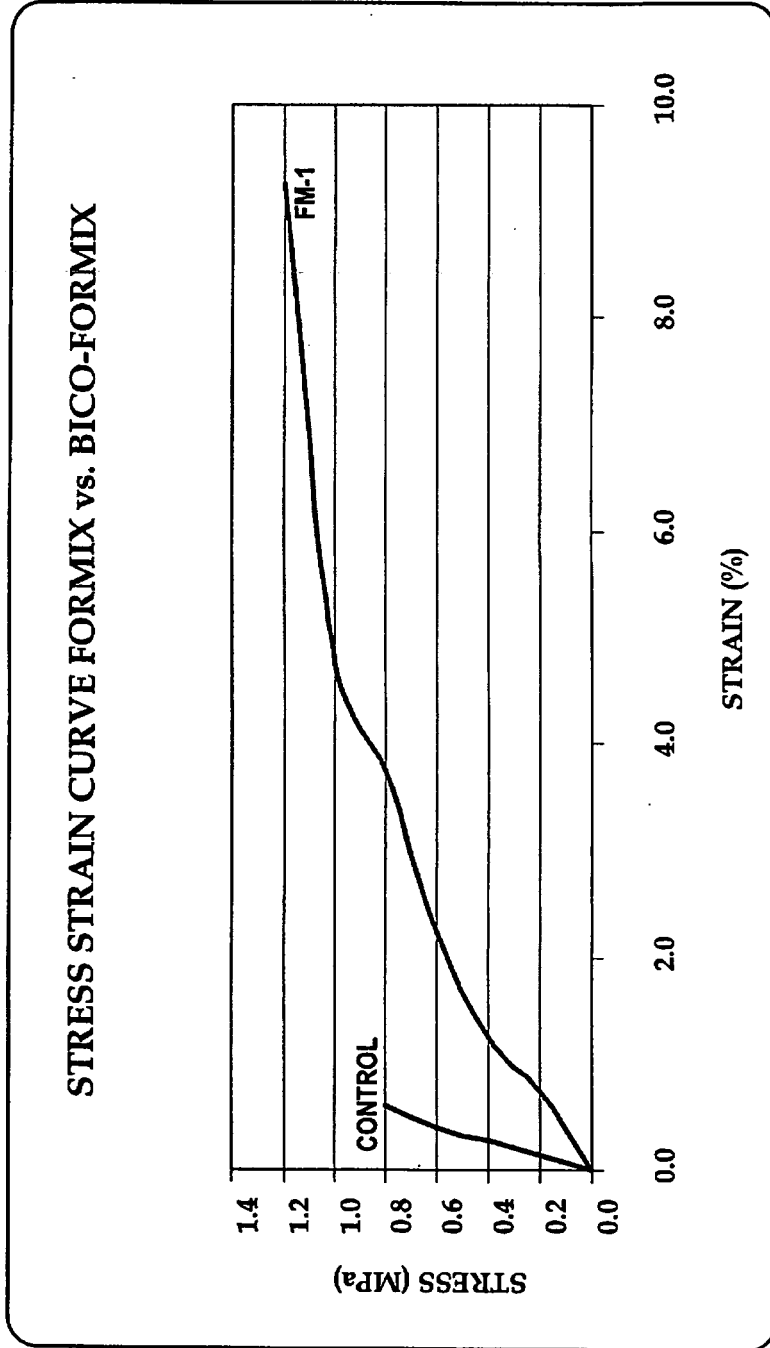

7/14

10

11



FIG. 7A

8/14

20

21

21

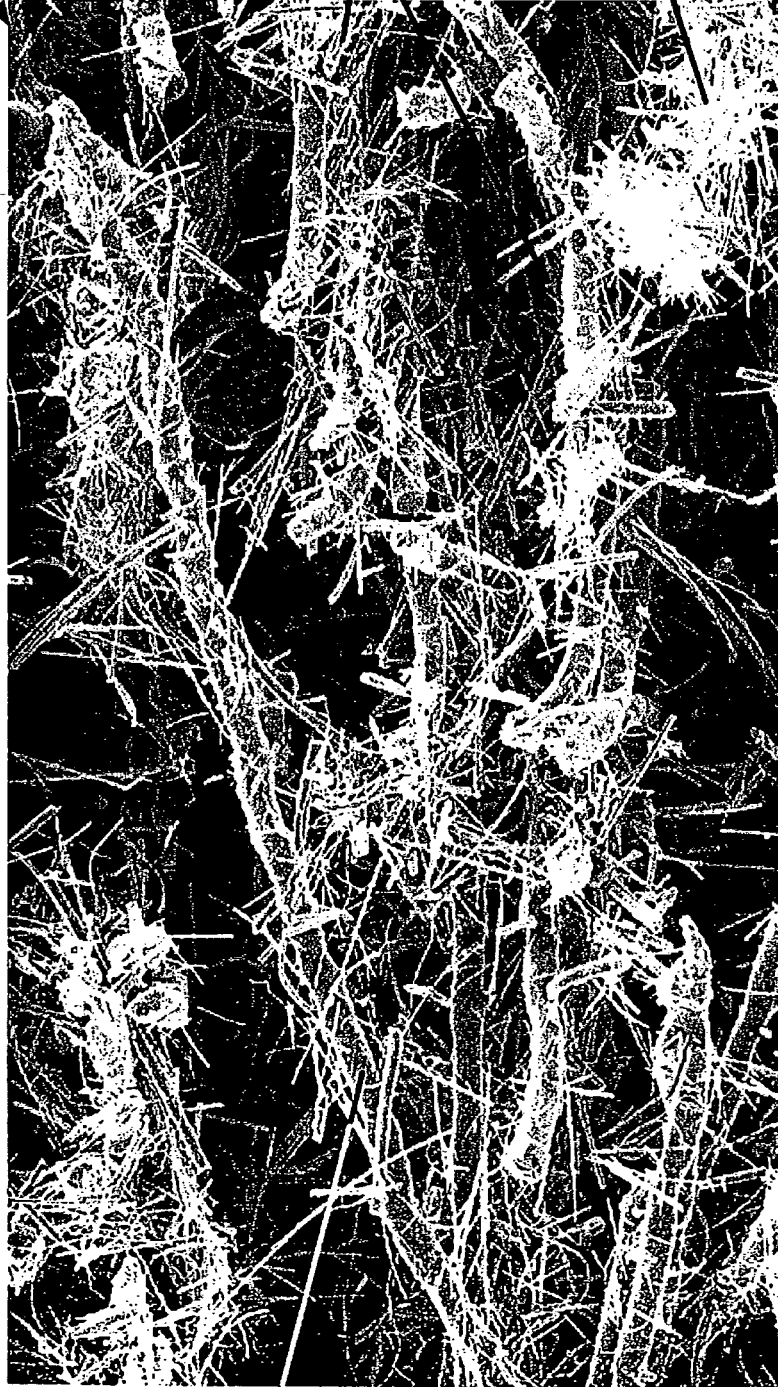


FIG. 7B

22

100 μm

9/14

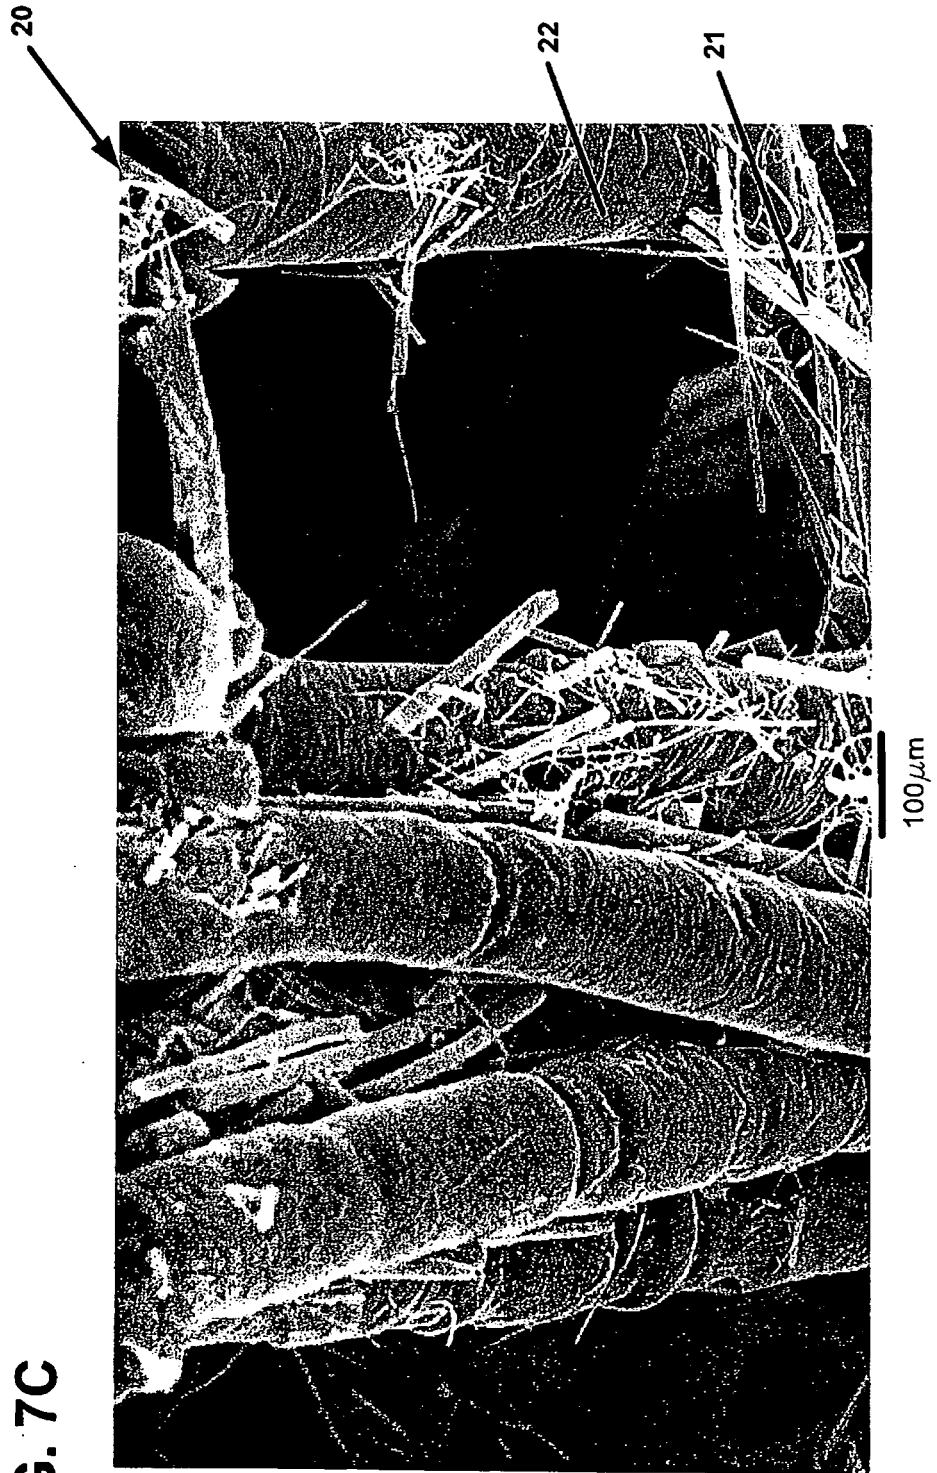


FIG. 7C

10/14

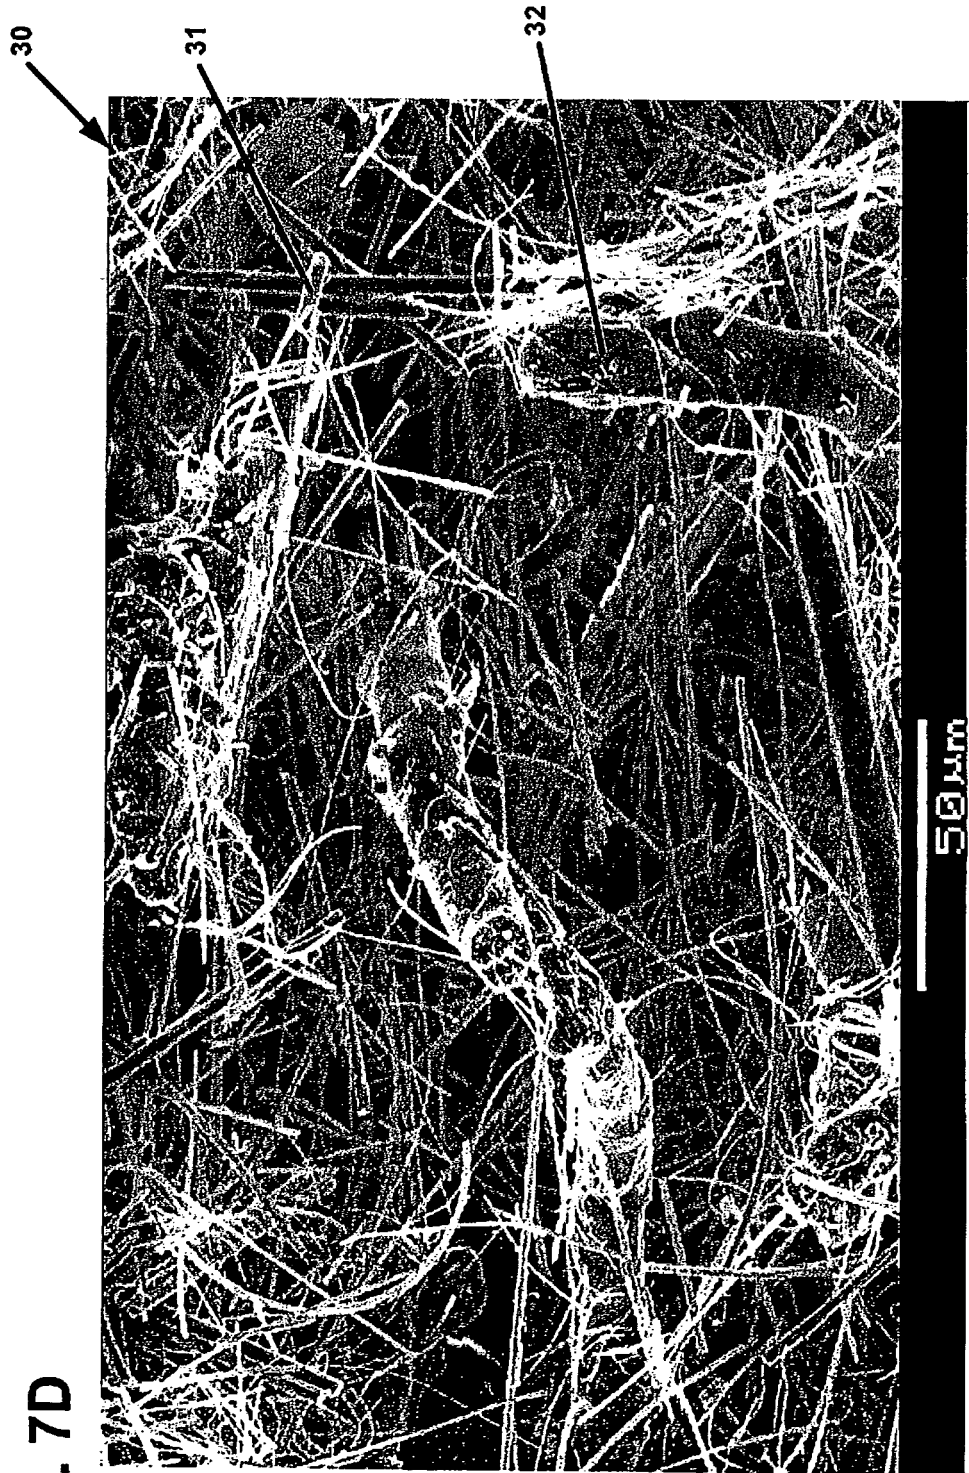


FIG. 7D

11/14

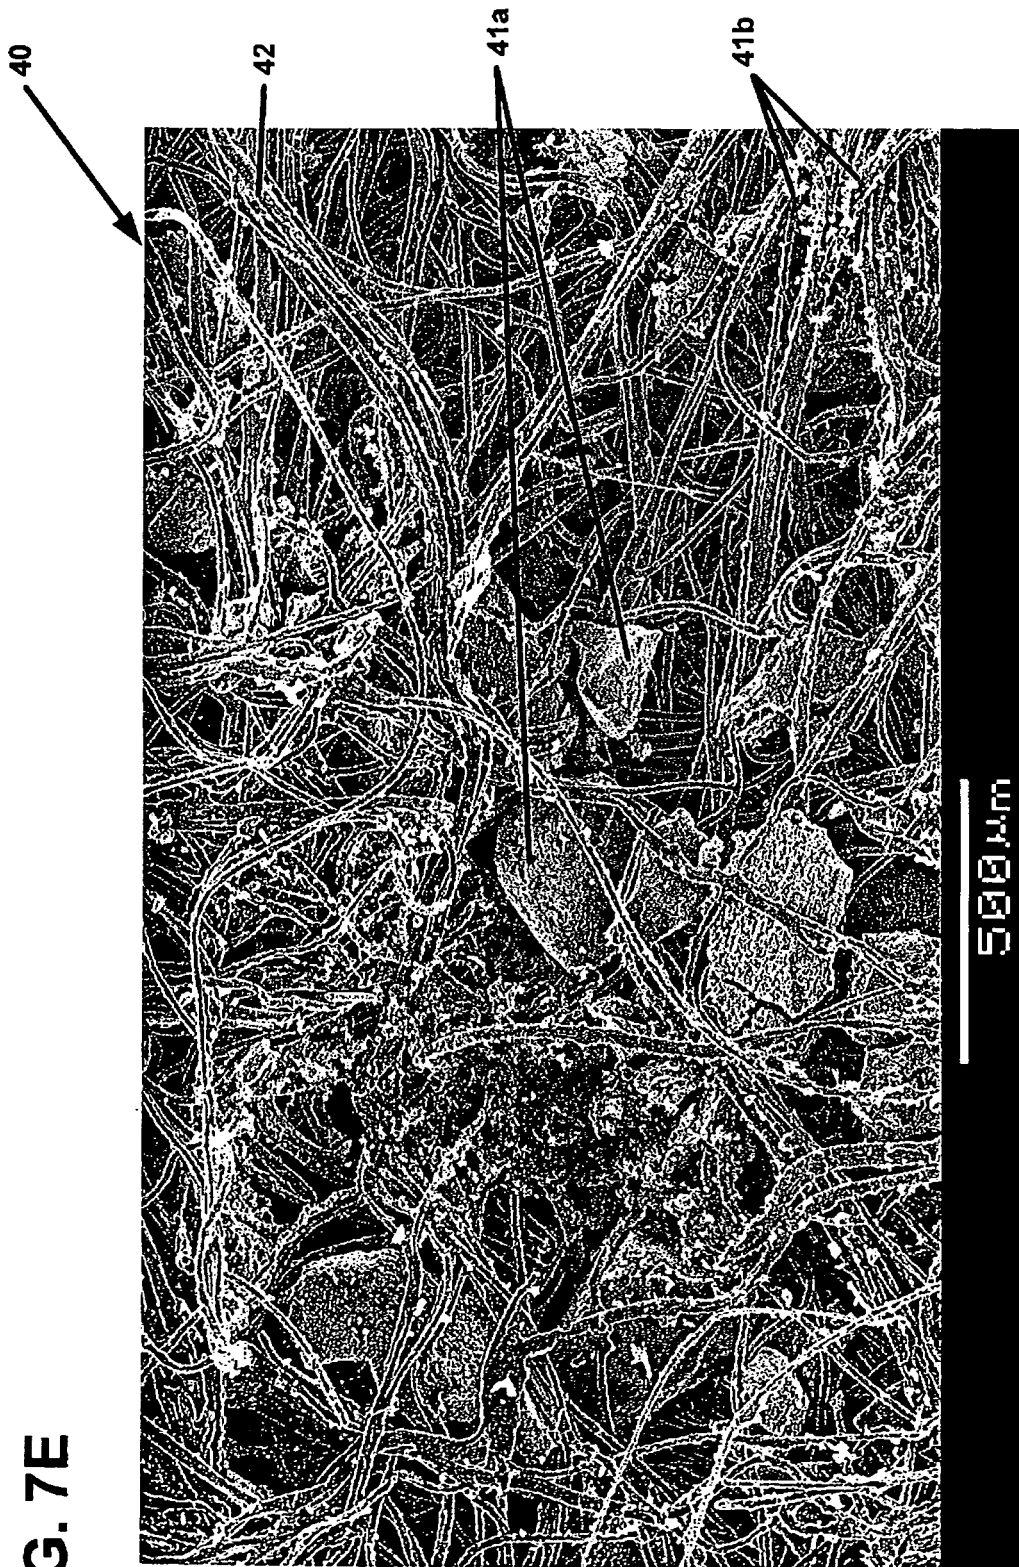


FIG. 7E

12/14



FIG. 8A



FIG. 8B

