

(19)



(11)

EP 2 889 004 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

17.08.2022 Bulletin 2022/33

(21) Application number: **14193643.5**

(22) Date of filing: **18.11.2014**

(51) International Patent Classification (IPC):

A61B 8/08 (2006.01)

(52) Cooperative Patent Classification (CPC):

**A61B 8/485; A61B 8/085; A61B 8/483;
A61B 8/5276; G01S 7/52042; G01S 7/52077;
G01S 15/8993; G01S 7/52022**

(54) MOTION CORRECTION IN THREE-DIMENSIONAL ELASTICITY ULTRASOUND IMAGING

BEWEGUNGSKORREKTUR IN DREIDIMENSIONALER
ELASTIZITÄTSULTRASCHALLBILDGEBUNG

CORRECTION DE MOUVEMENT DANS L'IMAGERIE PAR ULTRASONS D'ÉLASTICITÉ
TRIDIMENSIONNELLE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **04.12.2013 US 201314097189**

(43) Date of publication of application:

01.07.2015 Bulletin 2015/27

(73) Proprietor: **Siemens Medical Solutions USA, Inc.
Malvern, PA 19355 (US)**

(72) Inventors:

- **Fan, Liexiang
Sammamish, 98075 (US)**
- **Schenck, Art
Sammamish, 98075 (US)**

(74) Representative: **Horn Kleimann Waitzhofer**

**Patentanwälte PartG mbB
Ganghoferstraße 29a
80339 München (DE)**

(56) References cited:

**WO-A2-2012/080895 US-A1- 2012 203 108
US-A1- 2013 028 536**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

[0001] The present embodiments related to elasticity imaging. In particular, the present embodiments relate to motion correction in elasticity imaging.

[0002] U.S. Patent Nos 5,107,837, 5,293,870, 5,178,147 and 6,508,768 describe methods to generate elasticity images using the relative tissue displacement between adjacent frames. Strain, strain rate, modulus, or other parameters corresponding to tissue displacement are detected for generating an elasticity image. U.S. Pat.No. 6,558,324 describes methods to represent elasticity using colour coding. Other forms of elasticity imaging include shear and longitudinal wave imaging. Acoustic radiation force imaging also indicates the elasticity of tissue. WO2012/080895 discloses an ultrasound system that performs measurements of tissue stiffness or elasticity using shear waves. US2013/028536 discloses methods for reducing motion artefacts in shear wave images. US2012/203108 discloses an ultrasonic diagnostic apparatus. In order to take displacement other than by pressing on the patient into account a displacement baseline is estimated from the cumulative displacements at all obtained frames

[0003] Elasticity imaging relies on differences in compression or tissue response over time to stress. Tissue deformation parameters, such as longitudinal and shear strain, or shear wave propagation parameters are secondary order estimates from phase of displacement information. Given a period over which data is collected, the elasticity imaging is susceptible to motion artefacts. It is a challenge to avoid displacement from sources other than the compression or stress for measuring elasticity. The patient may move, the transducer probe may move, and anatomy may move. The result is low quality, biased, low repeatability elasticity imaging.

[0004] For two-dimensional elasticity imaging, motion correction is applied to frames of echo data prior to elasticity estimation. The motion correction may remove some undesired distortions, but does not deal with out-of-plane motion.

BRIEF SUMMARY

[0005] By way of introduction, methods, instructions and systems for elasticity ultrasound imaging are described. Three-dimensional elasticity imaging is provided. Motion in three-dimensions due to sources other than the stress or compression for elasticity imaging is found from anatomical information. Objects less likely to be subject to the stress for elasticity imaging and/or likely to be subject to undesired motion are used to find the undesired motion. This anatomical motion is accounted for in estimating the elasticity, such as removing the motion from echo data used to estimate elasticity or subtracting out the motion from motion generated as part of estimat-

ing elasticity.

[0006] In a first aspect, a method according to claim 1 is provided for elasticity ultrasound imaging.

[0007] In a second aspect, a non-transitory computer readable storage medium has stored therein data representing instructions executable by a programmed processor according to claim 15 for elasticity ultrasound imaging is provided.

[0008] In a third aspect, a method according to claim 1 is provided for elasticity ultrasound imaging.

[0009] The present invention is defined by the following claims, and nothing in this section should be taken as a limitation on those claims. Further aspects and advantages of the invention are discussed below in conjunction with the preferred embodiments and may be later claimed independently or in combination.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The components and the figures are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention. Moreover, in the figures, like reference numerals designate corresponding parts throughout the different views.

Figure 1 is a flow chart diagram of one embodiment of a method for elasticity ultrasound imaging;

Figure 2 is a graph showing two example displacement profiles as a function of time; and

Figure 3 is a block diagram of one embodiment of a system for elasticity ultrasound imaging.

DETAILED DESCRIPTION OF THE DRAWINGS AND PRESENTLY PREFERRED EMBODIMENTS

[0011] Multiple volumes of echo data are acquired separately. The volumes represent a three-dimensional region of the patient while changing due to stress. The stress may be from an anatomical source, acoustic radiation force, or the transducer probe. Each voxel of the volumes is classified as an anatomical landmark or not an anatomical landmark. Landmark voxels are grouped, and the resulting anatomical information is tracked for motion to represent the undesired motion. The landmark motion is applied to the non-landmark voxels. In one approach, the landmark motion of the voxels is used to suppress motion caused by reverberation, scattering, or other undesired motion in the echo data, and elasticity for the different voxels is estimated from the motion corrected data. In another approach, motion for each of multiple voxels is estimated as part of elasticity calculation, and the anatomical motion is subtracted from the estimated motions for the voxels.

[0012] Figure 1 shows a method for elasticity ultrasound imaging. In particular, three-dimensional elasticity imaging is performed by an ultrasound system. The response of tissue to compression or acoustic radiation force is measured. A processor removes or reduces mo-

tion other than caused by the stress (e.g., caused by compression or a wave resulting from the acoustic radiation force). The motion being removed is based on anatomic information representing structure less susceptible to the stress. The result is elasticity estimation with less undesired motion. The motion used for elasticity imaging has fewer motion artifacts. Since the elasticity imaging is performed for three-dimensions, the motion is not susceptible to out-of-plane errors in motion estimation.

[0013] Additional, different or fewer acts may be provided in the method of Figure 1. For example, one, both, or none of acts 40 and 42 are performed. As another example, the display act 44 is optional. The acts are performed in the order described or shown, but other orders may be provided.

[0014] In act 30, echo data is acquired sequentially for a volume of tissue subjected to different amounts of stress at different times. The echo data is acquired for a three-dimensional region. Frames or sets of data represent the same volume at different times. Any sampling of the volume may be used, such as a sector, Vector®, or linear sampling in three-dimensions. Scan lines responsive to a given transmission may be distributed in both azimuth and elevation. The scan pattern may sequentially cover scan lines distributed in azimuth and elevation. Alternatively, sequential scanning along planes separated in elevation is used to assemble data representing the volume.

[0015] The data is maintained in an acquisition format or converted (e.g., interpolated) to a regular three-dimensional grid. The data represents locations distributed along three axes, such as locations NxMxO where N, M, and O are integer numbers of locations along different axes and are each greater than one. The data for a location is a voxel. The volume of the patient is represented by frames or sets of voxels.

[0016] The acquired data represents the volume at different times. The scans to acquire the data are performed over different periods. Different amounts of stress are applied at the different periods. For example, the transducer probe is pressed against the patient by different amounts. As another example, a longitudinal or shear wave is generated with acoustic force radiation, a thumper, anatomy (e.g., heart or diaphragm), or other source. The wave passing through locations in the volume causes a variance in stress over time. Sets or frames of data are acquired over the periods or for times corresponding to the acquisition periods, but within a tissue response period. The tissue responds to the change in stress. The scanning is performed to acquire data representing the volume at different times while the tissue responds to the change. In alternative embodiments, the stress is repetitively applied, and frames are acquired at different amounts of time relative to the initiation of the stress.

[0017] In one embodiment, acoustic radiation force is used. An acoustic excitation is transmitted into a patient. The acoustic excitation acts as an impulse excitation for

causing displacement. For example, a 400 cycle transmit waveform with power or peak amplitude levels similar or lower than B-mode transmissions for imaging tissue is transmitted as an acoustic beam. In one embodiment, the transmission is a shear wave generating sequence applied to the field of view. Any acoustic radiation force impulse (ARFI) or shear wave imaging sequence may be used.

[0018] The transmission is configured by power, amplitude, timing, or other characteristic to cause stress on tissue sufficient to displace the tissue at one or more locations. For example, a transmit focus of the beam is positioned near a bottom, center of the field of view or region of interest (ROI) to cause displacement throughout the field of view. The transmission may be repeated for different sub-regions or ROIs.

[0019] The excitation is transmitted from an ultrasound transducer. The excitation is acoustic energy. The acoustic energy is focused, resulting in a three-dimensional beam profile. The excitation is focused using a phased array and/or mechanical focus. The excitation is transmitted into tissue of a patient.

[0020] The impulse excitation generates a longitudinal or shear wave at a spatial location. Where the excitation is sufficiently strong, a wave is generated. The shear wave propagates through tissue more slowly than the longitudinal wave propagates along the acoustic wave emission direction, so the type of wave may be distinguished by timing and/or direction. The difference in timing is used to isolate the shear wave from a longitudinal wave or vice versa. The wave propagates various directions, such as a direction perpendicular to the direction of the applied stress. The displacement of the wave is greater at locations closer to the focal location at which the wave is generated. As the wave travels, the magnitude of the wave attenuates.

[0021] In another embodiment, a user applies pressure axially while maintaining a transducer at a location. Ultrasound scanning is performed while applying different amounts of pressure with the transducer against the patient. In yet other embodiments, the stress caused by anatomy is used, such as heart motion.

[0022] Regardless of the form of stress, the echo data is acquired at different times to determine the displacement of the tissue in response to the change in stress. An ultrasound system scans the three-dimensional region of the patient while the region is subjected to the change in tissue deformation caused by the variance of stress (e.g., different pressures and/or wave).

[0023] The displacement is detected with ultrasound scanning. Ultrasound data is obtained. At least some of the ultrasound data is responsive to the wave or pressure. A region, such as a region of interest, entire field of view, or sub-region of interest, is scanned with ultrasound. For shear and longitudinal waves, the region is monitored to detect the wave. The echo data represents the tissue when subjected to different amounts of pressure at different times. The region is any size, such as 5x5 mm in

lateral and 10 mm in axial. For example, B-mode scans are performed to detect tissue displacement. Doppler, color flow, or other ultrasound mode may be used to detect displacement.

[0024] For a given time, ultrasound is transmitted to the tissue or region of interest. Any now known or later developed displacement imaging may be used. For example, pulses with 1-5 cycle durations are used with an intensity of less than 720 mW/cm². Pulses with other intensities may be used. The scanning is performed for any number of scan lines. For example, eight or sixteen receive beams distributed in three-dimensions are formed in response to each transmission. After or while applying stress, B-mode transmissions are performed repetitively along a single transmit scan line and receptions along adjacent receive scan lines. In other embodiments, only a single receive beam or other numbers of receive beams are formed in response to each transmission. Additional transmit scan lines and corresponding receive line or lines may be used. Any number of repetitions may be used, such as about 120 times.

[0025] The B-mode intensity may vary due to displacement of the tissue over time. For the monitored scan lines, a sequence of data is provided representing a time profile of tissue motion resulting from the stress. Echoes or reflections from the transmission are received. The echoes are beamformed, and the beamformed data represents one or more locations. To detect the displacement, ultrasound energy is transmitted to the tissue undergoing displacement and reflections of the energy are received. Any transmission and reception sequence may be used.

[0026] By performing the transmitting and receiving multiple times, data representing the three-dimensional region at different times is received. The transmission and reception are performed multiple times to determine change due to displacement caused by the change in stress. By repetitively scanning with ultrasound, the position of tissue at different times is determined.

[0027] The acquired echo or ultrasound data is information used to estimate stiffness of tissue, such as strain. The data is responsive to compression force or other stress applied to the tissue being scanned.

[0028] In act 32, an anatomical landmark of the three-dimensional region is identified. The ultrasound data representing the volume of the patient at the different times represents at least one anatomical landmark. The volume includes soft tissue for which elasticity imaging is being performed. The soft tissue is part of an organ (e.g., liver tissue), muscle, skin, fat, breast, or other tissue with greater flexibility than bone and less fluid than blood or liquid. The anatomical landmark may be a tumor, cyst, or other structure in anatomy of the patient that is harder or stiffer than soft tissue, so less susceptible to the stress. The anatomical landmark may be tissue spaced from a region of interest so that less or greatly attenuated stress is applied to the tissue.

[0029] The anatomical landmark is chosen to be less susceptible to the stress. For example, the anatomy is

stiffer and/or subject to a greater source of motion than the soft tissue being scanned for elasticity imaging. The anatomy is subject more to undesired motion than the motion caused by the stress. Any anatomy may be used, but anatomy with a greater response to undesired motion and/or lesser response to motion caused by the stress may be used to remove motion artifacts from the elasticity imaging. A specific landmark may be part of an anatomic structure or may be the anatomic structure itself. One or more anatomic structures may be used.

[0030] Any now known or later developed approach for detecting anatomy from ultrasound data may be used. For example, a processor applies edge detection, motion detection, region growing, thresholding, a machine-trained classifier, or image processing to locate specific anatomy. Filtering may be used, such as directional filtering applied to low pass filtered information to find a linear diaphragm.

[0031] The identification is performed automatically by a processor. In other embodiments, user assistance or use identification is provided. The user may confirm a processor identified anatomy, indicate a seed point for the anatomy, or trace the anatomy.

[0032] The anatomical landmark is represented by one or more voxels. For example, a bone or diaphragm is represented by a plurality of different voxels. The voxels are classified as representing the anatomy or not representing the anatomy. For example, all locations not identified as anatomy are treated as not representing the anatomy. As another example, a classifier outputs labels for each voxel as representing the anatomy or not.

[0033] Where more than one voxel is found to represent the anatomy, the voxels may be grouped. Different anatomy may be grouped separately or as a single group.

The voxels classified as representing anatomy are grouped by labeling, segmenting, or other process.

[0034] In act 34, the anatomy is tracked between different times. The frames of echo data representing the volume at different times are used to track the anatomy. The motion of the anatomical landmark or group of anatomy voxels are tracked through a sequence of two or more sets of data. The displacement or change in position over time or between times is determined.

[0035] The tracking is in three-dimensions. A three-dimensional displacement vector is found. The vector is for a global motion. An average, overall, or other global indication of the motion for the volume is found. The grouped locations are used to find motion of the volume, such as motion caused by the patient, the transducer, reverberation, or scattering. The displacement is a translation and/or rotation in any number of degrees of freedom. The motion may be rigid or non-rigid (e.g., affine). The global motion may account for local distortions, such as twisting, compression, and/or stretching. In other embodiments, each voxel, separate anatomy, or other separate tracking is performed for different anatomy.

[0036] Any now known or later developed tracking may be used. In one embodiment, the anatomy is identified

in each set of data. The displacement of the anatomy between sets is determined by any translation and/or rotation between sets. In other embodiments, the anatomy is identified in one frame. The identified voxels are correlated with all the voxels of another frame to find the displacement. Any correlation or other similarity measure (e.g., sum of absolute differences) are used. Different possible displacements are tested and the one with the greatest similarity is selected.

[0037] The tracking provides a transform or displacement field. The displacement for each voxel of the identified anatomy (e.g., grouped anatomy voxels) is represented in the field or transform. For rigid motion, the same displacement is provided for each voxel. For non-rigid motion, different voxels have different three-dimensional displacement. A three-dimensional displacement vector is provided for each of the voxels of the anatomical landmark or landmarks.

[0038] In act 36, the elasticity is estimated. An elasticity value is calculated for each of different locations in the volume. Elasticities are calculated for all the voxels or just a sub-set of the voxels. For example, elasticity is calculated for each of the voxels not classified as an anatomical landmark or just voxels in a region of interest. The elasticity of tissue in the volume is estimated.

[0039] Elasticity or elastography are general terms that include various types of parametric images of tissue stiffness, such as strain, strain rate, modulus or relaxation, and various methods of mechanically generating them. Strain images show tissue relative stiffness and deformation. Strain rate images display the first time derivative of the strain. Local strain rate may indicate cardiac muscle contractility from which is inferred the muscle health and condition. Modulus images (e.g., Young's modulus) may be generated when the strain image or strain rate image is normalized by and combined with stress measurements. One method is to measure the pressure at the body surface with sensors attached to the transducer. The stress field pattern is then extrapolated internally to the points (i.e., pixels or voxels) of measured strain. Young's modulus is defined as stress divided by strain. Local modulus values may be calculated and those numerical values are converted to gray scale or color values for display. In strain (e.g., shear) imaging, local three-dimensional displacements are measured and the numerical displacement, velocity or other values are converted to gray scale or color values for display. The direction of strain may be mapped to color or other display characteristic.

[0040] Strain images may be generated with manual palpation, external vibration sources, inherent tissues motion (e.g., motion due to cardiac pulsations, or breathing) or acoustic radiation force imaging (ARFI). ARFI produces strain images or produces relaxation images. Relaxation images may be displayed parametrically in similar fashion to strain and modulus images. The parametric images are generated with four (e.g., dynamic volumetric) dimensional acquisition and imaging. In one embod-

iment, any one or more of the methods or systems disclosed in U.S. Patent Nos. 5,107,837, 5,293,870, 5,178,147, 6,508,768 or 6,558,324 are used to generate elasticity frames of data or images with a three-dimensional scan pattern (e.g., scan lines spaced apart in azimuth and elevation). Any now known or later developed elasticity estimation may be used.

[0041] In one embodiment, the elasticity is estimated from the displacement over time of the tissue. The displacement is detected for each of multiple spatial locations. For example, the velocity, variance, shift in intensity pattern (e.g., speckle tracking), or other information is detected from the received data as the displacement between two times. An ongoing or sequence of displacements may be detected for each of the locations.

[0042] In one embodiment using B-mode data, the data from different scans is correlated as a function of time. For each depth or spatial location, a correlation over a plurality of depths or spatial locations (e.g., kernel of 64 depths with the center depth being the point for which the profile is calculated) is performed. For example, a current set of data is correlated multiple times with a reference set of data. The location of a sub-set of data centered at a given location in the reference set is identified in the current set. Different relative translations and/or rotations between the two data sets are performed.

[0043] The reference is a first or other set of data or data from another scan. The reference set is from before the stress, but may be from after the stress. The same reference is used for the entire displacement detection, or the reference data changes in an ongoing or moving window.

[0044] The correlation is three-dimensional. The translation is along three axes with or without rotation about three or fewer axes. The level of similarity or correlation of the data at each of the different offset positions is calculated. The translation and/or rotation with a greatest correlation represents the motion vector or offset for the time associated with the current data being compared to the reference.

[0045] Any now known or later developed correlation may be used, such as cross-correlation, pattern matching, or minimum sum of absolute differences. Tissue structure and/or speckle are correlated. Using Doppler detection, a clutter filter passes information associated with moving tissue. The velocity of the tissue is derived from multiple echoes. The velocity is used to determine the displacement towards or away from the transducer. Alternatively, the relative or difference between velocities at different locations may indicate strain or displacement.

[0046] Figure 2 shows two example displacement profiles of displacements for a voxel. The amplitude in distance of the motion vector over time from the reference data is shown. The period of analysis is over about 8 milliseconds, but may be longer or shorter (e.g., 12 milliseconds at a 4.8 kHz sample rate). Other displacement profiles are possible. Any number of locations may be measured for displacement, such as measuring every

millimeter in the 10x5 mm region of interest. Displacement for each location and for each sample time is measured. This displacement data represents a profile of amplitude as a function of time for a location. Similar profiles are calculated for other locations.

[0047] The displacements over time and/or space are used for calculation. In one embodiment, the displacements for different depths are combined, leaving displacements spaced in azimuth and elevation. For example, the displacements for a given scan line or lateral location are averaged over depth. Alternatively to averaging, a maximum or other selection criterion is used to determine the displacement for a given lateral location. Displacements for only one depth may be used. Displacements for different depths may be used independently.

[0048] Elasticity is estimated from the displacement profile. In one embodiment, the peak or maximum amplitude in the profile is determined. Based on a distance of the voxel from the source of the stress for wave-based elasticity, a difference in time between application of the stress and the peak amplitude indicates a velocity. A difference in velocity between locations is used as elasticity. In an alternative approach, the displacement profiles from different locations are correlated to find a delay between the locations. This phase shift may be used to calculate the velocity between the locations associated with the correlated profiles.

[0049] In embodiments using an external or non-focused source of pressure, a displacement between a frame associated with stress and one without is calculated. The displacement without a temporal profile may be used as the elasticity. Multiple displacements for a given location due to different levels of stress may be averaged or combined.

[0050] In other embodiments, analytic data is calculated from the displacement profile and phase shift is used to determine the elasticity. A difference in phase over time of the displacements of different voxels or a zero-crossing of the phase for a given voxel indicates a velocity. The velocity may be used as the or to estimate the elasticity.

[0051] In act 38, the displacement of the anatomy is accounted for in the estimation of the elasticities in act 36. The elasticity values are a function of the correction for undesired motion. The undesired motion is indicated by the displacement or motion of the anatomy. The motion field, motion value, transform, or other indicator of motion of the anatomic landmark is used in the estimation of the values for elasticity to reduce motion artifacts or other distortion caused by undesired motion (i.e., motion other than caused by the stress for elasticity imaging).

[0052] The anatomic motion is based on voxels representing anatomy. The elasticity values are estimated for those same voxels, other voxels (non-anatomical landmark soft tissue), or both. For the anatomy voxels, the three-dimensional motion vector of the anatomy is known from act 34. For other voxels, the anatomic motion is

used. For a single global motion, the global motion is applied to all of the voxels. Where a field or transform of different motions (e.g., non-rigid) is provided for the voxels representing anatomy, the anatomy motion is interpolated, extrapolated, modeled, or otherwise determined from the anatomy motion of the anatomy voxels for the other voxels. For example, the motion field is fit to a model for the relevant volume of the patient, and the model provides motion for the other, soft tissue voxels. The model fitting may be used to determine motion for other times as well as other locations. As another example, a nearest neighbor or extrapolation from the nearest four, six, or other number of neighboring anatomy voxels is used. The undesired motion represented by anatomic motion is expanded to the voxels not representing the anatomical landmark used to determine the undesired motion. Since the motion is a three-dimensional vector with or without rotational components, a three-dimensional expansion (e.g., interpolation) is used.

[0053] Acts 40 and 42 indicate two approaches for accounting for the anatomy displacement. One or both approaches may be used. For example, part of the undesired motion (e.g., some but not all dimensions and/or part of but not all of the amplitude of the motion is corrected in one approach and the remaining in the other). In other embodiments, a different approach or approaches are used.

[0054] In act 40, the displacement caused by the anatomy motion is suppressed in the ultrasound or echo data prior to calculating the elasticity values and prior to calculating displacements. Prior to determining the displacement caused by the change in stress over time, the anatomy motion is suppressed. One set of ultrasound data is motion corrected relative to another set for the voxels. The undesired aspect of the motion, as indicated by the motion based on the anatomic landmark, is removed from the echo data prior to calculating the displacement of tissue for each voxel for elasticity imaging. Voxels are offset to account for the undesired motion so that the locations represented by the voxels are aligned other than motion caused by the stress. For example, reverberation or scattering effects are included in the motion tracking of the anatomy, so correction for anatomical motion removes some of the effects of reverberation or scattering.

[0055] Any motion correction may be used. The echo data may be filtered with a spatial translation and/or rotation operation. The inverse of the anatomy motion or motion field is applied to adjust a later set of data to an earlier set of data. Conversely, the motion is added to the earlier set of data to adjust to the later set. Interpolation or nearest neighbor approaches may be used to determine echo data values in a regular grid after motion correction. The displacements and elasticity are calculated from the motion corrected echo data.

[0056] In act 42, the motion correction is a subtraction of motion from motion estimated for the elasticity imaging. For example, the displacement of a voxel over time

is calculated (see Figure 2). The motion of a given voxel for elasticity estimation is determined as a total motion. This displacement over time is represented by a sequence of three-dimensional vectors. Similarly, a sequence of three-dimensional vectors representing the motion of the anatomy over time or motion derived from the anatomy motion (e.g., for non-anatomy voxels) is provided for the voxel. By subtracting the anatomy-based motion from the calculated displacements for elasticity imaging, the undesired motion information is removed from the displacements. A three-dimensional vector subtraction is performed. Operations other than subtraction may be used to remove the undesired motion from the motion estimated for elasticity imaging. The elasticity is then estimated from the corrected displacements.

[0057] In act 44, an elasticity image is generated. After accounting for the undesired motion, as reflected by the displacement of the anatomy, elasticity values for different voxels are estimated in act 36. These elasticities are mapped to image values for displaying an elasticity image. Any now known or later developed elasticity imaging may be used. For example, a shear wave, longitudinal wave, strain, or other image is generated. One image or a sequence of images is generated.

[0058] Since the elasticities represent voxels or different locations in a volume, two or three-dimensional imaging may be used. For two-dimensional imaging, elasticity values along a user or processor defined plane are extracted and used to generate the image. Multi-planar reconstruction may be used. For three-dimensional imaging, any rendering technique may be used, such as maximum intensity projection. Alpha blending or other approaches may be used. The volume is rendered to a two-dimensional display. A three-dimensional representation of the elasticity in the three-dimensional region is generated. Animation may be added by shifting the perspective for the rendering, allowing the user to view the volume from different directions. The more opaquely rendered stiff regions may be better appreciated by animation of the view.

[0059] The elasticity image is displayed alone. Alternatively, a B-mode or other image representing the same region or a different field of view is displayed adjacent to the elasticity image. In another alternative embodiment, the elasticity image is combined with or overlaid on the B-mode image.

[0060] Figure 3 shows one embodiment of a system 10 for three-dimensional elasticity ultrasound imaging. The system 10 implements the method of Figure 1 or other methods. The system 10 includes a transmit beamformer 12, a transducer 14, a receive beamformer 16, an image processor 18, a display 20, and a memory 22. Additional, different or fewer components may be provided. For example, a user input is provided for user interaction with the system.

[0061] The system 10 is a medical diagnostic ultrasound imaging system. The system 10 is configured to acquire echo data distributed over three-dimensions for

elasticity imaging of a volume (e.g., act 30 of Figure 1). In alternative embodiments, the system 10 is a personal computer, workstation, PACS station, or other arrangement at a same location or distributed over a network for real-time or post acquisition imaging. The system 10 acquires data from a memory or another ultrasound imaging system.

[0062] The transmit beamformer 12 is an ultrasound transmitter, memory, pulser, analog circuit, digital circuit, or combinations thereof. The transmit beamformer 12 is operable to generate waveforms for a plurality of channels with different or relative amplitudes, delays, and/or phasing. Upon transmission of acoustic waves from the transducer 14 in response to the generated electrical waveforms, one or more beams are formed. A sequence of transmit beams are generated to scan a three-dimensional region. Sector, Vector®, linear, or other scan formats may be used. The same region is scanned multiple times. For flow or Doppler imaging and for shear imaging, a sequence of scans along the same line or lines is used. In Doppler imaging, the sequence may include multiple beams along a same scan line before scanning an adjacent scan line. For shear or longitudinal wave imaging, scan or frame interleaving may be used (i.e., scan the entire region before scanning again). Line or group of line interleaving may be used. In alternative embodiments, the transmit beamformer 12 generates a plane wave or diverging wave for more rapid scanning.

[0063] The same transmit beamformer 12 may generate impulse excitations or electrical waveforms for generating acoustic energy to cause displacement. Electrical waveforms for acoustic radiation force impulses are generated. In alternative embodiments, a different transmit beamformer is provided for generating the impulse excitation. The transmit beamformer 12 causes the transducer 14 to generate pushing pulses or acoustic radiation force impulse pulses. In other embodiments, a probe housing or other device is used to apply stress to the tissue of the patient.

[0064] The transducer 14 is an array for generating acoustic energy from electrical waveforms. For an array, relative delays focus the acoustic energy. A given transmit event corresponds to transmission of acoustic energy by different elements at a substantially same time given the delays. The transmit event may provide a pulse of ultrasound energy for displacing the tissue. The pulse is an impulse excitation or tracking pulse. Impulse excitation includes waveforms with many cycles (e.g., 500 cycles) but that occurs in a relatively short time to cause tissue displacement over a longer time. A tracking pulse may be B-mode transmission, such as using 1-5 cycles. The tracking pulses are used to scan a region of a patient undergoing a change in stress.

[0065] The transducer 14 is a 1-, 1.25-, 1.5-, 1.75- or 2 dimensional array of piezoelectric or capacitive membrane elements. A wobbler array may be used. The transducer 14 includes a plurality of elements for transducing between acoustic and electrical energies. Receive sig-

nals are generated in response to ultrasound energy (echoes) impinging on the elements of the transducer 14. The elements connect with channels of the transmit and receive beamformers 12, 16. Alternatively, a single element with a mechanical focus is used.

[0066] The receive beamformer 16 includes a plurality of channels with amplifiers, delays, and/or phase rotators, and one or more summers. Each channel connects with one or more transducer elements. The receive beamformer 16 is configured by hardware or software to apply relative delays, phases, and/or apodization to form one or more receive beams in response to each imaging or tracking transmission. Receive operation may not occur for echoes from the impulse excitation used to displace tissue. The receive beamformer 16 outputs data representing spatial locations using the receive signals. Relative delays and/or phasing and summation of signals from different elements provide beamformation. In alternative embodiments, the receive beamformer 16 is a processor for generating samples using Fourier or other transforms.

[0067] The receive beamformer 16 may include a filter, such as a filter for isolating information at a second harmonic or other frequency band relative to the transmit frequency band. Such information may more likely include desired tissue, contrast agent, and/or flow information. In another embodiment, the receive beamformer 16 includes a memory or buffer and a filter or adder. Two or more receive beams are combined to isolate information at a desired frequency band, such as a second harmonic, cubic fundamental or other band.

[0068] In coordination with the transmit beamformer 12, the receive beamformer 16 generates data representing a three-dimensional region at different times. After the acoustic impulse excitation, the receive beamformer 16 generates beams representing locations along a plurality of lines at different times. By scanning the region of interest with ultrasound, data (e.g., beamformed samples) is generated. By repeating the scanning, ultrasound data representing the region at different times after the impulse excitation is acquired.

[0069] The receive beamformer 16 outputs beam summed data representing spatial locations. Data for locations for a volume (e.g., voxels) are output. Dynamic focusing may be provided. The data may be for different purposes. For example, different scans are performed for B-mode or tissue data than for elasticity. Alternatively, the B-mode data is also used to determine elasticity. As another example, data for shear imaging are acquired with a series of shared scans, and B-mode or Doppler scanning is performed separately or using some of the same data. The ultrasound or echo data is from any stage of processing, such as beamformed data before detection or data after detection.

[0070] The processor 18 is a B-mode detector, Doppler detector, pulsed wave Doppler detector, correlation processor, Fourier transform processor, application specific integrated circuit, general processor, control processor,

image processor, field programmable gate array, graphics processing unit, digital signal processor, analog circuit, digital circuit, combinations thereof or other now known or later developed device for detecting and processing information for display from beamformed ultrasound samples.

[0071] In one embodiment, the processor 18 includes one or more detectors and a separate processor. The separate processor is a control processor, general processor, digital signal processor, application specific integrated circuit, field programmable gate array, network, server, group of processors, graphics processing unit, data path, combinations thereof or other now known or later developed device for anatomy identification, anatomy motion tracking, elasticity estimation, and accounting for undesired motion in the elasticity estimation. Attenuation, shear modulus, shear viscosity, or one or more other properties of shear wave propagation may be estimated. The processor 18 generates a three-dimensional representation as an elasticity image. For example, the separate processor is configured by hardware and/or software to perform any combination of one or more of the acts 32-44 shown in Figure 1.

[0072] The processor 18 is configured to estimate tissue displacement induced by the acoustic impulse excitation or other stress. Using correlation, tracking, motion detection, or other displacement measuring, the amount of shift in position of the tissue is estimated. The estimation is performed multiple times through a period, such as from prior to the tissue moving due to stress to during stress or after the tissue has mostly or completely returned to a relaxed state (e.g., recovered from the stress caused by the impulse excitation). Alternatively, a single shift is estimated. Differences in shift of the tissue between locations indicate relative stiffness or elasticity.

[0073] The processor 18 is configured to identify anatomy or one more locations of an anatomical landmark. For example, anatomy spaced from a region of application of stress is identified. Due to the spacing, the anatomy may be less susceptible to motion or change caused by the stress but still susceptible to other causes of motion or change. The processor 18 is configured to track the motion of the anatomy, such as a tissue boundary, different organ than being examined for elasticity, vessel, diaphragm, bone, tissue directly attached to bone, or fluid filled chamber. The change in position of the anatomy is used to represent undesired sources of change in elastography.

[0074] The processor 18 is configured to estimate elasticity values. Phase change detection, correlation, displacement determination, peak identification, velocity calculation, stress measures, stress attenuation, and/or other processes may be used to estimate elasticity. The processor 18 is configured to account for the undesired motion in the estimation. The motion of the anatomy is removed, suppressed, or corrected in the echo data prior to estimating displacements and elasticity values with the echo data. Alternatively or additionally, total motion

or change is determined as part of estimating elasticity values. The undesired motion is then subtracted from the motion, resulting in motion more likely due to the stress.

[0075] The processor 18 is configured to generate one or more images. For example, a shear wave velocity image is generated. Other elastography images may be generated, such as a shear modulus, strain, or strain rate image. The elastography image is presented as an overlay or region of interest within a B-mode image. The elasticity values modulate the color at locations in the region of interest. Where the elasticity value is below a threshold, B-mode information may be displayed without modulation by the elasticity value.

[0076] The image is a three-dimensional rendering or a planar reconstruction. The distribution of elasticity values in a volume is used to render to a display. A three-dimensional representation shows the elasticity values. For example, a rotating perspective display is shown. Using maximum intensity projection, regions or locations associated with stiffer soft tissue are displayed more opaquely. Bone or other tissue above a level of stiffness may be masked.

[0077] The processor 18 operates pursuant to instructions stored in the memory 22 or another memory for three-dimensional elasticity ultrasound imaging. The memory 22 is a non-transitory computer readable storage media. The instructions for implementing the processes, methods and/or techniques discussed herein are provided on the computer-readable storage media or memories, such as a cache, buffer, RAM, removable media, hard drive or other computer readable storage media. Computer readable storage media include various types of volatile and nonvolatile storage media. The functions, acts or tasks illustrated in the figures or described herein are executed in response to one or more sets of instructions stored in or on computer readable storage media. The functions, acts or tasks are independent of the particular type of instructions set, storage media, processor or processing strategy and may be performed by software, hardware, integrated circuits, firmware, micro code and the like, operating alone or in combination. Likewise, processing strategies may include multiprocessing, multitasking, parallel processing, and the like. In one embodiment, the instructions are stored on a removable media device for reading by local or remote systems. In other embodiments, the instructions are stored in a remote location for transfer through a computer network or over telephone lines. In yet other embodiments, the instructions are stored within a given computer, CPU, GPU or system.

[0078] The display 20 is a CRT, LCD, projector, plasma, or other display for displaying two-dimensional images or three-dimensional representations. The two dimensional images represent spatial distribution in an area, such as a plane reconstructed from data representing a volume. The three-dimensional representations are rendered from the data representing spatial distribution in a volume. The display 20 is configured by the processor

18 or other device by input of the signals to be displayed as an image. The display 20 displays an image representing elasticity for different locations in a region of interest.

Claims

1. A method for elasticity ultrasound imaging, the method comprising:

acquiring (30), with an ultrasound system, first ultrasound data for a three-dimensional region of tissue including the soft tissue for which elasticity imaging is being performed, the first ultrasound data comprising voxels representing different locations distributed along three axes in the three-dimensional region at a first time;
 acquiring (30), with the ultrasound system, second ultrasound data for the three-dimensional region, the second ultrasound data comprising voxels representing the different locations distributed along the three axes in the three-dimensional region at a second time different than the first time;
 identifying (32) an anatomical landmark of the three-dimensional region and represented in the first and second ultrasound data;
 determining (34) motion of the anatomical landmark from the first time to the second time;
 estimating (36) elasticity in the three-dimensional region from the first and second ultrasound data;
 motion correcting (38) in the estimating (36) of elasticity in the three-dimensional region from the first and second ultrasound data, the motion correcting (38) being a function of the motion of the anatomical landmark; and
 displaying (44) a three-dimensional representation of the elasticity in the three-dimensional region,
 wherein the elasticity ultrasound imaging is acquired by the ultrasound system with compression or acoustic radiation force;
 wherein the anatomical landmark represents a structure less susceptible to the compression or a wave resulting from the acoustic radiation force than the soft tissue.

2. The method of claim 1 wherein acquiring (30) the first and second ultrasound data comprises scanning the three-dimensional region while the three-dimensional region is subjected to a change in tissue deformation.
3. The method of claim 2 wherein scanning comprises scanning while the three-dimensional region is subjected to a longitudinal or shear wave, wherein esti-

- mating (36) comprises estimating (36) tissue response to the longitudinal or shear wave, and wherein displaying (44) comprises generating the three-dimensional representation as a longitudinal or shear wave image.
4. The method of claim 2 wherein scanning comprises scanning while the three-dimensional region is subjected to different pressures, wherein estimating (36) comprises estimating (36) the tissue response to the different pressures, and wherein displaying (44) comprises generating the three-dimensional representation as a strain image.
 5. The method of claim 1 wherein acquiring (30) the first and second ultrasound data comprise acquiring (30) with the first and second times being within a tissue response period to an applied stress.
 6. The method of claim 1 wherein identifying (32) the anatomical landmark comprises identifying (32) the voxels representing a bone, tumor, or cyst.
 7. The method of claim 1 wherein identifying (32) the anatomical landmark comprises identifying (32) voxels representing the anatomical landmark and grouping the voxels identified as representing the anatomical landmark.
 8. The method of claim 1 wherein determining (34) the motion comprises motion tracking the anatomical landmark, the motion being a three-dimensional displacement vector for each voxel of the anatomical landmark.
 9. The method of claim 1 wherein determining (34) the motion comprises determining (34) a rigid or non-rigid transform of the anatomical landmark between the first and second times.
 10. The method of claim 1 wherein estimating (36) comprises determining (34) a phase change between the first and second ultrasound data for each of the voxels.
 11. The method of claim 1 wherein estimating (36) comprises determining (34) a displacement between the first and second times of the soft tissue in the three-dimensional region for each of a plurality of voxels.
 12. The method of claim 1 wherein motion correcting (38) comprises motion correcting (40) the second ultrasound data relative to the first ultrasound data for voxels not representing the anatomical landmark and representing the soft tissue prior to estimating (36) the elasticity from the first and second ultrasound data.
 13. The method of claim 1 wherein estimating (36) comprises estimating (36) displacement motion between the first and second times for each of a plurality of the voxels, and wherein motion correcting (38) comprises removing (42) the motion of the anatomical landmark from the displacement motion.
 14. The method of claim 1 wherein motion correcting (38) comprises motion correcting (38) the voxels for tissue different than the anatomical landmark based on a model of motion from the motion of the anatomical landmark.
 15. A non-transitory computer readable storage medium having stored therein data representing instructions executable by a programmed processor (18) of an ultrasound system for elasticity ultrasound imaging, the storage medium comprising instructions for:

acquiring (30), with the ultrasound system, first ultrasound data for a three-dimensional region of tissue including the soft tissue for which elasticity imaging is being performed, the first ultrasound data comprising voxels representing different locations distributed along three axes in the three-dimensional region at a first time;
 acquiring (30), with the ultrasound system, second ultrasound data for the three-dimensional region, the second ultrasound data comprising voxels representing the different locations distributed along the three axes in the three-dimensional region at a second time different than the first time;
 identifying (32) an anatomical landmark of the three-dimensional region and represented in the first and second ultrasound data,;
 determining (34) motion of the anatomical landmark from the first time to the second time;
 estimating (36) elasticity in the three-dimensional region from the first and second ultrasound data;
 motion correcting (38) in the estimating (36) of elasticity in the three-dimensional region from the first and second ultrasound data, the motion correcting (38) being a function of the motion of the anatomical landmark; and
 displaying (44) a three-dimensional representation of the elasticity in the three-dimensional region,
 wherein the elasticity ultrasound imaging is acquired by the ultrasound system with compression or acoustic radiation force;
 wherein the anatomical landmark represents a structure less susceptible to the compression or a wave resulting from the acoustic radiation force than the soft tissue.
 16. The non-transitory computer readable storage me-

dium of claim 15 wherein tracking (34) comprises classifying first locations in the volume as representing the anatomy and second locations in the volume as not representing the anatomy, grouping the first locations, and tracking motion of the grouped first locations. 5

17. The non-transitory computer readable storage medium of claim 15 wherein motion correcting (38) comprises accounting for the displacement in locations not representing the anatomy. 10

18. The non-transitory computer readable storage medium of claim 15 wherein motion correcting (38) comprises suppressing (40) the displacement in the echo data prior to calculating the elasticities. 15

19. The non-transitory computer readable storage medium of claim 15 wherein motion correcting (38) comprises subtracting (42) the displacements from motion determined as part of estimating (36). 20

20. A method for elasticity ultrasound imaging, the method comprising: 25

three-dimensional elasticity imaging (36), by an ultrasound system, with compression or acoustic radiation force; and removing (42), by a processor (18), motion other than caused by the compression or a wave resulting from the acoustic radiation force, the motion removed being a function of the motion of an anatomical landmark structure which is less susceptible to the compression or the wave than the soft tissue for which the three-dimensional elasticity imaging is being performed. 30 35

Patentansprüche

1. Verfahren zur Elastizitätsultraschallbildgebung, wobei das Verfahren umfasst: 40

Erfassen (30) von ersten Ultraschalldaten für eine dreidimensionale Region von Gewebe einschließlich des Weichgewebes, für das Elastizitätsbildgebung durchgeführt wird, mit einem Ultraschallsystem, wobei die ersten Ultraschalldaten Voxel umfassen, die unterschiedliche Orte repräsentieren, die entlang drei Achsen in der dreidimensionalen Region zu einer ersten Zeit verteilt sind; Erfassen (30) von zweiten Ultraschalldaten für die dreidimensionale Region mit dem Ultraschallsystem, wobei die zweiten Ultraschalldaten Voxel umfassen, die die unterschiedlichen Orte repräsentieren, die entlang der drei Achsen in der dreidimensionalen Region zu einer zwei- 45 50 55

ten Zeit, die sich von der ersten Zeit unterscheiden, verteilt sind;

Identifizieren (32) einer anatomischen Leitstruktur der dreidimensionalen Region, und die in den ersten und zweiten Ultraschalldaten repräsentiert wird;

Bestimmen (34) von Bewegung der anatomischen Leitstruktur von der ersten Zeit zu der zweiten Zeit;

Schätzen (36) der Elastizität in der dreidimensionalen Region aus den ersten und zweiten Ultraschalldaten;

Korrigieren der Bewegung (38) in der Schätzung (36) der Elastizität in der dreidimensionalen Region aus den ersten und zweiten Ultraschalldaten, wobei die Bewegungskorrektur (38) eine Funktion der Bewegung einer anatomischen Leitstruktur ist; und

Anzeigen (44) einer dreidimensionalen Darstellung der Elastizität in der dreidimensionalen Region,

wobei die Elastizitätsultraschallbildgebung durch das Ultraschallsystem mit Kompression oder akustischer Strahlungskraft erfasst wird;

wobei die anatomische Leitstruktur eine Struktur repräsentiert, die hinsichtlich der Kompression oder einer Welle, die aus der akustischen Strahlungskraft resultiert, weniger empfänglich ist als das Weichgewebe.

2. Verfahren nach Anspruch 1, wobei Erfassen (30) der ersten und zweiten Ultraschalldaten umfasst, dass die dreidimensionale Region gescannt wird, während die dreidimensionale Region einer Änderung der Gewebeverformung ausgesetzt wird.

3. Verfahren nach Anspruch 2, wobei Scannen umfasst, dass gescannt wird, während die dreidimensionale Region einer Längswelle oder Scherwelle ausgesetzt wird, wobei Schätzen (36) umfasst, dass die Gewebereaktion auf die Längswelle oder Scherwelle geschätzt (36) wird, und wobei Anzeigen (44) umfasst, dass die dreidimensionale Darstellung als Längswellen oder Scherwellenbild generiert wird. 40

4. Verfahren nach Anspruch 2, wobei Scannen umfasst, dass gescannt wird, während die dreidimensionale Region unterschiedlichen Drücken ausgesetzt wird, wobei Schätzen (36) umfasst, dass die Gewebereaktion auf unterschiedliche Drücke geschätzt (36) wird, und wobei Anzeigen (44) umfasst, dass die dreidimensionale Darstellung als Dehnungsbild generiert wird.

5. Verfahren nach Anspruch 1, wobei Erfassen (30) der ersten und zweiten Ultraschalldaten umfasst, dass die ersten und zweiten Zeiten beim Erfassen (30) innerhalb einer Gewebereaktionsperiode auf eine

angewendete mechanische Spannung liegen.

6. Verfahren nach Anspruch 1, wobei Identifizieren (32) der anatomischen Leitstruktur umfasst, dass die Vo-
xel, die einen Knochen, Tumor oder eine Zyste re-
präsentieren, identifiziert (32) werden. 5
7. Verfahren nach Anspruch 1, wobei Identifizieren (32) der anatomischen Leitstruktur umfasst, dass Voxel
identifiziert (32) werden, welche die anatomische
Leitstruktur repräsentieren, und die Voxel gruppiert
werden, die als die anatomische Leitstruktur reprä-
sentierend identifiziert wurden. 10
8. Verfahren nach Anspruch 1, wobei Bestimmen (34) 15
der Bewegung umfasst, dass die Bewegung der ana-
tomischen Leitstruktur verfolgt wird, wobei die Be-
wegung ein dreidimensionaler Verschiebungsvektor
für jedes Voxel der anatomischen Leitstruktur ist. 20
9. Verfahren nach Anspruch 1, wobei Bestimmen (34)
der Bewegung umfasst, dass eine starre oder nicht-
starre Transformation der anatomischen Leitstruktur
zwischen der ersten und der zweiten Zeit bestimmt
(34) wird. 25
10. Verfahren nach Anspruch 1, wobei Schätzen (36)
umfasst, dass ein Phasenwechsel zwischen den
ersten und zweiten Ultraschalldaten für jedes der Vo-
xel bestimmt (34) wird. 30
11. Verfahren nach Anspruch 1, wobei Schätzen (36)
umfasst, dass eine Verschiebung von dem Weich-
gewebe zwischen der ersten und der zweiten Zeit in
der dreidimensionalen Region für jedes von einer
Vielzahl von Voxeln bestimmt (34) wird. 35
12. Verfahren nach Anspruch 1, wobei Bewegungskor-
rektur (38) umfasst, dass die zweiten Ultraschallda-
ten relativ zu den ersten Ultraschalldaten für Voxel,
welche die anatomische Leitstruktur nicht repräsen-
tieren und das Weichgewebe repräsentieren, bewe-
gungskorrigiert (40) werden, bevor die Elastizität aus
den ersten und zweiten Ultraschalldaten geschätzt
(36) wird. 40 45
13. Verfahren nach Anspruch 1, wobei Schätzen (36)
umfasst, dass die Verschiebungsbewegung zwi-
schen der ersten und der zweiten Zeit für jedes von
einer Vielzahl der Voxel geschätzt (36) wird, und wo-
bei Bewegungskorrektur (38) umfasst, dass die Be-
wegung der anatomischen Leitstruktur aus der Ver-
schiebungsbewegung entfernt (42) wird. 50
14. Verfahren nach Anspruch 1, wobei Bewegungskor-
rektur (38) umfasst, dass die Voxel für Gewebe, das
sich von der anatomischen Leitstruktur unterschei-
det, basierend auf einem Bewegungsmodell von der 55

Bewegung der anatomischen Leitstruktur bewe-
gungskorrigiert (38) werden.

15. Nicht-flüchtiges computerlesbares Speichermedi-
um, auf dem Daten gespeichert sind, die Anweisun-
gen repräsentieren, die durch einen programmierten
Prozessor (18) eines Ultraschallsystems für Elasti-
zitätsultraschallbildgebung ausführbar sind,
wobei das Speichermedium Anweisungen umfasst
zum:

Erfassen (30) von ersten Ultraschalldaten für ei-
ne dreidimensionale Region von Gewebe ein-
schließlich des Weichgewebes, für das Elasti-
zitätsbildgebung durchgeführt wird, mit einem Ul-
traschallsystem, wobei die ersten Ultraschallda-
ten Voxel umfassen, die unterschiedliche Orte
repräsentieren, die entlang drei Achsen in der
dreidimensionalen Region zu einer ersten Zeit
verteilt sind;

Erfassen (30) von zweiten Ultraschalldaten für
die dreidimensionale Region mit dem Ultra-
schallsystem, wobei die zweiten Ultraschallda-
ten Voxel umfassen, die die unterschiedlichen
Orte repräsentieren, die entlang der drei Achsen
in der dreidimensionalen Region zu einer zwei-
ten Zeit, die sich von der ersten Zeit unterschei-
det, verteilt sind;

Identifizieren (32) einer anatomischen Leitstruk-
tur der dreidimensionalen Region, und die in den
ersten und zweiten Ultraschalldaten repräsen-
tiert wird;

Bestimmen (34) von Bewegung der anatomi-
schen Leitstruktur von der ersten Zeit zu der
zweiten Zeit;

Schätzen (36) der Elastizität in der dreidimensi-
onalen Region aus den ersten und zweiten Ul-
traschalldaten;

Korrigieren der Bewegung (38) in der Schätzung
(36) der Elastizität in der dreidimensionalen Re-
gion aus den ersten und zweiten Ultraschallda-
ten, wobei die Bewegungskorrektur (38) eine
Funktion der Bewegung einer anatomischen
Leitstruktur ist; und

Anzeigen (44) einer dreidimensionalen Darstel-
lung der Elastizität in der dreidimensionalen Re-
gion, wobei

die Elastizitätsultraschallbildgebung durch das
Ultraschallsystem mit Kompression oder akus-
tischer Strahlungskraft erfasst wird;

wobei die anatomische Leitstruktur eine Struktur
repräsentiert, die hinsichtlich der Kompression
oder einer Welle, die aus der akustischen Strah-
lungskraft resultiert, weniger empfänglich ist als
das Weichgewebe.

16. Nicht-flüchtiges computerlesbares Speichermedi-
um nach Anspruch 15, wobei Verfolgen (34) um-

fasst, dass erste Orte in dem Volumen als die Anatomie repräsentierend und zweite Orte in dem Volumen als die Anatomie nicht repräsentierend klassifiziert werden, die ersten Orte gruppiert werden, und die Bewegung der gruppierten ersten Orte verfolgt wird.

17. Nicht-flüchtiges computerlesbares Speichermedium nach Anspruch 15, wobei Bewegungskorrektur (38) umfasst, dass die Verschiebung bei Orten, welche die Anatomie nicht repräsentieren, berücksichtigt wird.
18. Nicht-flüchtiges computerlesbares Speichermedium nach Anspruch 15, wobei Bewegungskorrektur (38) umfasst, dass die Verschiebung in den Echodaten unterdrückt (40) wird, bevor die Elastizitäten berechnet werden.
19. Nicht-flüchtiges computerlesbares Speichermedium nach Anspruch 15, wobei Bewegungskorrektur (38) umfasst, dass die Verschiebungen von Bewegung subtrahiert (42) werden, die als Teil des Schätzens (36) bestimmt wurde.
20. Verfahren zur Elastizitätsultraschallbildgebung, wobei das Verfahren umfasst:

dreidimensionale Elastizitätsbildgebung (36) durch ein Ultraschallsystem mit Kompression oder akustischer Strahlungskraft; und Entfernen (42) von Bewegung, die anders als jene ist, die durch die Kompression oder eine Welle bewirkt wird, die aus der akustischen Strahlungskraft resultiert, durch einen Prozessor (18), wobei die entfernte Bewegung eine Funktion der Bewegung einer anatomischen Leitstruktur ist, die hinsichtlich der Kompression oder der Welle weniger empfänglich ist als das Weichgewebe, für welches die dreidimensionale Elastizitätsbildgebung durchgeführt wird.

Revendications

1. Procédé d'imagerie par ultrasons d'élasticité, le procédé comprenant :

l'acquisition (30), avec un système à ultrasons, de premières données ultrasonores pour une région tridimensionnelle de tissu comprenant le tissu mou pour lequel une imagerie d'élasticité est effectuée, les premières données ultrasonores comprenant des voxels représentant différents emplacements répartis le long de trois axes dans la région tridimensionnelle à un premier moment ;
l'acquisition (30), avec le système à ultrasons,

de secondes données ultrasonores pour la région tridimensionnelle, les secondes données ultrasonores comprenant des voxels représentant les différents emplacements distribués le long des trois axes dans la région tridimensionnelle à un second moment différent du premier moment ;

l'identification (32) d'un point de repère anatomique de la région tridimensionnelle et représenté dans les premières et secondes données ultrasonores ;

la détermination (34) du mouvement du point de repère anatomique entre le premier moment et le second moment ;

l'estimation (36) de l'élasticité dans la région tridimensionnelle à partir des premières et secondes données ultrasonores ;

la correction de mouvement (38) dans l'estimation (36) de l'élasticité dans la région tridimensionnelle à partir des premières et secondes données ultrasonores, la correction de mouvement (38) étant fonction du mouvement du point de repère anatomique ; et

l'affichage (44) d'une représentation tridimensionnelle de l'élasticité dans la région tridimensionnelle, l'imagerie par ultrasons de l'élasticité étant acquise par le système à ultrasons avec une force de compression ou de rayonnement acoustique ;

le repère anatomique représentant une structure moins sensible à la compression ou à une onde résultant de la force de rayonnement acoustique que le tissu mou.

2. Procédé selon la revendication 1, l'acquisition (30) des premières et secondes données ultrasonores comprenant le balayage de la région tridimensionnelle alors que la région tridimensionnelle est soumise à un changement de déformation du tissu.

3. Procédé selon la revendication 2, le balayage comprenant le balayage pendant que la région tridimensionnelle est soumise à une onde longitudinale ou de cisaillement, l'estimation (36) comprenant l'estimation (36) de la réponse du tissu à l'onde longitudinale ou de cisaillement, et l'affichage (44) comprenant la génération de la représentation tridimensionnelle en tant qu'image d'onde longitudinale ou de cisaillement.

4. Procédé selon la revendication 2, le balayage comprenant le balayage pendant que la région tridimensionnelle est soumise à différentes pressions, l'estimation (36) comprenant l'estimation (36) de la réponse du tissu aux différentes pressions, et l'affichage (44) comprenant la génération de la représentation tridimensionnelle en tant qu'image de déformation.

5. Procédé selon la revendication 1, l'acquisition (30) des premières et secondes données ultrasonores comprenant l'acquisition (30) avec les premier et second moments étant dans une période de réponse du tissu à une contrainte appliquée. 5
6. Procédé selon la revendication 1, l'identification (32) du repère anatomique comprenant l'identification (32) des voxels représentant un os, une tumeur ou un kyste. 10
7. Procédé selon la revendication 1, l'identification (32) du repère anatomique comprenant l'identification (32) des voxels représentant le repère anatomique et le regroupement des voxels identifiés comme représentant le repère anatomique. 15
8. Procédé selon la revendication 1, la détermination (34) du mouvement comprenant le suivi du mouvement du repère anatomique, le mouvement étant un vecteur de déplacement tridimensionnel pour chaque voxel du repère anatomique. 20
9. Procédé selon la revendication 1 la détermination (34) du mouvement comprenant la détermination (34) d'une transformation rigide ou non rigide du repère anatomique entre les premier et second moments. 25
10. Procédé selon la revendication 1 l'estimation (36) comprenant la détermination (34) d'un changement de phase entre les premières et secondes données ultrasonores pour chacun des voxels. 30
11. Procédé selon la revendication 1 l'estimation (36) comprenant la détermination (34) d'un déplacement entre les premier et second moments du tissu mou dans la région tridimensionnelle pour chacun d'une pluralité de voxels. 35
12. Procédé selon la revendication 1, la correction de mouvement (38) comprenant la correction de mouvement (40) des secondes données ultrasonores par rapport aux premières données ultrasonores pour les voxels ne représentant pas le repère anatomique et représentant le tissu mou avant d'estimer (36) l'élasticité à partir des premières et secondes données ultrasonores. 40
13. Procédé selon la revendication 1, l'estimation (36) comprenant l'estimation (36) du mouvement de déplacement entre les premier et second moments pour chacun d'une pluralité de voxels, et la correction de mouvement (38) comprenant la suppression (42) du mouvement du repère anatomique du mouvement de déplacement. 45
14. Procédé selon la revendication 1, la correction de mouvement (38) comprenant la correction de mouvement (38) des voxels pour un tissu différent du repère anatomique sur la base d'un modèle de mouvement à partir du mouvement du repère anatomique. 50
15. Support de stockage non transitoire lisible par ordinateur dans lequel sont stockées des données représentant des instructions exécutables par un processeur programmé (18) d'un système à ultrasons pour l'imagerie par ultrasons d'élasticité, le support de stockage comprenant des instructions pour :
l'acquisition (30), avec le système à ultrasons, de premières données ultrasonores pour une région tridimensionnelle de tissu comprenant le tissu mou pour lequel une imagerie d'élasticité est réalisée, les premières données ultrasonores comprenant des voxels représentant différents emplacements répartis le long de trois axes dans la région tridimensionnelle à un premier moment ;
l'acquisition (30), avec le système à ultrasons, de secondes données ultrasonores pour la région tridimensionnelle, les secondes données ultrasonores comprenant des voxels représentant les différents emplacements distribués le long des trois axes dans la région tridimensionnelle à un second moment différent du premier moment ;
l'identification (32) d'un point de repère anatomique de la région tridimensionnelle et représenté dans les premières et secondes données ultrasonores, ;
la détermination (34) du mouvement du point de repère anatomique entre le premier moment et le second moment ;
l'estimation (36) de l'élasticité dans la région tridimensionnelle à partir des premières et secondes données ultrasonores ;
la correction de mouvement (38) dans l'estimation (36) de l'élasticité dans la région tridimensionnelle à partir des premières et secondes données ultrasonores, la correction de mouvement (38) étant fonction du mouvement du point de repère anatomique ; et
l'affichage (44) d'une représentation tridimensionnelle de l'élasticité dans la région tridimensionnelle, l'imagerie par ultrasons de l'élasticité étant acquise par le système à ultrasons avec une force de compression ou de rayonnement acoustique ;
le repère anatomique représentant une structure moins sensible à la compression ou à une onde résultant de la force de rayonnement acoustique que le tissu mou. 55
16. Support de stockage lisible par ordinateur non tran-

sitoire selon la revendication 15, le suivi (34) comprenant la classification de premiers emplacements dans le volume comme représentant l'anatomie et de seconds emplacements dans le volume comme ne représentant pas l'anatomie, le regroupement des premiers emplacements, et le suivi du mouvement des premiers emplacements regroupés. 5

17. Support de stockage lisible par ordinateur non-transitoire selon la revendication 15, la correction de mouvement (38) comprenant la prise en compte du déplacement dans des emplacements ne représentant pas l'anatomie. 10

18. Support de stockage lisible par ordinateur non transitoire selon la revendication 15, la correction de mouvement (38) comprenant la suppression (40) du déplacement dans les données d'écho avant de calculer les élasticités. 15

20

19. Support de stockage lisible par ordinateur non transitoire selon la revendication 15, la correction de mouvement (38) comprenant la soustraction (42) des déplacements du mouvement déterminé dans le cadre de l'estimation (36). 25

20. Procédé d'imagerie par ultrasons de l'élasticité, le procédé comprenant :

l'imagerie de l'élasticité tridimensionnelle (36), 30
par un système à ultrasons, avec une force de compression ou de rayonnement acoustique ; et
la suppression (42), par un processeur (18), d'un mouvement autre que celui provoqué par la 35
compression ou une onde résultant de la force de rayonnement acoustique, le mouvement supprimé étant fonction du mouvement d'une structure de repère anatomique qui est moins sensible à la compression ou à l'onde que le 40
tissu mou pour lequel l'imagerie de l'élasticité tridimensionnelle est réalisée.

45

50

55

FIG. 1

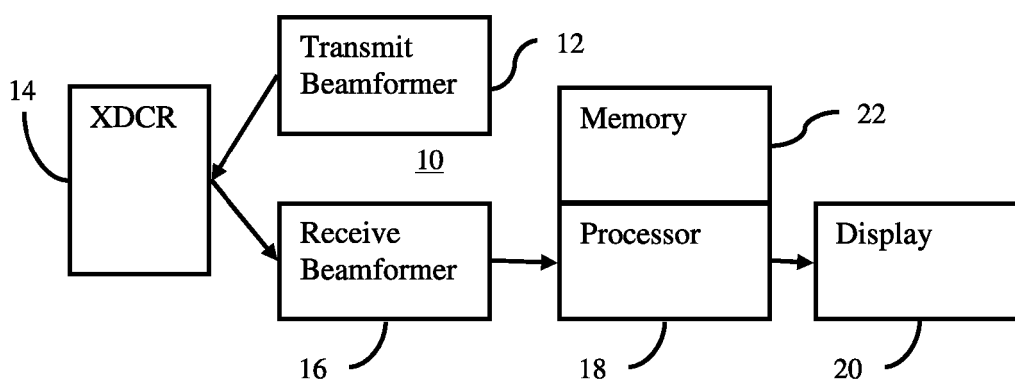
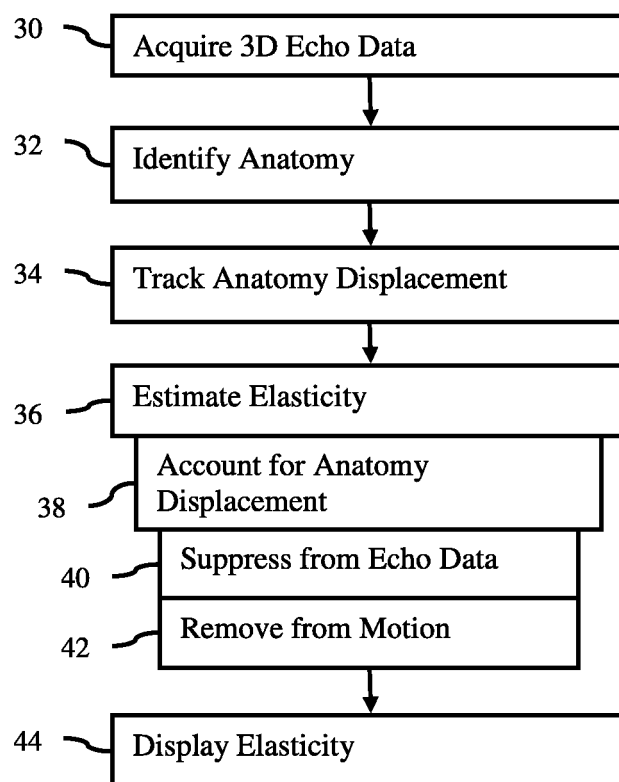


FIG. 3

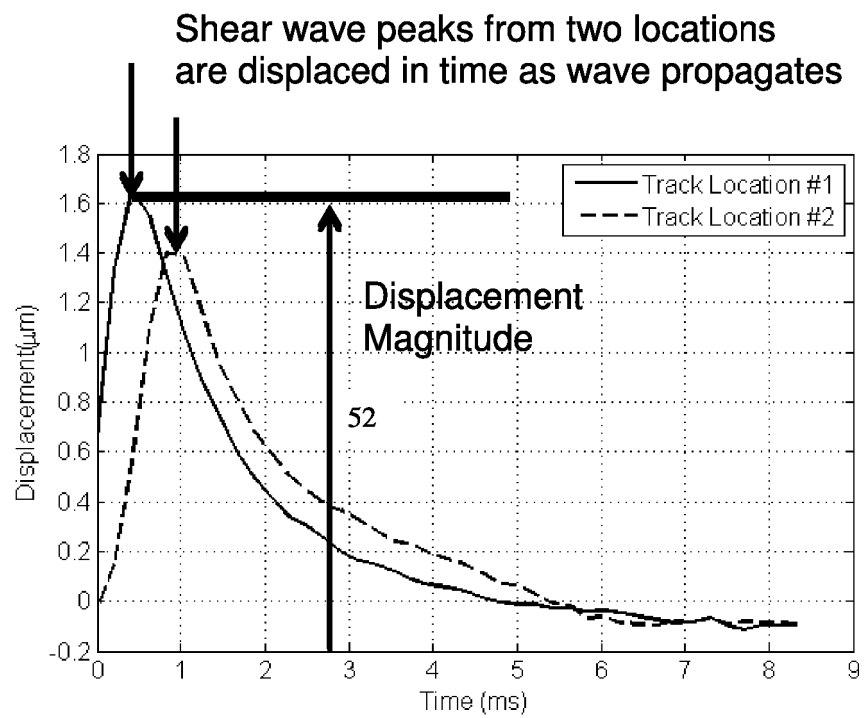


FIG. 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5107837 A [0002] [0040]
- US 5293870 A [0002] [0040]
- US 5178147 A [0002] [0040]
- US 6508768 B [0002] [0040]
- US 6558324 B [0002] [0040]
- WO 2012080895 A [0002]
- US 2013028536 A [0002]
- US 2012203108 A [0002]