




(No Model.)

J. R. LYLE.

NURSERY CASE FOR CHILDREN'S CARRIAGES.

No. 501,520.

Patented July 18, 1893.

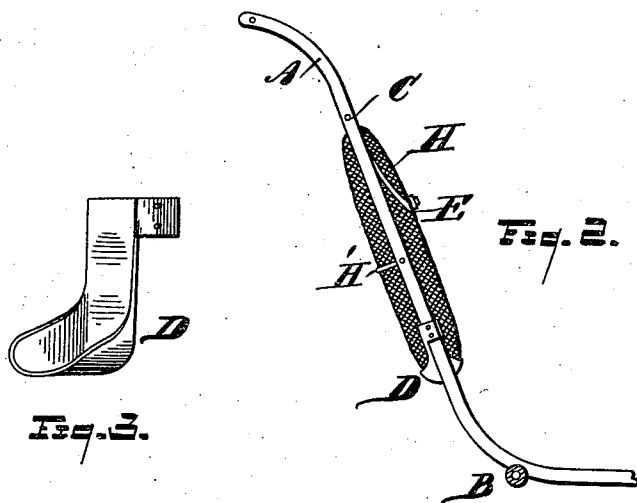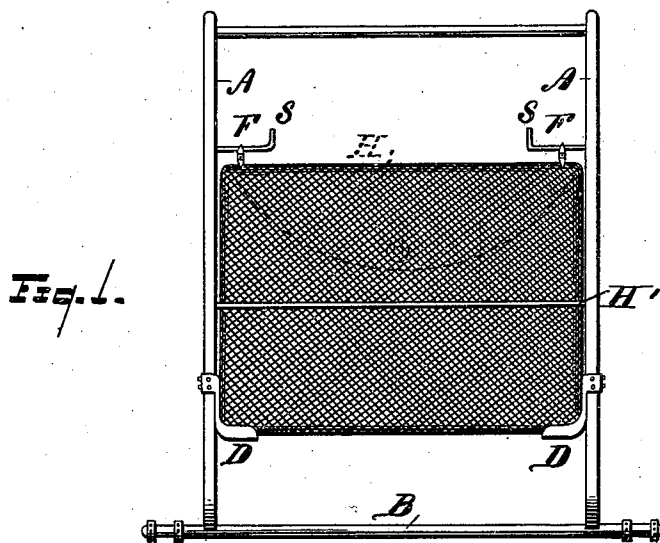

WITNESSES
Newton C. Leslie.
Albert Soll

INVENTOR
Jennie R. Lyle
By Lucius C. West
att'y

UNITED STATES PATENT OFFICE.

JENNIE R. LYLE, OF DOWAGIAC, MICHIGAN.

NURSERY-CASE FOR CHILDREN'S CARRIAGES.

SPECIFICATION forming part of Letters Patent No. 501,520, dated July 18, 1893.

Application filed November 7, 1892. Serial No. 451,271. (No model.)

To all whom it may concern:

Be it known that I, JENNIE R. LYLE, a citizen of the United States, residing at Dowagiac, county of Cass, State of Michigan, have
5 invented a new and useful Nursery-Case for Baby-Carriages, of which the following is a specification.

This invention has for its object to provide a baby carriage with a nursery case in a convenient position to be readily accessible to the nurse.

Another object consists in attaching the case to the handles of a baby carriage.

In the drawings forming a part of this
15 specification, Figure 1 is a rear elevation, showing the case attached to the handles of a baby carriage; Fig. 2 a side elevation of Fig. 1, looking from a point at the right; and Fig. 3 is an enlarged perspective of lettered
20 details from Figs. 1 and 2.

Referring to the lettered parts of the drawings, A represents the handles of a baby carriage, attached to the axle, B.

A little below the upper round of the handles, A A, are short hooks or rods, S S, attached to said handles and extending inward. To the lower portions of the handles and on the inside thereof are attached pockets or supports, D; or they may be like hooks S, or otherwise made.
30

The case is shown at E, which case may be made in any suitable form or of any suitable material, preferably having different compartments for different articles and having a
35 lid, H, opening preferably on the side next to the carriage, so as to be conveniently and readily accessible to the nurse in attendance without the handles interfering; owing to their being extended over to the rearward at

the upper ends. This case rests upon the supports or pockets, D, at the base, and is attached at the top by the hooks, F, catching on the rods S S, in a detachable manner. Thus the case may be readily attached to or detached from the handles.
40 45

To obviate undue bulging of the case rearwardly, a transverse rod, H', may be employed, attached to the handles intermediately between the top and bottom of the case, as shown in Figs. 1 and 2. However, this rod may be
50 employed or not, as deemed advisable.

While it is deemed most desirable to attach the case to the handles, it may be detachably attached to some convenient portion of the body.
55

Having thus described my invention, what I claim as new, and desire to secure by Letters Patent of the United States, is—

1. The combination of the handles of a baby carriage, upper and lower supports attached
60 to said handles, and a nursery case detachably and entirely supported thereby; substantially as set forth.

2. The combination of the handles of a baby carriage having the upper supports attached
65 to them below the upper round, a transverse rod attached to the handles below the said supports, pockets or supports attached to said handles below the transverse rod, and a nursery case detachably supported by the upper
70 and lower supports; substantially as set forth.

In testimony to the foregoing I have hereunto subscribed my name in the presence of two witnesses.

JENNIE R. LYLE.

Witnesses:

J. R. EDWARDS,
HENRY MICHAEL.