

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 June 2006 (29.06.2006)

PCT

(10) International Publication Number
WO 2006/067364 A1

(51) International Patent Classification:

F17C 7/00 (2006.01) *F17C 9/00* (2006.01)
F17C 7/02 (2006.01)

(21) International Application Number:

PCT/GB2005/004410

(22) International Filing Date:

16 November 2005 (16.11.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/019,842 22 December 2004 (22.12.2004) US

(71) Applicant (for all designated States except US): **THE BOC GROUP PLC** [GB/GB]; Chertsey Road, Windlesham, Surrey GU20 6HJ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HODGSON, Graham** [GB/GB]; c/o BOC Edwards, York House, Hillhouse International, Thornton-Cleveleys, Lancashire FY5 4QD (GB). **SHUTTLEWORTH, Andrew, William** [GB/US]; c/o BOC Edwards, 575 Mountain Ave, Murray Hill, NJ 07974 (US).

(74) Agent: **BOOTH, Andrew, Steven**; The BOC Group plc, Chertsey Road, Windlesham, Surrey GU20 6HJ (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF SUPPLYING FLUORINE

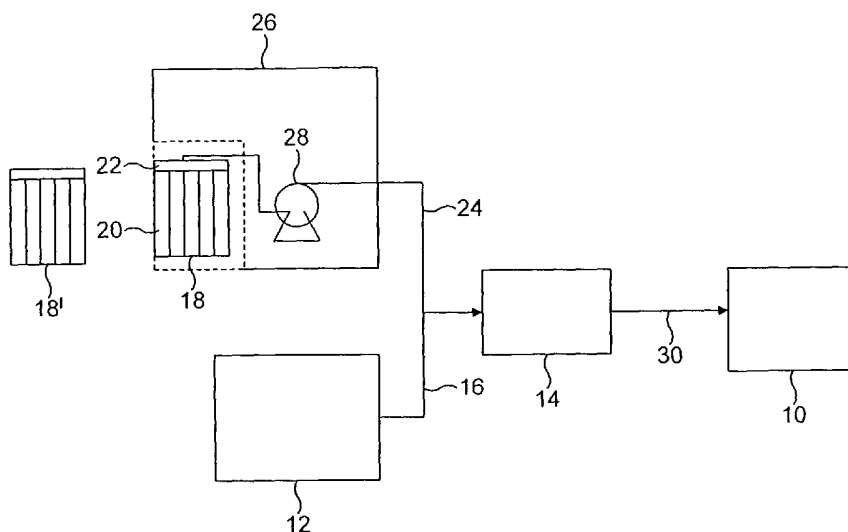

(57) Abstract: In a method of delivering high purity fluorine to a processing system, an on-site fluorine generator supplies high purity fluorine to a fixed storage tank, from which the high purity fluorine is supplied to the processing system. To provide a back up to the fluorine generator, high purity fluorine is also provided in a transportable gas storage vessel, for example, a multi-cylinder pack at a relatively low pressure, typically less than 35 psig. The transportable storage vessel is selectively connected to the fixed storage tank as required to enable the amount of fluorine within the storage tank to be maintained at a desired level.

WO 2006/067364 A1

METHOD OF SUPPLYING FLUORINE

This invention relates to a method of, and apparatus for, supplying fluorine to a processing system.

5

A primary step in the fabrication of semiconductor devices is the formation of a thin film on a semiconductor substrate by chemical reaction of vapour precursors. One known technique for depositing a thin film on a substrate is chemical vapour deposition (CVD). In this technique, gases are supplied to a process chamber housing the substrate and react to form a thin film over the surface of the substrate. However, deposition is not restricted to the surface of the substrate, and this can result, for example, in the clogging of gas nozzles and the clouding of chamber windows. In addition, particulates may be formed, which can fall on the substrate and cause a defect in the deposited thin film, or interfere with the mechanical operation of the deposition system. As a result of this, the inside surface of the process chamber is regularly cleaned to remove the unwanted deposition material from the chamber.

One method of cleaning the chamber is to supply molecular fluorine (F_2) to react with the unwanted deposition material. Fluorine is either supplied at a high purity (at least 99% fluorine) in single, high-pressure cylinder at 200 or 400 psig, or supplied diluted with nitrogen in the ratio of 20% F_2 to 80% N_2 in single, high-pressure cylinder at up to 2000 psig. At such high pressures, fluorine becomes very reactive and thus poses a serious safety hazard. Whilst on-site fluorine generators are available for supplying high purity fluorine directly to the processing system, multiple generators are required to maintain fluorine output in the event of a failure of one of the generators, which significantly increases costs.

It is an aim of at least the preferred embodiments of the present invention to provide a low cost, relatively safe method of delivering high purity fluorine.

- 2 -

In a first aspect, the present invention provides a method of delivering high purity fluorine to a processing system, the method comprising the steps of generating high purity fluorine using a fluorine generator located proximate the processing system, transferring fluorine from the fluorine generator to a fixed storage tank, providing a transportable gas storage vessel containing high purity fluorine at a pressure below 35 psig, selectively transferring fluorine from the transportable gas storage vessel to the fixed storage tank, and delivering fluorine to the processing system from the fixed storage tank.

10 A transportable gas storage vessel is thus provided as a back up to the fluorine generator in the event that the fluorine generator fails or is otherwise unable to supply fluorine to the fixed storage tank. This can significantly reduce costs in comparison to providing a second fluorine generator as a back up. Following exhaustion of the storage vessel, the exhausted storage
15 vessel can be readily replaced by a fresh storage vessel. Due to the relatively low pressure at which fluorine is stored in the transportable gas storage vessel (i.e. below 35psig, preferably below 25 psig) in comparison to the pressure at which fluorine is traditionally stored in gas cylinders (up to 2000 psig), the fluorine reactivity is significantly reduced, thereby greatly improving
20 the safety of the handling (transportation, replacement, etc.) of storage vessels. This can also enable the storage vessels to be safely stockpiled in readiness for future use.

The storage vessel may comprise any suitable transportable vessel for storing
25 high purity fluorine at a relatively low pressure. For example, the transportable storage vessel may comprise a single transportable bulk container, or plurality of gas cylinders, for example, between six and sixteen cylinders, containing high purity fluorine, the gas cylinders preferably being connected to a common manifold from which fluorine is transferred to the
30 fixed storage tank. The amount of fluorine stored in such a storage vessel can therefore be much greater than that stored in a 20% F₂ / 80% N₂ gas cylinder, thereby reducing the frequency at which the fluorine source needs to

- 3 -

be replaced and further improving safety. For example, whilst a 49 litre gas cylinder contains around 1.4 kg of F_2 within a 20% F_2 / 80% N_2 gas mixture at 400 psig, a 735 litre transportable gas storage vessel, comprising fifteen 49 litre gas cylinders, can contain around 3.2 kg of F_2 within a high purity F_2 gas at 25 psig.

Fluorine may be stored in the fixed storage tank at a pressure in the range from 5 to 25 psig, preferably around 20 psig. A compressor may be provided for transferring fluorine from the transportable gas storage vessel to the fixed storage tank. The use of a compressor is particularly advantageous when the fluorine pressure required at the chamber of the processing system is greater than the fluorine pressure that could be provided from the storage vessel alone, either due to the pressure drop between the storage vessel and the chamber and/or the pressure at which fluorine is stored in the storage vessel. The use of a compressor can thus provide a necessary boost to the fluorine pressure between the storage vessel and the chamber.

The fixed storage tank preferably has a volume in the range from 500 to 1500 litres, preferably around 1000 litres. The purity of the fluorine is at least 99% fluorine, more preferably at least 99.5% fluorine,

Due to the presence of an on-site fluorine generator, an exhausted storage vessel may be re-filled with gas generated by the fluorine generator, rather than being returned to a remote site for re-filling and subsequent transport back to the processing system. This can provide rapid back up of the fluorine generator following exhaustion of the storage vessel, as well as providing further cost reductions and improved safety. Therefore, in a second aspect, the present invention provides a method of delivering high purity fluorine to a processing system, the method comprising the steps of generating high purity fluorine using a fluorine generator located proximate the processing system, transferring fluorine from the fluorine generator to a fixed storage tank, filling a transportable gas storage vessel with fluorine generated by the fluorine

- 4 -

generator to a pressure below 35 psig, selectively transferring fluorine from the transportable gas storage vessel to the fixed storage tank, and delivering fluorine to the processing system from the fixed storage tank.

- 5 Where the transportable gas storage vessels are both filled remotely and returned to the remote site for re-filling, it may, of course, be possible to deliver high purity fluorine from these storage vessels in the absence of an on-site fluorine generator. Such a second source of fluorine may be removed altogether, or may be replaced by another transportable gas storage vessel
- 10 for providing a back up source of high purity fluorine. Thus, in a third aspect the present invention provides a method of delivering high purity fluorine to a processing system, the method comprising the steps of transporting to the processing system a transportable gas storage vessel containing high purity fluorine at a pressure below 35 psig, transferring fluorine from the
- 15 transportable gas storage vessel to a fixed storage tank, and delivering fluorine to the processing system from the fixed storage tank.

Features described above in relation to method aspects of the invention are equally applicable to apparatus aspects, and vice versa. Therefore, in a

20 fourth aspect the present invention provides apparatus for delivering high purity fluorine to a processing system, the apparatus comprising a fluorine generator located proximate the processing system for generating high purity fluorine, a fixed storage tank, means for transferring fluorine from the fluorine generator to the fixed storage tank, a transportable gas storage

25 vessel containing high purity fluorine at a pressure below 35 psig, means for selectively transferring fluorine from the storage vessel to the fixed storage tank, and means for delivering fluorine to the processing system from the fixed storage tank.

- 5 -

Furthermore, in a fifth aspect the present invention provides apparatus for delivering high purity fluorine to a processing system, the apparatus comprising a transportable gas storage vessel containing high purity fluorine at a pressure below 35 psig, a fixed storage tank, means for transferring
5 fluorine from the storage vessel to the fixed storage tank, and means for delivering fluorine to the processing system from the fixed storage tank.

Preferred features of the present invention will now be described with reference to the accompanying drawings, in which:

10

Figure 1 is a schematic illustration of a first embodiment of an apparatus for supplying fluorine to a chamber of a process system; and

15

Figure 2 is a schematic illustration of a second embodiment of an apparatus for supplying fluorine to a chamber of a process system.

Figure 1 illustrates a first embodiment of an apparatus for supplying high purity fluorine to a process chamber 10 of a processing system. The process chamber 10 may be a chamber in which a deposition process is conducted for depositing a thin film on the surface of a substrate, for example, using a
20 chemical vapour deposition (CVD) technique, a chamber in which etching of a substrate takes place, or a chamber in which any other processing technique is performed. Fluorine is supplied to the chamber 10 for cleaning the chamber 10 between process runs.

25

High purity fluorine, that is, a gas containing at least 99% fluorine, preferably at least 99.5% fluorine, is supplied to the chamber 10 from a on-site fluorine generator 12. Examples of a fluorine generator 12 suitable for use with the apparatus of Figure 1 are the Generation-F™ fluorine generators available
30 from BOC Edwards. Such generators typically generate fluorine at or around atmospheric pressure. As the chamber 10 is typically configured to receive fluorine at a pressure of around 15 to 20 psig, the fluorine generated by the

- 6 -

fluorine generator 12 is conveyed to a fixed storage tank 14 via a first conduit system 16 extending between the fluorine generator 12 and the fixed storage tank 14 and including a compressor (not shown). Any compressor having proper surface passivation to resist fluorine attack would be suitable.

5

The fixed storage tank 14 has a volume of around 1000 litres, and typically stores gas at a pressure of around 20 psig in view of the compression of the gas conveyed between the fluorine generator 12 and the fixed storage tank 14.

10

As the fluorine generator 12 can deliver up to 16 kg of fluorine per day, in this second embodiment the fluorine generator 12 provides a primary source of fluorine to the fixed storage tank 14. In this embodiment, a transportable gas storage vessel 18 provides a secondary source of fluorine to the fixed storage tank 14. The storage vessel 18 is preferably in the form of a multi-cylinder pack (MCP) comprising a plurality of gas cylinders 20 connected to a common manifold 22 and each containing high purity fluorine, although any other suitable type of transportable gas storage vessel, such as a bulk transport vessel, may be used. The pressure of the fluorine within the MCP 18 is relatively low, preferably below 35 psig, most preferably below 25 psig. In the illustrated embodiment, the MCP 18 comprises fifteen, 49 litre gas cylinders, and each containing high purity fluorine at a pressure of around 25 psig. Other combinations of (i) the number of cylinders 20, (ii) the capacity of the cylinders 20, and (iii) the pressure of the fluorine within the cylinders 20 are, of course, possible.

25

The manifold 22 of the MCP 18 is connected to a second conduit system 24 for transferring fluorine from the MCP 18 to the fixed storage tank 14. For safety purposes, the MCP 18 is, during use, housed within a ventilated gas storage cabinet 26. A compressor 28 may be provided within the second conduit system 24 for selectively drawing fluorine from the MCP 18 as required and exhausting fluorine to the fixed storage tank 14 at a pressure

30

- 7 -

roughly the same as that exhaust from the compressor provided within the first conduit system 16. As shown in Figure 1, the compressor 28 may be located within the cabinet 26, or may alternatively be located proximate the fixed storage tank 14. Again, any compressor having proper surface
5 passivation to resist fluorine attack would be suitable.

A third conduit system 30 is provided for conveying the high purity fluorine from the fixed storage tank 14 to the chamber 10. One or more valves (not shown) may be provided for selectively opening and closing the third conduit
10 system 30 so that fluorine may be provided to the chamber 10 as required, for example, in between process runs, to clean the chamber 10.

The MCP 18 can thus provide a relatively cheap secondary fluorine source for selectively supplying fluorine to the fixed storage tank 14 in the event of failure
15 of the fluorine generator 12. Sharing of the fixed storage tank 14 and third conduit system 30 between the primary and secondary fluorine sources also serves to reduce costs.

Furthermore, due to the relatively low pressure at which fluorine is stored – both within the MCP 18 and the fixed storage tank 14 – the safety associated
20 with the apparatus for supplying fluorine to the chamber 10 is much greater than that associated with systems where a high pressure fluorine source is used. Furthermore, as high purity fluorine is used throughout the apparatus, the rate at which the MCP 18 needs to be replaced with a fresh MCP 18' is
25 lower than when a cylinder containing 20% F₂ / 80% N₂ gas mixture, albeit at a higher pressure, is used to supply fluorine to the chamber 10.

In addition, whilst the MCPs 18 may be filled remotely from a source of high purity fluorine and transported to the processing system, due to the presence
30 of an on-site fluorine generator 12, exhausted MCPs 18 can instead be filled with fluorine generated by the fluorine generator 12, for example by selectively closing the first conduit system 16 and conveying the generated

- 8 -

fluorine to the exhausted MCP. By avoiding the transportation of exhausted MCPs back to the remote source for re-filling and subsequent transportation back to the processing system, further cost savings and improved safety can be provided.

5

As the MCPs 18 may be re-filled from a remote source of high purity fluorine and transported back to the processing system, a low cost version of the apparatus may be provided which does not include a fluorine generator 12 or associated conduit system 16. Such an apparatus is shown in Figure 2. The incremental cost associated with subsequently installing a fluorine generator 12 following the installation of the apparatus shown in Figure 2 would be relatively low, and would not involve any disruption in the supply of high purity fluorine to the chamber 10 from an MCP 18.

15

CLAIMS

1. A method of delivering high purity fluorine to a processing system, the method comprising the steps of generating high purity fluorine using a
5 fluorine generator located proximate the processing system, transferring fluorine from the fluorine generator to a fixed storage tank, providing a transportable gas storage vessel containing high purity fluorine at a pressure below 35 psig, selectively transferring fluorine from the transportable gas storage vessel to the fixed storage tank, and
10 delivering fluorine to the processing system from the fixed storage tank.
2. A method according to Claim 1, wherein the transportable gas storage vessel contains high purity fluorine at a pressure below 25 psig.
- 15 3. A method according to Claim 1 or Claim 2, wherein the transportable gas storage vessel comprises a plurality of gas cylinders.
4. A method according to Claim 3, wherein the gas cylinders are connected to a common manifold from which fluorine is transferred to
20 the fixed storage tank.
5. A method according to any preceding claim, wherein the high purity fluorine contains at least 99% fluorine.
- 25 6. A method according to Claim 5, wherein the high purity fluorine contains at least 99.5% fluorine.
7. A method according to any preceding claim, wherein fluorine is transferred from the transportable gas storage vessel to the fixed
30 storage tank using a compressor.

- 10 -

8. A method according to any preceding claim, wherein fluorine is stored in the fixed storage tank at a pressure in the range from 5 to 25 psig.
9. A method according to any preceding claim, wherein fluorine is delivered to a process chamber of the processing system.
10. A method according to Claim 9, wherein the process chamber is a CVD process chamber.
11. A method according to any preceding claim, wherein fluorine is transferred from the fluorine generator to the fixed storage tank using a compressor.
12. A method according to any preceding claim, wherein the transportable gas storage vessel is filled at a site remote from the processing system.
13. A method according to any preceding claim, wherein the storage vessel is filled with fluorine generated by the fluorine generator.
14. A method of delivering high purity fluorine to a processing system, the method comprising the steps of generating high purity fluorine using a fluorine generator located proximate the processing system, transferring fluorine from the fluorine generator to a fixed storage tank, filling a transportable gas storage vessel with fluorine generated by the fluorine generator to a pressure below 35 psig, selectively transferring fluorine from the transportable gas storage vessel to the fixed storage tank, and delivering fluorine to the processing system from the fixed storage tank.

30

- 11 -

15. A method of delivering high purity fluorine to a processing system, the method comprising the steps of transporting to the processing system a transportable gas storage vessel containing high purity fluorine at a pressure below 35 psig, transferring fluorine from the transportable gas storage vessel to a fixed storage tank, and delivering fluorine to the processing system from the fixed storage tank.
16. A method according to Claim 15, wherein the transportable gas storage vessel contains high purity fluorine at a pressure below 25 psig.
17. A method according to Claim 15 or Claim 16, wherein the transportable storage vessel comprises a plurality of gas cylinders.
18. A method according to Claim 17, wherein the gas cylinders are connected to a common manifold from which fluorine is transferred to the fixed storage tank.
19. A method according to any of Claims 15 to 18, wherein the transportable storage vessel is filled at a site remote from the processing system.
20. A method according to any of Claims 15 to 19, wherein the high purity fluorine contains at least 99% fluorine.
21. A method according to Claim 20, wherein the high purity fluorine contains at least 99.5% fluorine.
22. A method according to any of Claims 15 to 21, wherein fluorine is transferred from the transportable storage vessel to the fixed storage tank using a compressor.

- 12 -

23. A method according to any of Claims 15 to 22, wherein fluorine is stored in the fixed storage tank at a pressure in the range from 5 to 25 psig.
- 5 24. A method according to any of Claims 15 to 23, wherein fluorine is delivered to a process chamber of the processing system.
25. A method according to Claim 24, wherein the process chamber is a CVD process chamber.
- 10 26. A method according to any of Claims 15 to 25, wherein high purity fluorine is also supplied to the fixed storage tank from a fluorine generator.
- 15 27. A method according to Claim 26, wherein fluorine is transferred from the fluorine generator to the transportable storage tank using a compressor.
28. A method according to Claim 26 or Claim 27, wherein the transportable storage vessel is filled with fluorine generated by the fluorine generator.
- 20 29. Apparatus for delivering high purity fluorine to a processing system, the apparatus comprising a fluorine generator located proximate the processing system for generating high purity fluorine, a fixed storage tank, means for transferring fluorine from the fluorine generator to the fixed storage tank, a transportable gas storage vessel containing high purity fluorine at a pressure below 35 psig, means for selectively transferring fluorine from the storage vessel to the fixed storage tank, and means for delivering fluorine to the processing system from the fixed storage tank.
- 25 30

- 13 -

30. Apparatus according to Claim 29, wherein the transportable gas storage vessel contains high purity fluorine at a pressure below 25 psig.
- 5 31. Apparatus according to Claim 29 or Claim 30, wherein the transportable gas storage vessel comprises a plurality of gas cylinders.
32. Apparatus according to Claim 31, wherein the gas cylinders are connected to a common manifold from which fluorine is transferred to the fixed storage tank.
- 10 33. Apparatus according to any of Claims 29 to 32, wherein the high purity fluorine contains at least 99% fluorine.
- 15 34. Apparatus according to any of Claims 29 to 33, wherein the high purity fluorine contains at least 99.5% fluorine.
35. Apparatus according to any of Claims 29 to 34, wherein the means for transferring fluorine from the transportable gas storage vessel to the fixed storage tank comprises a compressor.
- 20 36. Apparatus according to Claim 35, wherein the compressor is located within a cabinet housing the transportable gas storage vessel.
- 25 37. Apparatus according to any of Claims 29 to 36, wherein the fixed storage tank is arranged to store fluorine at a pressure in the range from 5 to 25 psig.
- 30 38. Apparatus according to any of Claims 29 to 37, comprising a compressor for drawing fluorine from the fluorine generator and exhausting fluorine to the fixed storage tank.

- 14 -

39. Apparatus for delivering high purity fluorine to a processing system, the apparatus comprising a transportable gas storage vessel containing high purity fluorine at a pressure below 35 psig, a fixed storage tank, means for transferring fluorine from the storage vessel to the fixed storage tank, and means for delivering fluorine to the processing system from the fixed storage tank.
40. Apparatus according to Claim 39, wherein the transportable gas storage vessel contains high purity fluorine at a pressure below 25 psig.
41. Apparatus according to Claim 39 or Claim 40, wherein the transportable gas storage vessel comprises a plurality of gas cylinders.
42. Apparatus according to Claim 41, wherein the gas cylinders are connected to a common manifold from which fluorine is transferred to the fixed storage tank.
43. Apparatus according to any of Claims 39 to 42, wherein the high purity fluorine contains at least 99% fluorine.
44. Apparatus according to any of Claims 39 to 43, wherein the high purity fluorine contains at least 99.5% fluorine.
45. Apparatus according to any of Claims 39 to 44, wherein the means for transferring fluorine from the transportable gas storage vessel to the fixed storage tank comprises a compressor.
46. Apparatus according to Claim 45, wherein the compressor is located within a cabinet housing the transportable gas storage vessel.

- 15 -

47. Apparatus according to any of Claims 39 to 46, wherein the fixed storage tank is arranged to store fluorine at a pressure in the range from 5 to 25 psig.
- 5 48. Apparatus according to any of Claims 39 to 47, comprising a fluorine generator located proximate the processing system for supplying high purity fluorine to the fixed storage tank.
- 10 49. Apparatus according to Claim 48, comprising a compressor for drawing fluorine from the fluorine generator and exhausting fluorine to the storage tank.

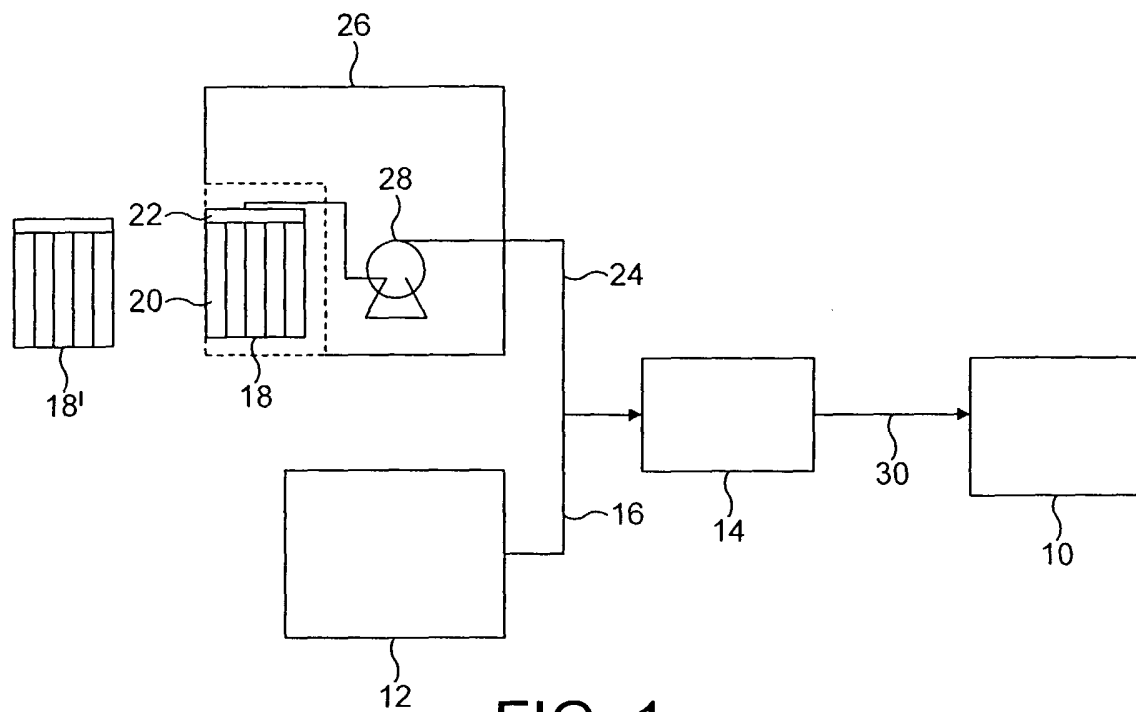


FIG. 1

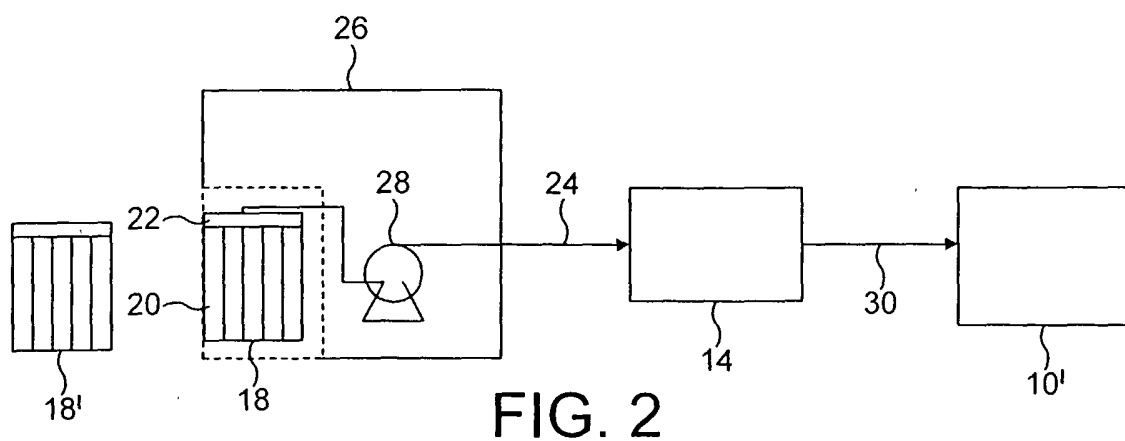


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2005/004410

A. CLASSIFICATION OF SUBJECT MATTER

INV. F17C7/00 F17C7/02 F17C9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F17C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 296 025 B1 (GREGG JOHN N ET AL) 2 October 2001 (2001-10-02) the whole document	1-49
X	EP 1 067 327 A (L'AIR LIQUIDE, SOCIETE ANONYME POUR) 10 January 2001 (2001-01-10) the whole document	1-49
X	EP 0 255 003 A (FUJITSU LIMITED) 3 February 1988 (1988-02-03) column 6, line 4 - column 12, line 23	1-49
X	EP 1 114 790 A (ADVANCED DELIVERY & CHEMICAL SYSTEMS, LTD) 11 July 2001 (2001-07-11) column 6, line 16 - column 20, line 11 ----- -/--	1-49

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 April 2006

Date of mailing of the international search report

21/04/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Staengl, G

INTERNATIONAL SEARCH REPORT

Inter national application No
PCT/GB2005/004410

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 260 588 B1 (NOAH CRAIG M ET AL) 17 July 2001 (2001-07-17) column 3, line 33 - column 11, line 67 -----	1-49
X	WO 00/00767 A (ADCS, LTD; NOAH, CRAIG, M; GREGG, JOHN, N) 6 January 2000 (2000-01-06) page 6, line 9 - page 18, line 31 -----	1-49
X	US 5 562 132 A (SIEGELE ET AL) 8 October 1996 (1996-10-08) column 8, line 43 - column 47, line 32 -----	49
X	WO 99/02251 A (ADVANCED DELIVERY & CHEMICAL SYSTEMS, LTD; NOAH, CRAIG, M; GREGG, JOHN) 21 January 1999 (1999-01-21) column 8, line 17 - column 26, line 5 -----	1-49
A	US 2 075 408 A (SHOLES JUSTIN GRANT) 30 March 1937 (1937-03-30) column 2, line 38 - column 8, line 4 -----	1-49

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2005/004410

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6296025	B1	02-10-2001	NONE	
EP 1067327	A	10-01-2001	JP 2001032997 A SG 82083 A1 TW 475046 B US 6199384 B1	06-02-2001 24-07-2001 01-02-2002 13-03-2001
EP 0255003	A	03-02-1988	DE 3773575 D1 JP 1796983 C JP 5004560 B JP 63026500 A KR 9007465 B1 US 4744384 A	14-11-1991 28-10-1993 20-01-1993 04-02-1988 10-10-1990 17-05-1988
EP 1114790	A	11-07-2001	NONE	
US 6260588	B1	17-07-2001	NONE	
WO 0000767	A	06-01-2000	AU 4849499 A DE 69916838 D1 DE 69916838 T2 EP 1093558 A1 JP 2003518591 T	17-01-2000 03-06-2004 04-08-2005 25-04-2001 10-06-2003
US 5562132	A	08-10-1996	US 5590695 A US 5711354 A	07-01-1997 27-01-1998
WO 9902251	A	21-01-1999	AT 249396 T AU 8481798 A DE 69818076 D1 DE 69818076 T2 EP 1017613 A2 JP 2003521359 T TW 387979 B	15-09-2003 08-02-1999 16-10-2003 03-06-2004 12-07-2000 15-07-2003 21-04-2000
US 2075408	A	30-03-1937	NONE	